

X-waves Generated at Second Harmonic

Claudio Conti* and Stefano Trillo†

National Institute for the Physics of Matter, INFN- Roma Tre, Via della Vasca Navale 84, 00146 Rome, Italy

(Dated: October 27, 2018)

Abstract

The process of optical frequency doubling can lead, in the undepleted regime, to the generation of a X-wave envelope with group velocity locked to the pump beam. Its parameters and its angular spectrum, are directly related to the zero- and first-order dispersive features of the nonlinear process. This constitutes a novel mechanism for spatio-temporal localization of light.

*Electronic address: c.conti@ele.uniroma3.it; URL: <http://optow.ele.uniroma3.it>

†Permanent address: Dept. of Engineering, University of Ferrara, Via Saragat 1, 44100, Ferrara, Italy

The fact that the *linear* Maxwell equations admit localized solutions dates back to the book of Stratton, (1) as pointed out more recently. (2) However, this research topics has flourished only after Durnin et al. experiment in 1987, who reported the practical realization of non-diffracting Bessel J_0 beams. (3) Since then, linear waves localized in both space and time (i.e., non-diffracting and non-dispersing) have been reported in experiments, (4; 5; 6), while main theoretical advances encompass the generalization of propagation invariant solutions (7; 8) and the study of their finite-aperture realizations (9; 10; 11; 12), or propagation in dispersive media (13; 14) and waveguides (15). The aspect of superluminality (2; 6) as well as potential applications such as femtosecond microscopy and communication systems have been also considered. (16; 17)

Recently, X-waves have been shown to be important also for nonlinear optics, since they exist as propagation invariant solutions to standard paraxial dispersive propagation models (18), whose formation is triggered by conical emission. (19) In second harmonic (SH) generation, these wavepackets are constituted by X-shaped envelopes at SH and fundamental frequency (FF) traveling locked together, which allow to explain recent experimental results (20). Since these X-waves continue to exist in the linear limit (in this sense they differ from any kind of soliton) where the FF and SH are uncoupled, it is natural to study the mechanism of their formation. In this Letter we show that a X-wave at SH can be generated spontaneously via doubling of a broad FF pump beam in the undepleted stage of its propagation.

To this end, let us start by reminding that the most simple axisymmetric localized wave in a dispersive medium with refractive index $n(\omega)$ and wavenumber $k(\omega) = \omega n(\omega)/c$ (c being vacuum light velocity) can be expressed as a superposition of Bessel beams (4)

$$E(r, z, t) = \int_0^\infty S(\omega) J_0(\kappa r) \exp[i(k_z z - \omega t)] d\omega, \quad (1)$$

where $\kappa = k(\omega) \sin[\theta(\omega)]$ and $k_z = k(\omega) \cos[\theta(\omega)]$ are the transverse and longitudinal wavenumbers, respectively. (13) Equation(1) describes a non-diffracting and non-dispersive beam provided that the following *X-wave dispersion relation* is satisfied

$$k_z(\omega) = \alpha + \beta_X \omega, \quad (2)$$

Indeed, Eq.(2) entails vanishing dispersion $\partial_\omega^n k_z = 0$ at all orders $n \geq 2$, and in turn an intensity $|E|^2$ which depends only upon the retarded time $t - \beta_X z$, $\beta_X = k'_z$ being the

inverse wavepacket velocity. Given the spectrum $S(\omega)$, α and β_X are the two parameters that characterize the localized wave. In the case of vacuum, when $\alpha = 0$ the spatio-temporal spectrum has an X-shape ($\kappa = \pm\omega(c^{-2} - \beta_X^2)^{1/2}$) and, due to invariant propagation, the far-field coincides with the near-field. Thus the wave retains its X-shape in the physical space (x, y, z, t) and turns out to be superluminal ($c|\beta_X| < 1$) (in the Fourier-transformable stationary regime no general theorem about causality and Maxwell equations is violated (21), as discussed extensively in the literature (22; 23; 24; 25)).

When $\alpha \neq 0$ the X in the spectrum is curved and subluminal propagation is allowed. (26) In general these localized waves have infinite energy, and only approximations can be realized in practice (as for non-diffracting Bessel beams (3)). Solutions with finite energy, though no longer propagation-invariant, have been also reported.(27; 28) In the case of dispersive media the situation is more complicated (the general angular spectra is given by $\kappa^2 = k(\omega)^2 - (\beta_X\omega + \alpha)^2$, encompassing evanescent waves). However, strongly dispersive elements such as axicon and diffraction gratings (29) or computer holograms (4) permit to generate X-waves.

Henceforth, we consider SH generation in the undepleted pump approximation. The paraxial and narrowband complex envelope amplitude $a = a(r, t, z)$ at SH carrier frequency $\omega_2 = 2\omega_1$ obeys the following equation

$$i\frac{\partial a}{\partial z} + i\beta_2\frac{\partial a}{\partial t} + \frac{1}{2k_2}\nabla_{\perp}^2 a + \chi A^2 e^{-i\Delta kz} = -i\epsilon a, \quad (3)$$

where $\Delta k = k_2 - 2k_1$ ($k_j = k(\omega_j)$, $j = 1, 2$) is the nonlinear phase mismatch, χ the usual nonlinear coefficient such that $|a|^2$ and $|A|^2$ are measured in W/m^2 , and $\epsilon > 0$ stands for a loss term which is included for technical convenience, though we will take the limit $\epsilon \rightarrow 0^+$. We also neglect second-order dispersions $k_j'' = k''(\omega_j)$, since in practical cases their effects are usually small with respect to the dominant first-order dispersion measured by the group delay $\beta_1 - \beta_2$, $\beta_j = k'(\omega_j)$ being inverse group-velocities. The validity of Eq.(3) requires also a broad (radially symmetric) pump beam so that its diffraction can be neglected, resulting into a pump amplitude $A = A(t - \beta_1 z) = \text{const.}$, or in other words into a pump beam traveling undistorted at velocity β_1^{-1} .

Under these hypothesis, Eq.(3) can be easily integrated in the spectral domain by making use of the Fourier-Bessel representation: $a(r, t, z) = \frac{1}{2\pi} \int_{-\infty}^{\infty} \int_0^{\infty} \hat{a}(\kappa, \Omega, z) J_0(\kappa r) e^{-i\Omega t} \kappa d\kappa d\Omega$.

The solution of Eq.(3) in terms of spectral variables (κ, Ω) reads

$$\hat{a} = \chi \psi \frac{\exp[i(\beta_1 \Omega - \Delta k)z] - \exp[i(\beta_2 \Omega - \kappa^2/2k_2 + i\epsilon)z]}{(\beta_1 - \beta_2)\Omega - \Delta k + \kappa^2/2k_2 - i\epsilon}. \quad (4)$$

where $\psi(\Omega, \kappa) \exp(i\Omega\beta_1 z)$ is the Fourier-Bessel transform of the source term $A^2(r, t - \beta_1 z)$ in Eq.(3), and we have considered, for sake of simplicity, the unseeded case, i.e. $a(z = 0) = \hat{a}(z = 0) = 0$. Note that the denominator in Eq.(4) represents (for $\epsilon \rightarrow 0$) the expansion of the mismatch $k_z(2(\omega_1 + \Omega)) - 2k_z(\omega_1 + \Omega)$. Consistently with our hypothesis, we limit the analysis to the case $\beta_1 \neq \beta_2$ (when $\beta_1 = \beta_2$, the effect of k_j'' becomes relevant and will be addressed in the future). The inverse transform of Eq.(4) in the lossless limit ($\epsilon \rightarrow 0$) can be obtained by applying residue theorems. We find $a = 0$ whenever $t < \min(\beta_1 z, \beta_2 z)$, or $t > \max(\beta_1 z, \beta_2 z)$, and

$$a(r, t, z) = \frac{1}{|\beta_1 - \beta_2|} \exp \left[-i\Delta k \frac{t - \beta_2 z}{\beta_1 - \beta_2} \right] \times \int_0^\infty X(\kappa) J_0(\kappa r) e^{i\frac{\kappa^2}{2k_2} \frac{t - \beta_1 z}{\beta_1 - \beta_2}} \kappa d\kappa \quad (5)$$

elsewhere (see Fig.1 for a pictorial representation of the support of a), with $X = \psi[(-\kappa^2/2k_2 + \Delta k)/(\beta_1 - \beta_2), \kappa]$ determined by the pump spectrum. Hence in the region covered by the SH (travelling at speed $1/\beta_2$) which is emitted in the center of the FF beam, a is given by a *non-diffracting beam which propagates at the group velocity of the FF*. Indeed, Eq.(5) shows that the intensity $|a|^2$ depends on z, t only through the combination $t - \beta_1 z$. Only one-half of the localized wave is generated due to causality: the peak moves at the FF group velocity, while its constituents (the SH beam) moves at their characteristic velocity $1/\beta_2$. As a result, the temporal extension of the wave is equal to $|\beta_1 - \beta_2|z$ (see Fig.1). This is similar to what has been theoretically predicted for practical finite-aperture realizations of vacuum localized waves. (9) As in that case, it can be shown that the a field is the sum of two X-waves which cancel each other in the non-causal regions, a form of the extinction theorem. (30) In the source-sink picture developed by Saari (17), only the source cone is present (as physically reasonable).

Equation(5) strongly resembles the vacuum nondiffracting beams developed in (26). However, since we are dealing with a dispersive medium, we need to prove that the wave in Eq.(5) belongs to the class given by (1). Consistently with the validity of Eq.(3), we make the paraxial approximation $k_z = [k(\omega)^2 - \kappa^2]^{1/2} \cong k(\omega) - \kappa^2/2k(\omega)$, and then expand $k(\omega)$ around ω_2 at first-order, to end up (neglecting space-time coupling terms such as $\Omega\kappa^2$) with

$k_z = k_2 + \beta_2\Omega - \kappa^2/2k_2$, where $\Omega = \omega - \omega_2$. By equating this expression of k_z to that in Eq.(2), we can express the frequency as $\omega = \omega_2 + (k_2 - \beta_X\omega_2 - \alpha - \kappa^2/2k_2)/(\beta_X - \beta_2)$, which, after substitution in Eq.(1), yields

$$E = e_2 \exp \left[-i(k_2 - \beta_X\omega_2 - \alpha) \frac{t - \beta_2 z}{\beta_X - \beta_2} \right] \times \int_0^\infty X'(\kappa) J_0(\kappa r) e^{i \frac{\kappa^2}{2k_2} \frac{t - \beta_X z}{\beta_X - \beta_2} \kappa} d\kappa \quad (6)$$

where $X'(\kappa)$ is a suitable redefinition of the spectrum $S(\omega)$ and $e_2 = \exp[i(k_2 z - \omega_2 t)]$ is the optical carrier. The field in Eq.(6) has exactly the same form of that reported in Eq.(5), once we account for the fact that the latter is an envelope which multiply the carrier e_2 . By comparing Eq.(6) and Eq.(5) we find that the parameters of the X-wave are directly related to those of the mixing process as

$$\beta_X = \beta_1; \alpha = k_2 - \beta_X\omega_2 - \Delta k = 2k_1 - \beta_1\omega_2. \quad (7)$$

Therefore, our calculation shows that, for undepleted frequency doubling, the X-wave dispersion constraint (2) is automatically satisfied and takes the form $k_z = \beta_1\Omega + 2k_1$. Correspondingly the angular dispersion is given by the equation ($\kappa \cong k_2\theta$, θ being the cone angle)

$$\Omega = \frac{\Delta k}{\beta_1 - \beta_2} - \frac{k_2}{2(\beta_1 - \beta_2)}\theta^2, \quad (8)$$

which is an horizontal parabola in the angle-detuning plane, with position and convexity determined by the dispersive features of the process (group-delay and Δk). Its experimental observation would be a clear signature of the presence of angular dispersion and of the formation of SH-Xwaves. From Eq.(5) we can determine the energy of the SH $\mathcal{E}(z) = 2\pi \int_{-\infty}^\infty \int_0^\infty |a|^2 r dr dt = \frac{\chi^2 \mathcal{F}_{FF}(\Delta k, \beta_1 - \beta_2)}{|\beta_1 - \beta_2|} z$, where $\mathcal{F}_{FF} = \int_0^\infty |X|^2 \kappa d\kappa$. \mathcal{E} grows linearly during propagation, its finiteness being a consequence of the X-wave compact support, and hence of causality. To make a practical example we assume the FF amplitude given by a gaussian pulsed beam with waist w_F and duration t_F : $A = A_0 \exp[-(t - \beta_1 z)^2/2t_F^2 - r^2/2w_F^2]$. In this case \mathcal{F}_{FF} can be evaluated explicitly yielding

$$\mathcal{E} = \frac{\chi^2 k_2 \mathcal{E}_F^2}{2\sqrt{2\pi} t_F} z e^{-\frac{k_2 w_F^2 |\beta_1 - \beta_2|}{2\sqrt{2} t_F}} e^{-\xi} [1 + erf(\sigma\xi)], \quad (9)$$

with \mathcal{E}_F the FF energy, $\xi = k_2 w_F^2 (\Delta k - \Delta\beta_X)$, $\Delta\beta_X = k_2 w_F^2 (\beta_1 - \beta_2)^2 / 2t_F^2$, and $\sigma = t_F / \sqrt{2} |\beta_1 - \beta_2| k_2 w_F^2$. Eq.(9) shows that for large $|\Delta k|$ the energy conversion is negligible,

while the maximum efficiency is obtained for a particular value of Δk (in general $\Delta k \neq 0$) which can be evaluated numerically. Choosing realistic parameters (20) ($w_F = 10^{-5}m$, $t_F = 10^{-13}s$, $|\beta_1 - \beta_2| = 45$ ps/m, $k_2 \cong 8\pi \times 10^6 m^{-1}$), we have $\sigma \cong 1$, and the maximum conversion efficiency is attained for $\Delta k \cong \Delta\beta_X \cong |\beta_1 - \beta_2|/t_F$, i.e. the inverse spatial separation between FF and SH associated with t_F .

At last we wish to point out that different (often equivalent) terms are adopted to classify localized waves. Strictly speaking, Eq.(1) defines the so-called *Focus Waves Mode* (FWM), a more general class than X-waves, according to the literature.(29) However we are dealing with narrowband optical wavepackets, and hence FWM are known as X-Bessel (5; 13). On the other hand Eq. (5) resembles the *Focused X-waves* (17). Furthermore the causality implies that only one-half of the double cone is generated, and thus they can be identified with the so-called Y-, or Hankel-, waves. (31) For the sake of simplicity we used the term “X-wave” from the beginning.

In conclusion we have theoretically predicted that the process of optical frequency doubling can lead to an X-wave, traveling at the FF velocity, whose α parameter is directly linked to the wavevector mismatch. For a given input FF wave, the X-wave can be modified by acting on the mixing control knobs (e.g. crystal temperature or orientation), while the resulting angular spectra (the far field) is given by horizontal parabolas [Eq.(8)]. This mechanism appears to be a valid alternative to the generation of optical localized-waves by means of *linear* techniques.

This result is also susceptible of a different interpretation. The fact that the morphogenesis into X-waves occurs spontaneously reveals the fundamental role that they can have in any ultrafast parametric process (e.g. four-wave mixing or optical parametric amplification) where the generalized phase-matching condition produces the correlation between spatial and temporal degrees of freedom which is behind the X-shape of the wavepacket. By studying such phenomena, the generation of new parametric sources could be conceived.

Acknowledgments

We thank P. Di Trapani and E. Recami for fruitful discussions. Financial support from Ministry of Instruction, University and Research (PRIN project) is acknowledged. C. C. thanks the Fondazione Tronchetti Provera for a generous grant.

References

- [1] J. A. Stratton, *Electromagnetic Theory* (McGraw-Hill, New York, USA, 1941).
- [2] E. Recami, “On localized X-shaped Superluminal solutions to Maxwell equations,” *Phys. A* **252**, 586–610 (1998).
- [3] J. Durnin, J. J. Miceli, and J. H. Eberly, “Diffraction-Free Beams,” *Phys. Rev. Lett.* **58**, 1499–1501 (1987).
- [4] H. Sonajalg, M. Ratsep, and P. Saari, “Demonstration of the Bessel-X pulse propagating with strong lateral and longitudinal localization in a dispersive media,” *Opt. Lett.* **22**, 310–312 (1997).
- [5] P. Saari and K. Reivelt, “Evidence of X-Shaped Propagation-Invariant Localized Light Waves,” *Phys. Rev. Lett.* **79**, 4135–4138 (1997).
- [6] D. Mugnai, A. Ranfagni, and R. Ruggeri, “Observation of Superluminal Behaviours in Wave Propagation,” *Phys. Rev. Lett.* **84**, 4830–4833 (2000).
- [7] R. Piestun and J. Shamir, “Generalized propagation-invariant wave fields,” *J. Opt. Soc. Am. A* **15**, 3039–3044 (1998).
- [8] J. C. Gutierrez, M. D. Iturbe-Castillo, and S. Chavez-Cerda, “Alternative formulation for invariant optical fields: Mathieu beams,” *Opt. Lett.* **25**, 1493–1495 (2000).
- [9] R. W. Ziolkowski, I. M. Besieris, and A. M. Shaarawi, “Aperture realizations to exact solutions to homogeneous-wave equations,” *J. Opt. Soc. Am. A* **10**, 75–87 (1993).
- [10] A. M. Shaarawi, “Comparison of two localized wave fields generated from dynamic apertures,” *J. Opt. Soc. Am. A* **14** (1997).
- [11] P. R. Stepanishen and J. Sun, “Acoustic bullets: Transient Bessel beams generated by planar apertures,” *J. Acous. Soc. Am.* **102**, 3308–3318 (1997).
- [12] P. R. Stepanishen, “Acoustic bullets/transient Bessel beams: Near to far field transition via an impulse response approach,” *J. Acous. Soc. Am.* **104**, 1742–1751 (1998).
- [13] H. Sonajalg and P. Saari, “Suppression of temporal spread of ultrashort pulses in dispersive media by Bessel beam generators,” *Opt. Lett.* **21**, 1162–1164 (1996).
- [14] M. A. Porras, “Diffraction-free and dispersion-free pulsed beam propagation in dispersive media,” *Opt. Lett.* **26**, 1364–1366 (2001).
- [15] M. Zamboni-Rached, E. Recami, and F. Fontana, “Superluminal localized solutions to Maxwell

- equations propagating along a normal sized waveguide,” Phys. Rev. E **64**, 0666031–0666036 (2001).
- [16] J. Y. Lu and S. P. He, “Optical X wave communications,” Opt. Commun. **161**, 187–192 (1999).
- [17] P. Saari, “Superluminal Localized Waves of Electromagnetic Field in Vacuo,” arXiv:physics/0103054 (2001).
- [18] C. Conti, S. Trillo, P. D. Trapani, O. Jedrkiewicz, G. Valiulis, and J. Trull, “Electromagnetic nonlinear X waves,” arXiv:physics/0204066 (2002), Phys. Rev. Lett. submitted.
- [19] S. Trillo, C. Conti, P. D. Trapani, O. Jedrkiewicz, J. Trull, G. Valiulis, and G. Bellanca, “Colored conical emission by means of second-harmonic generation,” Opt. Lett. **27**, 1451–1453 (2002).
- [20] S. Trillo, C. Conti, P. D. Trapani, O. Jedrkiewicz, J. Trull, and G. Valiulis, “Nonlinear X-waves: a new perspective for space-time localization,” In *Nonlinear Guided Waves and Their Application*, (Optical Society of America, Washington, D. C., 2002), invited paper NLMB.
- [21] T. Levi-Civita, *Caratteristiche dei sistemi differenziali e propagazione ondosa* (Zanichelli, Bologna, Italy, 1931).
- [22] E. Recami, F. Fontana, and R. Garavaglia, “Special relativity and superluminal motions: a discussion of some recent experiments,” Int. Journ. of Mod. Phys. A **15**, 2793–2812 (2000).
- [23] E. C. de Oliveira, W. A. Rodrigues, D. S. Thober, and A. L. Xavier, “Thoughtful comments on ‘Bessel beams and signal propagation’,” Phys. Lett. A **284**, 296–303 (2001).
- [24] J. T. Lunardi, “Remarks on Bessel beams, signals and superluminality,” Phys. Lett. A **291**, 66–72 (2001).
- [25] W. A. Rodrigues, D. S. Thober, and A. L. Xavier, “Causal explanation for observed superluminal behaviour of microwave propagation in free space,” Phys. Lett. a **284**, 217–224 (2001).
- [26] J. Salo and M. M. Salomaa, “Subsonic nondiffracting waves,” ARLO **2**, 31–36 (2001).
- [27] E. C. de Oliveira and W. A. Rodrigues, “Finite energy superluminal solutions of Maxwell equations,” Phys. Lett. A **291**, 367–370 (2001).
- [28] M. Zamboni-Rached, E. Recami, and H. E. Hernandez-Figueroa, “New localized Superluminal solutions to the wave equations with finite total energies and arbitrary frequencies,” arXiv:physics/0109062 (2001).
- [29] K. Reivelt and P. Saari, “Optical generation of focus wave modes,” J. Opt. Soc. Am. A **17**,

1785–1790 (2000).

[30] M. Born and E. Wolf, *Principles of Optics*, 6 ed. (Pergamon, New York, 1980).

[31] J. Salo, J. Fagerholm, A. T. Friberg, and M. M. Salomaa, “Unified description of nondiffracting X and Y waves,” *Phys. Rev. E* **62**, 4261–4275 (2000).

List of Figure Captions

Fig. 1. Orientation (and support) of generated SH X-wave for $\beta_1 > \beta_2$ (top) and $\beta_1 < \beta_2$ (bottom).

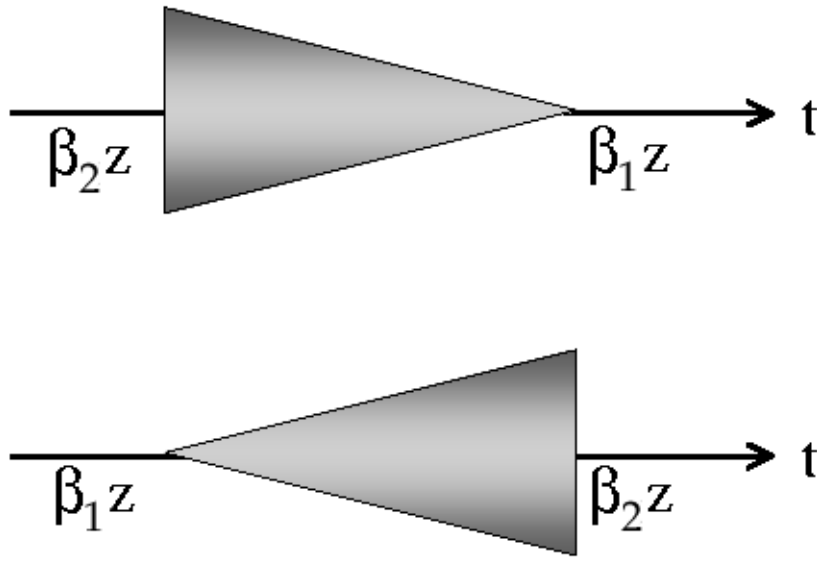


FIG. 1 Orientation (and support) of generated SH X-wave for $\beta_1 > \beta_2$ (top) and $\beta_1 < \beta_2$ (bottom).