

A Rabi Oscillation in Four and Five Level Systems

Kazuyuki FUJII ^{*}, Kyoko HIGASHIDA [†], Ryosuke KATO [‡], Yukako WADA [§]

Department of Mathematical Sciences

Yokohama City University

Yokohama, 236-0027

Japan

Abstract

In this paper we consider a general model of an atom with n energy levels interacting with $n-1$ external (laser) fields which is a natural extension in the two and three level systems. We exactly solve the Schrödinger equation to obtain a Rabi oscillation when $n = 4$ and 5 , which will constitute a quantum logic gate of Quantum Computation based on four and five level systems.

^{*}E-mail address : fujii@yokohama-cu.ac.jp

[†]E-mail address : s035577d@yokohama-cu.ac.jp

[‡]E-mail address : s035559g@yokohama-cu.ac.jp

[§]E-mail address : s035588a@yokohama-cu.ac.jp

1 Introduction

The purpose of this paper is to construct a Rabi oscillation in four and five level systems which is a natural extension of two and three level systems, [1], [2] or [6].

That is, we consider a model of an atom with n energy levels interacting with $n - 1$ external (laser) fields and solve the Schrödinger equation to obtain the Rabi oscillation. How to solve it can be reduced to the calculation of an exponential matrix, which is very clear from the mathematical view point. However, to calculate it in the general case seems almost impossible. For $n = 4$ and 5 we exactly calculate it by force to get the Rabi oscillation. The unitary matrix corresponding to the Rabi oscillation may play an important role in constructing the generalized Walsh–Hadamard matrix (transformation) or other useful matrices in four or five level systems.


This is a succession of the preceding paper [8] in which we treated the special case with coupling constants being all equal. Our motivation of the work is to construct Quantum Computation based on many energy levels (of laser-cooled atoms in a cavity). See also [3]–[9] for related work.

2 General Theory

We consider an atom with n energy levels $\{|k\rangle, E_k \mid 0 \leq k \leq n - 1\}$ which interacts with $n - 1$ external fields. As for the external fields we use laser fields with frequencies equal to energy differences of the atom and set $\Delta_k \equiv E_k - E_0$ for $1 \leq k \leq n - 1$. Moreover we assume

$$E_1 - E_0 > E_2 - E_1 > \cdots > E_{n-1} - E_{n-2}.$$

We subject the atom to $n - 1$ laser fields having the frequencies ω_k equal to the energy differences $\Delta_k - \Delta_{k-1} = E_k - E_{k-1}$. See the following picture :

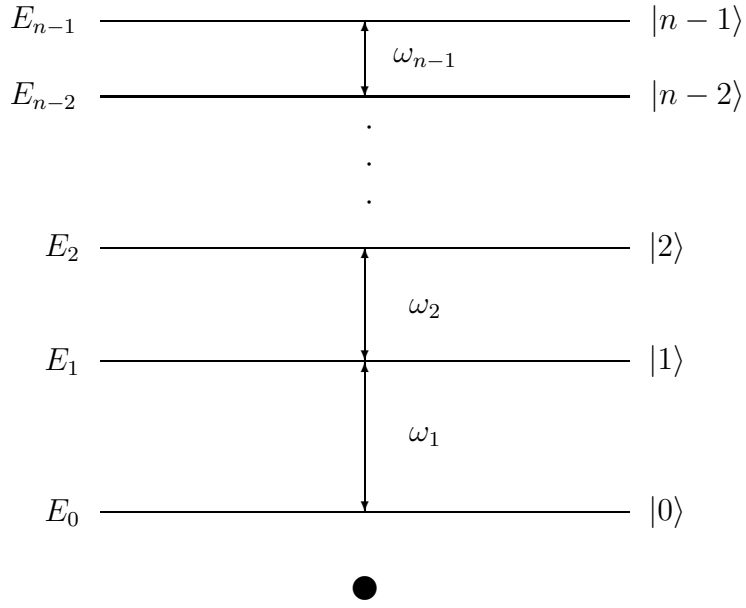

The Hamiltonian that we use is written as

$$H =$$

$$\left(\begin{array}{cccccccc} E_0 & g_1 e^{i(\omega_1 t + \phi_1)} & & & & & & \\ g_1 e^{-i(\omega_1 t + \phi_1)} & E_1 & g_2 e^{i(\omega_2 t + \phi_2)} & & & & & \\ & g_2 e^{-i(\omega_2 t + \phi_2)} & E_2 & g_3 e^{i(\omega_3 t + \phi_3)} & & & & \\ & & g_3 e^{-i(\omega_3 t + \phi_3)} & \cdot & \cdot & & & \\ & & & \cdot & \cdot & \cdot & & \\ & & & & & \cdot & & \\ & & & & & & E_{n-2} & g_{n-1} e^{i(\omega_{n-1} t + \phi_{n-1})} \\ & & & & & & g_{n-1} e^{-i(\omega_{n-1} t + \phi_{n-1})} & E_{n-1} \end{array} \right)$$

$$= E_0 \mathbf{1}_n +$$

$$\left(\begin{array}{cccc} 0 & g_1 e^{i(\omega_1 t + \phi_1)} & & \\ g_1 e^{-i(\omega_1 t + \phi_1)} & \Delta_1 & g_2 e^{i(\omega_2 t + \phi_2)} & \\ & g_2 e^{-i(\omega_2 t + \phi_2)} & \Delta_2 & g_3 e^{i(\omega_3 t + \phi_3)} \\ & & g_3 e^{-i(\omega_3 t + \phi_3)} & \cdot \\ & & & \cdot \\ & & & \cdot \\ & & & \cdot \\ & & & \cdot \\ & & \Delta_{n-2} & g_{n-1} e^{i(\omega_{n-1} t + \phi_{n-1})} \\ & & g_{n-1} e^{-i(\omega_{n-1} t + \phi_{n-1})} & \Delta_{n-1} \end{array} \right) \quad (1)$$

where g_1, g_2, \dots, g_{n-1} are coupling constants and $\phi_1, \phi_2, \dots, \phi_{n-1}$ some phases. Here we have assumed the so-called rotating wave approximation (RWA) from the beginning. We would like to decompose the Hamiltonian. If we set

$$V = \left(\begin{array}{c} 1 \\ e^{i(\omega_1 t + \phi_1)} \\ e^{i(\omega_1 t + \omega_2 t + \phi_1 + \phi_2)} \\ \cdot \\ \cdot \\ e^{i(\sum_{k=1}^{n-2} \omega_k t + \sum_{k=1}^{n-2} \phi_k)} \\ e^{i(\sum_{k=1}^{n-1} \omega_k t + \sum_{k=1}^{n-1} \phi_k)} \end{array} \right), \quad (2)$$

then it is easy to see

$$H = V^\dagger \left\{ E_0 \mathbf{1}_n + \left(\begin{array}{cccc} 0 & g_1 & & \\ g_1 & \Delta_1 & g_2 & \\ & g_2 & \Delta_2 & g_3 \\ & & \cdot & \cdot \\ & & & \cdot \\ & & & \cdot \\ & & & \cdot \\ & & & \cdot \\ & & g_{n-2} & \Delta_{n-2} & g_{n-1} \\ & & g_{n-1} & \Delta_{n-1} \end{array} \right) \right\} V. \quad (3)$$

To solve the Schrödinger equation (we set $\hbar = 1$ for simplicity)

$$i \frac{d}{dt} U = H U \quad (4)$$

for $U(t)$ being unitary we set $\tilde{U} = V U$ ($\Leftrightarrow U = V^\dagger \tilde{U}$), then it is not difficult to see

$$i \frac{d}{dt} \tilde{U} = \left(E_0 \mathbf{1}_n + \begin{pmatrix} 0 & g_1 & & & & \\ g_1 & \Delta_1 - \omega_1 & g_2 & & & \\ & g_2 & \Delta_2 - \omega_1 - \omega_2 & g_3 & & \\ & & & \cdot & \cdot & \cdot \\ & & & & \cdot & \cdot \\ & & & & & \cdot \\ & & & & & & g_{n-2} & \Delta_{n-2} - \sum_{k=1}^{n-2} \omega_k & g_{n-1} \\ & & & & & & & g_{n-1} & \Delta_{n-1} - \sum_{k=1}^{n-1} \omega_k \end{pmatrix} \right) \tilde{U}. \quad (5)$$

Now if we set the resonance conditions

$$\Delta_k - \Delta_{k-1} = \omega_k \quad \text{for } 1 \leq k \leq n-1, \quad (6)$$

then the equation above reduces to a simple one

$$i \frac{d}{dt} \tilde{U} = (E_0 \mathbf{1}_n + C) \tilde{U} \quad (7)$$

where

$$C \equiv C(g_1, g_2, \dots, g_{n-1}) = \begin{pmatrix} 0 & g_1 & & & & \\ g_1 & 0 & g_2 & & & \\ & g_2 & 0 & g_3 & & \\ & & & \cdot & \cdot & \cdot \\ & & & & \cdot & \cdot \\ & & & & & \cdot \\ & & & & & & g_{n-2} & 0 & g_{n-1} \\ & & & & & & & g_{n-1} & 0 \end{pmatrix}. \quad (8)$$

The solution is easily obtained to be $\tilde{U}(t) = e^{-itE_0}e^{-itC}$, so the solution we are looking for is

$$U(t) = V^\dagger \tilde{U}(t) = e^{-itE_0} V^\dagger e^{-itC}. \quad (9)$$

Therefore we have only to calculate e^{-itC} , which is however very hard task.

In the following sections let us list our calculations for $n = 3, 4, 5$.

3 Three Level Systems

We only list the calculation in the case of three level systems.

$$\begin{aligned} \exp(-itC) &= \exp \left\{ -it \begin{pmatrix} 0 & g_1 & 0 \\ g_1 & 0 & g_2 \\ 0 & g_2 & 0 \end{pmatrix} \right\} \\ &= \begin{pmatrix} \frac{g_1^2 \cos(\sqrt{g_1^2 + g_2^2}t) + g_2^2}{g_1^2 + g_2^2} & -i \frac{g_1 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} & \frac{g_1 g_2 \cos(\sqrt{g_1^2 + g_2^2}t) - g_1 g_2}{g_1^2 + g_2^2} \\ -i \frac{g_1 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} & \cos(\sqrt{g_1^2 + g_2^2}t) & -i \frac{g_2 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} \\ \frac{g_1 g_2 \cos(\sqrt{g_1^2 + g_2^2}t) - g_1 g_2}{g_1^2 + g_2^2} & -i \frac{g_2 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} & \frac{g_2^2 \cos(\sqrt{g_1^2 + g_2^2}t) + g_1^2}{g_1^2 + g_2^2} \end{pmatrix}, \quad (10) \end{aligned}$$

see Appendix in [6] or [1]. As a result the solution we are looking for in the three level systems is

$$\begin{aligned} U(t) &= e^{-itE_0} \begin{pmatrix} 1 & & \\ & e^{-i(\omega_1 t + \phi_1)} & \\ & & e^{-i(\omega_1 t + \omega_2 t + \phi_1 + \phi_2)} \end{pmatrix} \times \\ &\begin{pmatrix} \frac{g_1^2 \cos(\sqrt{g_1^2 + g_2^2}t) + g_2^2}{g_1^2 + g_2^2} & -i \frac{g_1 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} & \frac{g_1 g_2 \cos(\sqrt{g_1^2 + g_2^2}t) - g_1 g_2}{g_1^2 + g_2^2} \\ -i \frac{g_1 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} & \cos(\sqrt{g_1^2 + g_2^2}t) & -i \frac{g_2 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} \\ \frac{g_1 g_2 \cos(\sqrt{g_1^2 + g_2^2}t) - g_1 g_2}{g_1^2 + g_2^2} & -i \frac{g_2 \sin(\sqrt{g_1^2 + g_2^2}t)}{\sqrt{g_1^2 + g_2^2}} & \frac{g_2^2 \cos(\sqrt{g_1^2 + g_2^2}t) + g_1^2}{g_1^2 + g_2^2} \end{pmatrix}. \quad (11) \end{aligned}$$

4 Four Level Systems

We continue our calculation in the case of four level systems. We want to calculate

$$\exp(-itC) = \exp \left\{ -it \begin{pmatrix} 0 & g_1 & 0 & 0 \\ g_1 & 0 & g_2 & 0 \\ 0 & g_2 & 0 & g_3 \\ 0 & 0 & g_3 & 0 \end{pmatrix} \right\} = \begin{pmatrix} a_{11} & a_{12} & a_{13} & a_{14} \\ a_{21} & a_{22} & a_{23} & a_{24} \\ a_{31} & a_{32} & a_{33} & a_{34} \\ a_{41} & a_{42} & a_{43} & a_{44} \end{pmatrix} \quad (12)$$

exactly. To make C a diagonal form let us calculate the characteristic equation

$$0 = |\lambda \mathbf{1}_4 - C| = \begin{vmatrix} \lambda & -g_1 & 0 & 0 \\ -g_1 & \lambda & -g_2 & 0 \\ 0 & -g_2 & \lambda & -g_3 \\ 0 & 0 & -g_3 & \lambda \end{vmatrix} = \lambda^4 - (g_1^2 + g_2^2 + g_3^2)\lambda^2 + g_1^2 g_3^2. \quad (13)$$

We can find solutions with good form (see [7] as a modern derivation of the Ferrari formula). For that we set

$$A \equiv g_2^2 + (g_1 + g_3)^2, \quad B \equiv g_2^2 + (g_1 - g_3)^2,$$

then all solutions are given by

$$\lambda_1 = \frac{\sqrt{A} + \sqrt{B}}{2}, \quad \lambda_2 = \frac{\sqrt{A} - \sqrt{B}}{2}, \quad \lambda_3 = -\frac{\sqrt{A} - \sqrt{B}}{2}, \quad \lambda_4 = -\frac{\sqrt{A} + \sqrt{B}}{2}. \quad (14)$$

Let us rewrite these. It is easy to see

$$\lambda_1 = \frac{\sqrt{A} + \sqrt{B}}{2} \equiv \lambda, \quad \lambda_2 = \frac{g_1 g_3}{\lambda}, \quad \lambda_3 = -\frac{g_1 g_3}{\lambda}, \quad \lambda_4 = -\lambda. \quad (15)$$

Next we must look for orthonormal eigenvectors $|\lambda_j\rangle$ ($j = 1, 2, 3, 4$) corresponding to eigenvalues above which are rather complicated.

$$|\lambda_1\rangle = \begin{pmatrix} g_1 g_2 X \\ \lambda g_2 X \\ (\lambda^2 - g_1^2) X \\ \frac{g_3(\lambda^2 - g_1^2)}{\lambda} X \end{pmatrix}, \quad |\lambda_2\rangle = \begin{pmatrix} \lambda g_2 Y \\ g_2 g_3 Y \\ \frac{g_1(g_3^2 - \lambda^2)}{\lambda} Y \\ (g_3^2 - \lambda^2) Y \end{pmatrix},$$

$$|\lambda_3\rangle = \begin{pmatrix} -\lambda g_2 Y \\ g_2 g_3 Y \\ -\frac{g_1(g_3^2 - \lambda^2)}{\lambda} Y \\ (g_3^2 - \lambda^2) Y \end{pmatrix}, \quad |\lambda_4\rangle = \begin{pmatrix} g_1 g_2 X \\ -\lambda g_2 X \\ (\lambda^2 - g_1^2) X \\ -\frac{g_3(\lambda^2 - g_1^2)}{\lambda} X \end{pmatrix}, \quad (16)$$

where X and Y are given by

$$X = \frac{1}{\sqrt{2 \{ \lambda^2 (-g_1^2 + g_2^2 + g_3^2) + g_1^2 (g_1^2 + g_2^2 - g_3^2) \}}},$$

$$Y = \frac{1}{\sqrt{2 \{ g_3^2 (-g_1^2 + g_2^2 + g_3^2) + \lambda^2 (g_1^2 + g_2^2 - g_3^2) \}}}.$$

Therefore we obtain the orthogonal matrix

$$W = (|\lambda_1\rangle, |\lambda_2\rangle, |\lambda_3\rangle, |\lambda_4\rangle) \in O(4), \quad (17)$$

which makes $\exp(-itC)$ an easy form to calculate

$$\exp(-itC) = W \begin{pmatrix} e^{-it\lambda_1} & & & \\ & e^{-it\lambda_2} & & \\ & & e^{-it\lambda_3} & \\ & & & e^{-it\lambda_4} \end{pmatrix} W^{-1}. \quad (18)$$

Let us calculate components of the matrix (12). From (17) and (18) a long calculation leads to

$$a_{11} = 2g_2^2 \left\{ g_1^2 X^2 \cos(\lambda t) + \lambda^2 Y^2 \cos\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$a_{12} = a_{21} = -2i\lambda g_2^2 \left\{ g_1 X^2 \sin(\lambda t) + g_3 Y^2 \sin\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$a_{13} = a_{31} = 2g_1 g_2 \left\{ (\lambda^2 - g_1^2) X^2 \cos(\lambda t) + (g_3^2 - \lambda^2) Y^2 \cos\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$a_{14} = a_{41} = -2i g_2 \left\{ \frac{g_1 g_3 (\lambda^2 - g_1^2)}{\lambda} X^2 \sin(\lambda t) + \lambda (g_3^2 - \lambda^2) Y^2 \sin\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$a_{22} = 2g_2^2 \left\{ \lambda^2 X^2 \cos(\lambda t) + g_3^2 Y^2 \cos\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$a_{23} = a_{32} = -2i g_2 \left\{ \lambda (\lambda^2 - g_1^2) X^2 \sin(\lambda t) + \frac{g_1 g_3 (g_3^2 - \lambda^2)}{\lambda} Y^2 \sin\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$a_{24} = a_{42} = 2g_2 g_3 \left\{ (\lambda^2 - g_1^2) X^2 \cos(\lambda t) + (g_3^2 - \lambda^2) Y^2 \cos\left(\frac{g_1 g_3}{\lambda} t\right) \right\},$$

$$\begin{aligned}
a_{33} &= 2 \left\{ (\lambda^2 - g_1^2)^2 X^2 \cos(\lambda t) + \frac{g_1^2 (g_3^2 - \lambda^2)^2}{\lambda^2} Y^2 \cos\left(\frac{g_1 g_3}{\lambda} t\right) \right\}, \\
a_{34} &= a_{43} = -2i \frac{1}{\lambda} \left\{ g_3 (\lambda^2 - g_1^2)^2 X^2 \sin(\lambda t) + g_1 (g_3^2 - \lambda^2)^2 Y^2 \sin\left(\frac{g_1 g_3}{\lambda} t\right) \right\}, \\
a_{44} &= 2 \left\{ \frac{g_3^2 (\lambda^2 - g_1^2)^2}{\lambda^2} X^2 \cos(\lambda t) + (g_3^2 - \lambda^2)^2 Y^2 \cos\left(\frac{g_1 g_3}{\lambda} t\right) \right\}.
\end{aligned} \tag{19}$$

As a result the solution we are looking for in the four level systems is

$$U(t) = e^{-itE_0} \begin{pmatrix} 1 & & & & \\ & e^{-i(\omega_1 t + \phi_1)} & & & \\ & & e^{-i(\omega_1 t + \omega_2 t + \phi_1 + \phi_2)} & & \\ & & & e^{-i(\omega_1 t + \omega_2 t + \omega_3 t + \phi_1 + \phi_2 + \phi_3)} & \\ & & & & \end{pmatrix} \times \begin{pmatrix} a_{11} & a_{12} & a_{13} & a_{14} \\ a_{21} & a_{22} & a_{23} & a_{24} \\ a_{31} & a_{32} & a_{33} & a_{34} \\ a_{41} & a_{42} & a_{43} & a_{44} \end{pmatrix}. \tag{20}$$

We obtained the explicit solution of (4) under the resonance condition (6). This is the Rabi oscillation that we want, which is rather complicated.

5 Five Level Systems

We want to calculate

$$\exp(-itC) = \exp \left\{ -it \begin{pmatrix} 0 & g_1 & 0 & 0 & 0 \\ g_1 & 0 & g_2 & 0 & 0 \\ 0 & g_2 & 0 & g_3 & 0 \\ 0 & 0 & g_3 & 0 & g_4 \\ 0 & 0 & 0 & g_4 & 0 \end{pmatrix} \right\} = \begin{pmatrix} a_{11} & a_{12} & a_{13} & a_{14} & a_{15} \\ a_{21} & a_{22} & a_{23} & a_{24} & a_{25} \\ a_{31} & a_{32} & a_{33} & a_{34} & a_{35} \\ a_{41} & a_{42} & a_{43} & a_{44} & a_{45} \\ a_{51} & a_{52} & a_{53} & a_{54} & a_{55} \end{pmatrix} \tag{21}$$

exactly. The characteristic equation is

$$\begin{aligned}
0 = |\lambda \mathbf{1}_5 - C| &= \begin{vmatrix} \lambda & -g_1 & 0 & 0 & 0 \\ -g_1 & \lambda & -g_2 & 0 & 0 \\ 0 & -g_2 & \lambda & -g_3 & 0 \\ 0 & 0 & -g_3 & \lambda & -g_4 \\ 0 & 0 & 0 & -g_4 & \lambda \end{vmatrix} \\
&= \lambda \left\{ \lambda^4 - (g_1^2 + g_2^2 + g_3^2 + g_4^2) \lambda^2 + (g_1^2 g_3^2 + g_1^2 g_4^2 + g_2^2 g_4^2) \right\}. \tag{22}
\end{aligned}$$

All solutions are given by

$$\begin{aligned}
\lambda_1 &= \frac{\sqrt{A + 2\sqrt{B}} + \sqrt{A - 2\sqrt{B}}}{2}, & \lambda_2 &= \frac{\sqrt{A + 2\sqrt{B}} - \sqrt{A - 2\sqrt{B}}}{2}, & \lambda_3 &= 0, \\
\lambda_4 &= -\frac{\sqrt{A + 2\sqrt{B}} - \sqrt{A - 2\sqrt{B}}}{2}, & \lambda_5 &= -\frac{\sqrt{A + 2\sqrt{B}} + \sqrt{A - 2\sqrt{B}}}{2}, \tag{23}
\end{aligned}$$

where

$$A \equiv g_1^2 + g_2^2 + g_3^2 + g_4^2, \quad B \equiv g_1^2 g_3^2 + g_1^2 g_4^2 + g_2^2 g_4^2.$$

For

$$\lambda_1 = \frac{\sqrt{A + 2\sqrt{B}} + \sqrt{A - 2\sqrt{B}}}{2} \equiv \lambda, \quad \lambda_2 = \frac{\sqrt{B}}{\lambda}, \quad \lambda_3 = 0, \quad \lambda_4 = -\lambda_2, \quad \lambda_5 = -\lambda \tag{24}$$

orthonormal eigenvectors $|\lambda_j\rangle$ ($j = 1, 2, 3, 4, 5$) corresponding to the eigenvalues

$$\begin{aligned}
|\lambda_1\rangle &= \begin{pmatrix} g_1 g_2 g_3 X \\ \lambda g_2 g_3 X \\ (\lambda^2 - g_1^2) g_3 X \\ \lambda(\lambda^2 - g_1^2 - g_2^2) X \\ (\lambda^2 - g_1^2 - g_2^2) g_4 X \end{pmatrix}, & |\lambda_2\rangle &= \begin{pmatrix} \lambda g_1 g_2 g_3 Y \\ \sqrt{B} g_2 g_3 Y \\ \lambda g_3 \left(\frac{B}{\lambda^2} - g_1^2 \right) Y \\ \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right) Y \\ \lambda g_4 \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right) Y \end{pmatrix}, & |\lambda_3\rangle &= \begin{pmatrix} \frac{g_2 g_4}{\sqrt{B}} \\ 0 \\ -\frac{g_1 g_4}{\sqrt{B}} \\ 0 \\ \frac{g_1 g_3}{\sqrt{B}} \end{pmatrix}, \\
|\lambda_4\rangle &= \begin{pmatrix} -\lambda g_1 g_2 g_3 Y \\ \sqrt{B} g_2 g_3 Y \\ -\lambda g_3 \left(\frac{B}{\lambda^2} - g_1^2 \right) Y \\ \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right) Y \\ -\lambda g_4 \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right) Y \end{pmatrix}, & |\lambda_5\rangle &= \begin{pmatrix} g_1 g_2 g_3 X \\ -\lambda g_2 g_3 X \\ (\lambda^2 - g_1^2) g_3 X \\ -\lambda(\lambda^2 - g_1^2 - g_2^2) X \\ (\lambda^2 - g_1^2 - g_2^2) g_4 X \end{pmatrix}, \tag{25}
\end{aligned}$$

where X and Y are given by

$$X = \frac{1}{\sqrt{2 \{(g_3^2 + g_4^2)A - 2B\} \lambda^2 + 2(g_1^2 + g_2^2 - g_3^2 - g_4^2)B}},$$

$$Y = \frac{1}{\sqrt{2B \{(g_3^2 + g_4^2)A - 2B + (g_1^2 + g_2^2 - g_3^2 - g_4^2)\lambda^2\}}}.$$

Therefore by the orthogonal matrix

$$W = (|\lambda_1\rangle, |\lambda_2\rangle, |\lambda_3\rangle, |\lambda_4\rangle, |\lambda_5\rangle) \in O(5), \quad (26)$$

we have a diagonal form

$$\exp(-itC) = W \begin{pmatrix} e^{-it\lambda_1} & & & & \\ & e^{-it\lambda_2} & & & \\ & & e^{-it\lambda_3} & & \\ & & & e^{-it\lambda_4} & \\ & & & & e^{-it\lambda_5} \end{pmatrix} W^{-1}. \quad (27)$$

Let us calculate components of the matrix (21). A long calculation leads to

$$a_{11} = \frac{g_2^2 g_4^2}{B} + 2g_1^2 g_2^2 g_3^2 \left\{ X^2 \cos(\lambda t) + \lambda^2 Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{12} = a_{21} = -2i\lambda g_1 g_2^2 g_3^2 \left\{ X^2 \sin(\lambda t) + \sqrt{B} Y^2 \sin\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{13} = a_{31} = -\frac{g_1 g_2 g_4^2}{B} + 2g_1 g_2 g_3^2 \left\{ (\lambda^2 - g_1^2) X^2 \cos(\lambda t) + (B - \lambda^2 g_1^2) Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{14} = a_{41} = -2i\lambda g_1 g_2 g_3 \left\{ (\lambda^2 - g_1^2 - g_2^2) X^2 \sin(\lambda t) + \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2\right) Y^2 \sin\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{15} = a_{51} = g_1 g_2 g_3 g_4 \left\{ \frac{1}{B} + 2(\lambda^2 - g_1^2 - g_2^2) X^2 \cos(\lambda t) + 2(B - \lambda^2 g_1^2 - \lambda^2 g_2^2) Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{22} = 2g_2^2 g_3^2 \left\{ \lambda^2 X^2 \cos(\lambda t) + B Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{23} = a_{32} = -2i\lambda g_2 g_3^2 \left\{ (\lambda^2 - g_1^2) X^2 \sin(\lambda t) + \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2\right) Y^2 \sin\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{24} = a_{42} = 2g_2 g_3 \left\{ \lambda^2 (\lambda^2 - g_1^2 - g_2^2) X^2 \cos(\lambda t) + B \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2\right) Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$a_{25} = a_{52} = -2i\lambda g_2 g_3 g_4 \left\{ (\lambda^2 - g_1^2 - g_2^2) X^2 \sin(\lambda t) + \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2\right) Y^2 \sin\left(\frac{\sqrt{B}}{\lambda} t\right) \right\},$$

$$\begin{aligned}
a_{33} &= \frac{g_1^2 g_4^2}{B} + 2g_3^2 \left\{ (\lambda^2 - g_1^2)^2 X^2 \cos(\lambda t) + \lambda^2 \left(\frac{B}{\lambda^2} - g_1^2 \right)^2 Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\}, \\
a_{34} = a_{43} &= -2i\lambda g_3 \left\{ (\lambda^2 - g_1^2)(\lambda^2 - g_1^2 - g_2^2) X^2 \sin(\lambda t) + \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2 \right) \times \right. \\
&\quad \left. \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right) Y^2 \sin\left(\frac{\sqrt{B}}{\lambda} t\right) \right\}, \\
a_{35} = a_{53} &= -\frac{g_1^2 g_3 g_4}{B} + 2g_3 g_4 \left\{ (\lambda^2 - g_1^2)(\lambda^2 - g_1^2 - g_2^2) X^2 \cos(\lambda t) + \lambda^2 \left(\frac{B}{\lambda^2} - g_1^2 \right) \times \right. \\
&\quad \left. \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right) Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\}, \\
a_{44} &= 2\lambda^2 (\lambda^2 - g_1^2 - g_2^2)^2 X^2 \cos(\lambda t) + 2B \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right)^2 Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right), \\
a_{45} = a_{54} &= -2i\lambda g_4 \left\{ (\lambda^2 - g_1^2 - g_2^2)^2 X^2 \sin(\lambda t) + \sqrt{B} \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right)^2 Y^2 \sin\left(\frac{\sqrt{B}}{\lambda} t\right) \right\}, \\
a_{55} &= \frac{g_1^2 g_3^2}{B} + 2g_4^2 \left\{ (\lambda^2 - g_1^2 - g_2^2)^2 X^2 \cos(\lambda t) + \lambda^2 \left(\frac{B}{\lambda^2} - g_1^2 - g_2^2 \right)^2 Y^2 \cos\left(\frac{\sqrt{B}}{\lambda} t\right) \right\}. \quad (28)
\end{aligned}$$

As a result the solution we are looking for in the five level systems is

$$\begin{aligned}
U(t) &= e^{-itE_0} \begin{pmatrix} 1 & & & & \\ & e^{-i(\omega_1 t + \phi_1)} & & & \\ & & e^{-i(\omega_1 t + \omega_2 t + \phi_1 + \phi_2)} & & \\ & & & e^{-i(\sum_{k=1}^3 \omega_k t + \sum_{k=1}^3 \phi_k)} & \\ & & & & e^{-i(\sum_{k=1}^4 \omega_k t + \sum_{k=1}^4 \phi_k)} \end{pmatrix} \times \\
&\quad \begin{pmatrix} a_{11} & a_{12} & a_{13} & a_{14} & a_{15} \\ a_{21} & a_{22} & a_{23} & a_{24} & a_{25} \\ a_{31} & a_{32} & a_{33} & a_{34} & a_{35} \\ a_{41} & a_{42} & a_{43} & a_{44} & a_{45} \\ a_{51} & a_{52} & a_{53} & a_{54} & a_{55} \end{pmatrix}. \quad (29)
\end{aligned}$$

We obtained the explicit solution of (4) under the resonance condition (6). This is the Rabi oscillation that we want, which is quite complicated.

6 Discussion

We have calculated e^{-itC} with (8) for $n = 4$ and 5 which is a generalization of the case $n = 3$ in [1] or [6]. However, to calculate the general case is a very hard problem. One reason is as follows. In the general case the characteristic equation $|\lambda\mathbf{1} - C|$ becomes a general algebraic equation with degree n . By the Galois theory it is impossible to solve it in an algebraic manner. That is, we have no algebraic method to write down the solutions λ_k .

For the special case $g_1 = g_2 = \cdots = g_{n-1} \equiv g$ we can calculate it easily, see [8].

We also note that problems of this type occur elsewhere in Mathematics and Physics, see for example [10]. Thus our results may have broader applicability.

Acknowledgment.

We wish to thank Tatsuo Suzuki for his helpful comments and suggestions.

References

- [1] L. Allen and J. H. Eberly : Optical Resonance and Two-Level Atoms, Wiley, New York, 1975.
- [2] S. M. Barnett and P. M. Radmore : Methods in Theoretical Quantum Optics, Oxford University Press, 1997.
- [3] K. Fujii : Introduction to Grassmann Manifolds and Quantum Computation, J. Applied Math, 2(2002), 371, quant-ph/0103011.
- [4] K. Fujii : Exchange Gate on the Qudit Space and Fock Space, J. Opt. B : Quantum Semiclass. Opt, 5(2003), S613, quant-ph/0207002.
- [5] K. Fujii : How To Treat An N-Level System : A Proposal, quant-ph/0302050.

- [6] K. Fujii : Quantum Optical Construction of Generalized Pauli and Walsh–Hadamard Matrices in Three Level Systems, quant-ph/0309132.
- [7] K. Fujii : A Modern Introduction to Cardano and Ferrari Formulas in the Algebraic Equations, quant-ph/0311102.
- [8] K. Fujii, K. Higashida, R. Kato and Y. Wada : N Level System with RWA and Analytical Solutions Revisited, quant-ph/0307066.
- [9] K. Funahashi : Explicit Construction of Controlled–U and Unitary Transformation in Two–Qudit, to appear in Yokohama Mathematical Journal, quant-ph/0304078.
- [10] M. Christandl, N. Datta, A. Ekert and A. J. Landahl : Perfect state transfer in quantum spin networks, quant-ph/0309131.