

Isolated Diffusion: Optimizing Multi-Concept Text-to-Image Generation Training-Freely with Isolated Diffusion Guidance

Jingyuan Zhu, Huimin Ma, Jiansheng Chen, and Jian Yuan

Abstract—Large-scale text-to-image diffusion models have achieved great success in synthesizing high-quality and diverse images given target text prompts. Despite the revolutionary image generation ability, current state-of-the-art models still struggle to deal with multi-concept generation accurately in many cases. This phenomenon is known as “concept bleeding” and displays as the unexpected overlapping or merging of various concepts. This paper presents a general approach for text-to-image diffusion models to address the mutual interference between different subjects and their attachments in complex scenes, pursuing better text-image consistency. The core idea is to isolate the synthesizing processes of different concepts. We propose to bind each attachment to corresponding subjects separately with split text prompts. Besides, we introduce a revision method to fix the concept bleeding problem in multi-subject synthesis. We first depend on pre-trained object detection and segmentation models to obtain the layouts of subjects. Then we isolate and resynthesize each subject individually with corresponding text prompts to avoid mutual interference. Overall, we achieve a training-free strategy, named Isolated Diffusion, to optimize multi-concept text-to-image synthesis. It is compatible with the latest Stable Diffusion XL (SDXL) and prior Stable Diffusion (SD) models. We compare our approach with alternative methods using a variety of multi-concept text prompts and demonstrate its effectiveness with clear advantages in text-image consistency and user study.

Index Terms—Isolated Diffusion Guidance, Multi-concept Generation, Text-to-image Generation, Training-free.

I. INTRODUCTION

In recent years, diffusion probabilistic models [1]–[6] have attracted significant attention from both academia and industry with their outstanding performance and application to various downstream tasks [7]–[13]. Modern large-scale text-to-image diffusion models including Imagen [14], DALL-E [15], eDiff-I [16], and Stable Diffusion [17], [18] optimize numerous parameters using billions of training data and demonstrate unparalleled capabilities to produce high-quality and diverse samples given unfettered text prompts.

Despite the compelling results of modern text-to-image models in single-concept cases, they still suffer from text-image inconsistency given complex text prompts containing multiple concepts. Taking the latest SD model SDXL as an example, it has made great progress in avoiding the concept missing problem compared with prior SD models. However, SDXL still exhibits a phenomenon named “concept bleeding” to synthesize images inconsistent with text prompts in some multi-concept synthesis cases. Concept bleeding is considered to be caused by the pre-trained text encoders [19], [20], which compress all information in the text prompt into a



Fig. 1: Multi-concept generated samples comparison. Our approach fixes the concept bleeding problem of SDXL.

specific number of tokens. As a result, different concepts in text prompts may interfere with each other in the encoding process. As shown in Fig. 1, SDXL assigns the colors of various attachments erroneously in the left samples and merges the concept of “a cat” to both subjects in the right sample, resulting in unreasonable results.

A series of methods have been proposed to improve multi-concept generation. Composable Diffusion [21] first attempts to solve this problem by synthesizing different components in an image with a set of diffusion models using text prompts split according to conjunctions. It struggles to handle the interference between various concepts since it adds up noises predicted with split prompts directly. Following works [21]–[30] optimize cross-attention maps or latents to enhance text-image consistency. Some of them [24]–[27] introduce additional controls like layouts to enhance each concept. However, they still utilize embeddings encoded from complete text prompts, leading to inevitable concept bleeding in many cases.

In this paper, we propose training-free approaches based on the open-source SD models [17], [18] to deal with two typical challenges in multi-concept generation: concept bleeding of multiple attachments and subjects, as shown in Fig. 1. The key idea is to isolate the denoising processes of various concepts to relieve mutual interference. For multiple attachments, we use isolated text prompts to bind each attachment to corresponding subjects separately. For multiple subjects, we first segment the concept bleeding samples with pre-trained detection and segmentation models like YOLO [31] and SAM [32] to identify each subject and their layouts with masks. Then we

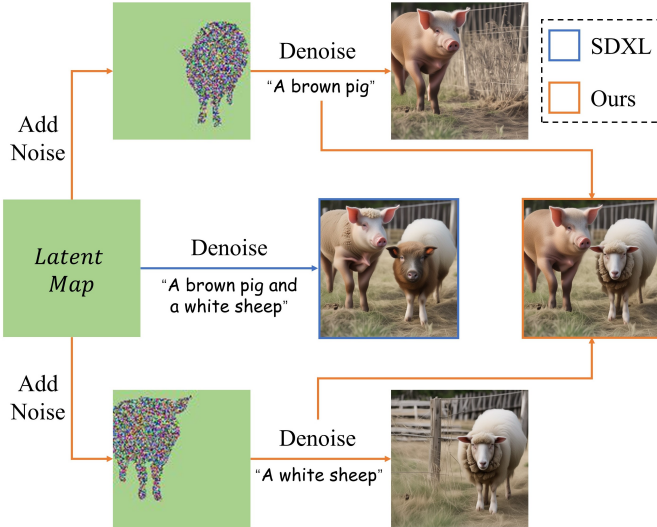


Fig. 2: We isolate multi-subject generation by replacing the regions of other subjects in latents with random noises and denoise each subject with split text prompts individually. Our approach avoids mutual interference between various subjects and gets a more reasonable result than SDXL.

figure out an effective method to resynthesize each subject individually using corresponding text prompts by replacing the regions of other subjects with random noises. Taking Fig. 2 as an example, we replace the region of “pig” in the latent with random noises and denoise “sheep” with the text prompt “A white sheep”. In this way, we revise the “sheep” with a brown pig head produced by SDXL to a white sheep consistent with the text prompt. We denote our approach as Isolated Diffusion. The main contributions are concluded as follows:

- We propose an intuitive inference method to bind each attachment to corresponding subjects separately and improve the text-image consistency of multi-attachment synthesis.
- We design a training-free method to revise multi-subject samples with pre-trained detection and segmentation models (e.g., YOLO and SAM) to keep image layouts and avoid unexpected mutual interference between various subjects, achieving better text-image consistency.
- We conduct sufficient experiments and user study to demonstrate the effectiveness of our approach.

II. RELATED WORK

Diffusion Models Diffusion models [1]–[6] have become mainstream in image synthesis, outperforming GANs [33]–[37], VAEs [38]–[40], and autoregressive models [41]–[43] on both generation quality and diversity. Moreover, a series of works [44]–[50] have introduced a variety of controls to realize diffusion-based conditional generation, such as text, sketch [51], [52], edge [53], [54], and segmentation mask [55] et al. As a result, diffusion models are applicable to all kinds of tasks, including text-to-image synthesis [14]–[18], [56], layout-to-image generation [44], [47], [57]–[62], inpainting [63], [64], outpainting [65], super resolution [66], and customization of subjects and styles [7]–[12], [67]–[69].

Text-to-Image Synthesis Diffusion-based text-to-image synthesis attracts the most visits among all the conditional generation tasks, benefiting from universal natural languages and several widely-used large-scale generative models [14]–[17]. Our work is implemented with SDXL [18], the latest version of SD models [17]. SD is a two-stage text-to-image generation model composed of pre-trained autoencoders and a transformer-based UNet, which works on low-resolution latents encoded by the autoencoders. Compared with prior open-source SD models like SD1.5 and SD2.1, SDXL improves the scale of parameters in its UNet from about 860M to 2.6B and introduces an optional refiner network to improve generation quality. In addition, SDXL employs two powerful text encoders, OpenCLIP ViT-bigG [20] and CLIP ViT-L [19], to encode text prompts. Nevertheless, SDXL still cannot completely avoid concept bleeding in multi-concept generation.

Concept Bleeding Apart from the pioneer Composable Diffusion [21], other works focus on manipulating cross-attention maps or latents. Structured Diffusion [22] encodes word relationships into the encoding explicitly. Attend-and-Excite [23] slightly shifts the latents and refines the cross-attention units with all subject tokens to avoid subjects missing. Divide-and-Bind [28] optimizes latents based on losses computed with cross-attention maps. SynGen [29] guides cross-attention maps to align with syntactically analyzed prompts. Other methods [24]–[27], [30] manipulate cross-attention maps using the prior knowledge of each concept’s layout with or without additional training or networks. Our work introduces an intuitive and training-free approach to isolate various concepts without directly manipulating attention maps.

Image Editing Diffusion-based text-driven image editing [48], [70]–[76] methods tackle a task different from this work. They manipulate part of the given images and keep the other parts unchanged. We handle the concept bleeding problem of SD models to achieve text-image consistency regardless of the consistency between revised and original samples. It is hard to compare our work with them directly. Our approach for multiple subjects synthesizes subjects within ranges of their masks separately. Blended Diffusion [71], [76] denoise the whole image with text prompts of edited parts and merge foreground and background with masks, leading to unrealistic results. DiffEdit [75] provides more accurate mask guidance but still struggles to deal with multi-subject scenes. We denoise background with latents containing foreground information and achieve realistic results with high text-image consistency.

III. METHOD

In this section, we present the Isolated Diffusion approach to relieve two typical concept bleeding problems of SD models in multi-concept generation. Isolated Diffusion for multiple attachments and multiple subjects are introduced in detail separately in Sec. III-A and III-B.

A. Isolated Diffusion for Multiple Attachments

Given text prompts containing multiple attachments bound to a single subject, the current SD inference strategy struggles to maintain considerable text-image consistency. For example,

a series of attachments and corresponding color descriptions exist in the text prompt “A baby penguin wearing a blue hat, a red scarf, and a green shirt”. As shown in the middle part of Fig. 3, SD encounters concept bleeding and produces samples inconsistent with the text prompt. It is considered to be caused by the pre-trained CLIP models [19], [20], which encode complex text prompts altogether into a specific number of tokens as the condition c_{con} . Therefore, the color descriptions are mixed up among multiple attachments. The predicted noises $\hat{\epsilon}(x_t, t)$ in the current inference process are defined as the linear combination of the unconditionally predicted noises $\epsilon_\theta(x_t, t, c_{ucon})$ and conditionally predicted noises $\epsilon_\theta(x_t, t, c_{con})$:

$$\hat{\epsilon}(x_t, t) = (1 - \lambda)\epsilon_\theta(x_t, t, c_{ucon}) + \lambda\epsilon_\theta(x_t, t, c_{con}), \quad (1)$$

where λ represents the scaling on the condition c_{con} .

To overcome the concept bleeding problem of multiple attachments, Isolated Diffusion first splits complex text prompts into a group of simpler text prompts with GPT4 [77], including a base subject p_{base} and the base subject bound with each attachment p_1, p_2, \dots, p_k separately. Isolated Diffusion conducts the denoising process using the linear combination of the noises predicted under the split conditions. We first add the variance between the noises predicted unconditionally and with p_{base} to synthesize the base subject. Then, we add the variance between the noises predicted under the prompt of the subject and the prompt of a single attachment bound to the subject to provide separate guidance. The overall predicted noises of Isolated Diffusion can be expressed as follows:

$$\begin{aligned} \hat{\epsilon}(x_t, t) &= (1 - \lambda)\epsilon_\theta(x_t, t, c_{ucon}) + \lambda\epsilon_\theta(x_t, t, c_{base}) \\ &+ \sum_{i=1}^k \lambda(\epsilon_\theta(x_t, t, c_i) - \epsilon_\theta(x_t, t, c_{base})) \end{aligned} \quad (2)$$

In this way, we avoid interference between multiple attachments. The pseudo-code of Isolated Diffusion for multiple attachments is provided in Algorithm 1. Compared with the current SD inference process, we only need to split the complex text prompts without additional training. As illustrated in the top part of Fig. 3, our approach achieves accurate assignments of color descriptions to multiple attachments consistent with the text prompt without fidelity degradation.

Our approach shares a similar idea of splitting the synthesizing processes of different components in an image with Composable Diffusion [21]. The core difference is that our approach binds each attachment to the base subject individually, while Composable Diffusion adds up the predicted noises of subjects and attachments directly. Given a text prompt “A table with red table cloth and yellow tulips”, Composable Diffusion decomposes it into a group of text prompts: “a table”, “red table cloth”, and “yellow tulips” and adds up the noises predicted with these split text prompts directly. However, these noises may overlap or influence each other in the denoising process, leading to concepts missing or merging. We decompose the text prompt into another group of text prompts: “a table”, “a table with a red table cloth”, and “a table with yellow tulips”. We synthesize the base subject “table” first and then bind each attachment to it. Our approach relieves

Algorithm 1 Isolated Diffusion for Multiple Attachments.

Require:

Fixed Models: CLIP text encoder $\text{CLIP}_{\text{text}}$, image decoder \mathcal{D} , pre-trained diffusion model ϵ_θ .

Input: Prompt list $\mathcal{P} = [p_{ucon}, p_{base}, p_1, \dots, p_k]$, random Gaussian noise x_T , scale hyperparameter λ .

Output: Generated image X .

- 1: $[c_{ucon}, c_{base}, c_1, \dots, c_k] \leftarrow \text{CLIP}_{\text{text}}(\mathcal{P})$.
 - 2: **for** $t = T, T - 1, \dots, 1$ **do**
 - 3: $\epsilon_{ucon} \leftarrow \epsilon_\theta(x_t, t, c_{ucon}), \quad \epsilon_{base} \leftarrow \epsilon_\theta(x_t, t, c_{base})$
 - 4: $\hat{\epsilon}(x_t, t) \leftarrow \epsilon_{ucon} + \lambda(\epsilon_{base} - \epsilon_{ucon})$
 - 5: **for** $i = 1, \dots, k$ **do**
 - 6: $\epsilon_i \leftarrow \epsilon_\theta(x_t, t, c_i)$
 - 7: $\hat{\epsilon}(x_t, t) += \lambda(\epsilon_i - \epsilon_{base})$
 - 8: **end for**
 - 9: Denoise x_t with $\hat{\epsilon}(x_t, t)$ to x_{t-1} .
 - 10: **end for**
 - 11: Feed x_0 to decoder \mathcal{D} to generate X .
-

the concept bleeding problem of multiple attachments. We further demonstrate the necessity of base subjects with ablation analysis in Appendix IV-D.

B. Isolated Diffusion for Multiple Subjects

Apart from multiple attachments, another common case of concept bleeding occurs when generating multiple subjects. Taking a simple text prompt composed of two subjects like “A dog next to a cat” as an example, SD still encounters concept bleeding as shown by the sample of “A cat next to a cat” in the middle part of Fig. 3. Different subjects in an image can interfere with each other, leading to text-image inconsistency.

Similar to Isolated Diffusion for multiple attachments, we also separate the denoising processes of different subjects to overcome the concept bleeding problem of multiple subjects. We propose to revise the concept bleeding samples produced by SD models. Compared with multi-attachment synthesis, we need to maintain the layouts of multiple subjects, which is difficult to solve automatically.

We depend on pre-trained detection and segmentation models to identify the positions of subjects by producing masks for them. Here we employ YOLO and SAM as examples to illustrate our approach. Firstly, we use YOLO to detect subjects in synthesized samples and determine whether concept bleeding occurs (e.g., detection inconsistent with subjects in text prompts or detection with low confidence). If so, we synthesize masks for each subject with SAM using the center points of bounding boxes as axes prompts. Then we assign the masks with split text prompts of each subject. The method of subject-mask assignment is flexible. Taking the right part of Fig. 1 as an example, we use various subject-mask assignments and revise the synthesized sample in different ways.

In the revision process, we first denoise the initial latents for T_{lay} steps to synthesize the layouts of all the subjects, which is determined in the early denoising steps [62], [75]. Then we replace the regions in $x_{T_{lay}}$ corresponding to other subjects with random noises to avoid mutual interference between

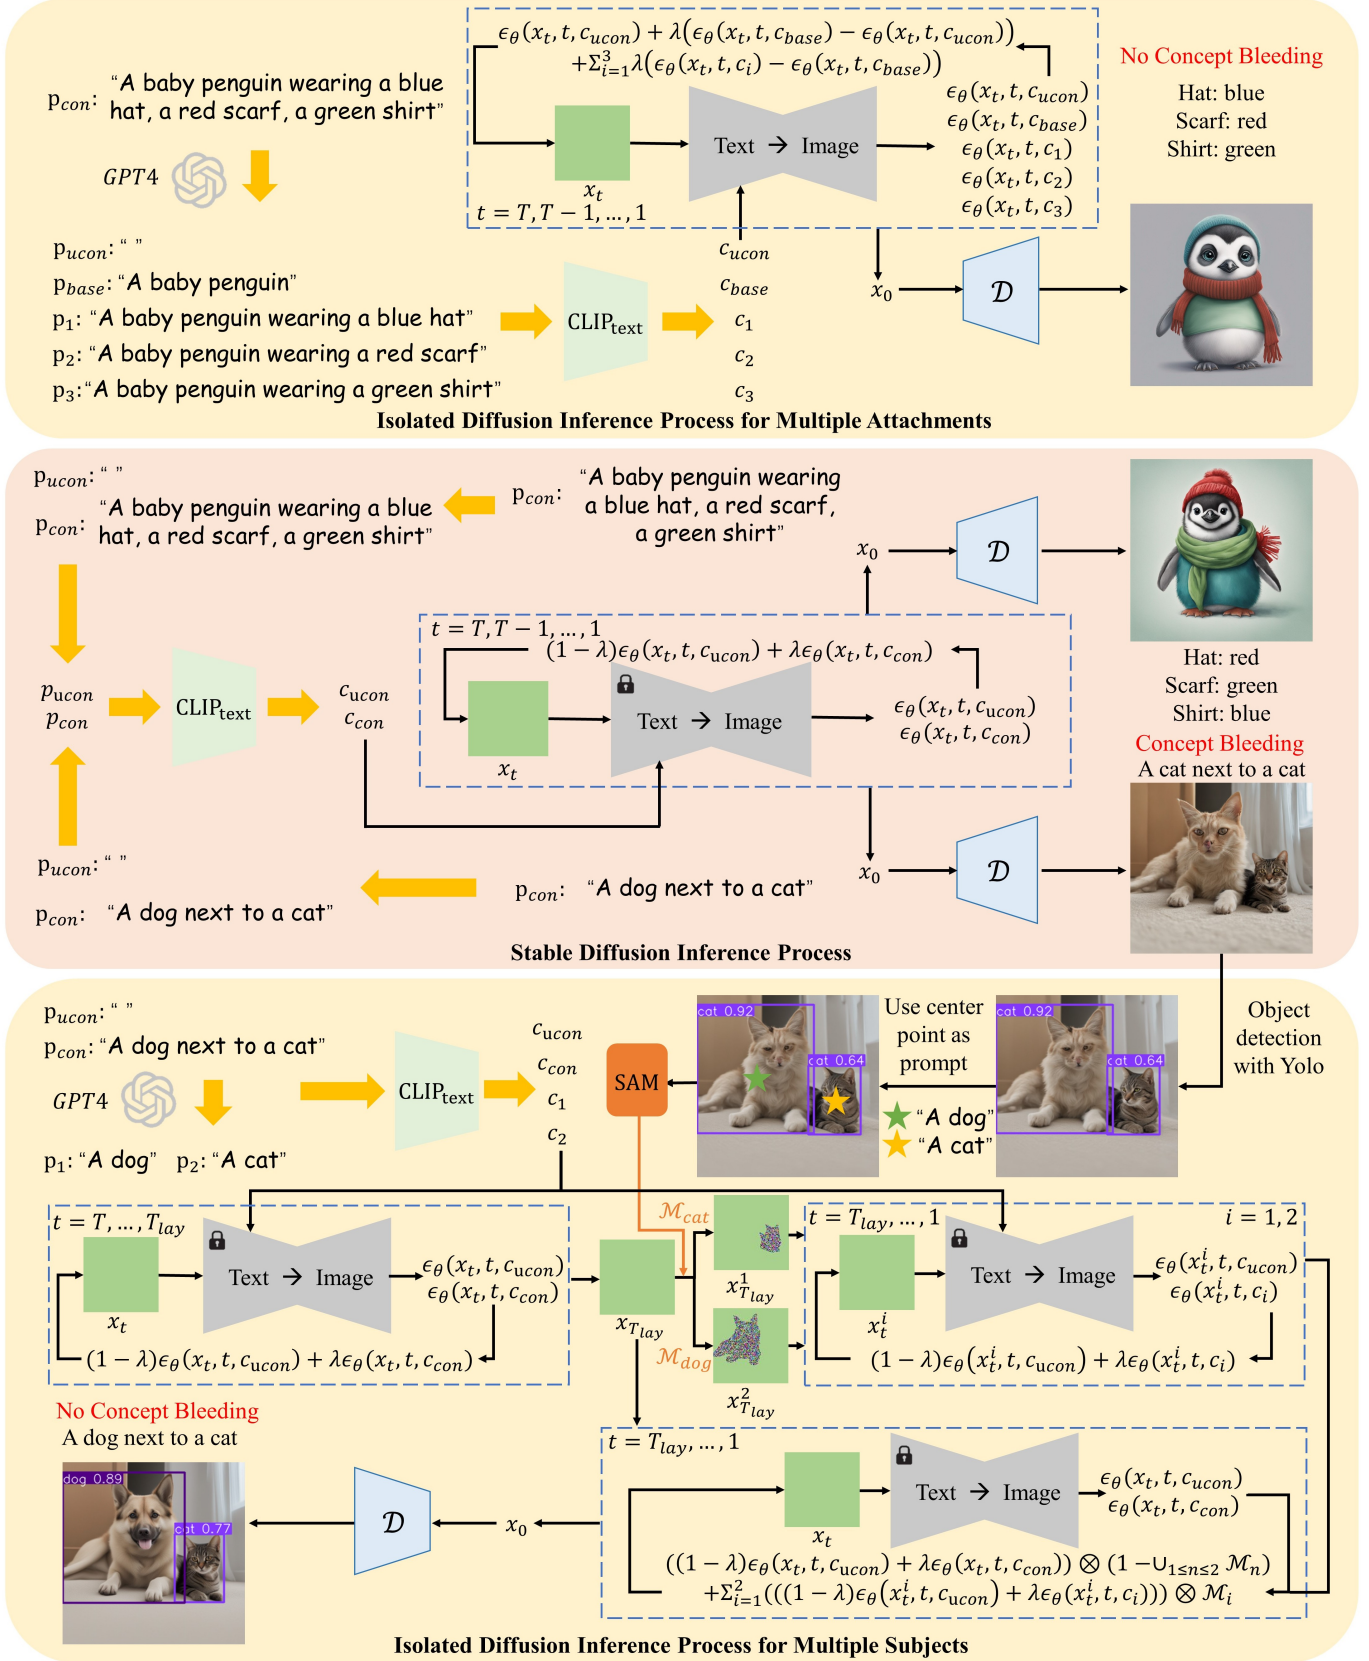


Fig. 3: Overview of Isolated Diffusion. We decompose complex text prompts into simpler forms with GPT4 and denoise each concept under split conditions to avoid mutual interference between various concepts for better text-image consistency.

Algorithm 2 Isolated Diffusion for Multiple Subjects

Require:

Fixed Models: CLIP text encoder $\text{CLIP}_{\text{text}}$, image decoder \mathcal{D} , pre-trained diffusion model ϵ_θ , YOLO and SAM models.

Input: Prompt list $\mathcal{P} = [\mathbf{p}_{ucon}, \mathbf{p}_{con}, \mathbf{p}_1, \dots, \mathbf{p}_k]$, random Gaussian noise x_T, x_ϵ , scale hyperparameter λ .

Output: Generated image X .

- 1: $[\mathbf{c}_{ucon}, \mathbf{c}_{con}, \mathbf{c}_1, \dots, \mathbf{c}_k] \leftarrow \text{CLIP}_{\text{text}}(\mathcal{P})$
 - 2: Generate X_0 with ϵ_θ based on \mathbf{c}_{ucon} and \mathbf{c}_{con} .
 - 3: Object detection on X_0 with YOLO
 - 4: **if** Detection results match text prompt with enough confidence: **then**
 - 5: $X \leftarrow X_0$
 - 6: **else**
 - 7: Segment subjects in X_0 with SAM using the center points of bounding boxes as prompts and get masks $[\mathcal{M}_1, \dots, \mathcal{M}_k]$, then assign masks to each subject.
 - 8: **for** $t = T, T-1, \dots, T_{\text{layout}}$ **do**
 - 9: $\epsilon_{ucon} \leftarrow \epsilon_\theta(x_t, t, \mathbf{c}_{ucon}), \epsilon_{con} \leftarrow \epsilon_\theta(x_t, t, \mathbf{c}_{con})$
 - 10: $\epsilon = \epsilon_{ucon} + \lambda * (\epsilon_{con} - \epsilon_{ucon})$
 - 11: Denoise x_t with ϵ to x_{t-1} .
 - 12: **end for**
 - 13: **for** $i = 1, \dots, k$ **do**
 - 14: $\mathcal{M} \leftarrow \bigcup_{1 \leq n \leq k}^{n \neq i} \mathcal{M}_n$
 - 15: $x_{T_{\text{lay}}}^i = x_{T_{\text{lay}}} \otimes (1 - \mathcal{M}) + x_\epsilon \otimes \mathcal{M}$
 - 16: **end for**
 - 17: **for** $t = T_{\text{lay}}, \dots, 1$ **do**
 - 18: $\epsilon_{ucon}^0 \leftarrow \epsilon_\theta(x_t, t, \mathbf{c}_{ucon}), \epsilon_{con}^0 \leftarrow \epsilon_\theta(x_t, t, \mathbf{c}_{con})$
 - 19: $\epsilon^0 = \epsilon_{ucon}^0 + \lambda(\epsilon_{con}^0 - \epsilon_{ucon}^0)$
 - 20: $\hat{\epsilon}(x_t, t) \leftarrow \epsilon^0 \otimes (1 - \bigcup_{1 \leq n \leq k} \mathcal{M}_n)$
 - 21: **for** $i = 1, \dots, k$ **do**
 - 22: $\epsilon_{ucon}^i \leftarrow \epsilon_\theta(x_t^i, t, \mathbf{c}_{ucon}), \epsilon_{con}^i \leftarrow \epsilon_\theta(x_t^i, t, \mathbf{c}_i)$
 - 23: $\epsilon^i = \epsilon_{ucon}^i + \lambda(\epsilon_{con}^i - \epsilon_{ucon}^i)$
 - 24: Denoise x_t^i with ϵ^i to x_{t-1}^i
 - 25: $\hat{\epsilon}(x_t, t) += \epsilon^i \otimes \mathcal{M}_i$
 - 26: **end for**
 - 27: Denoise x_t with $\hat{\epsilon}(x_t, t)$ to x_{t-1}
 - 28: **end for**
 - 29: Feed x_0 to decoder \mathcal{D} to generate X .
 - 30: **end if**
-

different subjects for following denoising steps under split conditions. Taking the sample in Fig. 3 as an example, we denote \mathcal{M}_{dog} and \mathcal{M}_{cat} as the masks of the dog and cat to be synthesized. In the denoising process of each subject, we replace the regions of other subjects with random noises. From the view of the attention mechanism, we manipulate the query maps by replacing the regions of other subjects with random noises to obtain attention maps for each subject individually. The latents to be denoised under the conditions of ‘‘A dog’’ and ‘‘A cat’’ can be defined as follows:

$$x_{T_{\text{lay}}}^1 = x_{T_{\text{lay}}} \otimes (1 - \mathcal{M}_{cat}) + \epsilon \otimes \mathcal{M}_{cat} \quad (3)$$

$$x_{T_{\text{lay}}}^2 = x_{T_{\text{lay}}} \otimes (1 - \mathcal{M}_{dog}) + \epsilon \otimes \mathcal{M}_{dog} \quad (4)$$

where ϵ and \otimes represent random noises and the element-wise

multiplication of tensors. Then they are denoised separately with the predicted noises as follows:

$$\epsilon^i = (1 - \lambda)\epsilon_\theta(x_t^i, t, \mathbf{c}_{ucon}) + \lambda\epsilon_\theta(x_t^i, t, \mathbf{c}_i). \quad (5)$$

At every time step t , we denoise x_t using the combination of predicted noises in different regions, including foreground and background, segmented by the masks as follows:

$$\epsilon^0 = ((1 - \lambda)\epsilon_\theta(x_t, t, \mathbf{c}_{ucon}) + \lambda\epsilon_\theta(x_t, t, \mathbf{c}_{con})) \quad (6)$$

$$\epsilon^i = ((1 - \lambda)\epsilon_\theta(x_t^i, t, \mathbf{c}_{ucon}) + \lambda\epsilon_\theta(x_t^i, t, \mathbf{c}_i)) \quad (7)$$

$$\hat{\epsilon}(x_t, t) = \epsilon^0 \otimes (1 - \bigcup_{1 \leq n \leq k} \mathcal{M}_n) + \sum_{i=1}^k \epsilon^i \otimes \mathcal{M}_i. \quad (8)$$

where k represents the number of subjects in the synthesized sample (e.g., $k = 2$ for ‘‘A dog next to a cat’’).

The pseudo-code of Isolated Diffusion for multiple subjects is provided in Algorithm 2. Compared with the SD inference process, we split text prompts into a group of simpler text prompts for each subject and introduce the open-source YOLO and SAM models to fix the concept bleeding problem for multiple subjects. There are alternative choices to erase the attention on other subjects with random noises. Ablations of noise adding strategies are provided in Appendix IV-D.

IV. EXPERIMENTS

Basic Setups The proposed Isolated Diffusion is mainly implemented with SDXL [18]. Our approach is training-free and the inference processes are conducted on a single NVIDIA RTX A6000 GPU. The max diffusion step T is 1000. We sample images with the DPM-solver [78] scheduler using 50 spaced time steps. The refiner introduced in SDXL is employed to denoise samples in the last 10% time steps. For multi-subject generation, we empirically set the time step T_{lay} as 700-800 to maintain the original layouts of subjects. We follow SDXL to set the scaling of condition λ as 5 for all the experiments. The YOLOv8x [31] and SAM ViT-H [32] models are employed in multi-subject generation.

Datasets We compile some text prompts from MS-COCO [79] and synthesize additional text prompts following specific formats of multiple concepts using GPT4 [77] as supplements. The formats for multiple concepts can be approximately concluded as follows: 1) a [subject] with [attachment1], [attachment2], and [attachment3], 2) a [subject A] and a [subject B], and 3) a [adjective A] [subject A] and a [adjective B] [subject B], 4) a [subject A] with [attachment A1], [attachment A2] and a [subject B] with [attachment B1], [attachment B2].

Baselines We employ Composable Diffusion [21], Structured Diffusion [22], Attend-and-Excite [23], Divide-and-Bind [28], and SynGEN [29] as baselines. SD1.4 and SDXL [18] as used as foundation models. All baselines are designed based on SD1.x or SD2.x models. However, SDXL uses different distributions of transformer blocks. Therefore, we implement most baselines with SD1.4 and provide the results of our approach based on both SD1.4 and SDXL. Conform [30] tackles similar tasks but is not open-source yet. Therefore, we do not include it for comparison.

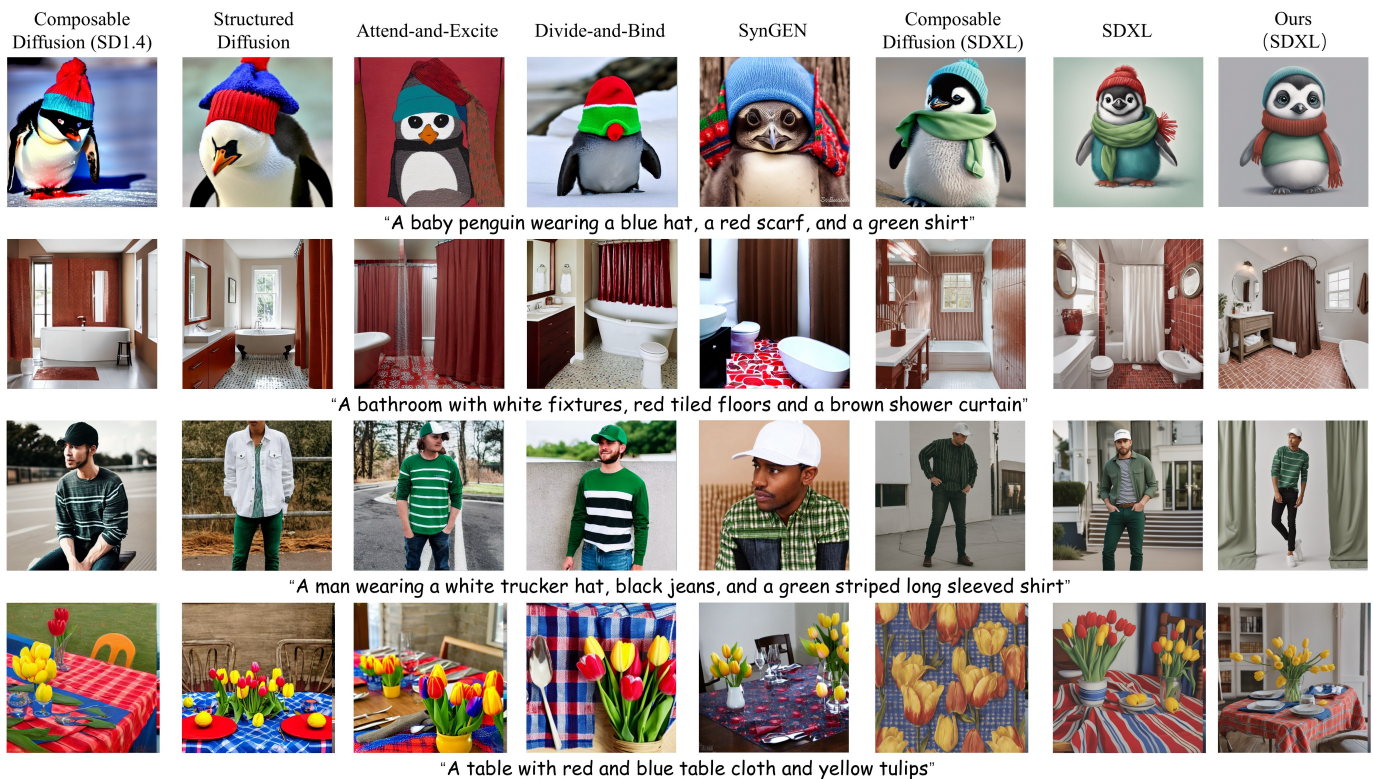


Fig. 4: Qualitative comparison between our approach and baselines using text prompts of multiple attachments. Isolated Diffusion achieves the best text-image consistency among all the methods and maintains high fidelity similar to SDXL.

Foundation Model	Method	CLIP-TEXT (\uparrow)		BLIP-VQA (\uparrow)		mGPT-CoT (\uparrow)	
		Attachments	Subjects	Attachments	Subjects	Attachments	Subjects
SD1.4	Composable Diffusion [21]	0.310	0.310	0.356	0.382	0.812	0.688
	Structured Diffusion [22]	0.316	0.310	0.379	0.496	0.815	0.765
	Attend-and-Excite [23]	0.315	0.323	0.430	0.589	0.815	0.795
	Divide-and-Bind [28]	0.322	0.331	0.451	0.549	0.825	0.771
	SynGEN [29]	0.320	0.338	0.515	0.594	0.845	0.805
	Ours	0.328	0.346	0.532	0.627	0.854	0.842
SDXL	Composable Diffusion [21]	0.318	0.321	0.443	0.396	0.825	0.765
	SDXL [18]	0.319	0.329	0.507	0.542	0.844	0.766
	Ours	0.332	0.354	0.571	0.699	0.879	0.861

TABLE I: Quantitative evaluation of text-image consistency for baselines and our approach. Results of different approaches averaged over 50 text prompts of multiple attachments or multiple subjects. Our approach outperforms baselines on all the benchmarks. We split the results according to the foundation model choice for fair comparison.

A. Qualitative Evaluation

We provide visualized samples accompanied by text prompts to evaluate the text-image matching degree qualitatively. We provide results of multi-attachment synthesis in Fig. 4. Our approach produces the best text-image consistent results with high fidelity. In detail, our approach avoids the concept bleeding of color and material descriptions bound to different attachments. Taking the first row as an example, our approach produces a baby penguin and synthesizes each attachment accurately. Baselines either neglect the “green shirt” or merge “green” to “hat” or “scarf”.

In Fig. 5, we show visualized samples of multiple subjects. Unlike the strategy for multiple attachments, Isolated Diffusion for multiple subjects is designed to fix the concept bleeding problem in samples produced by SD [17] models. Therefore, we provide samples of SDXL and samples revised by our

approach. We observe that baselines tend to generate samples of merging concepts. Given “a brown pig and a white sheep” as the text prompt, Structured Diffusion [22] synthesizes two sheep with different colors; Attend-and-Excite [23] gets pigs with sheep ears; Divide-and-Bind [28] and SynGEN [29] get sheep with a pig nose; SDXL [18] produces a sheep having a brown head and pig nose; Composable Diffusion [18] fuses pig and sheep directly. Our approach avoids the mutual interference between different subjects and synthesizes a brown pig and a white sheep appropriately. Moreover, baselines suffer from subjects merging or missing and wrongly assigned attachments between various subjects. Our approach draws support from YOLO and SAM models to separate the synthesis of each subject. It achieves the best text-image consistency and maintains image layouts and high generation quality. Visualized samples of our approach based on SD1.4

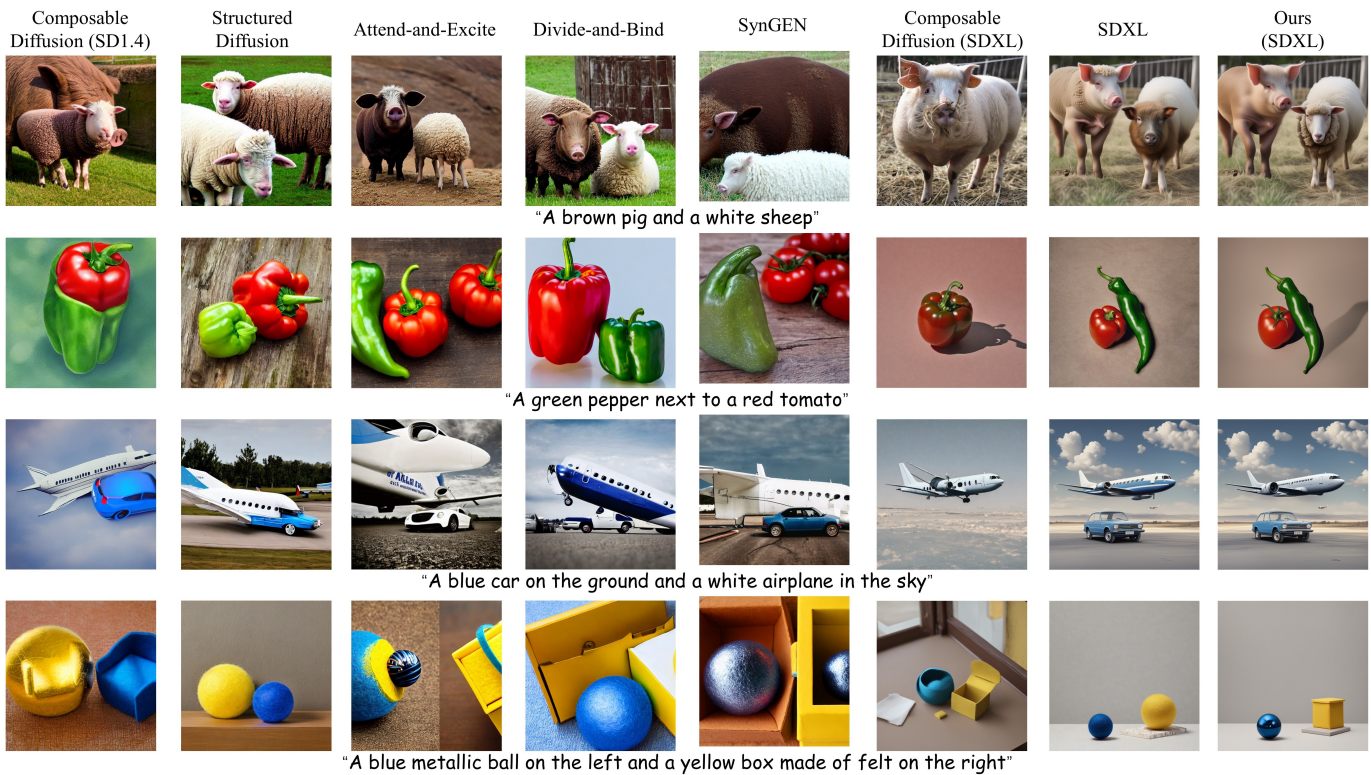


Fig. 5: Qualitative comparison between our approach and baselines using text prompts of multiple subjects. Isolated Diffusion revises the samples of SDXL to fix the problem of concept bleeding and achieves outstanding text-image consistency.

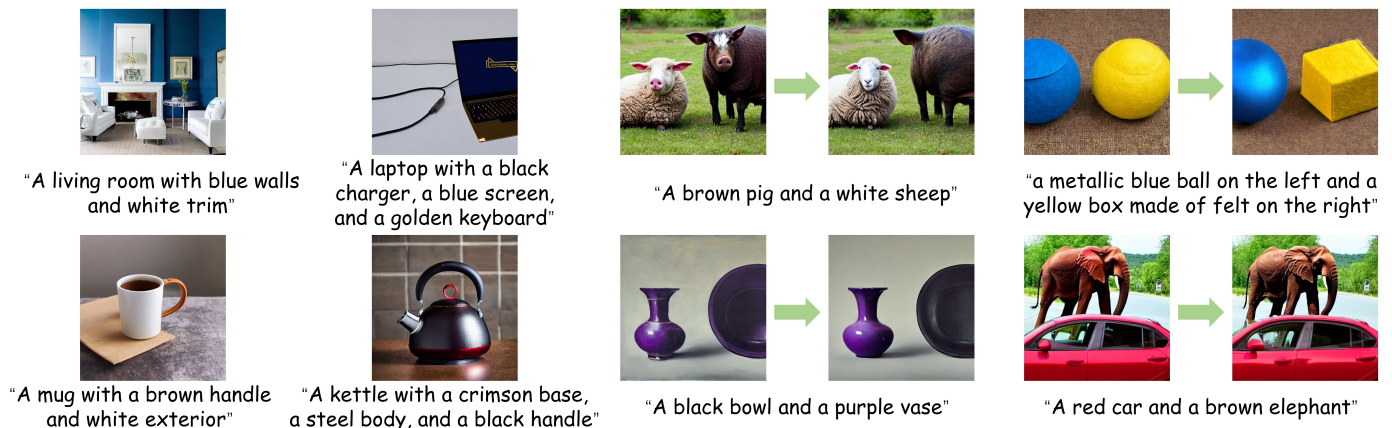


Fig. 6: Additional visualized samples of Isolated Diffusion based on SD1.4 for multiple attachments (the left two columns) and multiple subjects (the right two columns). In the two columns on the right, we provide the concept bleeding samples of SD1.4 on the left and the revised results of our approach on the right.

are shown in Fig. 6. More samples are added in Appendix C.

We follow prior works to focus mainly on two-subject scenes. We also explore samples of more complex scenes, such as three subjects or two subjects with multiple attachments bound to each one in Fig. 7. We combine Isolated Diffusion for multiple attachments and multiple subjects to revise the mutual interference between various concepts and achieve better text-image consistency in such complex scenes.

B. Quantitative Evaluation

We use 50 text prompts for multi-attachment and another 50 text prompts for multi-subject evaluation. We first encode the generated samples and text prompts to embeddings with CLIP [19] image and text encoders. Then we compute the cosine similarity between text and image embeddings as the CLIP-text metric. Besides, we employ the other two benchmarks designed for text-image consistency evaluation in multi-concept generation: BLIP-VQA and mGPT-CoT [80], which employs BLIP [81] and MiniGPT4 [82] to understand synthesized samples. The results are split into two groups based on

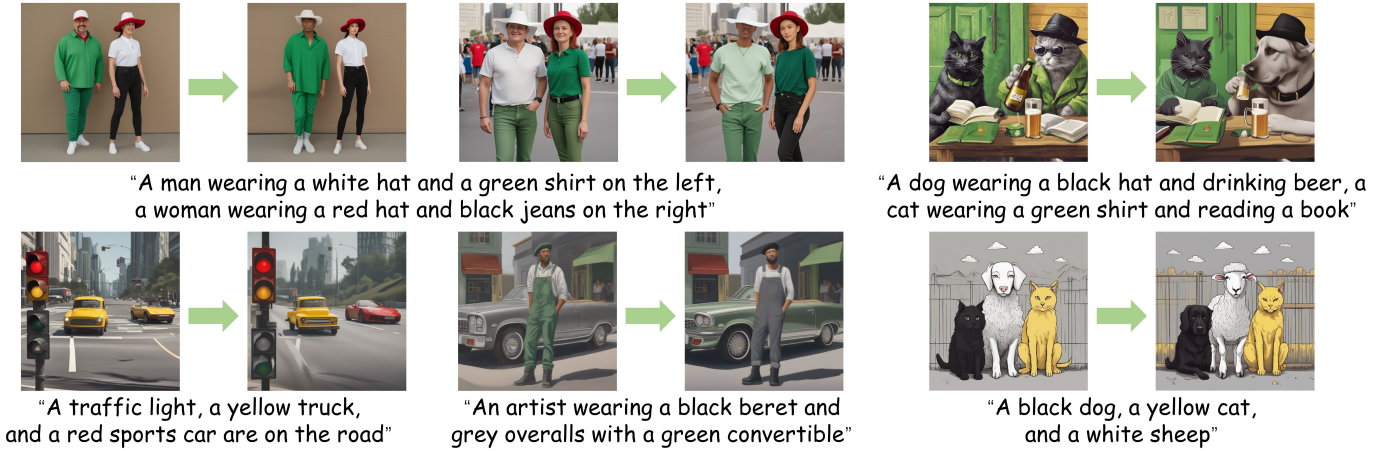


Fig. 7: Qualitative comparison between samples produced by SDXL and revised by our approach in more complex scenes, e.g., more kinds of subjects or two subjects with various attachments bound to each one.

Method	Attachments	Subjects
Composable Diffusion (SD1.4) [21]	2.18%	2.27%
Structured Diffusion (SD1.4) [22]	7.07%	5.78%
Attend-and-Excite (SD1.4) [23]	1.42%	11.51%
Divide-and-Bind (SD1.4) [28]	2.67%	12.44%
SynGEN (SD1.4) [29]	18.71%	17.73%
Composable Diffusion (SDXL) [21]	8.00%	4.93%
SDXL [18]	13.87%	5.07%
Ours (SDXL)	46.09%	40.27%

TABLE II: User study results. We achieve the highest support rates in two subsets of multiple attachments and subjects.

different foundation models SD1.4 and SDXL. As shown in Table I, our approach achieves state-of-the-art results on all the benchmarks, demonstrating its strong capability of maintaining text-image consistency for multi-concept synthesis.

C. User Study

We employ 75 participants in the user study and provide 125 questions for everyone. The ages of users range from 18 to 55. Users are asked to consider both text-image consistency and generation quality given text prompts as reference.

In the first 50 questions, users are provided with 8 options of our approach and baselines, including Structured Diffusion [22], Attend-and-Excite [23], Divide-and-Bind [28], SynGEN [29], SDXL [18], and Composable Diffusion [21] based on SD1.4 and SDXL and asked to choose the best sample. We synthesize samples based on SD1.4 and SDXL with fixed seeds separately for fair comparison. We choose 25 text prompts for each task (multiple attachments and multiple subjects). For multi-subject generation, we provide revised samples using axes prompts for the subjects provided by users. We count up the votes for every approach and report the results of the user study by percentage in Table II. For multiple attachments, our approach outperforms baselines and takes almost half of the votes. SynGEN achieves higher approval ratings than other baselines. Attend-and-Excite and Divide-and-Bind are not designed for multi-attachment synthesis. For multiple subjects, our approach achieves the highest approval

Method	Attachments	Subjects
Structured Diffusion (SD1.4) [22]	13.87%	4.22%
Attend-and-Excite (SD1.4) [23]	4.18%	14.27%
Divide-and-Bind (SD1.4) [28]	4.49%	17.02%
SynGEN (SD1.4) [29]	25.20%	25.33%
Ours (SD1.4)	52.71%	39.16%

TABLE III: User study implemented with SD1.4.

rate of 40.27%. Attend-and-Excite and Divide-and-Bind get apparently better results in multi-subject synthesis. Baselines like Structured Diffusion and Composable Diffusion fail to produce compelling results for multiple subjects. Some baselines can synthesize samples of high fidelity for some relatively simple prompts, making it hard for our approach to obtain overwhelming advantages among all the approaches.

In the next 50 questions, we implement methods including Structured Diffusion, Attend-and-Excite, Divide-and-Bind, SynGEN, and our approach with SD1.4 and ask users to choose the best one. The results are reported in Table III. Our approach still achieves clear advantages over baselines in both multi-attachment and multi-subject synthesis.

In the last 25 questions, users are asked to identify whether the revised samples of multiple subjects produced by our approach are better than the original ones or if the revised samples are similar to the original ones. Our approach gains the support rate of 82.93% while 3.64% votes think that the original samples are better, and other votes remain neutral.

D. Ablation Analysis

We first ablate Isolated Diffusion for multiple attachments with different methods to combine the attachments with the subject. As illustrated in Sec. III-A, we use the variance between noises predicted with the prompt of the base subject p_{base} and the prompt of each attachment bound to the base subject p_k . Naturally, there exists another method to isolate the denoising processes of multiple attachments. We can abandon using p_{base} and add up noises predicted with p_k directly. In this way, Eq. 2 degenerates to Eq. 9 as follows:

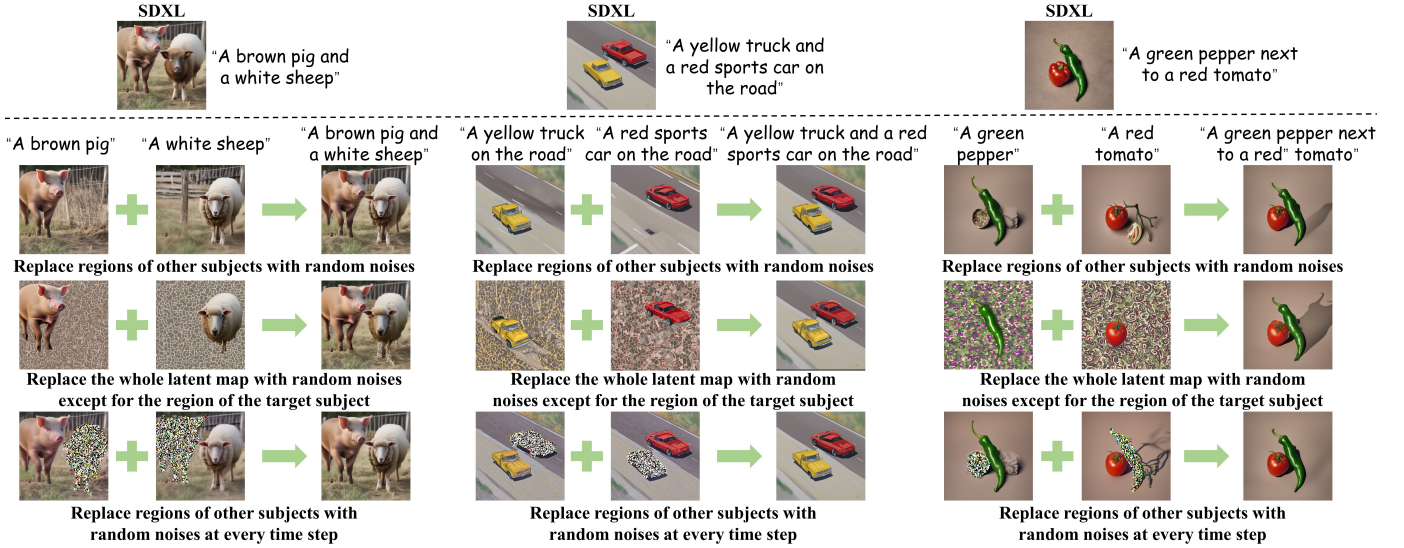


Fig. 8: Qualitative ablations for different noise adding strategies in multi-subject synthesis.

$$\hat{\epsilon}(x_t, t) = \epsilon_\theta(x_t, t, c_{ucon}) + \sum_{i=1}^k \lambda(\epsilon_\theta(x_t, t, c_i) - \epsilon_\theta(x_t, t, c_{ucon})) \quad (9)$$

We provide ablations of our approach and this method with visualized samples synthesized from fixed noise inputs in Fig. 9. It can be seen that without p_{base} , it becomes hard to obtain realistic samples. Most samples are abstract and inconsistent with text prompts. Some totally meaningless samples can be found as well. It further validates the effectiveness of our approach and the necessity of generating samples of multiple attachments based on the prompt of the base subject p_{base} .

Then we ablate Isolated Diffusion for multiple subjects with different methods to erase the attention on the other subjects. In Sec. III-B, we replace the regions of other subjects with random noises at the time step T_{lay} (method A) and denoise each subject individually in the following steps. Here we provide the other two methods: 1) replace the whole latent with random noises except for the region of the target subject (method B), 2) replace regions of other subjects with random noises at every time step after T_{lay} (method C).

We employ several text prompts and provide qualitative results in Fig. 8. We provide denoised samples of each subject and the final outputs, all of which are refined by the refiner of SDXL in the last 10% timesteps. As shown in the visualized samples, all three methods achieve better text-image consistency with isolated denoising processes of various subjects. However, it can be seen that it is difficult for method B to fuse subjects into the background naturally, leading to degraded generation quality. Method C achieves results similar to method A. However, it can be seen that keeping the regions of other subjects as random noises influences the generation quality of target subjects in certain cases. It leads to some unreasonable details, like the red sporting car in Fig. 8. Therefore, we choose to use method A in Isolated Diffusion.



Fig. 9: Qualitative ablations of Isolated Diffusion for multiple attachments. Samples of Isolated Diffusion are shown on the left for every text prompt. Samples of Isolated Diffusion w/o using p_{base} are shown on the right. Input noises are fixed.

E. Comparison with MultiDiffusion

MultiDiffusion [62] is a controllable generation method compatible with region-based image generation given masks for foreground subjects. It also splits text prompts for multi-subject generation. Here we add detailed comparison between MultiDiffusion and our approach. Our key idea is to erase attention on other subjects when denoising each subject individually with split text prompts. When denoising each subject, we replace the regions of other subjects in latents with random noises. MultiDiffusion denoises the same latents with split text prompts and fuses regions segmented by masks with closed-form formulas to get the full image. It doesn't take actions to

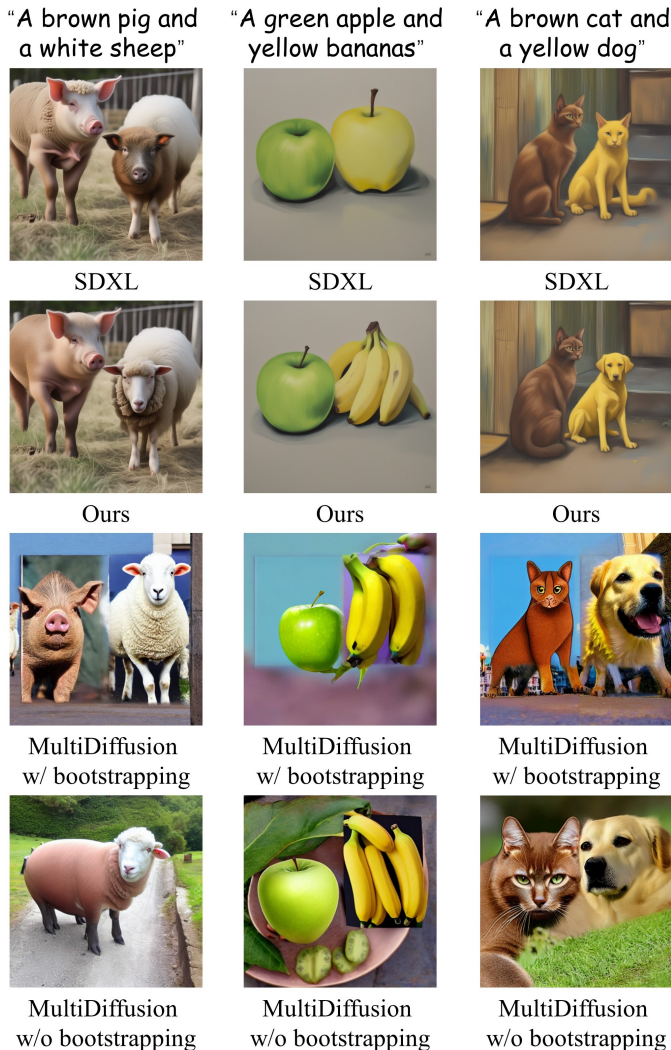


Fig. 10: Qualitative comparison between our approach and MultiDiffusion. We place coarse masks for two subjects in the left and right parts of images as conditions for MultiDiffusion.

erase attention on other subjects. We provide several samples produced by MultiDiffusion in Fig. 10 using coarse masks placed in the left and right parts of images and provide results of our approach for comparison. MultiDiffusion suffers two typical problems in multi-subject synthesis. It may merge two subjects into one or produce subjects in disharmonious styles. In contrast, our approach achieves more reasonable results.

V. LIMITATIONS

Despite the compelling results achieved by our approach, it still has some limitations. Our approach is designed to solve the concept bleeding problem of current SD models. However, it fails when SD models neglect subjects or YOLO fails to detect enough number of subjects. For example, given a text prompt of "A cat and a dog", our approach cannot deal with samples of only one cat or dog. Fortunately, SDXL has made great progress in avoiding the concept missing problem. For example, we use SDXL to synthesize hundreds of samples with text prompts like "A cat and a frog" and find almost all

the samples get results without subject missing. As for YOLO, synthesized samples generally have higher resolution and are clearer than natural images, making foreground subjects easier to be detected in most cases. We can also adjust confidence thresholds to obtain appropriate results. In addition, it is hard for YOLO to deal with unseen subjects. Alternative detectors or human feedback can be applied as replacements to deal with such cases.

VI. CONCLUSION

This work introduces Isolated Diffusion to handle the well-known "concept bleeding" problem of modern text-to-image SD models. Our approach is designed to deal with the mutual interference between different attachments and subjects in multi-concept generation. Different from recent works optimizing cross-attention maps or latents, we explore a novel route to isolate different concepts more intuitively. In detail, we isolate the denoising processes of various attachments and subjects using split text prompts as conditions. For multiple attachments, we synthesize each attachment bound to the same subject separately. For multiple subjects, we depend on pre-trained detection and segmentation models to identify image layouts and generate each subject separately. Our approach is training-free and compatible with any SD models. We conduct extensive experiments and demonstrate the effectiveness of our approach with clear advantages over existing methods in the user study. Our work takes a further step towards better text-image consistency in multi-concept synthesis.

REFERENCES

- [1] J. Sohl-Dickstein, E. Weiss, N. Maheswaranathan, and S. Ganguli, "Deep unsupervised learning using nonequilibrium thermodynamics," in *International Conference on Machine Learning*, 2015, pp. 2256–2265.
- [2] J. Ho, A. Jain, and P. Abbeel, "Denoising diffusion probabilistic models," *Advances in Neural Information Processing Systems*, vol. 33, pp. 6840–6851, 2020.
- [3] Y. Song and S. Ermon, "Improved techniques for training score-based generative models," *Advances in Neural Information Processing Systems*, vol. 33, pp. 12 438–12 448, 2020.
- [4] P. Dhariwal and A. Nichol, "Diffusion models beat gans on image synthesis," *Advances in Neural Information Processing Systems*, vol. 34, pp. 8780–8794, 2021.
- [5] A. Q. Nichol and P. Dhariwal, "Improved denoising diffusion probabilistic models," in *International Conference on Machine Learning*. PMLR, 2021, pp. 8162–8171.
- [6] D. Kingma, T. Salimans, B. Poole, and J. Ho, "Variational diffusion models," *Advances in Neural Information Processing Systems*, vol. 34, pp. 21 696–21 707, 2021.
- [7] N. Ruiz, Y. Li, V. Jampani, Y. Pritch, M. Rubinstein, and K. Aberman, "Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 22 500–22 510.
- [8] R. Gal, Y. Alaluf, Y. Atzmon, O. Patashnik, A. H. Bermano, G. Chechik, and D. Cohen-or, "An image is worth one word: Personalizing text-to-image generation using textual inversion," in *The Eleventh International Conference on Learning Representations*, 2022.
- [9] N. Kumari, B. Zhang, R. Zhang, E. Shechtman, and J.-Y. Zhu, "Multi-concept customization of text-to-image diffusion," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 1931–1941.
- [10] Y. Gu, X. Wang, J. Z. Wu, Y. Shi, Y. Chen, Z. Fan, W. Xiao, R. Zhao, S. Chang, W. Wu *et al.*, "Mix-of-show: Decentralized low-rank adaptation for multi-concept customization of diffusion models," *Advances in Neural Information Processing Systems*, vol. 36, 2024.

- [11] A. Raj, S. Kaza, B. Poole, M. Niemeyer, N. Ruiz, B. Mildenhall, S. Zada, K. Aberman, M. Rubinstein, J. Barron *et al.*, “Dreambooth3d: Subject-driven text-to-3d generation,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 2349–2359.
- [12] J. Zhu, H. Ma, J. Chen, and J. Yuan, “Domainstudio: Fine-tuning diffusion models for domain-driven image generation using limited data,” *arXiv preprint arXiv:2306.14153*, 2023.
- [13] B. Kawar, S. Zada, O. Lang, O. Tov, H. Chang, T. Dekel, I. Mosseri, and M. Irani, “Imagic: Text-based real image editing with diffusion models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 6007–6017.
- [14] C. Saharia, W. Chan, S. Saxena, L. Li, J. Whang, E. L. Denton, K. Ghasemipour, R. Gontijo Lopes, B. Karagol Ayan, T. Salimans *et al.*, “Photorealistic text-to-image diffusion models with deep language understanding,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 36479–36494, 2022.
- [15] A. Ramesh, P. Dhariwal, A. Nichol, C. Chu, and M. Chen, “Hierarchical text-conditional image generation with clip latents,” *arXiv preprint arXiv:2204.06125*, 2022.
- [16] Y. Balaji, S. Nah, X. Huang, A. Wahdat, J. Song, K. Kreis, M. Aittala, T. Aila, S. Laine, B. Catanzaro *et al.*, “ediffi: Text-to-image diffusion models with an ensemble of expert denoisers,” *arXiv preprint arXiv:2211.01324*, 2022.
- [17] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer, “High-resolution image synthesis with latent diffusion models,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 10684–10695.
- [18] D. Podell, Z. English, K. Lacey, A. Blattmann, T. Dockhorn, J. Müller, J. Penna, and R. Rombach, “Sdxl: Improving latent diffusion models for high-resolution image synthesis,” in *International Conference on Learning Representations*, 2024.
- [19] A. Radford, J. W. Kim, C. Hallacy *et al.*, “Learning transferable visual models from natural language supervision,” in *International conference on machine learning*. PMLR, 2021, pp. 8748–8763.
- [20] R. W. Gabriel Ilharco, Mitchell Wortsman *et al.*, “Openclip,” <https://doi.org/10.5281/zenodo.5143773>, July 2021.
- [21] N. Liu, S. Li, Y. Du, A. Torralba, and J. B. Tenenbaum, “Compositional visual generation with composable diffusion models,” in *European Conference on Computer Vision*. Springer, 2022, pp. 423–439.
- [22] W. Feng, X. He, T.-J. Fu, Y. Jampani, A. Akula, P. Narayana, S. Basu, X. E. Wang, and W. Y. Wang, “Training-free structured diffusion guidance for compositional text-to-image synthesis,” in *International Conference on Learning Representations*, 2023.
- [23] H. Chefer, Y. Alaluf, Y. Vinker, L. Wolf, and D. Cohen-Or, “Attend-and-excite: Attention-based semantic guidance for text-to-image diffusion models,” *ACM Transactions on Graphics (TOG)*, vol. 42, no. 4, pp. 1–10, 2023.
- [24] J. Mao and X. Wang, “Training-free location-aware text-to-image synthesis,” in *2023 IEEE International Conference on Image Processing (ICIP)*. IEEE, 2023, pp. 995–999.
- [25] M. Chen, I. Laina, and A. Vedaldi, “Training-free layout control with cross-attention guidance,” *arXiv preprint arXiv:2304.03373*, 2023.
- [26] W.-D. K. Ma, J. Lewis, W. B. Kleijn, and T. Leung, “Directed diffusion: Direct control of object placement through attention guidance,” *arXiv preprint arXiv:2302.13153*, 2023.
- [27] Q. Wu, Y. Liu, H. Zhao, T. Bui, Z. Lin, Y. Zhang, and S. Chang, “Harnessing the spatial-temporal attention of diffusion models for high-fidelity text-to-image synthesis,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 7766–7776.
- [28] Y. Li, M. Keuper, D. Zhang, and A. Khoreva, “Divide & bind your attention for improved generative semantic nursing,” in *BMVC*, 2023.
- [29] R. Rassin, E. Hirsch, D. Glickman, S. Ravfogel, Y. Goldberg, and G. Chechik, “Linguistic binding in diffusion models: Enhancing attribute correspondence through attention map alignment,” *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [30] T. H. S. Meral, E. Simsar, F. Tombari, and P. Yanardag, “Conform: Contrast is all you need for high-fidelity text-to-image diffusion models,” *arXiv preprint arXiv:2312.06059*, 2023.
- [31] J. Redmon, S. Divvala, R. Girshick, and A. Farhadi, “You only look once: Unified, real-time object detection,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 779–788.
- [32] A. Kirillov, E. Mintun, N. Ravi, H. Mao, C. Rolland, L. Gustafson, T. Xiao, S. Whitehead, A. C. Berg, W.-Y. Lo *et al.*, “Segment anything,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 4015–4026.
- [33] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, “Generative adversarial nets,” *Advances in Neural Information Processing Systems*, vol. 27, 2014.
- [34] A. Brock, J. Donahue, and K. Simonyan, “Large scale GAN training for high fidelity natural image synthesis,” in *International Conference on Learning Representations*, 2019.
- [35] T. Karras, S. Laine, and T. Aila, “A style-based generator architecture for generative adversarial networks,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 4401–4410.
- [36] T. Karras, S. Laine, M. Aittala, J. Hellsten, J. Lehtinen, and T. Aila, “Analyzing and improving the image quality of stylegan,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2020, pp. 8110–8119.
- [37] T. Karras, M. Aittala, S. Laine, E. Härkönen, J. Hellsten, J. Lehtinen, and T. Aila, “Alias-free generative adversarial networks,” *Advances in Neural Information Processing Systems*, vol. 34, pp. 852–863, 2021.
- [38] D. P. Kingma and M. Welling, “Auto-encoding variational bayes,” *arXiv preprint arXiv:1312.6114*, 2013.
- [39] D. J. Rezende, S. Mohamed, and D. Wierstra, “Stochastic backpropagation and approximate inference in deep generative models,” in *International Conference on Machine Learning*. PMLR, 2014, pp. 1278–1286.
- [40] A. Wahdat and J. Kautz, “Nvae: A deep hierarchical variational autoencoder,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 19667–19679, 2020.
- [41] A. Van den Oord, N. Kalchbrenner, L. Espeholt, O. Vinyals, A. Graves *et al.*, “Conditional image generation with pixelcnn decoders,” *Advances in Neural Information Processing Systems*, vol. 29, 2016.
- [42] X. Chen, N. Mishra, M. Rohaninejad, and P. Abbeel, “Pixelsnail: An improved autoregressive generative model,” in *International Conference on Machine Learning*. PMLR, 2018, pp. 864–872.
- [43] T. Henighan, J. Kaplan, M. Katz, M. Chen, C. Hesse, J. Jackson, H. Jun, T. B. Brown, P. Dhariwal, S. Gray *et al.*, “Scaling laws for autoregressive generative modeling,” *arXiv preprint arXiv:2010.14701*, 2020.
- [44] L. Zhang, A. Rao, and M. Agrawala, “Adding conditional control to text-to-image diffusion models,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 3836–3847.
- [45] S. Zhao, D. Chen, Y.-C. Chen, J. Bao, S. Hao, L. Yuan, and K.-Y. K. Wong, “Uni-controlnet: All-in-one control to text-to-image diffusion models,” *arXiv preprint arXiv:2305.16322*, 2023.
- [46] C. Mou, X. Wang, L. Xie, J. Zhang, Z. Qi, Y. Shan, and X. Qie, “T2i-adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models,” *arXiv preprint arXiv:2302.08453*, 2023.
- [47] Y. Li, H. Liu, Q. Wu, F. Mu, J. Yang, J. Gao, C. Li, and Y. J. Lee, “Gligen: Open-set grounded text-to-image generation,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 22511–22521.
- [48] A. Q. Nichol, P. Dhariwal, A. Ramesh, P. Shyam, P. Mishkin, B. McGrew, I. Sutskever, and M. Chen, “Glide: Towards photorealistic image generation and editing with text-guided diffusion models,” in *International Conference on Machine Learning*. PMLR, 2022, pp. 16784–16804.
- [49] W. Wang, J. Bao, W. Zhou, D. Chen, D. Chen, L. Yuan, and H. Li, “Semantic image synthesis via diffusion models,” *arXiv preprint arXiv:2207.00050*, 2022.
- [50] D. Epstein, A. Jabri, B. Poole, A. Efros, and A. Holynski, “Diffusion self-guidance for controllable image generation,” *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [51] E. Simo-Serra, S. Iizuka, K. Sasaki, and H. Ishikawa, “Learning to simplify: fully convolutional networks for rough sketch cleanup,” *ACM Transactions on Graphics (TOG)*, vol. 35, no. 4, pp. 1–11, 2016.
- [52] E. Simo-Serra, S. Iizuka, and H. Ishikawa, “Mastering sketching: adversarial augmentation for structured prediction,” *ACM Transactions on Graphics (TOG)*, vol. 37, no. 1, pp. 1–13, 2018.
- [53] J. Canny, “A computational approach to edge detection,” *IEEE Transactions on pattern analysis and machine intelligence*, no. 6, pp. 679–698, 1986.
- [54] G. Gu, B. Ko, S. Go, S.-H. Lee, J. Lee, and M. Shin, “Towards lightweight and real-time line segment detection,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 36, no. 1, 2022, pp. 726–734.
- [55] T. Xiao, Y. Liu, B. Zhou, Y. Jiang, and J. Sun, “Unified perceptual parsing for scene understanding,” in *Proceedings of the European conference on computer vision (ECCV)*, 2018, pp. 418–434.
- [56] O. Gafni, A. Polyak, O. Ashual, S. Sheynin, D. Parikh, and Y. Taigman, “Make-a-scene: Scene-based text-to-image generation with human priors,” in *Proceedings of the European Conference on Computer Vision*. Springer, 2022, pp. 89–106.

- [57] J. Cheng, X. Liang, X. Shi, T. He, T. Xiao, and M. Li, "Layoutdiffuse: Adapting foundational diffusion models for layout-to-image generation," *arXiv preprint arXiv:2302.08908*, 2023.
- [58] G. Zheng, X. Zhou, X. Li, Z. Qi, Y. Shan, and X. Li, "Layoutdiffusion: Controllable diffusion model for layout-to-image generation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 22 490–22 499.
- [59] H. Xue, Z. Huang, Q. Sun, L. Song, and W. Zhang, "Freestyle layout-to-image synthesis," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 14 256–14 266.
- [60] Y. Li, H. Liu, Y. Wen, and Y. J. Lee, "Generate anything anywhere in any scene," *arXiv preprint arXiv:2306.17154*, 2023.
- [61] J. Xie, Y. Li, Y. Huang, H. Liu, W. Zhang, Y. Zheng, and M. Z. Shou, "Boxdiff: Text-to-image synthesis with training-free box-constrained diffusion," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 7452–7461.
- [62] O. Bar-Tal, L. Yariv, Y. Lipman, and T. Dekel, "Multidiffusion: Fusing diffusion paths for controlled image generation," in *International Conference on Machine Learning*, 2023.
- [63] S. Xie, Z. Zhang, Z. Lin, T. Hinz, and K. Zhang, "Smartbrush: Text and shape guided object inpainting with diffusion model," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 22 428–22 437.
- [64] A. Lugmayr, M. Danelljan, A. Romero, F. Yu, R. Timofte, and L. Van Gool, "Repaint: Inpainting using denoising diffusion probabilistic models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 11 461–11 471.
- [65] T. Wu, C. Zheng, and T.-J. Cham, "Ipo-ldm: Depth-aided 360-degree indoor rgb panorama outpainting via latent diffusion model," *arXiv preprint arXiv:2307.03177*, 2023.
- [66] C. Saharia, J. Ho, W. Chan, T. Salimans, D. J. Fleet, and M. Norouzi, "Image super-resolution via iterative refinement," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 45, no. 4, pp. 4713–4726, 2022.
- [67] N. Ruiz, Y. Li, V. Jampani, W. Wei, T. Hou, Y. Pritch, N. Wadhwa, M. Rubinstein, and K. Aberman, "Hyperdreambooth: Hypernetworks for fast personalization of text-to-image models," *arXiv preprint arXiv:2307.06949*, 2023.
- [68] J. Ma, J. Liang, C. Chen, and H. Lu, "Subject-diffusion: Open domain personalized text-to-image generation without test-time fine-tuning," *arXiv preprint arXiv:2307.11410*, 2023.
- [69] N. Ahn, J. Lee, C. Lee, K. Kim, D. Kim, S.-H. Nam, and K. Hong, "Dreamstyler: Paint by style inversion with text-to-image diffusion models," in *AAAI*, 2024.
- [70] D. Bau, A. Andonian, A. Cui, Y. Park, A. Jahanian, A. Oliva, and A. Torralba, "Paint by word," *arXiv preprint arXiv:2103.10951*, 2021.
- [71] O. Avrahami, O. Fried, and D. Lischinski, "Blended latent diffusion," *ACM Transactions on Graphics (TOG)*, vol. 42, no. 4, pp. 1–11, 2023.
- [72] N. Huang, F. Tang, W. Dong, T.-Y. Lee, and C. Xu, "Region-aware diffusion for zero-shot text-driven image editing," *arXiv preprint arXiv:2302.11797*, 2023.
- [73] J. Mao, X. Wang, and K. Aizawa, "Guided image synthesis via initial image editing in diffusion model," in *Proceedings of the 31st ACM International Conference on Multimedia*, 2023, pp. 5321–5329.
- [74] T. Brooks, A. Holynski, and A. A. Efros, "Instructpix2pix: Learning to follow image editing instructions," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 18 392–18 402.
- [75] G. Couairon, J. Verbeek, H. Schwenk, and M. Cord, "Diffedit: Diffusion-based semantic image editing with mask guidance," in *The Eleventh International Conference on Learning Representations*, 2022.
- [76] O. Avrahami, D. Lischinski, and O. Fried, "Blended diffusion for text-driven editing of natural images," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 18 208–18 218.
- [77] T. Schick, J. Dwivedi-Yu, R. Dessì, R. Raileanu, M. Lomeli, E. Hambro, L. Zettlemoyer, N. Cancedda, and T. Scialom, "Toolformer: Language models can teach themselves to use tools," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [78] C. Lu, Y. Zhou, F. Bao, J. Chen, C. Li, and J. Zhu, "Dpm-solver: A fast ode solver for diffusion probabilistic model sampling in around 10 steps," *Advances in Neural Information Processing Systems*, vol. 35, pp. 5775–5787, 2022.
- [79] T.-Y. Lin, M. Maire, S. Belongie, J. Hays, P. Perona, D. Ramanan, P. Dollár, and C. L. Zitnick, "Microsoft coco: Common objects in context," in *European Conference on Computer Vision*. Springer, 2014, pp. 740–755.
- [80] K. Huang, K. Sun, E. Xie, Z. Li, and X. Liu, "T2i-compbench: A comprehensive benchmark for open-world compositional text-to-image generation," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [81] J. Li, D. Li, C. Xiong, and S. Hoi, "Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation," in *International Conference on Machine Learning*. PMLR, 2022, pp. 12 888–12 900.
- [82] D. Zhu, J. Chen, X. Shen, X. Li, and M. Elhoseiny, "Minigtpt-4: Enhancing vision-language understanding with advanced large language models," *arXiv preprint arXiv:2304.10592*, 2023.

Text Prompt	Prompt List \mathcal{P}
A bathroom with white fixtures, red tiled floors and a brown shower curtain	A bathroom , A bathroom with a white fixtures, A bathroom with red tiled floors, A bathroom with a brown shower curtain
A car with black wheels, a blue body, and red car lights	A car , A car with black wheels, A car with a blue body, A car with red car lights
A toothbrush with white bristles and a blue handle	A toothbrush , A toothbrush with white bristles, A toothbrush with a blue handle
A table with red and blue table cloth and yellow tulips	A table , A table with red and blue table cloth, A table with yellow tulips
A yellow truck and a red sports car on the road	A yellow truck on the road, A red sports car on the road
A metallic blue ball on the left and a yellow box made of felt on the right	A metallic blue ball on the left, A yellow box made of felt on the right
A blue car on the ground and a white airplane in the sky	A blue car on the ground, A white airplane in the sky
A green apple and yellow bananas	A green apple, Yellow bananas
A man wearing a white hat and a green shirt on the left, a woman wearing a red hat and black jeans on the right	A man on the left , A man wearing a white hat on the left, A man wearing a green shirt on the left, A woman on the right , A woman wearing a red hat on the right, A woman wearing black jeans on the right

TABLE IV: Prompt lists (separated by commas, the right part) used as inputs for Isolated Diffusion corresponding to the original text prompts (the left part). The text prompts of the base subjects p_{base} in multi-attachment generation are highlighted in **bold text**. Only the decomposed text prompts are shown here. The unconditional prompt p_{con} , and the original text prompt p_{con} are omitted. GPT4 [77] is employed to automate the text split process.

APPENDIX

A. Comparison with Image Editing Methods

As illustrated in Sec. II, image editing methods based on text-to-image diffusion models [48], [70], [71], [73]–[76] tackle tasks different from this work. They aim to manipulate parts of given images, while our approach aims to fix the concept bleeding problem in multi-concept generation. We use SAM [32] to get masks of subjects in Isolated Diffusion for multiple subjects. Some image editing methods like Blended Diffusion [71], [76] and DiffEdit [75] conduct image editing based on masks as well. Here we add detailed comparison.

Blended Diffusion marks the regions to be edited with user-given masks and denoise the whole image with text prompts of the edited content. In every denoising step, Blended Diffusion replaces the unedited regions with original images or compressed latents added with noises. Similarly, DiffEdit synthesizes masks for the subjects to be edited and denoises the whole image with text prompts of the edited content. DiffEdit shares the same method of maintaining unedited regions with Blended Diffusion. These methods may fail to produce samples that look realistic as a whole since they do not provide accurate guidance for the regions to be edited with given text prompts. Instead, they denoise the whole image with text prompts of edited parts directly and replace the unedited regions with the original image. Besides, they also struggle to deal with multi-attachment scenes like SD models. We provide samples produced by Blended Latent Diffusion in Fig. 11. It fails to deal with multi-attachment scenes and struggles to synthesize high-quality samples for multiple subjects. DiffEdit is not open-source yet, but some failed cases of multi-concept scenes are provided in its supplementary.

Isolated Diffusion is designed to achieve text-image consistency in multi-concept generation. It isolates the generation process of each subject by replacing the regions of other subjects with random noises and guides the diffusion model to

focus on a single subject with its corresponding text prompt. It composes the whole latent with regions of each subject and denoises the background with complete text prompts.

B. More Details of Implementation

We provide several examples of prompt lists \mathcal{P} corresponding to multi-concept text prompts in Table IV. For multiple attachments, we obtain the prompt of the subject and bind each attachment to this subject separately. For multiple subjects, we split the text of each subject directly. As shown in the last row of Table IV, we can combine these two methods to deal with more complex prompts containing multiple attachments bound to multiple subjects. We employ GPT4 [77] to automate this text split process.

In Isolated Diffusion for multiple subjects, we empirically find that time step T_{lay} between 700 and 800 is appropriate to keep the layouts of subjects and achieve effective revision of the subjects to avoid concept bleeding. We recommend larger T_{lay} to reserve more denoising steps for greater changes. For example, when Isolated Diffusion aims to change subjects into other subjects with different shapes (e.g., sphere \rightarrow box), more steps are needed to achieve such significant changes.

Besides, it is worth noting that YOLO [31] models are not always qualified for detecting target subjects, especially when the target subjects are not included in its training datasets. In such cases, we recommend users to provide axes prompts with alternative detection models or human feedback for the SAM [32] model to segment the synthesized subjects. In addition, our approach is promising to benefit from the SAM model using text prompts only, which has yet to be open-source.

C. Additional Visualized Samples

We provide additional multi-attachment and multi-subject samples produced by our approach in Fig. 12 as supplements to Sec. IV.

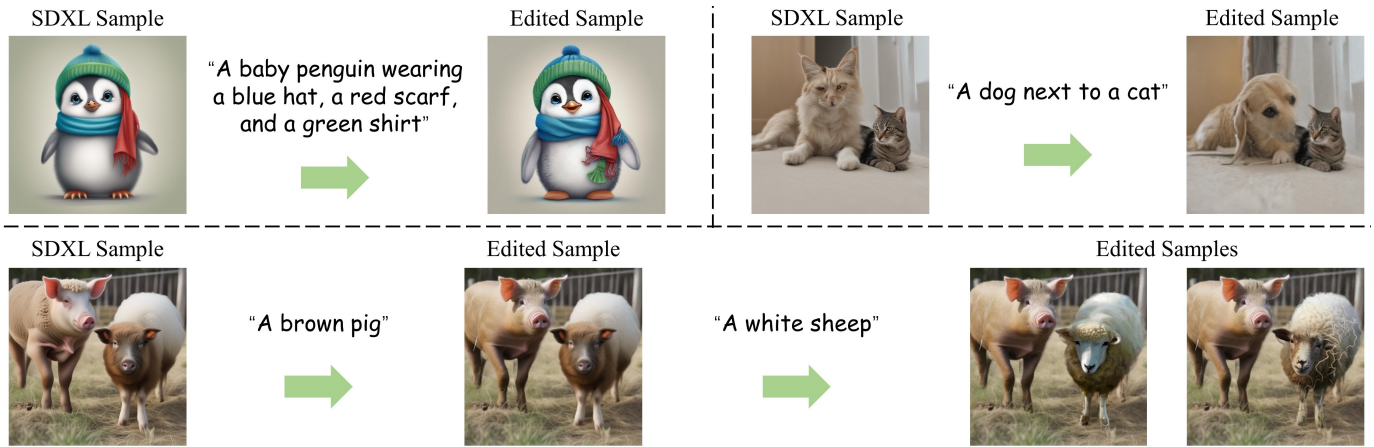


Fig. 11: Image editing examples produced by Blended Latent Diffusion [71] based on SDXL [18]. We use Blended Latent Diffusion to edit samples produced by SDXL. Blended Latent Diffusion can optimize the concept bleeding problem of multi-subject synthesis but still struggles to achieve harmonious results. It is not qualified for multi-attachment synthesis.

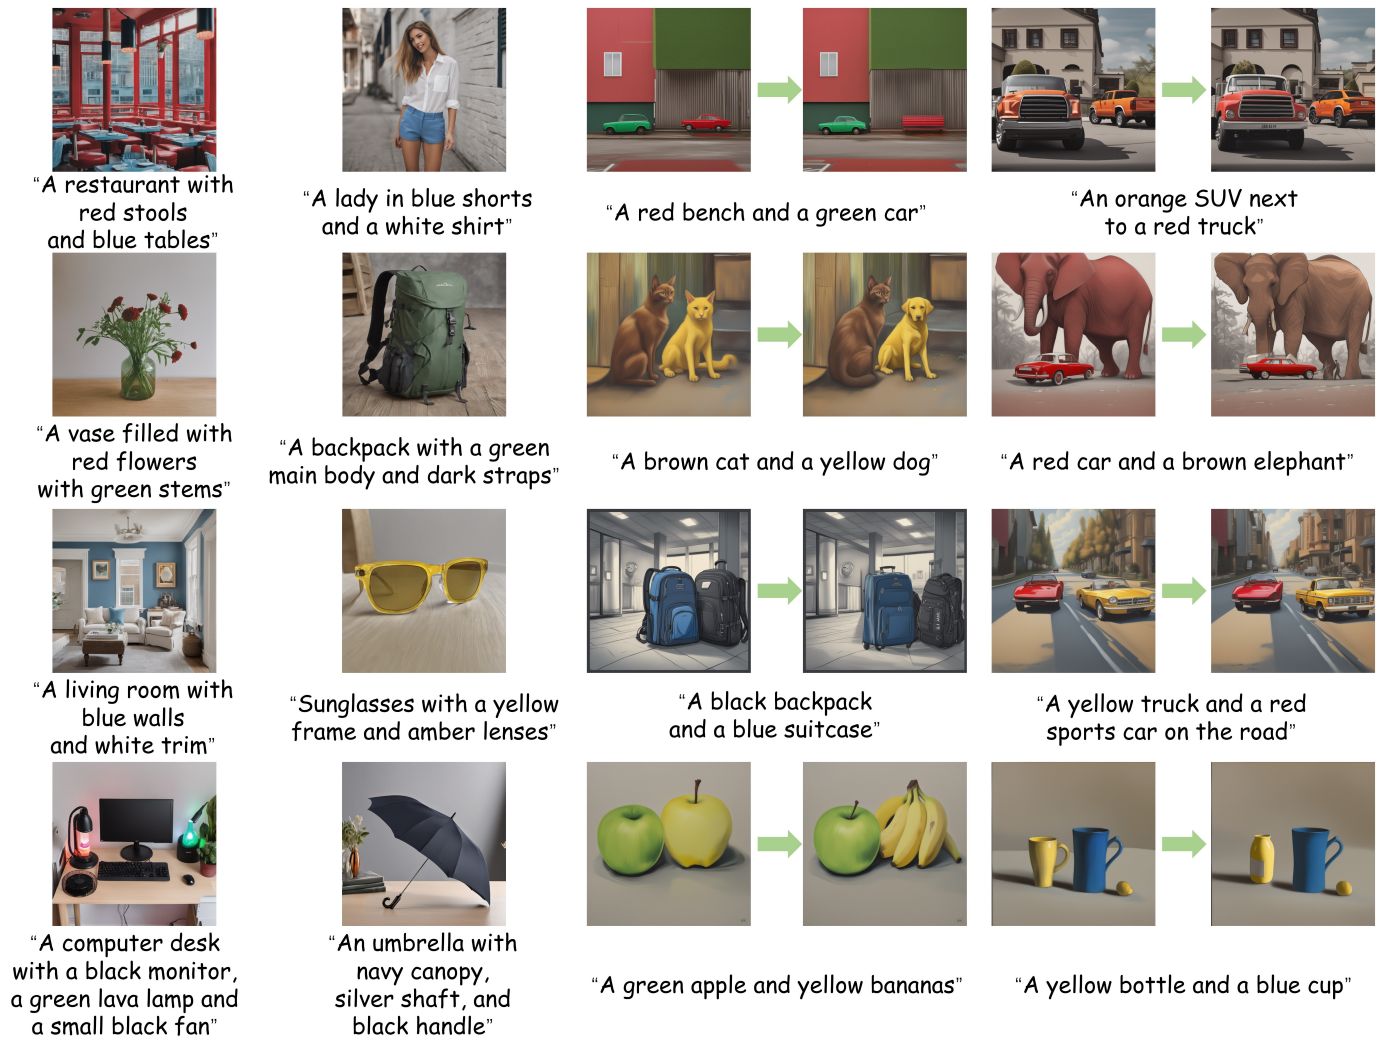


Fig. 12: Additional visualized samples of Isolated Diffusion for multiple attachments (the left two columns) and multiple subjects (the right two columns). In the right two columns, we provide the concept bleeding samples of SDXL [18] on the left and the revised results of our approach on the right.