

LISA: Layerwise Importance Sampling for Memory-Efficient Large Language Model Fine-Tuning

Rui Pan^{♡*}, Xiang Liu^{♡*}, Shizhe Diao[♡], Renjie Pi[♡], Jipeng Zhang[♡],
Chi Han[♣], Tong Zhang[♣]

[♡]The Hong Kong University of Science and Technology

[♣]University of Illinois Urbana-Champaign

{rpan, sdiaaaa, rpi, jzhanggr}@ust.hk xliu886@connect.hkust-gz.edu.cn
{chihan3, tozhang}@illinois.edu

March 27, 2024

Abstract

The machine learning community has witnessed impressive advancements since the first appearance of large language models (LLMs), yet their huge memory consumption has become a major roadblock to large-scale training. Parameter Efficient Fine-Tuning techniques such as Low-Rank Adaptation (LoRA) have been proposed to alleviate this problem, but their performance still fails to match full parameter training in most large-scale fine-tuning settings. Attempting to complement this deficiency, we investigate layerwise properties of LoRA on fine-tuning tasks and observe an uncommon skewness of weight norms across different layers. Utilizing this key observation, a surprisingly simple training strategy is discovered, which outperforms both LoRA and full parameter training in a wide range of settings with memory costs as low as LoRA. We name it **Layerwise Importance Sampled AdamW (LISA)**, a promising alternative for LoRA, which applies the idea of importance sampling to different layers in LLMs and randomly freeze most middle layers during optimization. Experimental results show that with similar or less GPU memory consumption, LISA surpasses LoRA or even full parameter tuning in downstream fine-tuning tasks, where LISA consistently outperforms LoRA by over 11%-37% in terms of MT-Bench scores. On large models, specifically LLaMA-2-70B, LISA achieves on-par or better performance than LoRA on MT-Bench, GSM8K, and PubMedQA, demonstrating its effectiveness across different domains.

1 Introduction

Large language models like ChatGPT excel in tasks such as writing documents, generating complex code, answering questions, and conducting human-like conversations (Ouyang et al., 2022). With LLMs being increasingly applied in diverse task domains, domain-specific fine-tuning has emerged as a key strategy to enhance their downstream capabilities (Raffel et al., 2020; Chowdhery et al., 2022; Rozière et al., 2023; OpenAI et al., 2023). Nevertheless, these methods are notably expensive, introducing major obstacles in developing large-scale models. Aiming to reduce the cost, Parameter-Efficient Fine-Tuning (PEFT) techniques, like adapter weights (Houlsby et al., 2019), prompt weights (Li and Liang, 2021), and LoRA (Hu et al., 2022) have been proposed to minimize the number of trainable parameters. Among them, LoRA is one of the most widely adopted PEFT techniques, due to its nice property of allowing the adaptor

Comparison of Loss Curves on Alpaca-GPT4 Dataset for LLaMA-2-7B

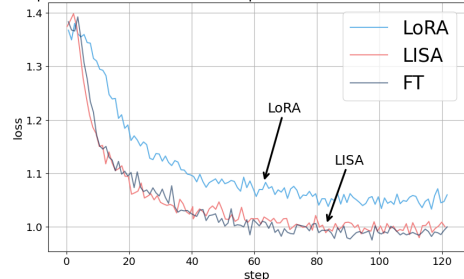


Figure 1: Training loss of LLaMA-2-7B model on Alpaca GPT-4 dataset with Full Parameter Training (FT), LoRA, and LISA.

*Equal Contribution.

to be merged back to the base model parameters. However, LoRA’s superior performance in fine-tuning tasks has yet to reach a point that universally surpasses full parameter fine-tuning in all settings (Ding et al., 2022; Dettmers et al., 2023). In particular, it has been observed that LoRA tends to falter on large-scale datasets during continual pre-training (Lialin et al., 2023), which raises doubts about the effectiveness of LoRA under those circumstances. We attribute this to the much fewer trainable parameters of LoRA compared to the base model, which limits the representation power of LoRA training.

To overcome this shortcoming, we delve into LoRA’s training statistics in each layer, aspiring to bridge the difference between LoRA and full-parameter fine-tuning. Surprisingly, we discover that LoRA’s layerwise weight norms have an uncommonly skewed distribution, where the bottom layer and/or the top layer occupy the majority of weights during the update, while the other self-attention layers only account for a small amount, which means different layers have different importance when updating. This key observation inspires us to “sample” different layers by their importance, which exactly matches the idea of importance sampling (Kloek and Van Dijk, 1978; Zhao and Zhang, 2015).

As a natural consequence, this strategy brings forth our **Layerwise Importance Sampled Adam (LISA)** algorithm, where by selectively updating only essential LLM layers and leaving others untouched, LISA enables training large-scale language models ($\geq 65\text{B}$ parameters) with less or similar memory consumption as LoRA. Furthermore, fine-tuned on downstream tasks, LISA outperformed both LoRA and conventional full-parameter fine-tuning approaches by a large margin, indicating the large potential of LISA as a promising alternative to LoRA.

We summarize our key contributions as follows,

- We discover the phenomenon of skewed weight-norm distribution across layers in both LoRA and full parameter fine-tuning, which implies the varied importance of different layers in large-scale LLM training.
- We propose the Layerwise Importance Sampled AdamW (LISA) algorithm, a simple optimization method that is capable of scaling up to over 70B LLMs with less or similar memory cost as LoRA.
- We demonstrate LISA’s effectiveness in fine-tuning tasks for modern LLMs, where it outperforms LoRA by 8%-36% in MT-Bench and exhibits much better convergence behaviors. LISA even outperforms full parameters training under certain settings. Similar performance gain is observed across different sized models (7B-70B) and different tasks, including instruction following, medical QA, and math problems.

2 Related Work

2.1 Large Language Models

In the realm of natural language processing (NLP), the Transformer architecture has been a revolutionary technique, initially known for its effectiveness in machine translation tasks (Vaswani et al., 2017). With the inception of models like BERT (Devlin et al., 2019) and GPT-2 (Radford et al., 2019), the approach shifted towards pre-training on extensive corpora, which led to significant performance enhancements in downstream fine-tuning tasks (Brown et al., 2020; Raffel et al., 2020; Zhang et al., 2022; Scao et al., 2022; Almazrouei et al., 2023; Touvron et al., 2023a,b; Chiang et al., 2023; Biderman et al., 2023; Jiang et al., 2024). However, the growing number of parameters in these models results in a huge GPU memory consumption, rendering the fine-tuning of large scale models ($\geq 65\text{B}$) infeasible under low resource scenarios. This has prompted a shift towards more efficient training of LLMs.

2.2 Parameter-Efficient Fine-Tuning

Parameter-efficient fine-tuning (PEFT) methods adapt pre-trained models by fine-tuning only a subset of parameters. In general, PEFT methods can be grouped into three classes: 1) Prompt Learning methods (Hambardzumyan et al., 2021; Zhong et al., 2021; Han et al., 2021; Li and Liang, 2021; Qin and Eisner, 2021; Liu et al., 2021a; Diao et al., 2022), 2) Adapter methods (Houlsby et al., 2019; Diao et al., 2021; Hu et al., 2022; Diao et al., 2023c), and 3) Selective methods (Liu et al., 2021b,b; Li et al., 2023a). Prompt learning methods emphasize optimization of the input token or input embedding with frozen model parameters, which generally has the least training cost among all three types. Adapter methods normally introduce an auxiliary module with much fewer parameters than the original model, where updates will only be applied to the adapter module during training. Compared with them, selective methods are more closely related to LISA, which focuses on optimizing

a fraction of the model’s parameters without appending extra modules. Recent advances in this domain have introduced several notable techniques through layer freezing. AutoFreeze (Liu et al., 2021b) offers an adaptive mechanism to identify layers for freezing automatically and accelerates the training process. FreezeOut (Brock et al., 2017) progressively freezes intermediate layers, resulting in significant training time reductions without notably affecting accuracy. The SmartFRZ (Li et al., 2023a) framework utilizes an attention-based predictor for layer selection, substantially cutting computation and training time while maintaining accuracy. However, none of these layer-freezing strategies has been widely adopted in the context of Large Language Models due to their inherent complexity or non-compatibility with modern memory reduction techniques (Rajbhandari et al., 2020; Rasley et al., 2020) for LLMs.

2.3 Low-Rank Adaptation (LoRA)

In contrast, the Low-Rank Adaptation (LoRA) technique is much more popular in common practices of LLM training (Hu et al., 2022). By employing low-rank matrices, LoRA reduces the number of trainable parameters, thereby lessening the computational burden and memory cost. One key strength of LoRA is its compatibility with models featuring linear layers, where the decomposed low-rank matrices can be merged back into the original model. This allows for efficient deployment without changing the model architecture. As a result, LoRA can be seamlessly combined with other techniques, such as quantization (Dettmers et al., 2023) or Mixture of Experts (Gou et al., 2023). Despite these advantages, LoRA’s performance is not universally comparable with full parameter fine-tuning. There have been tasks in Ding et al. (2022) that LoRA achieves much worse performance than full parameter training on. This phenomenon is especially evident in large-scale pre-training settings (Lialin et al., 2023), where to the best of our knowledge, only full parameter training was adopted for successful open-source LLMs (Almazrouei et al., 2023; Touvron et al., 2023a,b; Jiang et al., 2023; Zhang et al., 2024; Jiang et al., 2024).

2.4 Large-scale Optimization Algorithms

Besides approaches that change model architectures, there have also been efforts to improve the efficiency of optimization algorithms for LLMs. One branch of such is layerwise optimization, whose origin can be traced back to decades ago, where Hinton et al. (2006) pioneered an effective layer-by-layer pre-training method for Deep Belief Networks (DBN), proving the benefits of sequential layer optimization. Bengio et al. (2007) furthered this concept by showcasing the advantages of a greedy, unsupervised approach for pre-training each layer in deep networks. For large batch settings, You et al. (2017, 2019) propose LARS and LAMB, providing improvements in generalization behaviors to avoid performance degradation incurred by large batch sizes. Nevertheless, in most settings involving LLMs, Adam (Kingma and Ba, 2014; Reddi et al., 2019), and AdamW (Loshchilov and Hutter, 2017) are still the dominant optimization methods currently.

Recently, there have also been other attempts to reduce the training cost of LLMs. For example, MeZO (Maladi et al., 2023) adopted zeroth order optimization that brought significant memory savings during training. However, it also incurred a huge performance drop in multiple benchmarks, particularly in complex fine-tuning scenarios. In terms of acceleration, Sophia (Liu et al., 2023) incorporates clipped second-order information into the optimization, obtaining non-trivial speedup on LLM training. The major downsides are its intrinsic complexity of Hessian estimation and unverified empirical performance in large-size models (e.g., $\geq 65\text{B}$). In parallel to our work, Zhao et al. (2024) proposed GaLore, a memory-efficient training strategy that reduces memory cost by projecting gradients into a low-rank compact space. Yet the performance has still not surpassed full-parameter training in fine-tuning settings. To sum up, LoRA-variant methods (Hu et al., 2022; Dettmers et al., 2023; Zhao et al., 2024) with AdamW (Loshchilov and Hutter, 2017) is still the dominant paradigm for large-size LLM fine-tuning, the performance of which still demands further improvements.

3 Method

3.1 Motivation

To understand how LoRA achieves effective training with only a tiny portion of parameters, we carried out empirical studies on multiple models, specially observing the weight norms across various layers. We fine-tune it on the Alpaca-GPT4 dataset (Peng et al., 2023). During the training, we meticulously recorded the mean weight norms of each layer ℓ at every step t after updates, i.e.

$$\mathbf{w}^{(\ell)} \triangleq \text{mean-weight-norm}(\ell) = \frac{1}{T} \sum_{t=1}^T \|\boldsymbol{\theta}_t^{(\ell)}\|_2$$

Figure 2 presents these findings, with the x-axis representing the layer id, from embedding weights to the final layer, and the y-axis quantifying the weight norm. The visualization reveals one key trend:

- The embedding layer (wte and wpe layers for GPT2) or the language model (LM) head layer exhibited significantly larger weight norms compared to intermediary layers in LoRA, often by a factor of hundreds. This phenomenon, however, was not salient under full-parameter training settings.

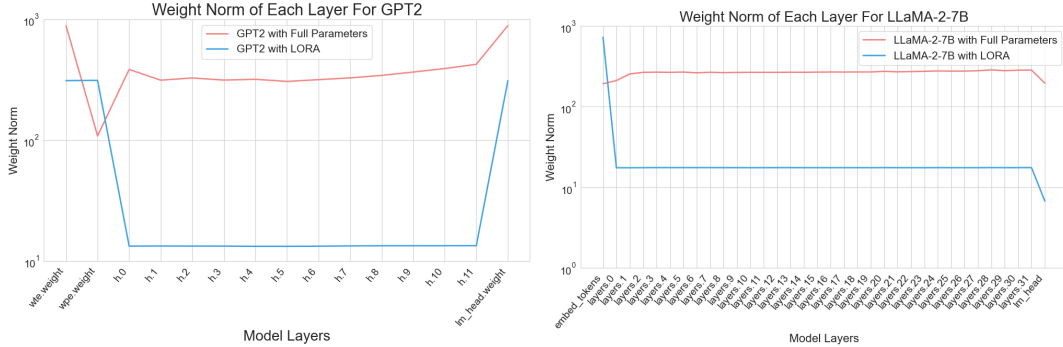


Figure 2: Layer-wise weight norms during training of GPT2 and LLaMA-2-7B Model with LoRA and Full Parameters training.

This observation indicates that the update emphasis of LoRA and full parameter training differ significantly, which can be attributed to the difference in their learned knowledge. For example, in embedding layers, tokens with similar meanings, i.e. synonyms, can be projected into the same embedding space and converted to similar embeddings. LoRA may capture this similarity in language and “group” them in the low-dimension space, allowing frequent features of language meanings to be promptly identified and optimized. The price is LoRA’s limited representation power restricted by its intrinsic low-rank space. Other possible explanations can also justify this phenomenon. Despite various interpretations of this observation, one fact remains clear: *LoRA values layerwise importance differently from full parameter tuning.*

3.2 Layerwise Importance Sampled AdamW (LISA)

To exploit the aforementioned discovery, we aspire to simulate LoRA’s updating pattern via sampling different layers to freeze. This way, we can avoid LoRA’s inherent deficiency of limited low-rank representation ability and also emulate its fast learning process. Intuitively, given the same global learning rates across layers, layers with small weight norms in LoRA should also have small sampling probabilities to unfreeze in full-parameter settings, so the expected learning rates across iterations can stay the same. This is exactly the idea of importance sampling (Kloek and Van Dijk, 1978; Zhao and Zhang, 2015), where instead of applying layerwise different learning rates $\{\eta_t\}$ in full-parameter settings to emulate LoRA’s updates $\{\tilde{\eta}_t\}$, we apply sampling instead

$$\eta_t^{(\ell)} = \tilde{\eta}_t^{(\ell)} \cdot \frac{\tilde{\mathbf{w}}^{(\ell)}}{\mathbf{w}^{(\ell)}} \quad \Rightarrow \quad \eta_t^{(\ell)} = \eta^{(\ell)}, p^{(\ell)} = \frac{\tilde{\mathbf{w}}^{(\ell)}}{\mathbf{w}^{(\ell)}}$$

This gives rise to our Layerwise Importance Sampling AdamW method, as illustrated in Algorithm 1. In practice, since all layers except the bottom and top layer have small weight norms in LoRA, we adopt $\{p_\ell\}_{\ell=1}^{N_L} = \{1.0, \gamma/N_L, \gamma/N_L, \dots, \gamma/N_L, 1.0\}$ in practice, where γ controls the expected number of unfreeze layers during optimization. Intuitively, γ serves as a compensation factor to bridge the difference between LoRA and full parameter tuning, letting LISA emulate a similar layerwise update pattern as LoRA. To further control the memory consumption in practical settings, we instead randomly sample γ layers every time to upper-bound the maximum number of unfrozen layers during training.

Algorithm 1 Layerwise Importance Sampling AdamW (LISA)

Require: number of layers N_L , number of iterations T , sampling period K , sampling probability $\{p_\ell\}_{\ell=1}^{N_L}$, initial learning rate η_0

- 1: **for** $i \leftarrow 0$ to $T/K - 1$ **do**
- 2: **for** $\ell \leftarrow 1$ to N_L **do**
- 3: **if** $\mathcal{U}(0, 1) > p_\ell$ **then**
- 4: Freeze layer ℓ
- 5: **end if**
- 6: **end for**
- 7: Run AdamW for K iterations with $\{\eta_t\}_{t=ik}^{ik+k-1}$
- 8: **end for**

	VANILLA	LORA RANK			LISA ACTIVATE LAYERS		
MODEL	-	128	256	512	E+H	E+H+2L	E+H+4L
GPT2-SMALL	3.8G	3.3G	3.5G	3.7G	3.3G	3.3G	3.4G
TINYLLAMA	13G	7.9G	8.6G	10G	7.4G	8.0G	8.3G
PHI-2	28G	14.3G	15.5G	18G	13.5G	14.6G	15G
MISTRAL-7B	59G	23G	26G	28G	21G	23G	24G
LLAMA-2-7B	59G	23G	26G	28G	21G	23G	24G
LLAMA-2-70B*	OOM	79G	OOM	OOM	71G	75G	79G

Table 1: The chart illustrates peak GPU memory consumption for various model architectures and configurations, highlighting differences across models. In the table, the LISA configuration is specifically labeled: “E” denotes the embedding layer, “H” represents the language model head layer, and “2L” indicates two additional standard layers. *: Model parallelism is applied for the 70B model.

4 Experimental Results

4.1 Memory Efficiency

To demonstrate the memory efficiency of LISA, showcasing that it has a comparable or lower memory cost than LoRA, we conducted peak GPU memory experiments.

Settings To produce a reasonable estimation of the memory cost, we randomly sample a prompt from the Alpaca dataset (Taori et al., 2023) and limit the maximum output token length to 1024. Our focus is on two key hyperparameters: LoRA’s rank and LISA’s number of activation layers. For other hyperparameters, a mini-batch size of 1 was consistently used across all five models in Table 3, deliberately excluding other GPU memory-saving techniques such as gradient checkpointing (Chen et al., 2016), offloading (Ren et al., 2021), and flash attention (Dao et al., 2022; Dao, 2023). All memory-efficiency experiments are conducted on $4 \times$ NVIDIA Ampere Architecture GPUs with 80G memory.

Results Upon examining Table 1, it is evident that the LISA configuration, particularly when enhanced with both the embedding layer (E) and two additional layers (E+H+2L), demonstrates a considerable reduction in GPU memory usage when fine-tuning the LLaMA-2-70B model, as compared to the LoRA method. Specifically, the LISA E+H+2L configuration

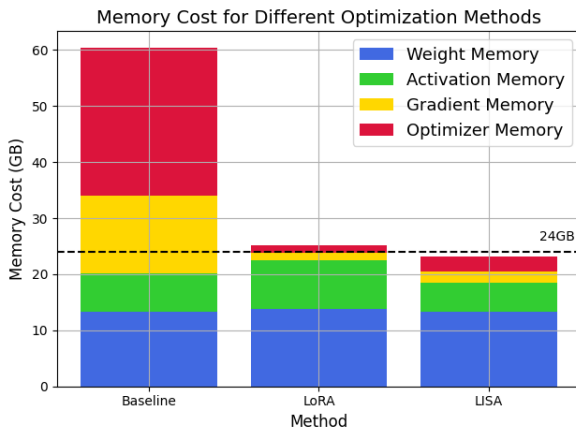


Figure 3: GPU memory consumption of LLaMA-2-7B with different methods and batch size 1.

shows a decrease to 75G of peak GPU memory from the 79G required by the LoRA Rank 128 configuration. This efficiency gain is not an isolated incident; a systematic memory usage decrease is observed across various model architectures, suggesting that LISA’s method of activating layers is inherently more memory-efficient.

In Figure 3, it is worth noticing that the memory reduction in LISA allows LLaMA-2-7B to be trained on a single RTX4090 (24GB) GPU, which makes high-quality fine-tuning affordable even on a laptop computer. In particular, LISA requires much less activation memory consumption than LoRA since it does not introduce additional parameters brought by the adaptor. LISA’s activation memory is even slightly less than full parameter training since pytorch (Paszke et al., 2019) with deepspeed (Rasley et al., 2020) allows deletion of redundant activations before back-propagation.

On top of that, a reduction in memory footprint from LISA also leads to an acceleration in speed. As shown in Figure 4, LISA provides almost $2.9\times$ speedup when compared with full-parameter tuning, and $\sim 2\times$ speedup against LoRA, partially due to the removal of adaptor structures. It is worth noticing that the reduction of memory footprint in both LoRA and LISA leads to a significant acceleration of forward propagation, which emphasizes the importance of memory-efficient training.

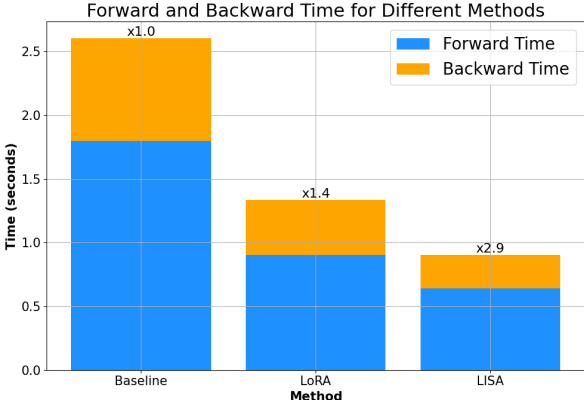


Figure 4: Single-iteration time cost of LLaMA-2-7B with different methods and batch size 1.

4.2 Moderate Scale Fine-Tuning

LISA is able to achieve this significant memory saving while still obtaining competitive performance in fine-tuning tasks.

Settings To demonstrate the superiority of LISA over LoRA, we employ the instruction-following fine-tuning task with Alpaca GPT-4 dataset, which consists of 52k instances generated by GPT-4 (OpenAI et al., 2023) based on inputs from Alpaca (Taori et al., 2023). The effectiveness of fine-tuning was evaluated with MT-Bench (Zheng et al., 2023), featuring 80 high-quality, multi-turn questions designed to assess LLMs on multiple aspects.

In our experiments, we assessed five baseline models: GPT2-Small (Radford et al., 2019), TinyLlama (Zhang et al., 2024), Phi-2 (Li et al., 2023b), Mistral-7B (Jiang et al., 2023), LLaMA-2-7B, and LLaMA-2-70B (Touvron et al., 2023b). These models, varying in size with parameters ranging from 124M to 70B, were selected to provide a diverse representation of decoder models. Detailed specifications of each model are provided in Table 3. For hyperparameters, we adopt rank 128 for LoRA and E+H+2L for LISA in this section of experiments, with full details available in Appendix A.

Results Table 4 offers a comprehensive evaluation of three fine-tuning methods—Full Parameter Fine-Tuning (FT), Low-Rank Adaptation (LoRA), and Layerwise Importance Sampling AdamW (LISA)—across a diverse set of tasks including Writing, Roleplay, Reasoning, Math, Extraction, STEM, and Humanities within the MT-Bench benchmark. The results clearly demonstrate LISA’s superior performance, which surpasses LoRA and full parameter tuning in most settings. Notably, LISA consistently outperforms LoRA and full parameter tuning in domains such as Writing,

DATASET	# TRAIN	# TEST
ALPACA GPT-4 (PENG ET AL., 2023)	52,000	-
MT-BENCH (ZHENG ET AL., 2023)	-	80
GSM8K (COBBE ET AL., 2021)	7,473	1,319
PUBMEDQA (JIN ET AL., 2019)	211,269	1,000

Table 2: The statistics of datasets. # TRAIN and # TEST denote the number of training and test samples respectively.

Model Name	Total Params	Layers	Model Dim	Heads
GPT2-Small	124 M	12	768	12
TinyLlama	1.1 B	22	2048	32
Phi-2	2.7 B	32	2560	32
Mistral-7B	7 B	32	4096	32
LLaMA-2-7B	7 B	32	4096	32
LLaMA-2-70B	70 B	80	8192	64

Table 3: Baseline Model Specifications

STEM, and Humanities. This implies that LISA can be beneficial for tasks involving memorization, while LoRA partially favors reasoning tasks.

MODEL & METHOD	MT-BENCH							AVG. ↑
	WRITING	ROLEPLAY	REASONING	MATH	EXTRACTION	STEM	HUMANITIES	
TINYLLAMA (VANILLA)	1.05	2.25	1.25	1.00	1.00	1.45	1.00	1.28
TINYLLAMA (FT)	3.27	3.95	1.35	1.33	1.73	2.69	2.35	2.38
TINYLLAMA (LoRA)	2.77	4.05	1.35	1.40	1.00	1.55	2.15	2.03
TINYLLAMA (LISA)	3.30	4.40	2.65	1.30	1.75	3.00	3.05	2.78
MISTRAL-7B (VANILLA)	5.25	3.20	4.50	2.70	6.50	6.17	4.65	4.71
MISTRAL-7B (FT)	5.50	4.45	5.45	3.25	5.78	4.75	5.45	4.94
MISTRAL-7B (LoRA)	5.30	4.40	4.65	3.30	5.50	5.55	4.30	4.71
MISTRAL-7B (LISA)	6.84	3.65	5.45	2.75	5.65	5.95	6.35	5.23
LLAMA-2-7B (VANILLA)	2.75	4.40	2.80	1.80	3.20	5.25	4.60	3.54
LLAMA-2-7B (FT)	5.55	6.45	3.60	2.00	4.70	6.45	7.50	5.10
LLAMA-2-7B (LoRA)	6.30	5.65	4.05	1.45	4.17	6.20	6.20	4.86
LLAMA-2-7B (LISA)	6.55	6.90	3.45	2.16	4.50	6.75	7.65	5.42

Table 4: Comparison of Language Model Fine-Tuning Methods on the MT-Bench score.

4.3 Large Scale Fine-Tuning

To further demonstrate LISA’s scalability on large-sized LLMs, we conduct additional experiments on LLaMA-2-70B (Touvron et al., 2023b).

Settings On top of the aforementioned instruction-following tasks in Section 4.2, we introduce an extra set of domain-specific fine-tuning tasks on mathematics and medical QA benchmarks. The GSM8K dataset (Cobbe et al., 2021), comprising 7473 training instances and 1319 test instances, was utilized for the mathematics domain. For the medical domain, we selected the PubMedQA dataset (Jin et al., 2019), which includes 211.3K artificially generated QA training instances and 1K test instances.

The statistics of these datasets are summarized in Table 2. Evaluation on the PubMedQA dataset (Jin et al., 2019) utilized a 5-shot prompt setting, while the GSM8K dataset (Cobbe et al., 2021) assessment was conducted using a Chain of Thought (CoT) prompt, as suggested by recent studies (Wei et al., 2022; Shum et al., 2023; Diao et al., 2023b). Regarding hyperparameters, we adopt rank 256 for LoRA and E+H+4L for LISA, where further details can be found in Appendix A.

Results As shown in Table 5, LISA consistently produces better or on-par performance when compared with LoRA. Furthermore, in instruction-tuning tasks, LISA again surpasses full-parameter training, rendering it a competitive method for this setting. Specifically, Figure 5 highlights the model’s performance in various aspects, particularly LISA’s superiority over all methods in aspects of Writing, Roleplay, and STEM. On top of that, LISA displays consistently higher performance than LoRA on all subtasks, underscoring LISA’s effectiveness across diverse tasks. The chart also contrasts the yellow LoRA line with the purple Vanilla line, revealing that in large models like the 70B, LoRA does not perform as well as expected, showing only marginal improvements on specific aspects. More fine-tuning experiments result in the Appendix B.1.

	MT-BENCH	GSM8K	PUBMEDQA
VANILLA	5.69	54.8	83.0
FT	6.66	67.1	90.8
LoRA	6.52	59.4	90.8
LISA	7.05	61.1	91.6

Table 5: MT-Bench, GSM8K, and PubMedQA score for LLaMA-2-70B with three fine-tuning methods.

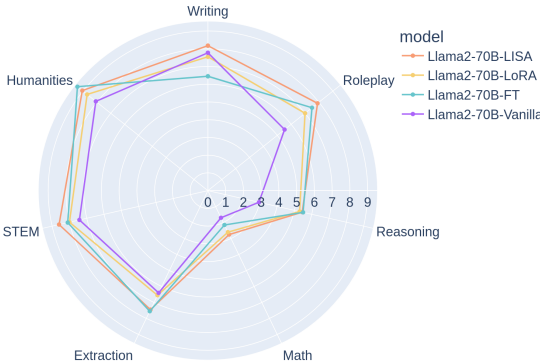


Figure 5: Different aspects of LLaMA-2-70B model on MT-Bench.

4.4 Ablation Studies

Hyperparameters of LISA The number of sampling layers γ and sampling period K are the two key hyperparameters of LISA. To obtain intuitive and empirical guidance of those hyperparameter choices, we conduct ablation studies using TinyLlama (Zhang et al., 2024) and LLaMA-2-7B (Touvron et al., 2023b) models with the Alpaca-GPT4 dataset. The configurations for γ , such as E+H+2L, E+H+8L, were denoted as $\gamma = 2$ and $\gamma = 8$. As for the sampling period — the number of updates per sampling interval — values were chosen from $\{1, 5, 25, 122\}$, with 122 representing the maximum training step within our experimental framework. The findings, presented in Table 6, reveal that both γ and K markedly affect the LISA algorithm’s performance. Specifically, a higher γ value increases the quantity of trainable parameters, albeit with higher memory costs. On the other hand, an optimal K value facilitates more frequent layer switching, thereby improving performance to a certain threshold, beyond which the performance may deteriorate. Generally, the rule of thumb is: *More sampling layers and higher sampling period lead to better performance*. For a detailed examination of loss curves and MT-Bench results, refer to Appendix C.

Models	MT-Bench Score	Sampling Layers γ	Sampling Frequency K
TinyLlama	2.59	8	1
	2.81	8	5
	2.73	2	5
	2.64	2	25
	2.26	2	122
LLaMA-2-7B	4.94	8	1
	5.11	8	5
	4.91	2	5
	4.88	2	25
	4.64	2	122

Table 6: The MT-Bench scores derived from different LISA hyperparameters combination. All settings adopt learning rate $\eta_0 = 10^{-5}$.

Sensitiveness of LISA As LISA is algorithmically dependent on the sampling sequence of layers, it is intriguing to see how stable LISA’s performance is under the effect of randomness. For this purpose, we further investigate LISA’s performance variance over three distinct runs, each with a different random seed for layer selection. Here we adopt TinyLlama, LLaMA-2-7B, and Mistral-7B models with the Alpaca-GPT4 dataset, while keeping all other hyperparameters consistent with those used in the instruction following experiments in section 4.2. As shown in Table 7, LISA is quite resilient to different random seeds, where the performance gap across three runs is within 0.13, a small value when compared with the performance gains over baseline methods.

Seed	TinyLlama	LLaMA-2-7B	Mistral-7B
1	2.65	5.42	5.23
2	2.75	5.31	5.12
3	2.78	5.35	5.18

Table 7: The MT-Bench scores derived from varying random seeds for layer selection.

5 Discussion

Theoretical Properties of LISA Compared with LoRA, which introduces additional parameters and leads to changes in loss objectives, layerwise importance sampling methods enjoy nice convergence guarantees in the original loss. For layerwise importance sampled SGD, similar to gradient sparsification (Wangni et al., 2018), the convergence can still be guaranteed for unbiased estimation of gradients with increased variance. The convergence behavior can be further improved by reducing the variance with appropriately defined importance sampling strategy (Zhao and Zhang, 2015). For layerwise importance sampled Adam, there have been theoretical results in (Zhou et al., 2020) proving its convergence in convex objectives. If we denote f as the loss function and assume that the stochastic gradients are bounded, then based on Loshchilov and Hutter (2017), we know that AdamW optimizing f aligns with Adam optimizing f with a scaled regularizer, which can be written as

$$f^{\text{reg}}(\mathbf{w}) \triangleq f(\mathbf{w}) + \frac{1}{2} \mathbf{w}^\top \mathbf{S} \mathbf{w},$$

where \mathbf{S} is a finite positive semidefinite diagonal matrix. Following existing convergence results of RBC-Adam (Corollary 1 in Zhou et al. (2020)), we have the convergence guarantee of LISA in Theorem 1.

Theorem 1 *Let the loss function f be convex and smooth. If the algorithm runs in a bounded convex set and the stochastic gradients are bounded, the sequence $\{\mathbf{w}_t\}_{t=1}^T$ generated by LISA admits the following convergence*

rate:

$$\frac{1}{T} \sum_{t=1}^T f^{\text{reg}}(\mathbf{w}_t) - f_*^{\text{reg}} \leq \mathcal{O}\left(\frac{1}{\sqrt{T}}\right),$$

where f_*^{reg} denotes the optimum value of f^{reg} .

Better Importance Sampling Strategies As suggested by the theoretical intuition, the strategy of E+H+2L in Section 4.2 and E+H+4L in Section 4.3 may not be the optimal importance sampling strategy, given it still sampled intermediate layers in a uniformly random fashion. We anticipate the optimizer’s efficiency to be further improved when taking data sources and model architecture into account in the importance sampling procedure.

6 Conclusion

In this paper, we propose Layerwise Importance Sampled AdamW (LISA), an optimization algorithm that randomly freezes layers of LLM based on a given probability. Inspired from observations of LoRA’s skewed weight norm distribution, a simple and memory-efficient freezing paradigm is introduced for LLM training, which achieves significant performance improvements over LoRA on downstream fine-tuning tasks with various models, including LLaMA-2-70B. Further experiments on domain-specific training also demonstrate its effectiveness, showing LISA’s huge potential as a promising alternative to LoRA for LLM training.

Limitations

The major bottleneck of LISA is the same as LoRA, where during optimization the forward pass still requires the model to be presented in the memory, leading to significant memory consumption. This limitation shall be compensated by approaches similar to QLoRA (Detmers et al., 2023), where we intend to conduct further experiments to verify its performance.

References

- Ebtesam Almazrouei, Hamza Alobeidli, Abdulaziz Alshamsi, Alessandro Cappelli, Ruxandra Cojocaru, Maitha Alhammedi, Mazzotta Daniele, Daniel Heslow, Julien Launay, Quentin Malartic, Badreddine Noune, Baptiste Pannier, and Guilherme Penedo. 2023. The falcon series of language models: Towards open frontier models.
- Yoshua Bengio, Pascal Lamblin, Dan Popovici, and Hugo Larochelle. 2007. *Greedy Layer-Wise Training of Deep Networks*, page 153–160.
- Stella Biderman, Hailey Schoelkopf, Quentin Gregory Anthony, Herbie Bradley, Kyle O’Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, USVSN Sai Prashanth, Edward Raff, et al. 2023. Pythia: A suite for analyzing large language models across training and scaling. In *International Conference on Machine Learning*, pages 2397–2430. PMLR.
- Andrew Brock, Theodore Lim, James M. Ritchie, and Nick Weston. 2017. *Freezeout: Accelerate training by progressively freezing layers*. *CoRR*, abs/1706.04983.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. *Language Models are Few-Shot Learners*. In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.
- Tianqi Chen, Bing Xu, Chiyuan Zhang, and Carlos Guestrin. 2016. Training deep nets with sublinear memory cost. *arXiv preprint arXiv:1604.06174*.

- Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. 2023. [Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality.](#)
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam M. Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Benton C. Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier García, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Díaz, Orhan Firat, Michele Catasta, Jason Wei, Kathleen S. Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. 2022. Palm: Scaling language modeling with pathways. *J. Mach. Learn. Res.*, 24:240:1–240:113.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. [Training verifiers to solve math word problems.](#)
- Tri Dao. 2023. FlashAttention-2: Faster attention with better parallelism and work partitioning.
- Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. 2022. FlashAttention: Fast and memory-efficient exact attention with IO-awareness. In *Advances in Neural Information Processing Systems*.
- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. 2023. Qlora: Efficient finetuning of quantized llms. *arXiv preprint arXiv:2305.14314*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding.](#) In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Shizhe Diao, Zhichao Huang, Ruijia Xu, Xuechun Li, LIN Yong, Xiao Zhou, and Tong Zhang. 2022. Black-box prompt learning for pre-trained language models. *Transactions on Machine Learning Research*.
- Shizhe Diao, Rui Pan, Hanze Dong, Ka Shun Shum, Jipeng Zhang, Wei Xiong, and Tong Zhang. 2023a. Lmflow: An extensible toolkit for finetuning and inference of large foundation models. *arXiv preprint arXiv:2306.12420*.
- Shizhe Diao, Pengcheng Wang, Yong Lin, and Tong Zhang. 2023b. [Active prompting with chain-of-thought for large language models.](#)
- Shizhe Diao, Ruijia Xu, Hongjin Su, Yilei Jiang, Yan Song, and Tong Zhang. 2021. Taming pre-trained language models with n-gram representations for low-resource domain adaptation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 3336–3349.
- Shizhe Diao, Tianyang Xu, Ruijia Xu, Jiawei Wang, and Tong Zhang. 2023c. Mixture-of-domain-adapters: Decoupling and injecting domain knowledge to pre-trained language models memories. *arXiv preprint arXiv:2306.05406*.
- Ning Ding, Yujia Qin, Guang Yang, Fuchao Wei, Zonghan Yang, Yusheng Su, Shengding Hu, Yulin Chen, Chi-Min Chan, Weize Chen, et al. 2022. Delta tuning: A comprehensive study of parameter efficient methods for pre-trained language models. *arXiv preprint arXiv:2203.06904*.
- Yunhao Gou, Zhili Liu, Kai Chen, Lanqing Hong, Hang Xu, Aoxue Li, Dit-Yan Yeung, James T Kwok, and Yu Zhang. 2023. Mixture of cluster-conditional lora experts for vision-language instruction tuning. *arXiv preprint arXiv:2312.12379*.

- Karen Hambardzumyan, Hrant Khachatryan, and Jonathan May. 2021. **WARP: Word-level Adversarial ReProgramming**. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4921–4933, Online. Association for Computational Linguistics.
- Xu Han, Weilin Zhao, Ning Ding, Zhiyuan Liu, and Maosong Sun. 2021. **PTR: Prompt Tuning with Rules for Text Classification**. *ArXiv preprint*, abs/2105.11259.
- Geoffrey E. Hinton, Simon Osindero, and Yee-Whye Teh. 2006. **A fast learning algorithm for deep belief nets**. *Neural Computation*, page 1527–1554.
- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin De Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019. Parameter-efficient transfer learning for nlp. In *International Conference on Machine Learning*, pages 2790–2799. PMLR.
- Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. **LoRA: Low-rank adaptation of large language models**. In *International Conference on Learning Representations*.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. 2023. **Mistral 7b**.
- Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. 2024. Mixtral of experts. *arXiv preprint arXiv:2401.04088*.
- Qiao Jin, Bhuwan Dhingra, Zhengping Liu, William Cohen, and Xinghua Lu. 2019. Pubmedqa: A dataset for biomedical research question answering. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2567–2577.
- Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Teun Kloek and Herman K Van Dijk. 1978. Bayesian estimates of equation system parameters: an application of integration by monte carlo. *Econometrica: Journal of the Econometric Society*, pages 1–19.
- Sheng Li, Geng Yuan, Yue Dai, Youtao Zhang, Yanzhi Wang, and Xulong Tang. 2023a. **SmartFRZ: An efficient training framework using attention-based layer freezing**. In *The Eleventh International Conference on Learning Representations*.
- Xiang Lisa Li and Percy Liang. 2021. Prefix-tuning: Optimizing continuous prompts for generation. *arXiv preprint arXiv:2101.00190*.
- Yuanzhi Li, S  bastien Bubeck, Ronen Eldan, Allie Del Giorno, Suriya Gunasekar, and Yin Tat Lee. 2023b. **Textbooks are all you need ii: phi-1.5 technical report**.
- Vladislav Lialin, Namrata Shivagunde, Sherin Muckatira, and Anna Rumshisky. 2023. **Relora: High-rank training through low-rank updates**.
- Hong Liu, Zhiyuan Li, David Hall, Percy Liang, and Tengyu Ma. 2023. Sophia: A scalable stochastic second-order optimizer for language model pre-training. *arXiv preprint arXiv:2305.14342*.
- Xiao Liu, Yanan Zheng, Zhengxiao Du, Ming Ding, Yujie Qian, Zhilin Yang, and Jie Tang. 2021a. Gpt understands, too. *arXiv preprint arXiv:2103.10385*.
- Yuhan Liu, Saurabh Agarwal, and Shivaram Venkataraman. 2021b. **Autofreeze: Automatically freezing model blocks to accelerate fine-tuning**.
- Ilya Loshchilov and Frank Hutter. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*.

Sadhika Malladi, Tianyu Gao, Eshaan Nichani, Alex Damian, Jason D. Lee, Danqi Chen, and Sanjeev Arora. 2023. [Fine-tuning language models with just forward passes](#). In *Thirty-seventh Conference on Neural Information Processing Systems*.

OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mo Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. 2023. [Gpt-4 technical report](#).

Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul F Christiano, Jan Leike, and Ryan Lowe. 2022. Training language models to follow instructions with human feedback. In *Advances in Neural Information Processing Systems*, volume 35, pages 27730–27744. Curran Associates, Inc.

Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. 2019. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32.

Baolin Peng, Chunyuan Li, Pengcheng He, Michel Galley, and Jianfeng Gao. 2023. Instruction tuning with gpt-4. *arXiv preprint arXiv:2304.03277*.

- Guanghui Qin and Jason Eisner. 2021. **Learning how to ask: Querying LMs with mixtures of soft prompts**. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5203–5212, Online. Association for Computational Linguistics.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(1).
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. 2020. Zero: Memory optimizations toward training trillion parameter models. In *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*, pages 1–16. IEEE.
- Jeff Rasley, Samyam Rajbhandari, Olatunji Ruwase, and Yuxiong He. 2020. Deepspeed: System optimizations enable training deep learning models with over 100 billion parameters. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 3505–3506.
- Sashank J Reddi, Satyen Kale, and Sanjiv Kumar. 2019. On the convergence of adam and beyond. *arXiv preprint arXiv:1904.09237*.
- Jie Ren, Samyam Rajbhandari, Reza Yazdani Aminabadi, Olatunji Ruwase, Shuangyan Yang, Minjia Zhang, Dong Li, and Yuxiong He. 2021. **Zero-offload: Democratizing billion-scale model training**.
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. 2023. **Code llama: Open foundation models for code**.
- Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, et al. 2022. Bloom: A 176b-parameter open-access multilingual language model. *arXiv preprint arXiv:2211.05100*.
- Kashun Shum, Shizhe Diao, and Tong Zhang. 2023. Automatic prompt augmentation and selection with chain-of-thought from labeled data. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 12113–12139.
- Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. 2023. Stanford alpaca: An instruction-following llama model. https://github.com/tatsu-lab/stanford_alpaca.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023a. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, et al. 2023b. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, AidanN. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Neural Information Processing Systems, Neural Information Processing Systems*.
- Jianqiao Wangni, Jialei Wang, Ji Liu, and Tong Zhang. 2018. Gradient sparsification for communication-efficient distributed optimization. *Advances in Neural Information Processing Systems*, 31.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems*, 35:24824–24837.

- Yang You, Igor Gitman, and Boris Ginsburg. 2017. Large batch training of convolutional networks. *arXiv preprint arXiv:1708.03888*.
- Yang You, Jing Li, Sashank Reddi, Jonathan Hseu, Sanjiv Kumar, Srinadh Bhojanapalli, Xiaodan Song, James Demmel, Kurt Keutzer, and Cho-Jui Hsieh. 2019. Large batch optimization for deep learning: Training bert in 76 minutes. *arXiv preprint arXiv:1904.00962*.
- Piyyuan Zhang, Guangtao Zeng, Tianduo Wang, and Wei Lu. 2024. [Tinyllama: An open-source small language model](#).
- Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, et al. 2022. Opt: Open pre-trained transformer language models. *arXiv preprint arXiv:2205.01068*.
- Jiawei Zhao, Zhenyu Zhang, Beidi Chen, Zhangyang Wang, Anima Anandkumar, and Yuandong Tian. 2024. Galore: Memory-efficient llm training by gradient low-rank projection. *arXiv preprint arXiv:2403.03507*.
- Peilin Zhao and Tong Zhang. 2015. Stochastic optimization with importance sampling for regularized loss minimization. In *international conference on machine learning*, pages 1–9. PMLR.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. 2023. [Judging llm-as-a-judge with mt-bench and chatbot arena](#).
- Zexuan Zhong, Dan Friedman, and Danqi Chen. 2021. [Factual probing is \[MASK\]: Learning vs. learning to recall](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5017–5033, Online. Association for Computational Linguistics.
- Yangfan Zhou, Mingchuan Zhang, Junlong Zhu, Ruijuan Zheng, and Qingtao Wu. 2020. A randomized block-coordinate adam online learning optimization algorithm. *Neural Computing and Applications*, 32(16):12671–12684.

A Training Setup and Hyperparameters

A.1 Training Setup

In our experiments, we employ the LMFlow toolkit (Diao et al., 2023a)* for conducting full parameter fine-tuning, LoRA tuning, and LISA tuning. We set the epoch number to 1 for both fine-tuning and continual pre-training scenarios. Additionally, we utilized DeepSpeed offload technology (Ren et al., 2021) to efficiently run the LLMs. All experiments were conducted on $8 \times$ NVIDIA Ampere Architecture GPU with 48 GB memory.

In our study, we explored a range of learning rates from 5×10^{-6} to 3×10^{-4} , applying this spectrum to Full Parameter Training, LoRA, and LISA methods. For LoRA, we adjusted the rank r to either 128 or 256 to vary the number of trainable parameters, applying LoRA across all linear layers. Regarding the number of sampling layers γ , our selections were guided by GPU memory considerations as reported in LoRA studies (Hu et al., 2022); For the LISA algorithm, we selected $\gamma = 2$, and for experiments involving the 70B model, we opted for $\gamma = 4$. The sampling period (K), defined as the number of update steps per sampling interval, ranged from 1 to 50. This range was influenced by variables such as the size of the dataset, the batch size, and the total number of training steps. To manage this effectively, we partitioned the entire training dataset into K segments, thereby enabling precise regulation of the training steps within each sampling period.

A.2 Hyperparameter search

*<https://github.com/OptimalScale/LMFlow>

We commenced our study with a grid search covering (i) learning rate, (ii) number of sampling layers γ , and (iii) sampling period K . Noting the effective performance of the LoRA method, we set the rank value to either $r = 128$ or $r = 256$.

The optimal learning rate was explored within the range $\{5 \times 10^{-6}, 10^{-5}, 5 \times 10^{-5}, 6 \times 10^{-4}, 3 \times 10^{-4}\}$, applicable to full parameter training, LoRA, and LISA.

Regarding the number of sampling layers γ , in alignment with Table 1, we selected values that matched or were lower than LoRA’s GPU memory cost. Consequently, $\gamma = 2$ was predominantly used in the LISA experiments, while $\gamma = 4$ was chosen for the 70B model experiments.

For the sampling period K , we examined values within 1, 3, 5, 10, 50, 80, aiming to maintain the model’s update steps within a range of 10 to 50 per sampling instance. This selection was informed by factors such as dataset size, batch size, and total training steps.

The comprehensive results of our hyperparameter search, detailing the optimal values for each configuration, are presented in Table 8.

Model	FP	LoRA		LISA		
	lr	lr	Rank	lr	γ	K
GPT2-Small	3×10^{-4}	6×10^{-4}	128	6×10^{-4}	2	3
TinyLlama	5×10^{-6}	5×10^{-5}	128	5×10^{-5}	2	10
Phi-2	5×10^{-6}	5×10^{-5}	128	5×10^{-5}	2	3
Mistral-7B	5×10^{-6}	5×10^{-5}	128	5×10^{-5}	2	3
LLaMA-2-7B	5×10^{-6}	5×10^{-5}	128	5×10^{-5}	2	3
LLaMA-2-70B	5×10^{-6}	5×10^{-5}	128	5×10^{-5}	4	50

Table 8: The hyperparameter search identified optimal settings for each method: FP (Full Parameter Training), LoRA, and LISA.

B Additional Experimental Results

B.1 Instruction Following Fine-tuning

MODEL & METHOD	MT-BENCH							AVG. \uparrow
	WRITING	ROLEPLAY	REASONING	MATH	EXTRACTION	STEM	HUMANITIES	
LLAMA-2-70B(VANILLA)	7.77	5.52	2.95	1.70	6.40	7.42	8.07	5.69
LLAMA-2-70B(FT)	6.45	7.50	5.50	2.15	7.55	8.10	9.40	6.66
LLAMA-2-70B(LoRA)	7.55	7.00	5.30	2.60	6.55	8.00	8.70	6.52
LLAMA-2-70B(LISA)	8.18	7.90	5.45	2.75	7.45	8.60	9.05	7.05

Table 9: Mean score of three fine-tuning methods over three seeds for LLaMA-2-70B on the MT-Bench.

Table 9 provides detailed MT-Bench scores for the LLaMA-2-70B model discussed in Section 4.3, demonstrating LISA’s superior performance over LoRA in all aspects under large-scale training scenarios. Furthermore, in Figure 6, we observe that LISA always exhibits on-par or faster convergence speed than LoRA across different models, which provides strong evidence for LISA’s superiority in practice.

It is also intriguing to observe from Figure 5 that Vanilla LLaMA-2-70B excelled in Writing, but full-parameter fine-tuning led to a decline in these areas, a phenomenon known as the “Alignment Tax” (Ouyang et al., 2022). This tax highlights the trade-offs between performance and human alignment in instruction tuning. LISA, however, maintains strong performance across various domains with a lower “Alignment Tax”.

C Ablation Experiments

C.1 Sampling Layers γ

We conducted an ablation study on the LLaMA-2-7B model trained with the Alpaca-GPT4 dataset, setting the sampling period $K = 13$, so the number of samplings is exactly 10. The study explored different configurations of sampling layers γ including {E+H+2L, E+H+4L, E+H+8L}. Figure 7 depicts the impact of the number of sampling layers γ on the training dynamics of the model. Three scenarios were analyzed: $\gamma = 2$ (blue line), $\gamma = 4$ (green line), and $\gamma = 8$ (red line), throughout 120 training steps. Initially, all three configurations exhibit a steep decrease in loss, signaling rapid initial improvements in model performance. It’s clear that the scenario with $\gamma = 8$ consistently maintains a lower loss compared to the $\gamma = 2$ and $\gamma = 4$ configurations, suggesting that a higher γ value leads to better performance in this context. The radar graph of the MT-Bench score also indicates that the $\gamma=8$ configuration yields the best conversational ability of the model in this ablation experiment.

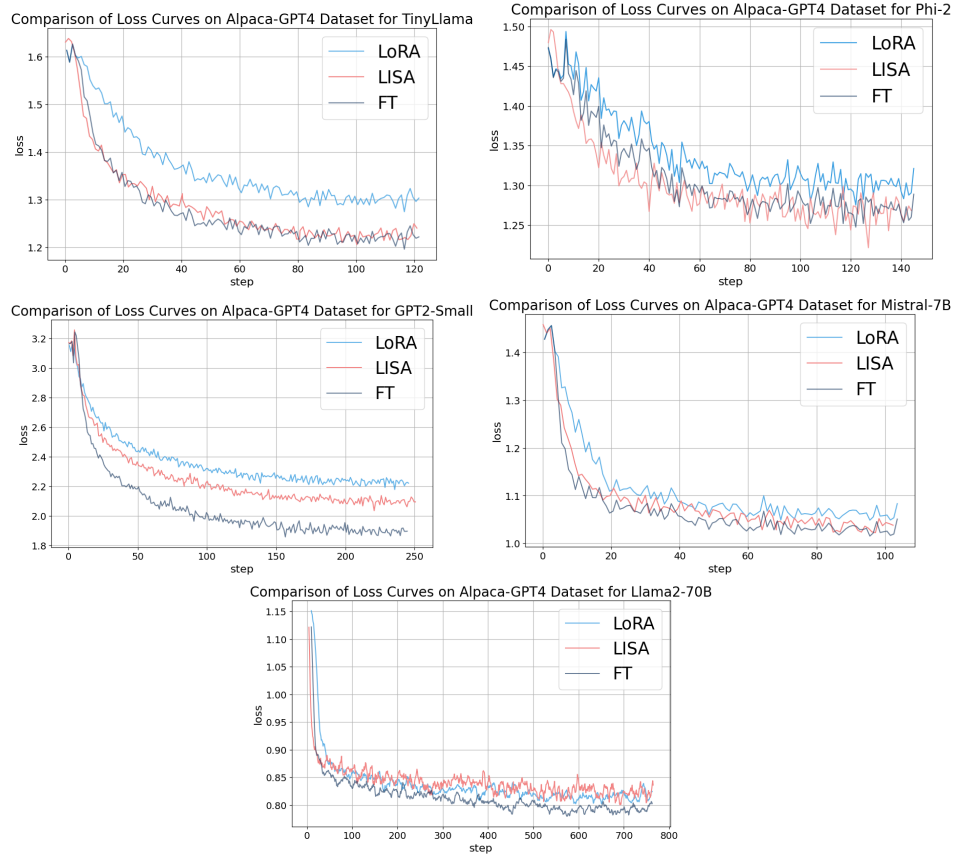


Figure 6: Loss curves for LoRA, LISA and full-parameter tuning on the Alpaca-GPT4 dataset across different models.

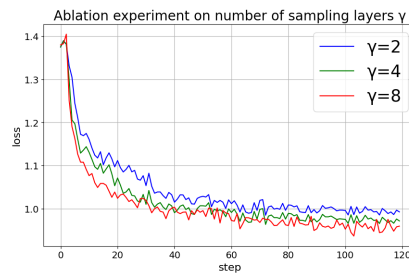


Figure 7: Comparison of loss curves for the γ (number of sampling layers) ablation experiment.

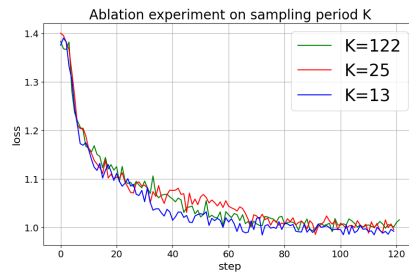


Figure 8: Comparison of loss curves for the sampling period K ablation experiment.

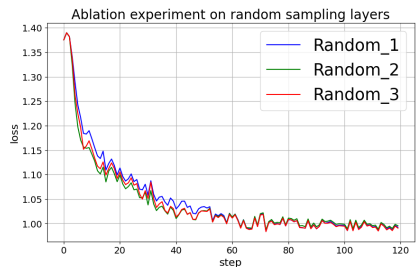


Figure 9: Comparison of loss curves for random variance ablation experiment, indicating the loss metric over steps.

C.2 Sampling Period K

Figure 8 displays the effects of varying sampling Period K on training a 7B-sized model using the 52K-entry Alpaca-GPT4 dataset. This graph contrasts loss curves for different sampling period K values: $K = 122$ (green line), $K = 25$ (red line), and $K = 13$ (blue line) across 122 training steps. The results indicate that although each K value results in distinct training trajectories, their convergence points are remarkably similar. This finding implies that for a 7B model trained on a dataset of 52K instruction conversation pairs, a sampling period of $K = 13$ is optimal for achieving the best loss curve and corresponding MT-Bench score radar graph.

C.3 Sensitiveness to Randomness

LLaMA-2-7B on Alpaca-GPT4 with update step per sampling period $K = 13$, and sampling layers $\gamma = 2$, run 3 times with different random layer pick. Figure 9 shows that different random selections of layers slightly affect the training process but converge similarly. Despite initial fluctuations, the loss trends of three runs—distinguished by blue, green, and red lines—demonstrate that the model consistently reaches a stable state, underscoring the robustness of the training against the randomness in layer selection.

D Licenses

For instruction following and domain-specific fine-tuning tasks, all the datasets including Alpaca (Taori et al., 2023), GSM8k (Cobbe et al., 2021) and PubMedQA (Jin et al., 2019) are released under MIT license. For GPT-4, the generated dataset is only for research purposes, which shall not violate its terms of use.