
JURU: LEGAL BRAZILIAN LARGE LANGUAGE MODEL FROM REPUTABLE SOURCES

Roseval Malaquias Junior
Computer Science Department
University of São Paulo (USP)
São Carlos, Brazil
roseval@usp.br

Ramon Pires
Maritaca AI
Campinas, Brazil
ramon@maritaca.ai

Roseli Romero
Computer Science Department
University of São Paulo (USP)
São Carlos, Brazil
rafrance@icmc.usp.br

Rodrigo Nogueira
Maritaca AI
Campinas, Brazil
rodrigo@maritaca.ai

March 28, 2024

ABSTRACT

The high computational cost associated with pretraining large language models limits their research. Two strategies have emerged to address this issue: domain specialization and pretraining with high-quality data. To explore these strategies, we specialized the Sabiá-2 Small model with 1.9 billion unique tokens from reputable Brazilian legal sources and conducted few-shot evaluations on legal and general knowledge exams. Our model, Juru, demonstrates the benefits of domain specialization with a reduced amount of pretraining data. However, this specialization comes at the expense of degrading performance in other knowledge areas within the same language. This study contributes to the growing body of scientific evidence showing that pretraining data selection may enhance the performance of large language models, enabling the exploration of these models at a lower cost.

1 Introduction

Large Language Models (LLMs) are commonly trained on vast amounts of general-purpose data sourced from internet snapshots, such as the CommonCrawl [1, 2, 3] and C4 [4, 3]. Scaling laws [5] support this paradigm, suggesting more capable models with increased data and training parameters. As a result, LLMs developed through this method demonstrate the ability to address tasks across multiple languages and domains [6].

The significant computational resources required for pretraining with such massive datasets pose a challenge for research, limiting the exploration of their capabilities. However, it is possible to observe competitive results on a smaller scale through the application of continued pretraining. In the literature, the selection of domain-specific data [7, 8, 9] from reputable sources [10, 11, 12] stand out.

The large general-purpose pretraining of LLMs promotes general factual knowledge and language comprehension. Therefore, continued pretraining on the same scale and scope might not be necessary to improve LLMs' performance. By employing domain-specific data from reputable sources, we postulate that a LLM initially trained on general-purpose data can improve its performance in a specific domain with minimal additional data, although this may come at the expense of performance degradation in other domains.

To test this hypothesis, we specialized the Sabiá-2 Small [13] model for the Brazilian legal domain, utilizing 1.9 billion unique tokens sourced mainly from academic studies from reputable sources, resulting in the Juru model. We evaluated the performance of our model on benchmarks of multiple-choice questions in Brazilian law and general knowledge. Our objective is to examine the impact of incorporating only domain-specific knowledge during the model training process.

Across the proposed pretraining, our model demonstrated enhanced performance on the law benchmark, while exhibiting a decrease in performance on the general knowledge benchmark. This contributes to the growing body of scientific evidence supporting the effectiveness of specialized pretraining for improving the performance of generalist models on specific domains. Such specialization may facilitate their research by reducing the computational cost associated with training.

2 Related works

The increasing scale of LLMs, in both parameter numbers and training data, has led to the emergence of previously unseen abilities in smaller-scale models [14]. Recent advances have enabled these models to achieve human-level performance across various tasks that require textual comprehension, specialized knowledge, mathematical reasoning, multilingualism, programming, and image interpretation [6]. With such results, it is arguable that these models demonstrate the capacity to integrate these diverse skills in a cohesive manner.

Language and domain specialization have become an effective practice for ensuring that LLMs bring tangible benefits in real-world applications. Recent works have shown that continued pretrained in language-specific corpora, particularly in Portuguese [9, 13, 15], enhances significantly the performance of downstream tasks without the need to increase the parameter count.

The Brazilian legal field emerges as a relevant example of such domain specialization, as previous studies have underscored the performance of language models pretrained on legal corpora [16, 8]. However, those models are encoder-only, lacking the ability to generate text sequentially, which is essential for several legal applications.

SauLLM-7B [7] is the first LLM pretrained to tackle the nuances of legal languages and follow instructions to support conversation interactions. Starting from Mistral-7B [17], the model is pretrained on a large corpus of English-centered documents of legal domain. To the best of our knowledge, Juru is the first LLM pretrained for the Brazilian legal domain.

3 Methodology

In this section, we describe the gathering and curation of data from public sources within the Brazilian legal domain, as well as the pretraining of the Juru model, including its base model, hyperparameters, and optimization methods.

3.1 Pretraining Data

We conducted web scraping of academic papers in Portuguese within the Brazilian legal domain, prioritizing data with educational value.

Academic papers were scraped from various reputable sources that catalog research from Brazilian higher education institutions and national journals. Each platform offers filters for extracting Brazilian papers exclusively in Portuguese, accessible for non-commercial distribution. Also, we scraped the LexML¹ database, focusing on a subset of Brazilian federal laws.

A total of 13,281 documents were extracted from the academic paper databases. Nearly 99% of these documents are in Portable Document Format (PDF). Hence, we used PyMuPDF² for extracting text from these documents.

Texts from 14,743 federal laws were extracted from the LexML database. Additionally, the dataset from the study by [18] was added to the pretraining dataset, consisting of 32,535 legal documents distributed between decisions and judgments from the Brazilian Supreme Federal Court.

After extracting the documents, they were automatically curated using the filter proposed by Rae et al. [19], adapted for Portuguese. This filter removes documents that are unlikely to be predominantly natural language, such as tables or long lists, as they could hinder the learning process of the LLM.

Considering the tokenizer of Sabiá-2 Small, the model employed in our pretraining, we gathered 1.9 billion tokens, as shown in Table 1. Each document was divided into sequences of 4,096 tokens.

¹<https://www.lexml.gov.br>

²<https://github.com/pymupdf/PyMuPDF>

Datasets	Tokens
Academic papers	1, 806, 023, 152
Federal regulations	60, 402, 071
Decisions and rulings	133, 295, 895
Total	1, 999, 721, 118

Table 1: Distribution of Byte-Pair Encoding (BPE) [20] tokens for the pretraining dataset, using the Sabiá-2 Small tokenizer.

3.2 Juru Model

The Juru³ model extends the causal language modeling pretraining of a Sabiá-2 Small model specialized in Portuguese, without instruction fine-tuning. We employed the t5x and seqio frameworks [21] for the proposed pretraining.

The pretraining hyperparameters are based on the Sabiá model [9]. We employed the AdaFactor optimizer [22] without factorization, with a first-order momentum of 0.9 and a second-order momentum of $1 - k^{-0.8}$, where k represents the current training step. Additionally, we applied dynamic weight decay by lr^2 , with lr as the current learning rate value, and global norm clipping of 1.0.

In addition to the loss associated with the causal language modeling task, we utilized an auxiliary loss of $10^{-4} \log^2 (\sum_i e^{z_i})$, where z denotes the logits of the prediction. This auxiliary loss helps dampen the values of the pretraining loss. Initially, the learning rate is set at 0 and gradually increases during a linear warm-up period of 100 training steps until it reaches 0.001. Following this warm-up phase, the learning rate remains constant.

The model was pretrained for causal language modeling on a cluster of TPUs v2-128. Each batch consisted of 512 sequences, with 4, 096 tokens in each sequence. The pretraining process ran for 2, 800 training steps, equivalent to 2.94 epochs, processing a total of 5.88 billion tokens. This process took 44.22 hours, achieving a Model FLOPs Utilization (MFU) of 55.5% [23], excluding self-attention operations.

4 Evaluation

Evaluating LLMs for text generation poses challenges due to the subjective nature of emerging skills such as natural language understanding and domain expertise, alongside their ability to integrate these skills for problem-solving. Given their broad capabilities, evaluating with open-ended questioning provides insights into the models' knowledge representation and their capacity to generate human-like responses [24].

However, the evaluation of responses to open-ended questions poses inherent difficulties. Human evaluation is resource-intensive, requiring expertise in specific domain tasks and training in evaluation methodology for experimental robustness. Additionally, relying solely on SOTA LLMs for evaluation may yield a low correlation with human judges due to specific vocabulary and knowledge of a target domain. Hence, there's an increasing emphasis on evaluating these models using standardized multiple-choice exams, such as those used in university admission processes [25, 26, 27, 28, 29]. Such exams cover diverse topics and skills, proving advantageous for LLM evaluation.

We aim to evaluate the dynamics of learning domain-specific knowledge while also retaining the knowledge previously learned in the pretraining phase. Therefore, we conducted two main evaluations of the Juru model, focusing on Brazilian law and general knowledge with Brazilian standardized multiple-choice exams in Portuguese.

4.1 Law

For evaluating the Juru model, we utilized questions from two Bar Association Exams (OAB) of 2023 and the National Student Performance Exam (ENADE) of 2022. The OAB exam is obligatory for all law graduates aspiring to practice law in Brazil. It comprises two phases; the initial phase encompasses 80 multiple-choice questions, while the second phase consists of 4 essay questions and the creation of a procedural document. ENADE aims to assess the performance of undergraduate students in the subjects outlined for their respective courses. This exam includes 35 multiple-choice questions, and 5 essay questions.

³Juru is the Tupi name for the largest Brazilian parrot, in homage to the Sabiá model, which served as the main foundation for this research.

The evaluation of law knowledge was conducted with a single example for few-shot learning, using accuracy as the evaluation metric. We included only multiple-choice questions from the 2023 OAB exams and the ENADE in law, comprising a total set of 195 questions, as illustrated in Table 2.

Benchmark	Task	Metric	Size
OAB-2023	Multiple-choice (4)	Accuracy	160
ENADE-2022-Law	Multiple-choice (5)	Accuracy	35

Table 2: Configuration of law knowledge benchmarks.

4.2 General Knowledge

Pires et al. [9] observed a performance degradation in English benchmarks after the specialization of an English-centric LLM for Portuguese. Analog to their study, the following question arises: does this trend persist when training a Portuguese LLM for the Brazilian legal domain?

Thus, we explored the impact of domain specialization on the general knowledge of the Juru model with the following Brazilian Portuguese multiple-choice exams [13]:

- Accounting (CFCES);
- Medicine (Revalidation and residency exams for USP and UNICAMP);
- Computer science (POSCOMP);
- Undergraduate admission (USP, UNICAMP, and ENEM);
- College education evaluation (ENADE 2022 and 2023).

Following [13], we ignore all the questions that require image understanding. Some exams have captions describing the image contents. In those cases, we incorporate them into the exact position the images would appear.

5 Results

The benchmarks tracked the performance progression of the pretrained model at each checkpoint. Figure 1 illustrates the study’s hypothesis: as the LLM specializes, domain-specific performance increases while general knowledge performance declines. Upon analyzing the curves, we observed a notable increase in the models’ scores for law benchmarks compared to general knowledge. The law curve peaked at a maximum accuracy score of 72.0% at 3.78B tokens, whereas the general knowledge curve reached its maximum score of 68.8% at the Sabiá-2 Small model.

The optimal version of Juru was reached at 3.78B tokens, displaying the highest accuracy for the law benchmark. The next subsection compares the performance of Sabiá-2 Small with the model pretrained with 3.78B tokens for both law and general knowledge benchmarks.

5.1 Results per Benchmark

In Table 3, we observe an increase of approximately 6 points in accuracy when comparing Sabiá-2 Small with the model pretrained on 3.78B tokens on the law benchmarks. All law benchmarks on 3.78B tokens show higher scores. Notably, the ENADE-2022-Law benchmark presented the highest improvement of the pretrained model, with an increase of about 11 points compared to Sabiá-2 Small.

Benchmark	Accuracy	
	Sabiá-2 Small	Juru
OAB-2023	60.0%	62.5%
ENADE-2022-Law	70.4%	81.5%
Mean	65.2%	72.0%

Table 3: Comparison of Sabiá-2 Small against Juru on law benchmarks.

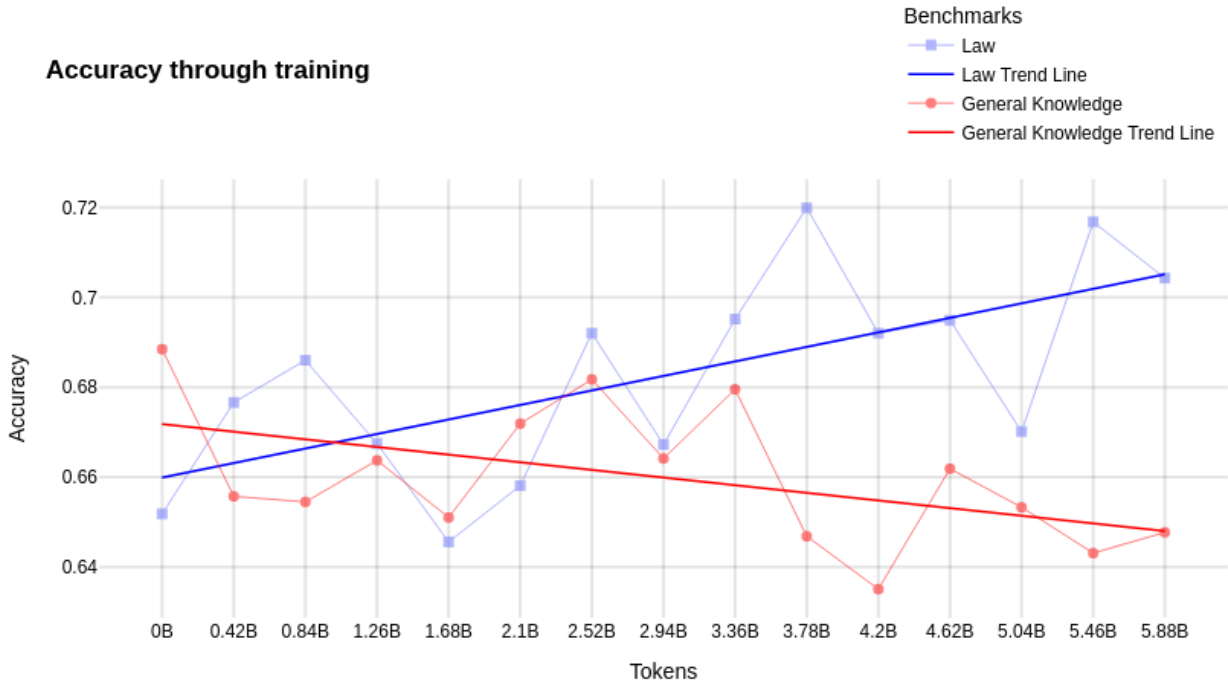


Figure 1: Accuracy on law and general knowledge benchmarks with respect to the number of training tokens related to legal Brazilian texts. One epoch is 1.9 billion tokens. The first points (0B) correspond to the Sabiá-2 Small model.

Figure 2 presents the comparison between Juru and Sabiá-2 Small across 53 areas of knowledge, solely for the ENADE of 2022 and 2023. With our pretraining, we observe a decrease in performance for 48 exams. The Speech Therapy exam presents the highest decline with a decrease of 14 points in accuracy. Even with a decline in performance for most exams, we observed a sharp increase for the medicine exam with 13 points in accuracy.

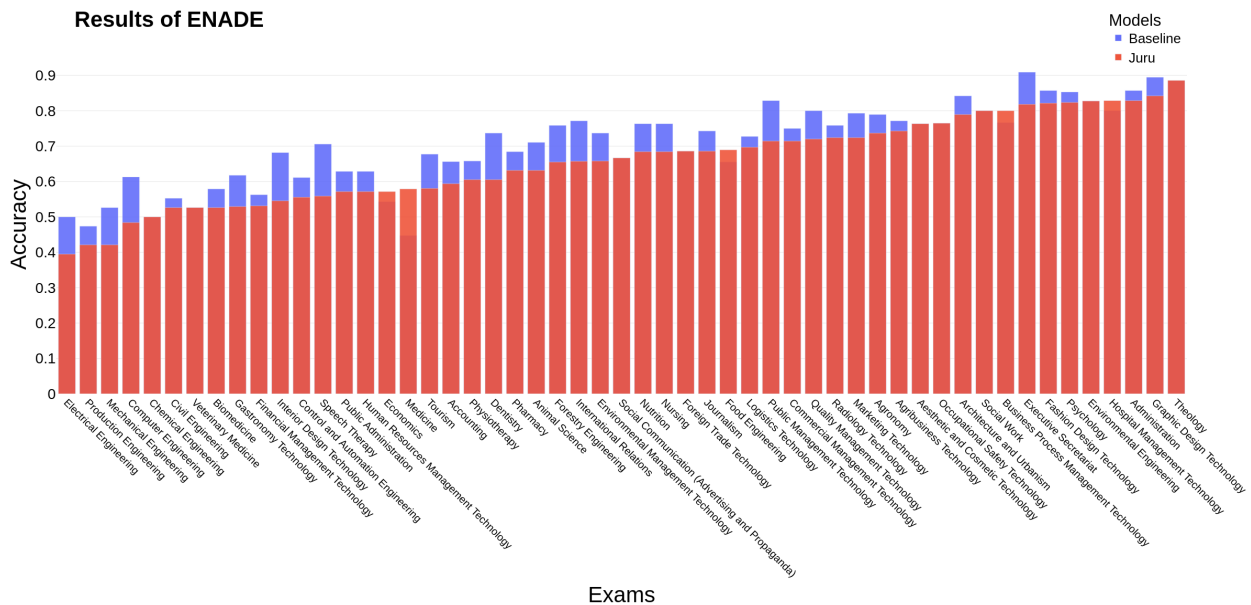


Figure 2: Comparison of Sabiá-2 Small against Juru on the general knowledge benchmark with ENADE 2022 and 2023.

5.2 Results Analysis

The results demonstrate the dynamics of learning domain-specific knowledge for the specialization of the Juru model. Specialization in Brazilian law yielded a significant increase of 6 points compared to Sabiá-2 Small in the law benchmark, despite the relatively small dataset of only 1.9 billion unique tokens.

In line with the hypothesis of this study, specialization has led to a decline in the model’s capacity to solve tasks beyond its specialized domain. Despite the shared language among evaluated tasks, specialization in only one knowledge domain has resulted in decreased performance in other areas. Clear correlations between types of knowledge areas and degradation were not evident.

We posit that further pretraining of the Juru model is likely to increase the disparity between law and general knowledge curves. Consequently, while performance in law-related tasks may increase, there would likely be a significant decrease in performance in specific knowledge domains that require different skill sets.

5.3 Data Contamination

While positive results are evident, there’s a noticeable risk of contamination in the pretraining dataset. This risk arises from web scraping pretraining data in the latter half of 2023, after the publication of all exams used. Although the origin of data from reputable sources in Brazilian academic works likely doesn’t include the data from the law benchmark, this risk of validity persists. Hence, to mitigate data contamination, the continuation of this work involves annotating new exams released in 2024 and 2025.

6 Conclusion

In this study, we presented the Juru model, a large language model specialized for the Brazilian legal domain using 3.7 billion tokens. Despite its smaller size and limited data, we observed an expressive improvement in the model’s ability to resolve multiple-choice questions within the Brazilian legal domain. Our primary finding highlights the effectiveness of domain specialization in improving LLM performance with fewer data, thus reducing pretraining costs, at the expense of the model’s performance degradation in other knowledge domains within the target language.

For future work, our primary aim is to incorporate evaluations of the Juru model with new benchmarks that fall outside the model’s knowledge cut-off to mitigate the possibility of data contamination. Additionally, it’s pertinent to explore methods for mitigating the observed degradation in domains outside the model’s specialization.

7 Acknowledgements

This work was partially financed by the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior - Brasil (CAPES) and INCT (CAPES #88887.136349/2017-00, CNPQ #465755/2014-3). We thank Google Cloud Platform for the TPU grant.

References

- [1] Nicholas Carlini, Florian Tramèr, Eric Wallace, Matthew Jagielski, Ariel Herbert-Voss, Katherine Lee, Adam Roberts, Tom Brown, Dawn Song, Úlfar Erlingsson, Alina Oprea, and Colin Raffel. Extracting training data from large language models. In *30th USENIX Security Symposium (USENIX Security 21)*, pages 2633 – 2650, 2021.
- [2] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In *Advances in Neural Information Processing Systems*, volume 2020-December, 2020.
- [3] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [4] Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. mT5: A massively multilingual pre-trained text-to-text transformer. In *Proceedings of the 2021*

- Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483 – 498. Association for Computational Linguistics, 2021.
- [5] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. Training compute-optimal large language models, 2022.
 - [6] OpenAI. Gpt-4 technical report, 2023.
 - [7] Pierre Colombo, Telmo Pessoa Pires, Malik Boudiaf, Dominic Culver, Rui Melo, Caio Corro, Andre FT Martins, Fabrizio Esposito, Vera Lúcia Raposo, Sofia Morgado, et al. Saullm-7b: A pioneering large language model for law. *arXiv preprint arXiv:2403.03883*, 2024.
 - [8] Eduardo A. S. Garcia, Nadia F. F. Silva, Felipe Siqueira, Hidemberg O. Albuquerque, Juliana R. S. Gomes, Ellen Souza, and Eliomar A. Lima. RoBERTaLexPT: A legal RoBERTa model pretrained with deduplication for Portuguese. In Pablo Gamallo, Daniela Claro, António Teixeira, Livy Real, Marcos Garcia, Hugo Gonçalo Oliveira, and Raquel Amaro, editors, *Proceedings of the 16th International Conference on Computational Processing of Portuguese*, pages 374–383, Santiago de Compostela, Galicia/Spain, March 2024. Association for Computational Linguistics.
 - [9] Ramon Pires, Hugo Abonizio, Thales Sales Almeida, and Rodrigo Nogueira. Sabiá: Portuguese large language models, 2023.
 - [10] Yuanzhi Li, Sébastien Bubeck, Ronen Eldan, Allie Del Giorno, Suriya Gunasekar, and Yin Tat Lee. Textbooks are all you need ii: phi-1.5 technical report. *arXiv preprint arXiv:2309.05463*, 2023.
 - [11] Suriya Gunasekar, Yi Zhang, Jyoti Aneja, Caio César Teodoro Mendes, Allie Del Giorno, Sivakanth Gopi, Mojan Javaheripi, Piero Kauffmann, Gustavo de Rosa, Olli Saarikivi, Adil Salim, Shital Shah, Harkirat Singh Behl, Xin Wang, Sébastien Bubeck, Ronen Eldan, Adam Tauman Kalai, Yin Tat Lee, and Yuanzhi Li. Textbooks are all you need, 2023.
 - [12] Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Cappelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay. The RefinedWeb dataset for Falcon LLM: outperforming curated corpora with web data, and web data only. *arXiv preprint arXiv:2306.01116*, 2023.
 - [13] Thales Sales Almeida, Hugo Abonizio, Rodrigo Nogueira, and Ramon Pires. Sabiá-2: A new generation of portuguese large language models, 2024.
 - [14] Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent abilities of large language models, 2022.
 - [15] Celio Larcher, Marcos Piau, Paulo Finardi, Pedro Gengo, Piero Esposito, and Vinicius Caridá. Cabrita: closing the gap for foreign languages. *arXiv preprint arXiv:2308.11878*, 2023.
 - [16] Felipe Maia Polo, Gabriel Caiaffa Floriano Mendonça, Kauê Capellato J Parreira, Lucka Gianvechio, Peterson Cordeiro, Jonathan Batista Ferreira, Leticia Maria Paz de Lima, Antônio Carlos do Amaral Maia, and Renato Vicente. Legalnlp-natural language processing methods for the brazilian legal language. In *Anais do XVIII Encontro Nacional de Inteligência Artificial e Computacional*, pages 763 – 774, 2021.
 - [17] Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
 - [18] Kenzo Sakiyama, Raphael Montanari, Roseval Malaquias Junior, Rodrigo Nogueira, and Roseli AF Romero. Exploring text decoding methods for portuguese legal text generation. In *Brazilian Conference on Intelligent Systems*, pages 63 – 77. Springer, 2023.
 - [19] Jack W Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, et al. Scaling language models: Methods, analysis & insights from training gopher. *arXiv preprint arXiv:2112.11446*, 2021.
 - [20] Rico Sennrich, Barry Haddow, and Alexandra Birch. Neural machine translation of rare words with subword units. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics*, volume 1: Long Papers, pages 1715 – 1725, 2016.
 - [21] Adam Roberts, Hyung Won Chung, Gaurav Mishra, Anselm Levskaya, James Bradbury, Daniel Andor, Sharan Narang, Brian Lester, Colin Gaffney, Afroz Mohiuddin, et al. Scaling up models and data with t5x and seqio. *Journal of Machine Learning Research*, 24(377):1 – 8, 2023.

- [22] Noam Shazeer and Mitchell Stern. Adafactor: Adaptive learning rates with sublinear memory cost. In *International Conference on Machine Learning*, pages 4596 – 4604. PMLR, 2018.
- [23] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayana Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. Palm: Scaling language modeling with pathways, 2022.
- [24] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, Hao Zhang, Joseph E Gonzalez, and Ion Stoica. Judging llm-as-a-judge with mt-bench and chatbot arena. In *Advances in Neural Information Processing Systems*, volume 36, pages 46595 – 46623, 2023.
- [25] Thales Sales Almeida, Thiago Laitz, Giovana K Bonás, and Rodrigo Nogueira. Bluex: A benchmark based on brazilian leading universities entrance exams. In *Brazilian Conference on Intelligent Systems*, pages 337 – 347. Springer, 2023.
- [26] Hélio Fonseca Sayama, Anderson Viçoso Araujo, and Eraldo Rezende Fernandes. Faquad: Reading comprehension dataset in the domain of brazilian higher education. In *2019 8th Brazilian Conference on Intelligent Systems (BRACIS)*, pages 443 – 448. IEEE, 2019.
- [27] Igor Cataneo Silveira and Denis Deratani Mauá. Advances in automatically solving the enem. In *2018 7th Brazilian Conference on Intelligent Systems (BRACIS)*, pages 43 – 48. IEEE, 2018.
- [28] Desnes Nunes, Ricardo Primi, Ramon Pires, Roberto Lotufo, and Rodrigo Nogueira. Evaluating gpt-3.5 and gpt-4 models on brazilian university admission exams. *arXiv preprint arXiv:2303.17003*, 2023.
- [29] Ramon Pires, Thales Sales Almeida, Hugo Abonizio, and Rodrigo Nogueira. Evaluating gpt-4’s vision capabilities on brazilian university admission exams. *arXiv preprint arXiv:2311.14169*, 2023.