

HARMamba: Efficient Wearable Sensor Human Activity Recognition Based on Bidirectional Selective SSM

Shuangjian Li, Tao Zhu, *Member, IEEE*, Furong Duan, Liming Chen *Senior Member, IEEE*, Huansheng Ning, *Senior Member, IEEE*, Christopher Nugent and Yaping Wan

Abstract—Wearable sensor-based human activity recognition (HAR) is a critical research domain in activity perception. However, achieving high efficiency and long sequence recognition remains a challenge. Despite the extensive investigation of temporal deep learning models, such as CNNs, RNNs, and transformers, their extensive parameters often pose significant computational and memory constraints, rendering them less suitable for resource-constrained mobile health applications. This study introduces HARMamba, an innovative light-weight and versatile HAR architecture that combines selective bidirectional SSM and hardware-aware design. To optimize real-time resource consumption in practical scenarios, HARMamba employs linear recursive mechanisms and parameter discretization, allowing it to selectively focus on relevant input sequences while efficiently fusing scan and recompute operations. To address potential issues with invalid sensor data, the system processes the data stream through independent channels, dividing each channel into “patches” and appending classification token to the end of the sequence. Position embeddings are incorporated to represent the sequence order, and the activity categories are output through a classification header. The HARMamba Block serves as the fundamental component of the HARMamba architecture, enabling the effective capture of more discriminative activity sequence features. HARMamba outperforms contemporary state-of-the-art frameworks, delivering comparable or better accuracy with significantly reducing computational and memory demands. Its effectiveness has been extensively validated on public datasets like PAMAP2, WISDM, UNIMIB SHAR and UCI, showcasing impressive results.

Index Terms—Human Activity Recognition, Selective State Space Models, Wearable Sensors, Deep Learning, Light-weight

I. INTRODUCTION

REAL-TIME human activity recognition using wearable sensors has emerged as a prominent research focus in recent years [1], with extensive applications in healthcare, assisted living, and smart homes. While traditional machine

learning methods, such as support vector machines (SVM), k-nearest neighbour (KNN), and random forests, have demonstrated promising results, their reliance on manually crafted features and domain expertise often limits their performance. As computing power advances, deep learning, specifically convolutional neural networks (CNNs) [2], long short-term memory (LSTM) models [3], and Transformers [4], has revolutionized human activity recognition. However, these three models also have their own shortcomings in sequence modeling. The fixed convolution kernel size of CNNs may impede their ability to capture long-distance dependencies when processing long sequences. Additionally, the sheer number of network parameters in deep convolutional networks may restrict their applicability in resource-limited environments or on small devices. LSTMs are designed to address the long-term dependency issue, yet in certain instances, they may still encounter challenges in effectively capturing longer-distance dependencies, potentially leading to vanishing or exploding gradient problems. Furthermore, the LSTM model contains more computational steps than the CNNs model in long sequence tasks, resulting in increased training and inference calculations. Transformers, renowned for their success in natural language processing (NLP) [6], computer vision (CV) [7], and time series analysis [5], excels in capturing relationships and sequence correlations through the attention mechanism. However, the traditional transformer models face challenges in processing large sensor data sequences due to quadratic self-attention complexity, hindering the extraction of valuable information from individual time points. Limited training data is another issue, particularly in activity recognition where scarcity affects performance. Consequently, designing a novel architecture that balances long-term sensor signal dependencies with linear computational resource utilization is a key challenge in the field of activity recognition.

Recent research efforts [10], [11] have sparked significant interest in state space models (SSMs). Modern iterations of SSMs effectively excel in capturing long-range dependencies, and the incorporation of parallel training computations enables continuous enhancement over extended durations. These models exhibit a remarkable capability in modeling sequence dependencies. Various SSM-based methodologies have been introduced for applications in domains dealing with continuous signal data, notably the Linear State Space Layer (LSSL) [11], Structured State Space Sequence Model (S4) [10], Diagonal State Space (DSS) [12], and S4D [13]. Leveraging efficient

This work was supported in part by the National Natural Science Foundation of China(62006110), the Natural Science Foundation of Hunan Province (2021JJ30574). (Corresponding author: Tao Zhu.)

Shuangjian Li, Tao Zhu, Furong Duan and Yaping Wan are with the School of Computer Science, University of South China, 421001 China (e-mail: sjli@stu.usc.edu.cn, tzhu@usc.edu.cn, frduan@stu.usc.edu.cn, ypan@aliyun.com).

Liming Chen was with School of Computer Science and Technology, Dalian University of Technology, China. Huansheng Ning was Department of Computer & Communication Engineering, University of Science and Technology Beijing, 100083 China. Christopher Nugent are with the School of Computing, Ulster University, Jordanstown, Northern Ireland, UK. (email: limingchen0922@dlut.edu.cn, ninghuansheng@ustb.edu.cn, cd.nugent@ulster.ac.uk).

convolution or recursion computations with linear or near-linear scalability concerning sequence length, these approaches are proved versatile in processing sequence data across diverse tasks and modalities. Notably, the recent innovation of Mamba [14] introduced a straightforward selection mechanism to parameterize SSM parameters based on input, along with a hardware-aware algorithm that achieves highly efficient training and inference. However, the exploration of SSM-based backbone networks for processing IMU activity data remains an uncharted territory.

While Mamba has demonstrated success in modeling language, audio, video, and other domains, it encounters challenges when applied to sensor activity data due to its unidirectional modeling approach and lacking of consideration for sequence position information. Inspired by [14], we introduce the HARMamba model. Initially, we segment each channel of continuous sensor data into patches, with each patch encapsulating sensor channel information. Subsequently, we apply position embeddings to each patch block, projecting them as linear vectors into Mamba blocks. Since Mamba's one-way modeling lacks information awareness of context, these Mamba blocks leverage bidirectional selective state space to efficiently compress patch sequence representations, with position embeddings facilitating information exchange between patch blocks and enhancing the model's accuracy in activity recognition. Leveraging Mamba's linear modeling capability, HARMamba adopts a pure SSM approach, modeling IMU signals in patch form. Our approach maintains the training parallelism of SSM, ensures inference efficiency, and achieves significant enhancements with a low number of parameters. This design establishes an efficient backbone network for activity recognition.

The main contributions of this paper can be summarized as follows:

- We introduced a simple and light-weight framework called HARMamba, which is a pioneering approach that applies the selective state space model and scanning mechanism in activity recognition tasks.
- The framework adopts a sensor data channel-independent approach and patch operation to process sensor signal sequences, modeling the global context and location embedding of sensor signal patch sequences through bidirectional SSM.
- Our proposed framework achieves light-weight utilisation of computational resources, with higher computational speed, lower parameters and memory consumption than current state-of-the-art work. This feature facilitates its deployment on real-time activity detection devices.
- Performing activity recognition classification experiments on four widely utilized benchmark datasets, the findings demonstrate that HARMamba demonstrates higher recognition performance when compared to alternative frameworks.

II. RELATED WORK

This section provides a review of several related works on sensor-based activity recognition and state space models.

A. Sensor-based activity recognition

Sensor-based human activity recognition primarily relies on IMU sensors in wearable devices like smartwatches, smart insoles, and exercise bands. Traditional approaches, such as fixed-size sliding windows and dense labeling, have demonstrated strong performance [23]. Recent advancements in deep learning have facilitated the application of convolutional neural networks [55], recurrent neural networks [56], and hybrid structures [57] for feature extraction and activity recognition. For instance, [24] employed an LSTM-based method to identify fine-grained patterns using high-level features from sequential motion data, [17] introduced a deformable convolutional network for activity recognition from complex sensory data, and [18] presented a GRU-INC model that initializes attention-based GRUs to effectively leverage spatiotemporal information in time series. Additionally, [19] proposed a multi-branch CNN-BiLSTM network that extracts features from raw sensor data with minimal preprocessing. Inspired by image semantic segmentation, [29]–[31] employed FCNs and U-nets for dense label prediction, achieving commendable recognition rates. [33] further developed Conditional-UNet, which models conditional dependencies between dense labels for coherent human activity recognition.

The Transformer's success in sequence modeling has led to a surge in the application of attention mechanisms to sensor activity sequences, significantly enhancing activity recognition performance. [25] introduced an attention-based Multi-head model for human activity recognition, demonstrating its effectiveness. [26] further advanced the field by proposing a triplet cross-dimensional attention method, which employs three branches to capture interactions between sensor dimensions, time, and channel aspects in sensor-based tasks. [27] introduced a deep CNN with an attention mechanism, allowing for kernel selection across multiple branches with distinct receptive fields in the context of human activity recognition. [4] showcased the potential of adaptive Transformers with their model, achieving favorable results on smartphone motion sensor data from diverse activities. Lastly, [20] presented the Multi-ResAtt model, integrating recurrent neural networks and attention for time series feature extraction and activity recognition.

Deep learning models have demonstrated exceptional performance in human activity recognition, but their resource-intensive nature often hinders deployment on edge devices. To address this issue, researchers have proposed light-weight deep learning models, such as [21] proposes a HAR light-weight deep learning model that requires less computing power, making it suitable for deployment on edge devices. [22] employs pruning and quantization techniques to CNNs, effectively reducing computational demands and memory consumption. [44] further contribute by introducing a light-weight CNN designed for activity recognition, achieving a balance between recognition accuracy and resource efficiency.

B. State space models

State Space Sequence Models (SSMs) [10], [11] have emerged as a promising architecture for sequence modeling,

with Mamba [14] standing out as a selective SSM that integrates time-varying parameters and employs a hardware-aware algorithm for efficient training and inference. Mamba employs selective scan algorithms and recomputation techniques to optimize the I/O and memory efficiency of modern GPU hardware accelerators. To address memory constraints, it leverages recomputation to minimize the memory footprint associated with selective state selection methods. In its forward pass, Mamba bypasses storing intermediate states, allowing for direct gradient computation and transmission. As the network propagates backward, Mamba swiftly recomputes these states, thereby minimizing the expense of High bandwidth memory (HBM) data reads, resulting in a highly efficient process. Mamba's success in long sequence modeling has sparked its application in various domains, such as U-Mamba [58], which explores Mamba's potential in vision tasks by proposing a universal segmentation network for 2D and 3D biomedical images. Vim [15] introduces a bidirectional SSM block for efficient visual representation learning, achieving competitive performance with ViT [7]. VMamba [37] introduces the Cross Scan Module (CSM), converting visual images into ordered sequences with linear complexity and global receptive field. LightM-UNet [38] combines Mamba and UNet in a lightweight framework for efficient image processing. 2D SSM [34] integrates SSM blocks into Transformer blocks [6], [7], while DenseMamba [40] enhances SSMs by selectively fusing shallow hidden states for fine-grained information retention. ConvSSM [35] combines ConvLSTM [36] principles with SSM, enabling parallel scans and sub-quadratic parallelization. TimeMachine [59] utilizes Mamba for long-term dependencies in multivariate time series, and Motion Mamba [39] introduces a motion generation model with hierarchical temporal Mamba (HTM) and bidirectional spatial Mamba (BSM) blocks for temporal and bidirectional processing of latent pose data.

III. METHOD

This section provides a detailed introduction to the HAR-Mamba architecture. Firstly, the basic concepts of SSM are presented, followed by an explanation of how the input token sequence is processed and the HARMamba model is utilized for activity recognition.

A. Preliminaries

Inspired by the Structured State Space Sequence Model (S4) [10] and Mamba [14], SSM has emerged as a promising architecture for efficient long sequence modeling. Structured SSM maps a sequence $x(t) \in \mathbb{R}^L$ to $y(t) \in \mathbb{R}^L$ by hiding the state $h(t) \in \mathbb{R}^N$, and the model uses $\mathbf{A} \in \mathbb{R}^{N \times N}$ as an evolution parameter and $\mathbf{B} \in \mathbb{R}^{N \times 1}$ and $\mathbf{C} \in \mathbb{R}^{1 \times N}$ as projection parameters. The whole process can be formulated as:

$$\begin{aligned} h'(t) &= \mathbf{A}h(t) + \mathbf{B}h(t) \\ y(t) &= \mathbf{C}h(t) \end{aligned} \quad (1)$$

To apply SSM to discrete data, the continuous parameters $\mathbf{A}$ and $\mathbf{B}$ are converted into discrete parameters $\bar{\mathbf{A}}$ and $\bar{\mathbf{B}}$ using the

time scale parameter Δ . One commonly used transformation method is the zero-order hold (ZOH), which is defined as follows:

$$\begin{aligned} \bar{\mathbf{A}} &= \exp(\Delta \mathbf{A}) \\ \bar{\mathbf{B}} &= (\Delta \mathbf{A})^{-1}(\exp(\Delta \mathbf{A}) - \mathbf{I}) \cdot \Delta \mathbf{B} \end{aligned} \quad (2)$$

After discretizing the parameters, the Eq. (1) can be rewritten using the discretization parameters as follows:

$$\begin{aligned} h_t &= \bar{\mathbf{A}}h_{t-1} + \bar{\mathbf{B}}x_t \\ y_t &= \mathbf{C}h_t \end{aligned} \quad (3)$$

The model calculates the output using global convolution:

$$\begin{aligned} \bar{\mathbf{K}} &= (\mathbf{C}\bar{\mathbf{B}}, \mathbf{C}\bar{\mathbf{A}}\bar{\mathbf{B}}, \dots, \mathbf{C}\bar{\mathbf{A}}^{L-1}\bar{\mathbf{B}}) \\ y &= \mathbf{x} * \bar{\mathbf{K}} \end{aligned} \quad (4)$$

The length of the input sequence $\mathbf{x}$ is denoted by L , and the structured convolution kernel is represented by $\bar{\mathbf{K}} \in \mathbb{R}^L$. Eq. (3) is utilized for autoregressive inference of the model, while Eq. (4) is effective for parallel training.

B. HAR Mamba

Figure 1 shows the definition of the D_c -dimensional input wearable sensor sequence as $\mathbf{X}_{1:L} = [x_1, \dots, x_L]$, $x_i \in \mathbb{R}^{D_c}$. Here, x_i represents the sensor signal collected at timestamp t , and the activity label corresponding to each sample is marked as $y_{1:L} = [y_1, \dots, y_L]$, $y_t \in \mathbb{R}^C$. C represents the category of the activity number, t is the time step, L is the length of the wearable sensor sequence, and the length of Patch is defined as P .

The input sensor sequence $[x_1, \dots, x_L]$ is first divided into D_c single-variable sequences $x^{(i)} \in \mathbb{R}^{1 \times L}$. Prior to processing the patches, we apply reversible instance normalization (RevIN) [41] to multiple channels of sensor signal data. This is intended to address the issue of non-uniform time distribution between training and test data, which is often referred to as distribution shift. Before combining the channel modules, we normalize the data for each channel using instance normalization. For each instance of $x^{(i)}$, we compute the mean and standard deviation.

$$RevIN(x^{(i)}) = \left\{ \gamma_i \frac{x^{(i)} - \text{Mean}(x^{(i)})}{\sqrt{\text{Var}(x^{(i)}) + \varepsilon}} \right\}, i = 1, 2, \dots, D_c \quad (5)$$

After normalization of reversible instances, each single-channel sensor signal sequence $x^{(i)}$ can be further divided into overlapping or non-overlapping Patch blocks, with a length of P . The non-overlapping part between two consecutive Patch blocks is referred to as the step size, expressed as S . The segmentation of the patch block results in a patch-level sensor sequence $x_p^{(i)} \in \mathbb{R}^{P \times N}$, where $N = \lfloor \frac{(L-P)}{S} \rfloor$. In order to facilitate the classification of sensor sequences, a class token ($token_{cls}$) has been introduced, which performs global feature aggregation over all other tokens. The $token_{cls}$ is initially set to an all-zero matrix and is updated continuously as the network trains. The input token and $token_{cls}$ are spliced

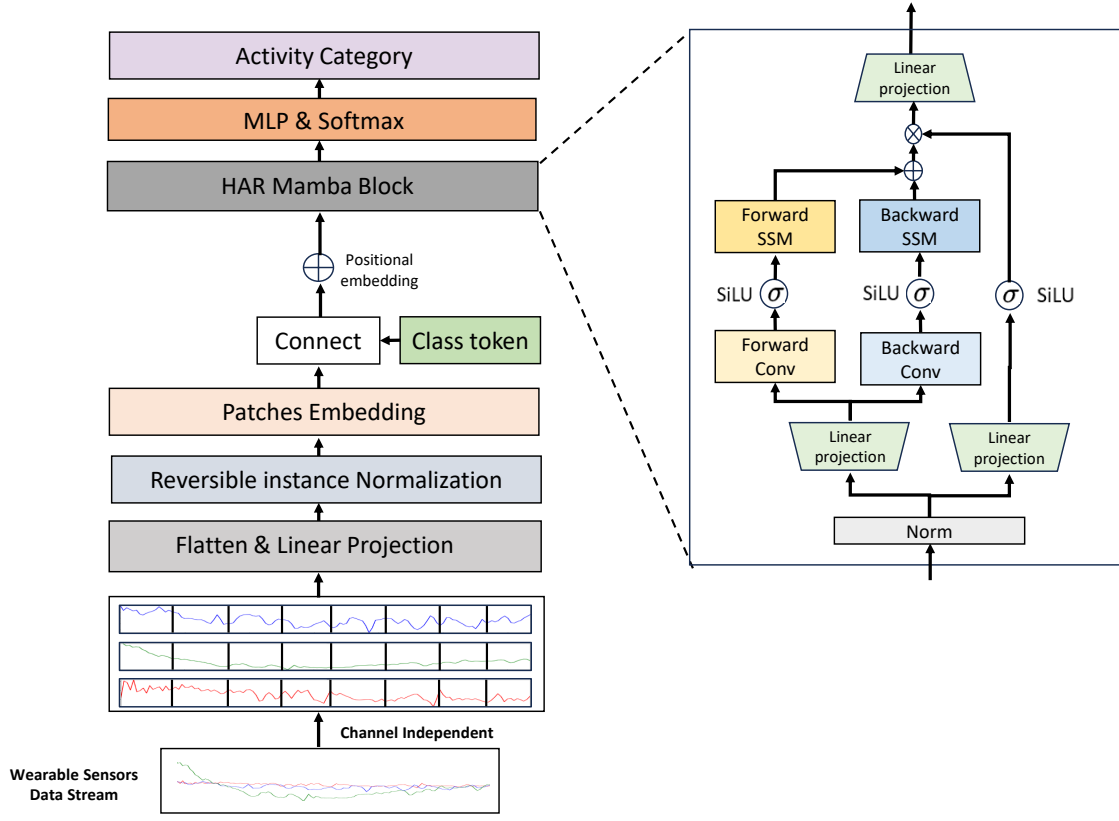


Fig. 1. illustrates the schematic of our proposed HARMamba model. Initially, we render the input sensor signal sequence channel-agnostic, segment the sequence of each channel into patch sequences, and subsequently map them to patch tokens while incorporating position encoding for each token. Subsequently, the token sequence is fed into the HARMamba architecture. In contrast to Mamba, which is tailored for text sequences, the HARMamba encoder executes bidirectional processing of token sequences.

together to create a patch token vector of length $N + 1$. Subsequently, we linearly project this sequence into a D -dimensional vector space. Each token is then augmented with a position embedding $E_{pos} \in \mathbb{R}^{(N+1) \times D}$. This process is expressed mathematically as:

$$\text{Tokens} = \text{Concat}(x_p^{(i)} \mathbf{W}, \text{token}_{cls}), i = 1, 2, \dots, N \quad (6)$$

$$\mathbf{T}_0 = \text{Tokens} + E_{pos} \quad (7)$$

Where $\mathbf{W} \in \mathbb{R}^{(N \times L) \times D}$ is the learnable projection matrix, then we input the token sequence representation $\mathbf{T}_{l-1}$ into the HARMamba Block of the l -th layer, and the output is $\mathbf{T}_l$. We normalize the output class token $\mathbf{T}_l^{N+1}$ and then transport it to the MLP. Finally, the final activity class prediction $\hat{y}$ is obtained through the Softmax layer. The specific representation is as follows:

$$\mathbf{T}_l = \text{HARMambaBlock}(\mathbf{T}_{l-1}) \quad (8)$$

$$\hat{y} = \text{Softmax}(\text{MLP}(\text{Norm}(\mathbf{T}_l^{N+1}))) \quad (9)$$

Predicted and true labels are used to construct an activity classification loss, which efficiently optimizes model parameters. The loss is defined as follows:

$$L_{cls}(\hat{y}, y) = -\frac{1}{L} \sum_{l=1}^L \sum_{c=1}^C y \log(\hat{y}) \quad (10)$$

C. HARMamba Block

This section introduces the HARMamba Block, which models sensor sequences bidirectionally. The HARMamba Block is depicted in Figure 1.

The token sequence representation $\mathbf{T}_{l-1}$ is normalized using a normalization layer. The output sequence is then projected into $\mathbf{x}$ and $\mathbf{z}$ of size E through two linear mappings.

$$\mathbf{x}, \mathbf{z} = \text{Linear}(\text{Norm}(\mathbf{T}_{l-1})) \quad (11)$$

The input $\mathbf{x}$ is processed through two independent branches, one forward and one backward. In each direction, $\mathbf{x}$ undergoes one-dimensional causal convolution resulting in $\mathbf{x}'_o$. The SiLU activation function is then applied to $\mathbf{x}'_o$ before it is fed into the SSM. Within the SSM, $\mathbf{x}'_o$ is linearly projected onto $\mathbf{B}_o$, $\mathbf{C}_o$, and Δ_o , and then converted through Δ_o to obtain $\bar{\mathbf{A}}_o$ and $\bar{\mathbf{B}}_o$. Finally, $y_{forward}$ and $y_{backward}$ are obtained through bidirectional SSM.

$$y_{forward/backward} = \text{SSM}(\text{SiLU}(\text{Conv1D}(\mathbf{x}))) \quad (12)$$

Finally, we add $y_{forward}$ and $y_{backward}$, calculate the result with $\mathbf{z}$ to get the gate value, and then use it through a linear projection to get the final output Token sequence $\mathbf{T}_l$.

$$\mathbf{T}_l = \text{Linear}((y_{forward} + y_{backward}) \otimes \mathbf{z}) \quad (13)$$

Algorithm 1 describes the specific process. l represents the number of HARMamba Blocks, D represents the hidden state dimension, and E represents the extended state dimension.

Algorithm 1 HARMamba Block

Input: Patch token sequence $\mathbf{T}_{l-1} : (B, L, D)$
Output: Patch token sequence $\mathbf{T}_l : (B, L, D)$
1: $\mathbf{T}'_{l-1} : (B, L, D) \leftarrow \text{Norm}(\mathbf{T}_{l-1})$
2: $\mathbf{x}, \mathbf{z} : (B, L, E) \leftarrow \text{Linear}(\mathbf{T}'_{l-1})$
3: **for** $\mathbf{o}$ in $\{\text{forward}, \text{backward}\}$ **do**
4: $\mathbf{x}'_{\mathbf{o}} : (B, L, E) \leftarrow \text{SiLU}(\text{Conv1D}(\mathbf{x}))$
5: $\mathbf{B}_{\mathbf{o}}, \mathbf{C}_{\mathbf{o}}, \mathbf{\Delta}_{\mathbf{o}} \leftarrow \text{Linear}(\mathbf{x}'_{\mathbf{o}})$
6: $\overline{\mathbf{A}}_{\mathbf{o}}, \overline{\mathbf{B}}_{\mathbf{o}} : \text{Transform } \mathbf{A}, \mathbf{B} \text{ through } \mathbf{\Delta}_{\mathbf{o}}$
7: $\mathbf{y}_{\mathbf{o}} : (B, L, E) \leftarrow \text{SSM}(\overline{\mathbf{A}}_{\mathbf{o}}, \overline{\mathbf{B}}_{\mathbf{o}}, \mathbf{C}_{\mathbf{o}})$
8: **end for**
9: $\mathbf{T}_l \leftarrow \text{Linear}((\mathbf{y}_{forward} + \mathbf{y}_{backward}) \odot \text{SiLU}(\mathbf{z}))$
10: **Return:** $\mathbf{T}_l$

IV. EXPERIMENT

This section introduces the experimental settings, datasets, recognition metrics, and competing algorithms used in the experiments. The proposed HARMamba framework is then evaluated using cutting-edge research, demonstrating significant advantages in recognition performance.

A. Experimental setup

The method was implemented using PyTorch and trained on two RTX 3090 GPUs. The batch size was set to 64, and AdamW with a momentum of 0.9 and a weight decay of 0.05 was used to optimize the model, along with a learning rate of 0.0001. The HARMamba block consists of 12 layers. The patch sizes for PAMAP2, UCI, UNIMIB SHAR, and WISDM are 16, 8, 10, and 4 respectively.

B. Datasets

To evaluate our proposed method, we used four challenging public HAR datasets: WISDM, PAMAP2, UNIMIB SHAR, and UCI. The datasets are briefly introduced below, and Table I provides details of the four benchmark datasets.

WISDM dataset [52]: this dataset was collected from 29 participants who wore mobile phones equipped with three-axis accelerometers in their pants pockets. The data were sampled at 20 Hz. The study participants engaged in six activities daily: walking, strolling, ascending stairs, descending stairs, standing, and standing still. To address any missing data in the dataset, the corresponding column's mean is used for filling.

PAMAP2 dataset [51]: this dataset comprises data collected from nine participants wearing IMUs on their chest, hands, and ankles. These IMUs gather information on acceleration, angular velocity, and magnetic sensors. Each participant completed

12 mandatory activities, including lying down, standing, and going up and down stairs, as well as 6 optional activities, such as watching TV, driving a car, and playing ball.

UNIMIB SHAR dataset [53]: this dataset was collected by researchers at Milan-Bicocca. Thirty volunteers, aged 18 to 60, had their Samsung phones equipped with Bosch BMA 220 sensors. The study recorded 11,771 activities by placing phones in the participants' left and right pockets. The dataset comprises 17 categories of activities, divided into two groups: 9 activities of daily living (ADL) and 8 falling behaviors.

UCI dataset [54]: this dataset was collected from 30 volunteers aged 19 to 48 who strapped their smartphones to their waists and performed one of 6 standard activities using mobile phone software to record exercise data. The recorded motion data consists of linear acceleration (x, y, and z accelerometer data) and angular velocity (gyroscope data) from a Samsung Galaxy S II smartphone. The data was sampled at a frequency of 50Hz, which equates to 50 data points per second.

TABLE I
SPECIFICS OF THE BASELINE DATA SET

Dataset	Categories	Subject	Rate	Window	Sample
WISDM	6	29	20HZ	200	1,098,208
PAMAP2	12	9	33.3HZ	512	2,872,533
UNIMIB SHAR	17	4	30HZ	151	11,771
UCI	6	20	50HZ	128	74,8406

C. Evaluation metrics

To assess the activity categories of the final output of the model, we employ the following identification metrics:

Accuracy: an overall measure of correctness across all categories, calculated as follows:

$$\text{Accuracy} = \frac{\sum_{c=1}^C TP_c + \sum_{c=1}^C TN_c}{\sum_{c=1}^C (TP_c + TN_c + FP_c + FN_c)} \quad (14)$$

F1 score: The F1 score is calculated based on the proportion of samples:

$$F1 = \sum_{c=1}^C 2 * w_c \frac{\text{prec}_c \cdot \text{recall}_c}{\text{prec}_c + \text{recall}_c} \quad (15)$$

Where $\text{prec}_c = \frac{TP_c}{TP_c + FP_c}$ and $\text{recall}_c = \frac{TP_c}{TP_c + FN_c}$ represent precision and recall, respectively. The weight w_c is calculated as the ratio of n_c to N , where n_c is the number of Patch samples per class, and N is the total number of samples.

D. Comparisons with activity recognition algorithm

1) Activity recognition result

This section compares the recognition performance of our proposed model with contemporary competing methods on four publicly available wearable-based HAR datasets. Our model consistently outperforms or matches state-of-the-art results, as demonstrated in Table II. Our method exhibits

TABLE II
ACC AND F1 PERFORMANCE ON FOUR PUBLIC DATASETS

Dataset	Related work	Method	Accuracy	F1 score
PAMAP2	Challa S K et al. (2022) [19]	CNN-BiLSTM	94.29%	0.9427
	Tang Y et al. (2022) [26]	Triple cross domain Attention	-	0.9320
	Essa E et al. (2023) [42]	Temporal-channel convolution with self-attention network	89.10%	0.8642
	Tang Y et al. (2022) [43]	Dual-branch interactive networks on multichannel	92.05%	0.9199
	Huang W et al. (2023) [44]	Channel-Equalization-HAR	92.14%	0.9218
	Tang Y et al. (2022) [45]	HS-ResNet	93.75%	0.9429
	F. Duan et al. (2023) [46]	MTHAR	94.50%	0.9480
	Tong L et al. (2022) [47]	Bi-GRU-I	95.42%	0.9545
	J Li et al. (2023) [48]	Multi-resolution Fusion Convolutional Network	<u>98.14%</u>	<u>0.9812</u>
	Ours	HARMamba	99.91%	0.9974
UCI	Challa S K et al. (2022) [19]	CNN-BiLSTM	96.37%	0.9631
	Tang Y et al. (2022) [26]	Triple cross domain Attention	-	0.9677
	Huang W et al. (2023) [44]	Channel-Equalization-HAR	<u>97.35%</u>	0.9712
	Tang Y et al. (2022) [45]	HS-ResNet	97.28%	0.9738
	F. Duan et al. (2023) [46]	MTHAR	96.32%	<u>0.9723</u>
	MA Khatun et al. (2022) [49]	CNN-LSTM with Self-Attention	93.11%	0.8961
	Y Wang et al. (2023) [50]	Multifeature extraction framework based on attention mechanism	96.00%	0.9580
	Ours	HARMamba	97.65%	0.9701
UNIMIB SHAR	Tang Y et al. (2022) [26]	Triple cross domain Attention	-	0.7855
	MAA Al-Qaness et al. (2023) [20]	Multilevel Residual Network With Attention	<u>85.35%</u>	<u>0.8506</u>
	Huang W et al. (2023) [44]	Channel-Equalization-HAR	78.65%	0.7878
	Tang Y et al. (2022) [45]	HS-ResNet	79.02%	0.7919
	F. Duan et al. (2023) [46]	MTHAR	76.48%	0.7571
	Ours	HARMamba	88.08%	0.8823
WISDM	Challa S K et al. (2022) [19]	CNN-BiLSTM	96.05%	0.9604
	Tang Y et al. (2022) [26]	Triple cross domain Attention	-	0.9861
	Essa E et al. (2023) [42]	Temporal-channel convolution with self-attention network	92.51%	0.8518
	Tang Y et al. (2022) [43]	Dual-branch interactive networks on multichannel	98.17%	0.9856
	Huang W et al. (2023) [44]	Channel-Equalization-HAR	<u>99.04%</u>	<u>0.9918</u>
	Tong L et al. (2022) [47]	Bi-GRU-I	98.25%	0.9712
	J Li et al. (2023) [48]	Multi-resolution Fusion Convolutional Network	98.60%	0.9864
	Y Wang et al. (2023) [50]	Multifeature extraction framework based on attention mechanism	97.90%	0.9800
	Ours	HARMamba	99.11%	0.9920

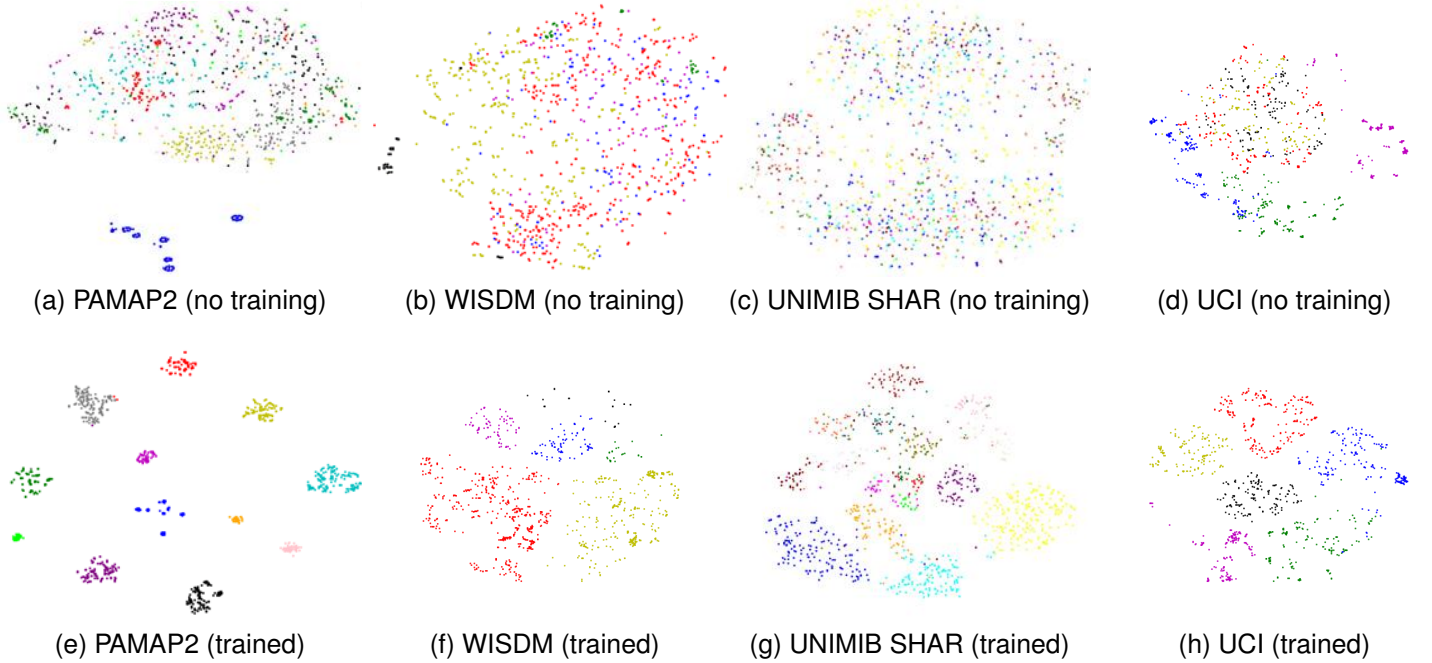


Fig. 2. T-SNE visualization results. Subfigures (a), (b), (c) and (d) display sample T-SNE visualization results without any training, while subfigures (e), (f), (g) and (h) show the T-SNE visualization results output by the pre-trained model. The T-SNE visualization results show samples from four different datasets: PAMAP2, WISDM, UNIMIB SHAR and UCI. The activity categories are represented by different colours.

notable improvements, with increases of 1.77%, 0.30%, 2.73% and 0.07% in accuracy over recent works on the PAMAP2, UCI, UNIMIB SHAR and WISDM datasets, respectively.

To assess the efficacy of pre-trained models in capturing and representing activity features across different datasets, we employed T-SNE visualization on HARMamba block outputs from four sources: PAMAP2, WISDM, UNIMIB SHAR and UCI. Each point in Figure 2 is color-coded according to its corresponding activity label, and the position of each label reflects the feature dimensionality reduction of the model in the 2D projection. This visualization helps distinguish different activities through assigned colors and provides a clear representation of the spatial arrangement of features. Figure 2 (a), (b), (c) and (d) show the T-sne results of the untrained model output features, it is evident that feature extraction between activities is challenging. In contrast, Figure 2 (e), (f), (g) and (h), which showcase the pre-trained model’s results, display distinct separation or clusters for each category, indicating improved feature extraction. This capability contributes to enhanced classification performance.

The figure 3 illustrates the confusion matrices for HARMamba and MTHAR on the PAMAP2 dataset. It demonstrates that our proposed framework significantly enhances the performance for activities like "sit", "stand", "cycling", and "ironing", among others. These findings substantiate the superior recognition capabilities of our framework.

2) Performance evaluation

To assess the performance of the HARMamba model, we compared it with the Channel-Equalization-HAR model [44] on four benchmark datasets. The aim was to compare the number of model parameters (M) and the amount of calculation FLOPs (M) in the forward propagation process of the

model. Channel-Equalization-HAR is a light-weight convolutional neural network. The comparison results between the two models are presented in Table III. HARMamba achieves equivalent or higher recognition accuracy and F1 scores than the Channel-Equalization-HAR model on all four datasets, with lower model parameters and FLOPs. This suggests that our model has lower computational costs and is suitable for real-time activity recognition on mobile devices.

TABLE III
PERFORMANCE COMPARISON OF HARMAMBA AND
CHANNEL-EQUALIZATION-HAR MODELS ON FOUR BENCHMARK
DATASETS

Method	param.(M)	FLOPs(M)	Acc	F1
PAMAP2				
Channel-Equalization-HAR	1.6800	488.69	92.14%	0.9218
HARMamba	0.4271	30.60	99.91%	0.9974
UCI				
Channel-Equalization-HAR	0.4300	43.82	97.35%	0.9712
HARMamba	0.3883	11.07	97.65%	0.9701
UNIMIB SHAR				
Channel-Equalization-HAR	0.4700	25.86	78.65%	0.7869
HARMamba	0.3522	7.94	88.08%	0.8823
WISDM				
Channel-Equalization-HAR	0.4300	34.86	99.04%	0.9918
HARMamba	0.2201	10.58	99.11%	0.9920

To evaluate the efficiency of HARMamba in activity recog-

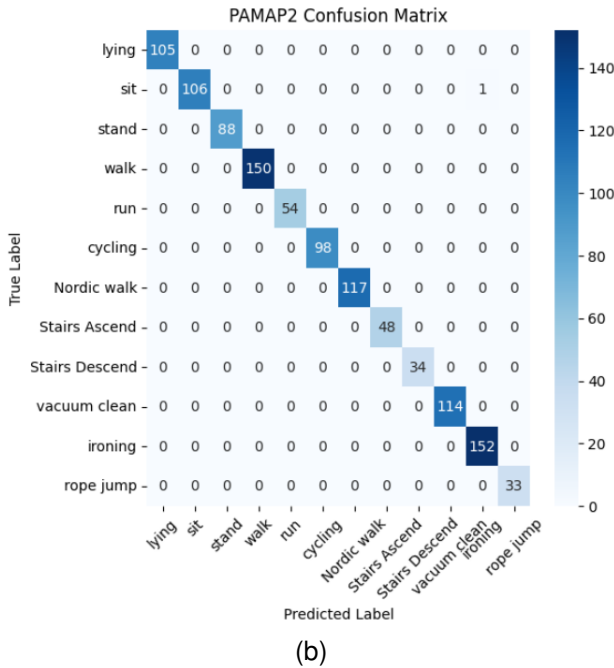
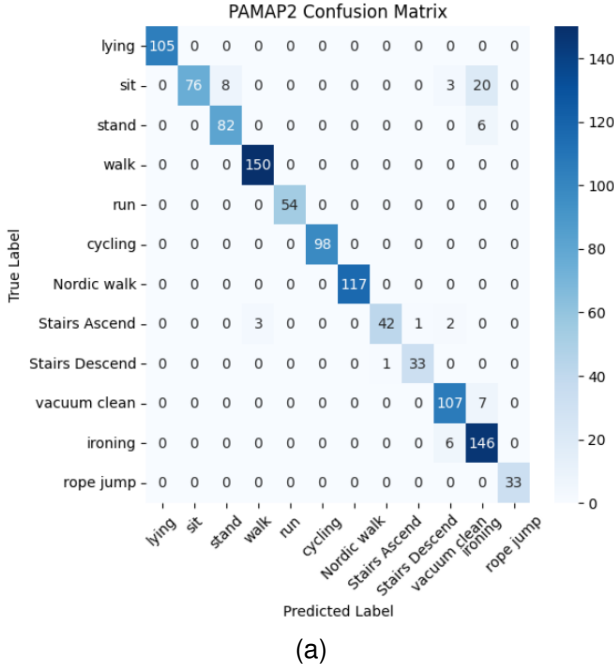


Fig. 3. The confusion matrices on the PAMAP2 dataset between MTHAR [46] and HARMamba. (a) MTHAR, (b) HARMamba

dition tasks, we benchmarked GPUs memory on the PAMAP2 dataset using different patch sizes. Figure 4 shows that we replaced the HARMamba Block module with the standard Transformer module to test its memory resource consumption. Benefiting from the hardware-aware design of SSM, HARMamba has excellent linear scaling performance and consumes less computing resources than the Transformer block.

E. Ablation experiment

1) The impact of bidirectional SSM on classification results:

Three strategies are mainly studied: (1) SSM: using a single

Mamba block to process the sensor data representation sequence directly. (2) Bidirectional SSM: adding an additional SSM to each block to handle the sequence of sensor data representations in the backward direction. (3) Bidirectional SSM + Conv1d: adding a Conv1d before each SSM based on Bidirectional SSM.

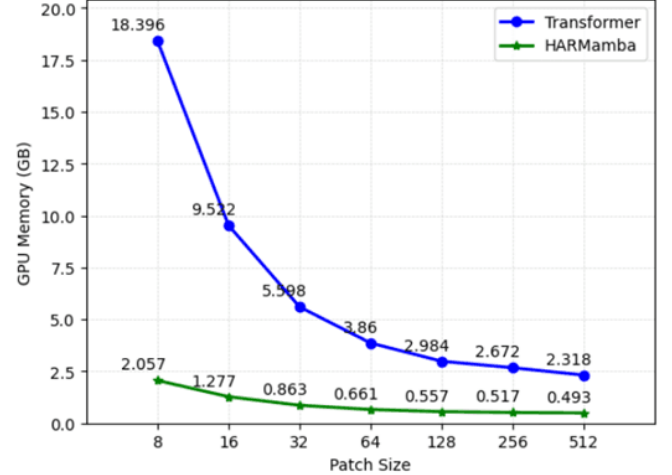


Fig. 4. The memory efficiency results of Transformer and HARMamba models are compared under different patch sizes on the Pamap2 dataset.

As shown in Table IV, a single SSM can achieve good recognition results, but it lacks understanding of the global sequence context modeling, and the best performance is achieved by adding backward SSM and Conv1d. The default strategy in the HARMamba block is to use bidirectional SSM+Conv1d.

TABLE IV
THE IMPACT OF DIFFERENT STRATEGIES ON THE RESULTS ON THE UNIMIB SHAR DATASET

Strategy	Accuracy	F1 score
SSM	77.30%	0.7723
Bidirectional SSM	85.57%	0.8569
Bidirectional SSM + Conv1d	88.08%	0.8823

2) *Comparison of Results from Channel Independent and Channel Fusion Methods:* To assess the channel independent strategy's influence on performance, we performed experiments comparing the activity recognition capabilities of HARMamba models employing channel fusion and channel independence. Utilizing PAMAP2, UCI, UNIMIB SHAR and WISDM datasets, with 9, 9, 3, and 3 sensor channels respectively, the results are compiled in Table V. The analysis reveals that separating channels from the full-channel fusion approach enhances the F1 score of HARMamba across all datasets, suggesting that not all channels are equally crucial for recognition. This implies that adopting channel independence does not compromise model performance.

3) *Classification design:* We ablated the classification design of HARMamba and used the four datasets of PAMAP2, UCI, UNIMIB SHAR and WISDM as benchmarks. We study the following classification strategies:

TABLE V
F₁ SCORE RESULTS OF CHANNEL-INDEPENDENT AND CHANNEL-FUSION
METHODS ON FOUR BENCHMARK DATASETS

Methods	PAMAP2	UCI	UNIMIB	WISDM
Channel Fusion	0.9876	0.9493	0.8683	0.9634
Channel Independent	0.9974	0.9701	0.8823	0.9920

- No class token. we forego the addition of class tokens to the input sequence. Instead, we focus on extracting features from the final HARMamba block, applying mean pooling, and subsequently performing classification on the pooled output.
- End classification token. We concatenate the class token at the tail of the token sequence and perform classification.

As demonstrated in Table VI, experiments have shown that the classification token strategy, when added at the end of the sequence, can optimally utilise the recursive nature of SSM, resulting in the highest accuracy on four datasets.

TABLE VI
ACCURACY RESULTS OF DIFFERENT CLASSIFICATION DESIGNS ON FOUR
BENCHMARK DATASETS

Classification strategy	PAMAP2	UCI	UNIMIB	WISDM
No class token	97.70%	94.53%	82.30%	95.09%
End class token	99.91%	97.65%	88.08%	99.11%

V. CONCLUSION AND FUTURE WORK

We introduce HARMamba, a light-weight activity recognition model that employs the state-of-the-art Mamba architecture as its backbone. By implementing bidirectional state space modeling on sensor patch blocks, HARMamba outperforms attention-based and convolutional networks in terms of recognition accuracy while maintaining lower computational complexity and memory consumption. This demonstrates its potential as a favorable backbone for activity recognition tasks, with plans for future extensions. Specifically, we aim to apply Mamba in self-supervised learning to alleviate the need for active labeling, explore cross-human domain adaptation, and deploy the model on mobile devices for real-time activity recognition.

REFERENCES

- [1] F. Gu, M.-H. Chung, M. Chignell, S. Valaee, B. Zhou, and X. Liu, "A survey on deep learning for human activity recognition," *ACM Computing Surveys (CSUR)*, vol. 54, no. 8, pp. 1–34, 2021.
- [2] Y. Xu and T. T. Qiu, "Human activity recognition and embedded application based on convolutional neural network," *Journal of Artificial Intelligence and Technology*, vol. 1, no. 1, pp. 51–60, 2021.
- [3] J. Zhang, F. Wu, B. Wei, Q. Zhang, H. Huang, S. W. Shah, and J. Cheng, "Data augmentation and dense-1stm for human activity recognition using wifi signal," *IEEE Internet of Things Journal*, vol. 8, no. 6, pp. 4628–4641, 2020.
- [4] I. Dirgová Luptáková, M. Kubovčík, and J. Pospíchal, "Wearable sensor-based human activity recognition with transformer model," *Sensors*, vol. 22, no. 5, p. 1911, 2022.

- [5] S. Ahmed, I. E. Nielsen, A. Tripathi, S. Siddiqui, R. P. Ramachandran, and G. Rasool, "Transformers in time-series analysis: A tutorial," *Circuits, Systems, and Signal Processing*, vol. 42, no. 12, pp. 7433–7466, 2023.
- [6] A. Waswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. Gomez, L. Kaiser, and I. Polosukhin, "Attention is all you need," in *NIPS*, 2017.
- [7] A. Dosovitskiy, L. Beyer, A. Kolesnikov, D. Weissenborn, X. Zhai, T. Unterthiner, M. Dehghani, M. Minderer, G. Heigold, S. Gelly, J. Uszkoreit, and N. Houlsby, "An image is worth 16x16 words: Transformers for image recognition at scale," *ICLR*, 2021.
- [8] Z. Liu, Y. Lin, Y. Cao, H. Hu, Y. Wei, Z. Zhang, S. Lin, and B. Guo, "Swin transformer: Hierarchical vision transformer using shifted windows," in *Proceedings of the IEEE/CVF international conference on computer vision*, 2021, pp. 10012–10022.
- [9] Z. Xia, X. Pan, S. Song, L. E. Li, and G. Huang, "Vision transformer with deformable attention," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2022, pp. 4794–4803.
- [10] A. Gu, K. Goel, and C. Ré, "Efficiently Modeling Long Sequences with Structured State Spaces," *International Conference on Learning Representations*, 2021.
- [11] A. Gu, I. Johnson, K. Goel, K. Saab, T. Dao, A. Rudra, and C. Ré, "Combining recurrent, convolutional, and continuous-time models with linear state space layers," *Advances in neural information processing systems*, vol. 34, pp. 572–585, 2021.
- [12] A. Gupta, A. Gu, and J. Berant, "Diagonal state spaces are as effective as structured state spaces," *Advances in Neural Information Processing Systems*, vol. 35, pp. 22982–22994, 2022.
- [13] A. Gu, K. Goel, A. Gupta, and C. Ré, "On the parameterization and initialization of diagonal state space models," *Advances in Neural Information Processing Systems*, vol. 35, pp. 35971–35983, 2022.
- [14] A. Gu and T. Dao, "Mamba: Linear-time sequence modeling with selective state spaces," *arXiv preprint arXiv:2312.00752*, 2023.
- [15] L. Zhu, B. Liao, Q. Zhang, X. Wang, W. Liu, and X. Wang, "Vision mamba: Efficient visual representation learning with bidirectional state space model," *arXiv preprint arXiv:2401.09417*, 2024.
- [16] Y. Nie, N. H. Nguyen, P. Sinthong, and J. Kalagnanam, "A time series is worth 64 words: Long-term forecasting with transformers," in *International Conference on Learning Representations*, 2023.
- [17] S. Xu, L. Zhang, W. Huang, H. Wu, and A. Song, "Deformable convolutional networks for multimodal human activity recognition using wearable sensors," *IEEE Transactions on Instrumentation and Measurement*, vol. 71, pp. 1–14, 2022.
- [18] T. R. Mim, M. Amatullah, S. Afreen, M. A. Yousuf, S. Uddin, S. A. Alyami, K. F. Hasan, and M. A. Moni, "Gru-inc: An inception-attention based approach using gru for human activity recognition," *Expert Systems with Applications*, vol. 216, p. 119419, 2023.
- [19] S. K. Challa, A. Kumar, and V. B. Semwal, "A multibranch cnn-bilstm model for human activity recognition using wearable sensor data," *The Visual Computer*, vol. 38, no. 12, pp. 4095–4109, 2022.
- [20] M. A. Al-Qaness, A. Dahou, M. Abd Elaziz, and A. Helmi, "Multi-resatt: Multilevel residual network with attention for human activity recognition using wearable sensors," *IEEE Transactions on Industrial Informatics*, vol. 19, no. 1, pp. 144–152, 2023.
- [21] "A lightweight deep learning model for human activity recognition on edge devices," *Procedia Computer Science*, vol. 167, pp. 2364–2373, 2020, international Conference on Computational Intelligence and Data Science.
- [22] M.-K. Yi, W.-K. Lee, and S. O. Hwang, "A human activity recognition method based on lightweight feature extraction combined with pruned and quantized cnn for wearable device," *IEEE Transactions on Consumer Electronics*, vol. 69, no. 3, pp. 657–670, 2023.
- [23] K. Chen, D. Zhang, L. Yao, B. Guo, Z. Yu, and Y. Liu, "Deep learning for sensor-based human activity recognition: Overview, challenges, and opportunities," *ACM Computing Surveys (CSUR)*, vol. 54, no. 4, pp. 1–40, 2021.
- [24] X. Zhou, W. Liang, K. I.-K. Wang, H. Wang, L. T. Yang, and Q. Jin, "Deep-learning-enhanced human activity recognition for internet of healthcare things," *IEEE Internet of Things Journal*, vol. 7, no. 7, pp. 6429–6438, 2020.
- [25] Z. N. Khan and J. Ahmad, "Attention induced multi-head convolutional neural network for human activity recognition," *Applied soft computing*, vol. 110, p. 107671, 2021.
- [26] Y. Tang, L. Zhang, Q. Teng, F. Min, and A. Song, "Triple cross-domain attention on human activity recognition using wearable sensors," *IEEE Transactions on Emerging Topics in Computational Intelligence*, vol. 6, no. 5, pp. 1167–1176, 2022.

- [27] W. Gao, L. Zhang, W. Huang, F. Min, J. He, and A. Song, "Deep neural networks for sensor-based human activity recognition using selective kernel convolution," *IEEE Transactions on Instrumentation and Measurement*, vol. 70, pp. 1–13, 2021.
- [28] O. Banos, J.-M. Galvez, M. Damas, A. Guillen, L.-J. Herrera, H. Pomares, I. Rojas, C. Villalonga, C. S. Hong, and S. Lee, "Multiwindow fusion for wearable activity recognition," in *Advances in Computational Intelligence: 13th International Work-Conference on Artificial Neural Networks, IWANN 2015, Palma de Mallorca, Spain, June 10-12, 2015. Proceedings, Part II 13*. Springer, 2015, pp. 290–297.
- [29] V. Badrinarayanan, A. Kendall, and R. Cipolla, "Segnet: A deep convolutional encoder-decoder architecture for image segmentation," *IEEE transactions on pattern analysis and machine intelligence*, vol. 39, no. 12, pp. 2481–2495, 2017.
- [30] R. Yao, G. Lin, Q. Shi, and D. C. Ranasinghe, "Efficient dense labelling of human activity sequences from wearables using fully convolutional networks," *Pattern Recognition*, vol. 78, pp. 252–266, 2018.
- [31] Y. Zhang, Z. Zhang, Y. Zhang, J. Bao, Y. Zhang, and H. Deng, "Human activity recognition based on motion sensor using u-net," *IEEE Access*, vol. 7, pp. 75 213–75 226, 2019.
- [32] J. Long, E. Shelhamer, and T. Darrell, "Fully convolutional networks for semantic segmentation," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 3431–3440.
- [33] L. Zhang, W. Zhang, and N. Japkowicz, "Conditional-unet: A condition-aware deep model for coherent human activity recognition from wearables," in *2020 25th International Conference on Pattern Recognition (ICPR)*. IEEE, 2021, pp. 5889–5896.
- [34] E. Baron, I. Zimerman, and L. Wolf, "2-d ssm: A general spatial layer for visual transformers," *arXiv preprint arXiv:2306.06635*, 2023.
- [35] J. Smith, S. De Mello, J. Kautz, S. Linderman, and W. Byeon, "Convolutional state space models for long-range spatiotemporal modeling," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [36] X. Shi, Z. Chen, H. Wang, D.-Y. Yeung, W.-K. Wong, and W.-c. Woo, "Convolutional lstm network: A machine learning approach for precipitation nowcasting," *Advances in neural information processing systems*, vol. 28, 2015.
- [37] Y. Liu, Y. Tian, Y. Zhao, H. Yu, L. Xie, Y. Wang, Q. Ye, and Y. Liu, "Vmamba: Visual state space model," *arXiv preprint arXiv:2401.10166*, 2024.
- [38] W. Liao, Y. Zhu, X. Wang, C. Pan, Y. Wang, and L. Ma, "Lightm-unet: Mamba assists in lightweight unet for medical image segmentation," *arXiv preprint arXiv:2403.05246*, 2024.
- [39] Z. Zhang, A. Liu, I. Reid, R. Hartley, B. Zhuang, and H. Tang, "Motion mamba: Efficient and long sequence motion generation with hierarchical and bidirectional selective ssm," *arXiv preprint arXiv:2403.07487*, 2024.
- [40] W. He, K. Han, Y. Tang, C. Wang, Y. Yang, T. Guo, and Y. Wang, "Densemamba: State space models with dense hidden connection for efficient large language models," *arXiv preprint arXiv:2403.00818*, 2024.
- [41] T. Kim, J. Kim, Y. Tae, C. Park, J.-H. Choi, and J. Choo, "Reversible instance normalization for accurate time-series forecasting against distribution shift," in *International Conference on Learning Representations*, 2021.
- [42] E. Essa and I. R. Abdelmaksoud, "Temporal-channel convolution with self-attention network for human activity recognition using wearable sensors," *Knowledge-Based Systems*, vol. 278, p. 110867, 2023.
- [43] Y. Tang, L. Zhang, H. Wu, J. He, and A. Song, "Dual-branch interactive networks on multichannel time series for human activity recognition," *IEEE Journal of Biomedical and Health Informatics*, vol. 26, no. 10, pp. 5223–5234, 2022.
- [44] W. Huang, L. Zhang, H. Wu, F. Min, and A. Song, "Channel-equalization-har: A light-weight convolutional neural network for wearable sensor based human activity recognition," *IEEE Transactions on Mobile Computing*, vol. 22, no. 9, pp. 5064–5077, 2023.
- [45] Y. Tang, L. Zhang, F. Min, and J. He, "Multiscale deep feature learning for human activity recognition using wearable sensors," *IEEE Transactions on Industrial Electronics*, vol. 70, no. 2, pp. 2106–2116, 2022.
- [46] F. Duan, T. Zhu, J. Wang, L. Chen, H. Ning, and Y. Wan, "A multi-task deep learning approach for sensor-based human activity recognition and segmentation," *IEEE Transactions on Instrumentation and Measurement*, 2023.
- [47] L. Tong, H. Ma, Q. Lin, J. He, and L. Peng, "A novel deep learning bi-gru-i model for real-time human activity recognition using inertial sensors," *IEEE Sensors Journal*, vol. 22, no. 6, pp. 6164–6174, 2022.
- [48] J. Li, H. Xu, and Y. Wang, "Multi-resolution fusion convolutional network for open set human activity recognition," *IEEE Internet of Things Journal*, 2023.
- [49] M. A. Khatun, M. A. Yousuf, S. Ahmed, M. Z. Uddin, S. A. Alyami, S. Al-Ashhab, H. F. Akhdar, A. Khan, A. Azad, and M. A. Moni, "Deep cnn-lstm with self-attention model for human activity recognition using wearable sensor," *IEEE Journal of Translational Engineering in Health and Medicine*, vol. 10, pp. 1–16, 2022.
- [50] Y. Wang, H. Xu, Y. Liu, M. Wang, Y. Wang, Y. Yang, S. Zhou, J. Zeng, J. Xu, S. Li *et al.*, "A novel deep multifeature extraction framework based on attention mechanism using wearable sensor data for human activity recognition," *IEEE Sensors Journal*, vol. 23, no. 7, pp. 7188–7198, 2023.
- [51] A. Reiss and D. Stricker, "Introducing a new benchmarked dataset for activity monitoring," in *2012 16th international symposium on wearable computers*. IEEE, 2012, pp. 108–109.
- [52] J. R. Kwapisz, G. M. Weiss, and S. A. Moore, "Activity recognition using cell phone accelerometers," *ACM SigKDD Explorations Newsletter*, vol. 12, no. 2, pp. 74–82, 2011.
- [53] D. Micucci, M. Mobilio, and P. Napolitano, "Unimib shar: A dataset for human activity recognition using acceleration data from smartphones," *Applied Sciences*, vol. 7, no. 10, p. 1101, 2017.
- [54] D. Anguita, A. Ghio, L. Oneto, X. Parra Perez, and J. L. Reyes Ortiz, "A public domain dataset for human activity recognition using smartphones," in *Proceedings of the 21th international European symposium on artificial neural networks, computational intelligence and machine learning*, 2013, pp. 437–442.
- [55] J. Yang, M. N. Nguyen, P. P. San, X. Li, and S. Krishnaswamy, "Deep convolutional neural networks on multichannel time series for human activity recognition," in *Ijcai*, vol. 15. Buenos Aires, Argentina, 2015, pp. 3995–4001.
- [56] K. Chen, L. Yao, D. Zhang, X. Wang, X. Chang, and F. Nie, "A semisupervised recurrent convolutional attention model for human activity recognition," *IEEE transactions on neural networks and learning systems*, vol. 31, no. 5, pp. 1747–1756, 2019.
- [57] F. J. Ordóñez and D. Roggen, "Deep convolutional and lstm recurrent neural networks for multimodal wearable activity recognition," *Sensors*, vol. 16, no. 1, p. 115, 2016.
- [58] J. Ma, F. Li, and B. Wang, "U-mamba: Enhancing long-range dependency for biomedical image segmentation," *arXiv preprint arXiv:2401.04722*, 2024.
- [59] M. A. Ahamed and Q. Cheng, "Timemachine: A time series is worth 4 mambas for long-term forecasting," *arXiv preprint arXiv:2403.09898*, 2024.