
QuaRot: Outlier-Free 4-Bit Inference in Rotated LLMs

Saleh Ashkboos
ETH Zurich
saleh.ashkboos@inf.ethz.ch

Amirkeivan Mohtashami
EPFL
amirkeivan.mohtashami@epfl.ch

Maximilian L. Croci
Microsoft Research
t-mcroci@microsoft.com

Bo Li
ETH Zurich
bolibo@ethz.ch

Martin Jaggi
EPFL
martin.jaggi@epfl.ch

Dan Alistarh
IST Austria & NeuralMagic
dan.alistarh@ist.ac.at

Torsten Hoefler
ETH Zurich
torsten.hoefler@inf.ethz.ch

James Hensman
Microsoft Research
jameshensman@microsoft.com

Abstract

We introduce QuaRot, a new *Quantization* scheme based on *Rotations*, which is able to quantize LLMs end-to-end, including all weights, activations, and KV cache in 4 bits. QuaRot rotates LLMs in a way that removes outliers from the hidden state without changing the output, making quantization easier. This *computational invariance* is applied to the hidden state (residual) of the LLM, as well as to the activations of the feed-forward components, aspects of the attention mechanism and to the KV cache. The result is a quantized model where all matrix multiplications are performed in 4-bits, without any channels identified for retention in higher precision. Our quantized LLAMA2-70B model has losses of at most 0.29 WikiText-2 perplexity and retains 99% of the zero-shot performance. Code is available at: <https://github.com/spcl/QuaRot>.

1 Introduction

Large language models (LLMs) have become increasingly important due to their countless applications. However, their inference requires a significant amount of computations, memory, and energy. LLM inference has two main phases: during the *prefill* phase, the prompt is processed and cached in each layer, and then in the *decoding* phase the output tokens are generated one-by-one. The prefill phase is usually compute-bound while the decoding phase is known to be memory-bound.

Quantization is among the most important techniques to solve both memory and compute issues during LLM inference. Joint quantization aims to reduce the precision of parameters and KV cache (which results in lower memory usage) as well as inputs (known as activations) and compute the forward pass in low precision. However, quantizing the activations is hard as they have large outlier elements (see Figure 1 for an illustrative example) with much larger values, making activation quantization more difficult than weight quantization, especially for the 4-bit case. Previous work relies on characterizing outlier features using a calibration set and keeping them in higher precision during the inference.

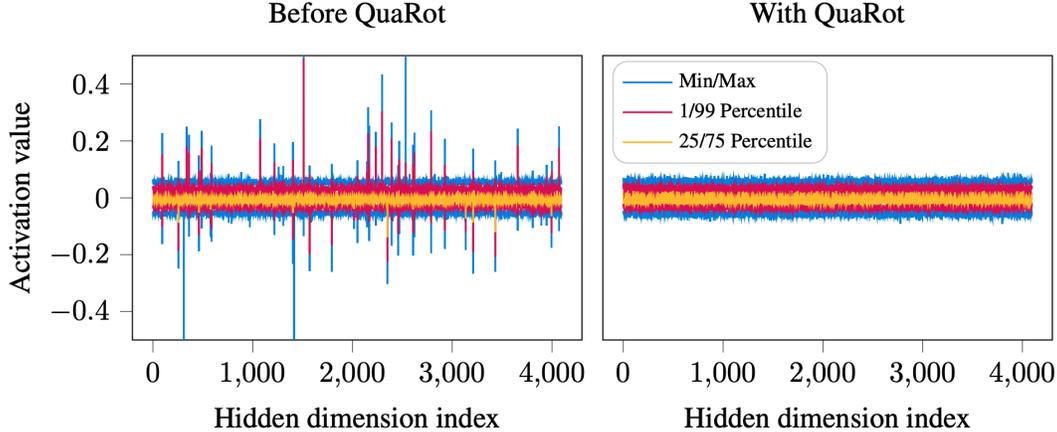


Figure 1: The distributions of activations at the input to the FFN block in LLAMA2-7B model, in the tenth layer. Left: using the default configuration as downloaded from Hugging Face. Right: after processing using QuaRot. The processed distribution has no outliers, leading to superior quantization.

In this work, we address the issue of outlier features by rotating the inputs of the model using randomized Hadamard transformations. We do this using the *computational invariance* idea [Ashkboos et al., 2024] and fuse Hadamard transformations into the weight matrices, resulting in an equivalent network without outlier features. This enables the weights, activations, and KV caches to be quantized to 4 bits with minimal accuracy drop. Our main contributions are:

- Using *computational invariance* from SliceGPT [Ashkboos et al., 2024], we apply randomized Hadamard transformations to the weight matrices without changing the model. This completely eliminates the outlier features and makes the activations easy to quantize without changing the output of the model.
- We also apply online Hadamard transformations to the attention module to remove outlier features in keys and values, enabling the KV cache to be quantized.
- Using the above modifications, QuaRot enables 4-bit LLM inference by quantizing all the weights, activations, and KV caches using integer quantization. On LLAMA2-7B model, QuaRot achieves up to 2.16x prefill speedups, and 3.39x memory saving during the decoding stage, with at most 0.63 WikiText-2 perplexity loss. QuaRot preserves 99% of the accuracy of zero-shot tasks. We show that our 6 and 8-bit quantization (weights *and* activations) is lossless.

2 Related Work

The majority of quantization schemes focus on compressing LLMs by using *weight-only quantization*, [Frantar et al., 2022, Dettmers et al., 2023, Lin et al., 2023, Egiazarian et al., 2024, Tseng et al., 2024]. These methods downcast each weight into a low precision representation and upcast it before the actual computation. The main computation is still performed in high precision. Several works show that, unlike weights, quantizing the activations is hard due to the outlier features [Wei et al., 2022, Dettmers et al., 2022, Xiao et al., 2023]. For 8-bit quantization, LLM.int8() [Dettmers et al., 2022] identifies the outlier features during the inference and keeps them in 16-bits which results in poor performance. SmoothQuant [Xiao et al., 2023] normalizes the features using some scaling factors from a calibration set, solving the issue for the 8-bit case. For 4-bit quantization, recent studies identify and keep the outlier features in high precision offline. Atom [Zhao et al., 2023] keeps 128 outliers in 8-bits and quantizes the inputs using group-wise quantization (through a complex kernel). QUIK [Ashkboos et al., 2023] keeps 256 outlier features with per-token quantization but at the cost of keeping the down-projection layer in 8-bits.

SliceGPT [Ashkboos et al., 2024] is a structured pruning method that produces a model with a smaller hidden dimension. The method relies on *computational invariance* which means that the hidden state of a transformer model can be computed in any transformed coordinate system, by multiplying

input (output) weight matrices of each block on the left (right) by an orthogonal matrix. In this work, we apply computational invariance to LLMs to enable more effective quantization: by applying Hadamard orthogonal matrices to each weight matrix, we change the coordinate system of the hidden state, eliminating outliers. We extend this idea further than SliceGPT, applying coordinate transforms to activations within blocks, and to the KV cache.

Two weight-only quantization methods, QuIP [Chee et al., 2024] and QuIP# [Tseng et al., 2024] have previously considered improving quantization by applying rotations. [Chee et al., 2024] introduced the idea of *incoherence processing* which applies rotation matrices to the left and right of each weight matrix, as well as the Hessian, which is used in minimizing the weight-quantization objective.

Incoherence processing replaces the weight matrix \mathbf{W} with $\tilde{\mathbf{W}} = \mathbf{U}\mathbf{W}\mathbf{V}$, where \mathbf{U} and \mathbf{V} are orthogonal matrices. This suppresses outliers in the weights, making quantization more effective. In the forward pass of the quantized network, the effects of \mathbf{U} and \mathbf{V} must be undone. To make this fast, QuIP used Kronecker-structured orthogonal matrices which allows these additional computations to be computed quickly. Building on this, QuIP# introduced the use of Hadamard matrices instead of Kronecker-structured matrices. This enables both improved quantization (through better incoherence) and a faster forward pass since the Hadamard transform can be computed in $\mathcal{O}(n \log n)$ addition operations.

Finally, KV cache quantization is another line of research where the goal is to compress the cached keys and values during the generation task. This is crucial for large batch size and long-context length generation as the KV cache will be the main memory bottleneck in such problems. [Sheng et al., 2023] quantizes the KV cache using 4-bit group-wise quantization. KVQuant [Hooper et al., 2024] pushes this limit to 3-bit quantization and KIVI [Liu et al., 2024] shows promising results on 2-bit KV cache quantization. Such methods show that outliers also exist in the keys, and apply a set of complex ideas (like feature-wise quantization, non-uniform representation, keeping high precision outliers) to recover the accuracy of a quantized KV cache.

In this work we also adopt the Hadamard transform to improve quantization of weights through incoherence processing. Instead of undoing the Hadamard transform during the forward pass, we adopt the computational invariance theorem from SliceGPT to fuse the transformations into the weights where possible. Instead of requiring two Hadamard transforms per weight-matrix in the forward pass, QuaRot requires just $1\frac{1}{2}$ Hadamard transforms per transformer layer. Computational invariance also means that the *activations* are incoherence-processed, enabling them to be effectively quantized. We also apply a similar technique to the attention block and quantize the KV cache in 4-bit with minimal accuracy loss.

3 Background

Here we introduce some background mathematical concepts and notation that are necessary for QuaRot.

3.1 Orthogonal, Rotation and Hadamard Matrices

An orthogonal matrix \mathbf{Q} is a square matrix such that $\mathbf{Q}\mathbf{Q}^\top = \mathbf{I}$. In this work, we consider only real orthogonal matrices. A rotation matrix is an orthogonal matrix with $|\mathbf{Q}| = 1$.

A Hadamard matrix is an orthogonal matrix with entries proportional to $\{+1, -1\}$. A Walsh-Hadamard matrix is a square matrix of size 2^n , with

$$\mathbf{H}_2 = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad \text{and} \quad \mathbf{H}_{2^n} = \mathbf{H}_2 \otimes \mathbf{H}_{2^{n-1}}. \quad (1)$$

These identities give rise to the Walsh-Hadamard transform, which computes the matrix-vector product $\mathbf{H}\mathbf{x}$ in $\mathcal{O}(d \log_2(d))$ operations.

For matrix sizes that are not 2^n , the existence of a Hadamard matrix is not guaranteed. A useful list of known Hadamard matrices is available at [Sloane, 2024]. Where we require a Hadamard matrix of size $d \neq 2^n$, we factorize $d = 2^m m$, where m is the size of a known Hadamard matrix. Then we use a Kronecker construction $\mathbf{H}_d = \mathbf{H}_{2^m} \otimes \mathbf{H}_m$. This allows computation of $\mathbf{H}_d \mathbf{x}$ in $\mathcal{O}(d(m+n))$ operations.

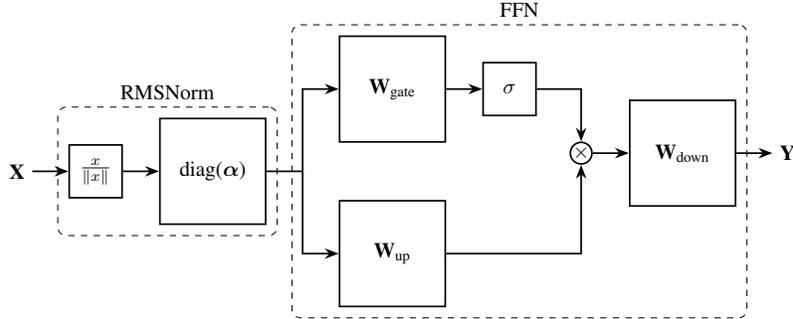


Figure 2: The gated feed-forward network used in most LMs, including the pre-positioned RMSNorm. The input signal is divided by its norm, and re-scaled by parameters α . Two linear blocks, \mathbf{W}_{up} and \mathbf{W}_{gate} are applied. The activation function σ is applied to the gated signal, and the two signals are element-wise multiplied together. The final linear block \mathbf{W}_{down} produces the output signal \mathbf{Y} . Before quantization, the operations are performed in single (32 bit) or half (16 bit) precision.

Following [Tseng et al., 2024] we make use of *randomized* Hadamard matrices where convenient. Let s be a vector containing random draws from $\{+1, -1\}$, and $\tilde{\mathbf{H}} = \mathbf{H} \text{diag}(s)$. It is straightforward to see that $\tilde{\mathbf{H}}$ is also an orthogonal matrix.

3.2 Incoherence Processing

The idea of *incoherence processing* was introduced by [Chee et al., 2024] in the context of weight normalization. We define a weight matrix \mathbf{W} to be μ -incoherent if

$$\max(\mathbf{W}) \leq \mu \|\mathbf{W}\|_F / \sqrt{mn} \quad (2)$$

where \max is the element-wise max of the matrix, and mn is the number of elements. A weight matrix that has high incoherence is hard to quantize: the largest element is an outlier relative to the magnitude of the average element. [Chee et al., 2024] showed that multiplying a weight matrix on the left and right by an orthogonal matrix can reduce the incoherence, making matrices easier to quantize. In this work we adopt a similar technique, multiplying weight matrices by orthogonal matrices to improve incoherence, though we add fewer operations to the forward pass, and additionally apply incoherence processing to the activations, enabling improved weight and activation quantization. Figure 1 shows the effect of applying incoherence processing to the activations of LLAMA-2.

3.3 Transformer structures

Large Language Models are neural networks with repeating attention and feed-forward layers. We introduce our notation through Figures 2 and 3, which show the construction of these blocks. We assume that the construction of the network is “pre-norm”, in that each block is preceded by a LayerNorm or RMSNorm operation. We also assume that the feed-forward network uses a gated architecture, as in LLAMA-2, though our methodology is straightforwardly applied to MLP architectures also.

3.4 Computational Invariance

The computational invariance theorem [Theorem 1, [Ashkboos et al., 2024]] states that the weights and between-block activations in a transformer can be transformed using an orthogonal matrix with no change to the model output. Here we sketch the main idea. If \mathbf{W}_{in} is a weight matrix that appears on the left of a transformer block (i.e. \mathbf{W}_{gate} , \mathbf{W}_{up} in Figure 2, or \mathbf{W}_k , \mathbf{W}_q , \mathbf{W}_v in Figure 3) then we can multiply on the left by an orthogonal matrix \mathbf{Q} , and cancel out this effect by multiplying the output matrix (\mathbf{W}_{down} , \mathbf{W}_{out}) by \mathbf{Q}^T . This applies despite the fact that RMSNorm is applied between the two blocks, so long as no re-scaling happens in the RMSNorm block (and in practise, we absorb any re-scaling into adjacent weight matrices first). Conceptually, this is because RMSNorm divides the activations by their norm, and applying a rotation \mathbf{Q} to the activations does not affect the norm.

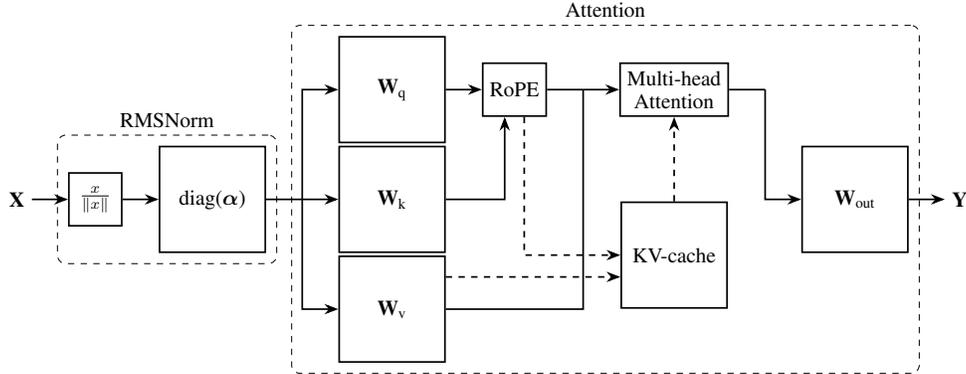


Figure 3: Flow diagram of a self-attention block as used in most LMs, including the pre-positioned RMSNorm. Solid arrows represent flow during training, prefill and inference of each token. Dashed arrows show access to and from the KV cache, used at generation-time. The RoPE block computes relative positional embeddings.

We have the commutation property

$$\text{RMSNorm}(\mathbf{X}) = \text{RMSNorm}(\mathbf{X}\mathbf{Q}^\top)\mathbf{Q}, \quad (3)$$

where we assume here that RMSNorm applied to each row of the activations \mathbf{X} as $x_i \leftarrow x_i/\|x_i\|$. This means that multiplying an output matrix by \mathbf{Q}^\top makes the linear layer output $\mathbf{X}\mathbf{Q}^\top$, which is normalized and then passed into the next block whose input weight matrix is now $\mathbf{Q}\mathbf{W}$, and so *this* linear layer outputs the original activations without modification.

4 Method

QuaRot consists of two stages. In the first stage, the model weights are manipulated (in full precision), and two additional Hadamard operations are inserted into the model’s forward pass. In the second stage, the weights are quantized using some existing method, and quantization operations are added to the forward pass to enable on-line quantization of the activations. By default, we use GPTQ for quantizing weights, whilst activations are quantized on-the-fly using a simple round-to-nearest scheme. Figures 4 and 5 show updated block diagrams for the forward pass with QuaRot modifications, including updated weight matrices, inserted blocks and the bit-width of weights and activations.

Stage 1a: Weight Modification. We first make use of computational invariance to multiply each weight matrix by an orthogonal matrix. To enable this, the linear parts of LayerNorm or RMSNorm are fused into adjacent weight matrices. Figure 4 shows how the feed-forward block of a transformer is modified by removing the scaling operation from RMSNorm ($\text{diag}(\alpha)$) and absorbing into the subsequent weight matrices. We select a randomized Hadamard matrix with size that matches the hidden dimension of the model and pre- or post-multiply each weight matrix. In Figures 4 and 5 this matrix is denoted \mathbf{Q} . For example the key-projection weight matrix \mathbf{W}_k is modified as

$$\mathbf{W}_k \leftarrow \mathbf{Q}^\top \text{diag}(\alpha) \mathbf{W}_k, \quad (4)$$

and similarly for other weight matrices. Matrices that appear on the *output* side of a block are post-multiplied by \mathbf{Q} .

This weight modification does not affect the output of the model (assuming sufficient precision) as per the computational invariance theorem [Ashkboos et al., 2024]. We note that the modified weights resemble the modifications used in QUiP# [Tseng et al., 2024], reducing the incoherence of the weights, though our modification does not require any additional processing at run-time. Additionally, the activation matrix passed between blocks of the transformer is also incoherence processed, becoming $\mathbf{X} \leftarrow \mathbf{X}\mathbf{Q}$. Figure 1 shows the result of this processing: we see that the processed activations no longer contain any outliers.

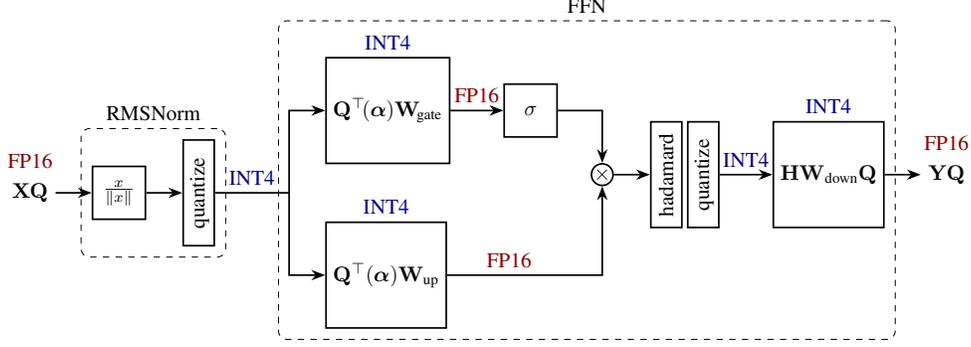


Figure 4: QuaRot applied to a FFN component. The RMSNorm scaling (α) has been absorbed into the weight matrices. The hidden state X has been rotated by Q , which is cancelled out by the absorption of Q^T into the first two weight matrices. All weights are stored in INT4, and all activations immediately before the weights are also quantized to INT4. The result of the matmul between the INT4 weights and INT4 activations on a TensorCore is INT32, which we immediately cast (and scale) to FP16. Whilst the signal is still in FP16, we perform a single on-the-fly Hadamard transform before quantizing and computing a (modified) down-proj, which results in a rotated output YQ .

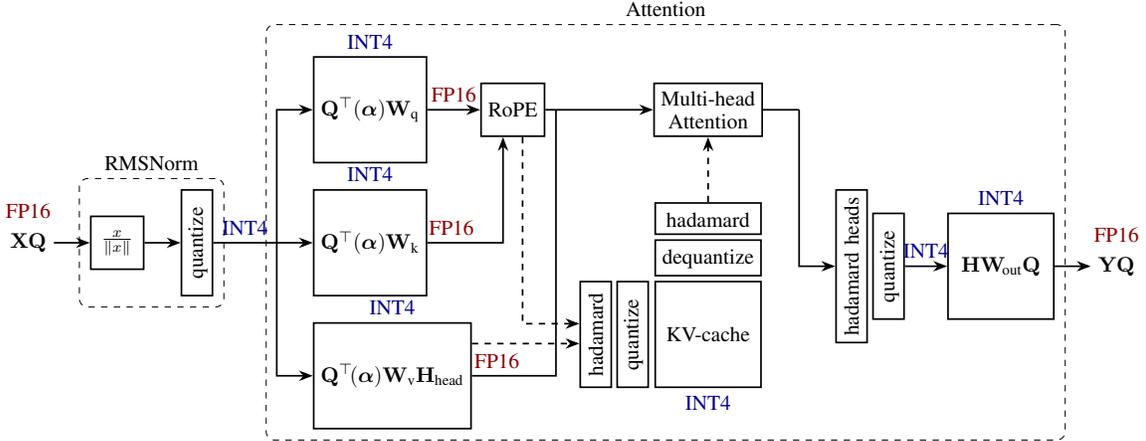


Figure 5: QuaRot applied to an attention component. The RMSNorm scaling α is absorbed into the input weight matrices, and the hidden state has been rotated by Q in the same way as for the FFN block (see previous figure). Colored labels show the bit-width of each flow, and dashed lines show the flow to/from the KV cache.

Stage 1b: Rotate FFN activations. With the above weight-modifications in place, we have multiplied many weight matrices on one side by a Hadamard matrix, and changed the computed activations between blocks of the transformer. It still remains to improve the quantize-ability of the activations *within* each block, which we achieve by inserting on-line Hadamard operations.

We first insert a Hadamard operation into the feed-forward network, before the down-projection matrix. This operation is performed in full precision, and implemented using a fast kernel following [Tseng et al., 2024]. This operation is implicitly reversed by fusing a Hadamard matrix into the down-projection matrix of the network: $W_{\text{down}} \leftarrow HW_{\text{down}}$. Combined with the global matrix Q , this means that the down-projection matrix now becomes $HW_{\text{down}}Q$ (see Figure 4).

Stage 1c: Attention Value Projection. Next, we apply an additional Hadamard operation to each attention block. This modification is partially on-line, and partially fused into the weight matrices as we will now detail.

First, note that in the computation of attention, the \mathbf{W}_v and \mathbf{W}_{out} matrices are implicitly multiplied together within each head. To see this, note that the attention computation consists of

$$\mathbf{Y} = \text{concat}[(\mathbf{P}_1 \mathbf{V}_1) \dots (\mathbf{P}_{n_h} \mathbf{V}_{n_h})] \mathbf{W}_{\text{out}} \quad (5)$$

$$= \sum_{h=1}^H \mathbf{P}_h \mathbf{X} \mathbf{W}_v^{(h)} \mathbf{W}_{\text{out}}^{(h)} \quad (6)$$

where \mathbf{P}_h is a sequence-length sized square matrix computed by softmaxing keys and values, and $\mathbf{V}_h = \mathbf{X} \mathbf{W}_v^{(h)}$ is the value matrix for one head. This presents an opportunity to perform additional processing on \mathbf{W}_v and \mathbf{W}_{out} using a Hadamard matrix \mathbf{H}_{d_h} which matches the dimension of each head:

$$\mathbf{W}_v^{(h)} \leftarrow \mathbf{W}_v^{(h)} \mathbf{H}_{d_h}, \quad \mathbf{W}_{\text{out}}^{(h)} \leftarrow \mathbf{H}_{d_h} \mathbf{W}_{\text{out}}^{(h)}. \quad (7)$$

Substituting these modifications into equation 6, we see that the computed result of attention remains unchanged. Since the weights for each head are concatenated in the weight representation, we can equivalently perform a single Kronecker structured multiplication:

$$\mathbf{W}_v \leftarrow \mathbf{W}_v (\mathbf{I} \otimes \mathbf{H}_{d_h}), \quad \mathbf{W}_{\text{out}} \leftarrow (\mathbf{I} \otimes \mathbf{H}_{d_h}) \mathbf{W}_{\text{out}}. \quad (8)$$

This transformation has now been applied head-wise to the weight matrices, and results in computed activations (emitted by the block *multi-head attention*) rotated head-wise also. To complete a ‘‘full’’ Hadamard operation on the attention-activations, sharing the transform across heads, we make use of the identity

$$\mathbf{H}_{n_h \times d_h} = (\mathbf{I} \otimes \mathbf{H}_{d_h}) (\mathbf{H}_{n_h} \otimes \mathbf{I}) \quad (9)$$

which holds when the number of heads n_h and the dimension of each head d_h are both powers of 2. Since we have already applied $(\mathbf{I} \otimes \mathbf{H}_{d_h})$ to both \mathbf{W}_v and \mathbf{W}_{out} , it remains to apply $(\mathbf{H}_{d_h} \otimes \mathbf{I})$ to \mathbf{W}_{out} , which results in a complete transformation of $\mathbf{W}_{\text{out}} \leftarrow \mathbf{H} \mathbf{W}_{\text{out}}$, and to insert a block into the forward pass that computes $\mathbf{Z} \leftarrow \mathbf{Z} (\mathbf{H}_{n_h} \otimes \mathbf{I})$ where \mathbf{Z} is the attention activation. This block is denoted *Hadamard heads* in Figure 5 and can be computed efficiently using a reshape to deal with the Kronecker structure, and a Walsh-Hadamard transform on the reshaped data.

Stage 1d: Key Rotation. Using the method above, we can successfully quantize the value vectors. However, key vectors in the attention module are also known to suffer from outliers []. Similar to above, we can use a Hadamard rotation to alleviate this issue, allowing us to have a fully quantized KV-cache. First note that the attention scores $\mathbf{P}_1, \dots, \mathbf{P}_h$ are computed as:

$$\mathbf{Q} := \text{Pos}(\mathbf{X} \mathbf{W}_q) =: \text{concat}[\text{Pos}(\mathbf{Q}_1), \dots, \text{Pos}(\mathbf{Q}_{n_h})] \quad (10)$$

$$\mathbf{K} := \text{Pos}(\mathbf{X} \mathbf{W}_k) =: \text{concat}[\text{Pos}(\mathbf{K}_1), \dots, \text{Pos}(\mathbf{K}_{n_h})] \quad (11)$$

$$\mathbf{P}_h := \text{Softmax}(\alpha \text{Pos}(\mathbf{Q}_h) \text{Pos}(\mathbf{K}_h^T) \odot \mathbf{M}), \quad (12)$$

where α is the Softmax scale usually set to $\frac{1}{\sqrt{d_h}}$, \mathbf{M} is the attention mask (e.g. causal), and Pos denotes the positional embedding. Previously, positional embedding was only added before the first layer to the input, in which case Pos is an identity function. However, recent methods such as RoPE [Su et al., 2021] add position information directly to the key and query vectors.

We can now observe the same interaction between \mathbf{Q} and \mathbf{K} as we observed between \mathbf{W}_v and \mathbf{W}_{out} . However, the existence of Pos prevents us from directly fusing the Hadamard matrix into \mathbf{W}_q and \mathbf{W}_k . Therefore, we use online head-wise Hadamard rotation to rotate both the queries and keys. As a result, the computation of query and key matrices is altered as follows:

$$\mathbf{Q} \leftarrow \text{Pos}(\mathbf{X} \mathbf{W}_q) (\mathbf{I} \otimes \mathbf{H}_{d_h}) = \text{concat}[\text{Pos}(\mathbf{Q}_1) \mathbf{H}_{d_h}, \dots, \text{Pos}(\mathbf{Q}_{n_h}) \mathbf{H}_{d_h}] \quad (13)$$

$$\mathbf{K} \leftarrow \text{Pos}(\mathbf{X} \mathbf{W}_k) (\mathbf{I} \otimes \mathbf{H}_{d_h}) = \text{concat}[\text{Pos}(\mathbf{K}_1) \mathbf{H}_{d_h}, \dots, \text{Pos}(\mathbf{K}_{n_h}) \mathbf{H}_{d_h}]. \quad (14)$$

Since both queries and keys are rotated, the final attention scores $\mathbf{P}_1, \dots, \mathbf{P}_h$ remains unchanged. We note that an alternative to the above process is caching the keys before applying the positional encoding. This approach (called Pre-RoPE Caching [Hooper et al., 2024]) needs the inverse rotation to be applied online before applying the positional encoding but removes the need to rotate the query vector. It also adds the overhead of rotating the keys and values for every query. Given that at the

time of decoding there is a single query vector and many cached key vectors, we decided to use Post-RoPE caching.

Overall, our modifications to the forward pass, including the insertion of special Hadamard blocks and adjustments to the weights do not change the forward pass of the model. The effect is that the activations between blocks have been multiplied by a Hadamard matrix, and the activations within blocks are processed on-line using Hadamard transforms in a way that is undone by corresponding weight matrix modifications. We are now ready to quantize the weights and activations.

Stage 2a: Weight Quantization. We apply GPTQ [Frantar et al., 2022] to quantize the weights of the network. We note that after the above forward-pass modifications, any quantization method could be applied. In subsequent sections, we show that a simple round-to-nearest (RTN) scheme can be applied instead of GPTQ, at the cost of some accuracy.

Stage 2b: Online Quantization Operations. With the weights quantized, we are ready to apply operations to the forward pass that quantize the activations. We deliberately leave the computation of RMSNorm (without scaling) in FP32. We quantize the input of the linear layers using symmetric per-token (rows of the input matrix). During symmetric quantization, the row scales are computed by dividing the maximum absolute value of each token by 7. We then divide each row to its corresponding scale and round the result to its nearest integer. The dequantization is also done by casting the INT32 output of GEMM into FP16, multiply the corresponding scale for the row (from input scales) and column (from weight scales).

Stage 2c: Quantized Attention. Attention is significantly memory bound for longer sequences and larger batch sizes. Having rotated both keys and values, we can successfully quantize the cache into low bit-width. This reduces the number of IO operations needed. We keep the queries in FP16 and use online softmax calculation similar to Flash Attention [Dao et al., 2022]. After a segment of the key and value vectors are loaded from the memory, we dequantize them and compute the dot product in FP16.

5 Experimental Validation

Setup. We implement QuaRot using Hugging Face [Wolf et al., 2019] on top of the PyTorch framework [Paszke et al., 2019]. To quantize the inputs, we use per-token symmetric quantization (a single scale for every row) with a constant clipping ratio of 0.9 in all our experiments. We quantize the KV caches using asymmetric quantization with a group size 128 with a constant clipping ratio of 0.95. For weight quantization, we use round-to-nearest (RTN) and GPTQ [Frantar et al., 2022] with per-column (also known as per-channel) symmetric quantization, where we extract the clipping ratio using a linear search over the squared error. We use 128 samples from WikiText-2 [Merity et al., 2016] training set with 2048 sequence length as the calibration set during GPTQ quantization. On a single NVIDIA A100 GPU, modifying LLAMA2-70B with QuaRot takes 5 minutes and quantizing the model with GPTQ takes a further 2 hours.

Models, Tasks, and GPUs. We evaluate QuaRot on the LLAMA-2 family [Touvron et al., 2023] on both language generation and zero-shot tasks. We implement our low-level CUDA kernel to perform 4-bit matrix-multiplication using the CUTLASS [NVIDIA, 2023] library. We use the FlashInfer [Ye, 2023] library for implementing our KV cache quantization. As we target consumer-type GPUs, we evaluate all the performance experiments on NVIDIA RTX 3090 GPUs.

5.1 Accuracy Results

Language Generation Tasks. First, we evaluate the accuracy of QuaRot on the language generation task. Table 1 shows the perplexity of LLAMA-2 models on WikiText-2 when we quantize the weights using GPTQ. We compare against 4-bit SmoothQuant [Xiao et al., 2023] and OmniQuant [Shao et al., 2023]. We also include the QUIK [Ashkboos et al., 2023] results when they keep all the layers (including down-projection) in 4 bits. QuaRot outperforms all previous work with at most 0.63 perplexity loss (0.47 on LLAMA2-70B model). QuaRot does not need re-training steps (as in OmniQuant) nor higher precision outlier features and asymmetric quantization (as in QUIK). We also apply group-wise quantization to compare against Atom [Zhao et al., 2023] on the same number of

groups for weight and activations. In this setting, QuaRot doesn’t need to keep any higher precision features and related operations (like re-ordering). QuaRot outperforms Atom with 0.1 perplexity points in the 7B model. On the 13B model, we get the same perplexity number as Atom. Our results demonstrate the effectiveness of applying the Hadamard transformation in suppressing the outliers on the generation task.

Table 1: WikiText-2 perplexity results on 4-bit quantization of LLAMA-2 models with 2048 sequence length. We extract the results for SmoothQuant and OmniQuant results from [Shao et al., 2023]. 128G shows the group-wise quantization with group size 128.

Method	Weight Quantization	#Outlier Features	LLAMA-2		
			7B	13B	70B
Baseline	-	-	5.47	4.88	3.32
SmoothQuant	RTN	0	83.12	35.88	-
OmniQuant	RTN	0	14.26	12.30	-
QUIK-4B	GPTQ	256	8.87	7.78	6.91
QuaRot	GPTQ	0	6.10	5.40	3.79
Atom-128G	GPTQ-128G	128	6.03	5.26	-
QuaRot-128G		0	5.93	5.26	3.61

Zero-Shot Tasks. Next, we focus on evaluating QuaRot on six important zero-shot tasks: PIQA [Bisk et al., 2020], WinoGrande [Sakaguchi et al., 2021], HellaSwag [Zellers et al., 2019], LAMBADA (OpenAI) [Radford et al., 2019], and Arc (Easy and Challenge) [Clark et al., 2018]. We use the LM Evaluation Harness [Gao et al., 2021] with default parameters for our experiments. Table 2 shows the accuracy of our scheme on the above tasks as well as the average score. QuaRot preserves the accuracy with at most 4.18% average score loss (1.09% for 70B model).

Table 2: Zero-shot accuracy of LLAMA-2 models with 4-bit QuaRot on PIQA (PQ), WinoGrande (WG), HellaSwag (HS), Arc-Easy (A-e), Arc-Challenge (A-c), and LAMBADA (LA).

Model	Method	PQ	WG	HS	A-e	A-c	LA	Avg.
7B	FP16	79.11	69.06	75.99	74.58	46.25	73.90	69.82
	QuaRot	76.77	63.77	72.16	69.87	40.87	70.39	65.64
13B	FP16	80.47	72.22	79.39	77.48	49.23	76.75	72.59
	QuaRot	78.89	70.24	76.37	72.98	46.59	73.67	69.79
70B	FP16	82.70	77.98	83.84	80.98	57.34	79.58	77.07
	QuaRot	82.43	76.24	81.82	80.43	56.23	78.73	75.98

5.2 Performance Analysis

We implement QuaRot using CUDA/12.1 on top of PyTorch and use CUTLASS for performing INT-4 matrix multiplication on TensorCore (where the results will be saved in an INT32 accumulator). We implement the attention mechanism using three routines: 1) **Init**: During the prefill stage, this routine initializes the cache from all the key and value vectors in the prefill. The attention output during prefill is computed directly using Flash Attention [Dao et al., 2022] since we already have access to dequantized keys and values. 2) **Append**: During decoding, this routine is called first to quantize the current keys and values and append them to the cache. 3) **Decode**: Finally, this routine is called during decoding with the current query vector. The routine computes the attention output using a quantized implementation of flash attention which can load the quantized cache and compute the final value vector. In this section, we evaluate the performance of our kernels separately. Then, we evaluate the prefill and decoding stage performances.

4-bit Linear and Attention Layers. First, we benchmark our 4-bit linear layer which involves 4-bit matrix multiplication. For a given input of FP16, the layer optionally computes the Hadamard operation, then calls the quantization kernel to quantize and save the input in a sub-byte format. In the

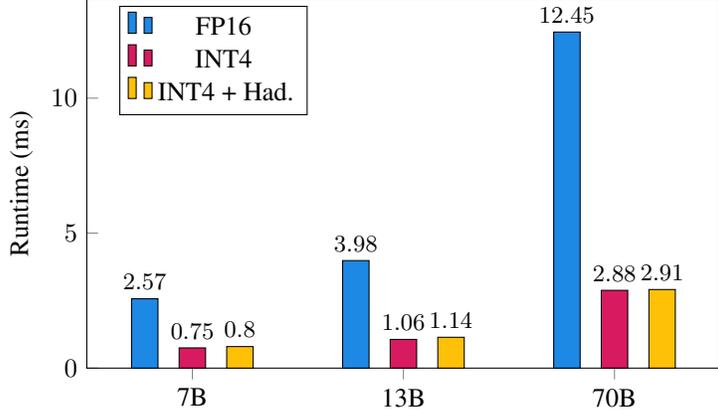


Figure 6: Performance of 16-bit and 4-bit linear layer for 2048 sequence lengths with and without online Hadamard transformation on a NVIDIA RTX 3090 GPU, averaged over 1000 runs. The matrix sizes correspond to the linear layer sizes in LLAMA-2 FFN blocks (i.e. \mathbf{W}_{down}). Here the batch size is 1, but the performance ratio holds for larger batches: see Appendix A.2 for detailed results.

next step, the quantized weights and input are passed to the CUTLASS 4-bit GEMM kernel. Finally, the output is dequantized and cast back to FP16. Figure 6 shows the speedup of our 4-bit layer for different layer sizes where the layer sizes match the FFN linear layer sizes in LLAMA-2 models. Our 4-bit linear layer gets 3.2x speedup relative to FP16 in LLAMA2-7B model, and 4.3x on the LLAMA2-70B model. These numbers are for a batch size of 1, we find that scaling is approximately linear with batch size: more results in Table 12. We include the runtime with and without Hadamard operations, as \mathbf{W}_{up} and \mathbf{W}_{gate} do not require Hadamard transforms, whilst \mathbf{W}_{down} does. We see that the Hadamard transform adds very little overhead to the forward pass at most 7% overhead.

We also compare the speed of performing append and decode routines for a single token given a cache of size 2047. This is equivalent to the cost of decoding the 2048-th token in a sequence. The comparison between the speed of FP16 and INT4 for different batch sizes and layer sizes is reported in Table 13. For the layer size used in LLAMA2-7B, our 4-bit implementation gets up to 1.72x improvement in speed for the larger batch sizes (e.g. from 16 onwards). The 4-bit cache is slower than FP16 for smaller batch sizes (e.g. up to 8). Note that this is intuitive as the main benefit of the 4-bit cache is reducing the I/O cost. A speed up is only visible if this reduction is more significant than the quantization overhead which happens for either larger batch sizes or longer sequences.

Prefill and Decoding Stages Performance increases. Finally, we evaluate the improvements in memory and computation from using QuaRot at different phases of inference for the LLAMA2-7B model. We divide our evaluations into two separate parts: First, we evaluate the speedup of QuaRot during the prefill (time-to-first-token) phase which is usually compute-bound. Table 3 shows the speedup of QuaRot during prefill with various batch sizes. QuaRot achieves up to 2.16x speedup on LLAMA2-7B. This is less than the 3.2x achieved by the linear layers alone since the majority of attention computations is still done in FP16 or FP32 even though the smaller cache size reduces IO demand. We expect further improvement by specialized attention and more kernel optimizations. We note that QuaRot’s prefill also includes quantizing the KV cache which is needed for the decoding stage.

In addition to the speedup gained during pre-fill, we observed significant reductions in memory usage up to 3.71x during decoding with QuaRot. This improvement comes from both quantizing the KV cache as well as quantizing the model’s weights. To demonstrate the reduced memory usage, we present the peak memory during one step of decoding (after pre-fill has finished) in Table 4. In all cases, we observe a significant reduction in memory usage. This reduction is especially important on consumer hardware, such as on an nVidia RTX 3090 GPU where using QuaRot allows inference at 2048 sequence length which would be impossible otherwise.

Batch Size	Speedup
1	1.97x
4	2.06x
16	2.11x
64	2.16x

Table 3: Time-to-first-token (prefill) speedup of each transformation block of LLAMA2-7B model in QuaRot (over the FP16 model) on NVIDIA RTX 3090 GPU. We use 2048 sequence lengths with different batch sizes.

Batch Size	Sequence Length	Baseline (GB)	QuaRot (GB)	Saving Factor
1	256	12.75	3.66	3.48x
	512	12.88	3.69	3.49x
	1024	13.13	3.76	3.49x
	2048	13.64	3.89	3.50x
	4096	14.72	4.22	3.49x
16	256	14.66	4.16	3.52x
	512	16.69	4.69	3.56x
	1024	20.76	5.76	3.60x
	2048	28.88	7.88	3.66x
	4096	45.20	12.19	3.71x

Table 4: Peak Memory usage (in GB) for decoding a single token using LLAMA2-7B model with KV caches of different lengths and with different batch size.

5.3 Ablation Studies

To evaluate different aspects of QuaRot, we investigate the role of applying Hadamard transformation on the **Weight-only Quantization** schemes as well as using **Random Orthogonal Matrices** instead of Hadamard matrices. We also evaluate the accuracy of our quantized models when we apply **FP16 Hadamard Transformation**. At the quantization level, we evaluate the use of **Round-to-Nearest Weight Quantization** and **Group-wise Quantization** (with different group sizes). Finally, we evaluate using different precision for **KV cache Quantization**.

Weight-only Quantization. QuaRot improves the quality of quantized models by removing the outlier features during the Hadamard transformations. As we fuse the Hadamard matrices into the weights, we study the role of these transformations for weight-only quantization (we keep the rest of the data-types in FP16). Table 5 shows the WikiText-2 perplexity results with asymmetric quantization. Using GPTQ quantization, QuaRot improves the perplexity by up to 2.65 in 4 bits. In addition, applying QuaRot improves the quality more in lower precision (2-3 bits) in all models. QuaRot also improves the RTN quantization up to 0.24 perplexity points. GPTQ still has a lower perplexity in 2-3 bits. However, applying QuaRot improves the quality of GPTQ in 2 bits to a non-trivial value (5.6 on the LLAMA2-70B model).

Table 5: Weight-only quantization results on WikiText-2 on LLAMA-2 models. We use asymmetric per-column quantization and keep the inputs and KV cache in FP16. We show the perplexity results >100 by Inf. We show the failed GPTQ experiments using NaN.

Method	LLAMA-2								
	7B			13B			70B		
Baseline	5.47			4.88			3.32		
	A16W4	A16W3	A16W2	A16W4	A16W3	A16W2	A16W4	A16W3	A16W2
RTN	6.99	Inf	Inf	6.32	Inf	Inf	4.45	42.11	Inf
GPTQ	8.25	NaN	NaN	5.65	9.51	Inf	3.87	5.91	25.30
QuaRot-RTN	6.76	Inf	Inf	5.48	48.89	Inf	3.66	5.25	Inf
QuaRot-GPTQ	5.60	6.09	22.07	5.00	5.37	10.41	3.41	3.72	5.60

Random Orthogonal Matrices. QuaRot fuses Hadamard transformations into weight matrices to eliminate outliers. However, due to the computational invariance property in LLMs, any orthogonal matrix can be fused to the model and we only need to apply an online $1\frac{1}{2}$ Hadamard transformations in each layer (see Section 4). Here, we study the use of random orthogonal matrices in QuaRot. We start with a uniformly random matrix and apply QR decomposition to make it orthogonal before fusing it into the weights.

Table 6: WikiText-2 perplexity of 4-bit QuaRot on LLAMA-2 models with different orthogonal matrices.

Method	LLAMA-2		
	7B	13B	70B
Baseline	5.47	4.88	3.32
QuaRot (Random)	7.45	5.84	4.07
QuaRot (Hadamard)	6.10	5.40	3.79

Table 6 shows the results of applying random orthogonal matrices on LLAMA-2 models. Random orthogonal matrices are not as good as random Hadamard transformations and we have up 1.35 perplexity gap on LLAMA2-7B . However, as the model size increases, the gap decreases, resulting in a perplexity change of 0.28 in the LLAMA2-70B model. Note that using the above matrices does not change the computation as we still use a fast Hadamard kernel for the down-projection and out-projection layers.

FP16 Hadamard Transformation. We use FP32 online Hadamard transformation across all our experiments. Table 7 shows the results of using FP16 Hadamard transformation during the inference (for *down-projection* and *out-projection* layers). On LLAMA2-7B model, the results show <0.1 perplexity change on WikiText-2 and <0.6% averaged accuracy change on the zero-shot tasks, which we consider as noise. On LLAMA2-13B model, different Hadamard precisions have the same perplexities with 0.07% difference in the averaged zero-shot results. We conclude that the model will not be changed using different Hadamard precision.

Table 7: Ablation on the precision of online Hadamard transformations for QuaRot. We use WikiText-2 perplexity as well as zero-shot tasks, explained in 5.3.

Model	Method	Hadamard Precision	PPL ↓	PQ ↑	WG ↑	HS ↑	A-e ↑	A-c ↑	LA ↑	Avg. ↑
7B	Baseline	-	5.47	79.11	69.06	75.99	74.58	46.25	73.90	69.82
	QuaRot	FP32	6.10	76.77	63.77	72.16	69.87	40.87	70.39	65.64
		FP16	6.08	76.99	66.46	72.59	69.07	41.21	70.59	66.21
13B	Baseline	-	4.88	80.47	72.22	79.39	77.48	49.23	76.75	72.59
	QuaRot	FP32	5.40	78.89	70.24	76.37	72.98	46.59	73.67	69.79
		FP16	5.40	77.69	70.09	75.75	73.95	47.61	73.22	69.72

Round-to-Nearest Weight Quantization. GPTQ is our default choice for weight quantization in QuaRot. Here, we study the role of quantizing the weights using Round-to-Nearest (RTN). Table 8 shows that applying GPTQ and RTN during the weight quantization maintains 99% and 98% respectively of the FP16 model accuracy in both 6 and 8 bits. In 4 bits, the gap between QuaRot-RTN and QuaRot-GPTQ decreases when the model size is increased (2.27 on LLAMA2-7B and 0.34 on LLAMA2-70B) showing that GPTQ is a better option in smaller models.

Table 8: WikiText-2 Perplexity and zero-shot accuracy of QuaRot on the LLAMA-2 family using 4, 6 and 8-bits with GPTQ and RTN weight quantization and RTN activation quantization. For zero-shot tasks, we use PIQA (PQ), WinoGrande (WG), HellaSwag (HS), Arc-Easy (A-e), Arc-Challenge (A-c), and LAMBADA (LA).

Model	Method	Precision	PPL ↓	PQ ↑	WG ↑	HS ↑	A-e ↑	A-c ↑	LA ↑	Avg. ↑
7B	Baseline	FP16	5.47	79.11	69.06	75.99	74.58	46.25	73.90	69.82
	QuaRot-RTN	INT4	8.37	72.09	60.69	65.40	58.88	35.24	57.27	58.26
		INT6	5.56	78.73	67.80	75.92	74.16	46.08	73.86	69.42
		INT8	5.50	78.94	68.67	75.80	74.79	45.39	74.33	69.65
	QuaRot-GPTQ	INT4	6.10	76.77	63.77	72.16	69.87	40.87	70.39	65.64
		INT6	5.52	78.45	69.46	75.60	74.45	46.50	74.19	69.77
INT8		5.50	78.94	68.90	75.79	74.66	46.16	74.44	69.81	
13B	Baseline	FP16	4.88	80.47	72.22	79.39	77.48	49.23	76.75	72.59
	QuaRot-RTN	INT4	6.09	77.37	67.32	73.11	70.83	43.69	70.66	67.16
		INT6	4.95	79.65	72.22	79.10	77.27	50.34	76.75	72.56
		INT8	4.90	80.52	71.59	79.38	77.31	49.32	76.63	72.46
	QuaRot-GPTQ	INT4	5.40	78.89	70.24	76.37	72.98	46.59	73.67	69.79
		INT6	4.92	79.98	72.69	79.17	77.78	49.74	76.27	72.60
INT8		4.90	80.36	71.98	79.38	77.31	49.15	76.79	72.49	
70B	Baseline	FP16	3.32	82.70	77.98	83.84	80.98	57.34	79.58	77.07
	QuaRot-RTN	INT4	4.14	80.69	75.14	79.63	77.57	51.71	77.02	73.63
		INT6	3.36	83.24	77.90	83.47	80.93	58.28	79.41	77.21
		INT8	3.33	82.97	77.98	83.67	80.77	58.11	79.53	77.17
	QuaRot-GPTQ	INT4	3.79	82.43	76.24	81.82	80.43	56.23	78.73	75.98
		INT6	3.35	82.13	77.66	83.63	80.89	57.08	79.70	77.02
INT8		3.33	83.13	78.06	83.72	80.85	58.19	79.72	77.28	

Group-wise Quantization. Table 9 shows the accuracy of applying QuaRot with various group-sizes for the activations and weights. The results show a clear trade-off between the accuracy and the group-sizes: smaller group-sizes give better accuracy (but require more bits to store scales for each group and more complex matrix-multiplication kernels).

KV Cache Quantization. We keep the rest of the model (including weights and activations) in high precision and apply our group-wise asymmetric quantization (with group-size 128) with various precision to keys and values. Table 10 shows the results of using various precision during KV cache quantization. The results show a negligible (at most 0.21) perplexity degradation up to 3-bit KV cache (0.07 for LLAMA2-70B model). In addition, by comparing the 3 and 4-bit quantization, we can see that compared to the values, keys are more sensitive to quantization as keeping the keys in 4-bits and values in 3-bits has 0.03 perplexity loss (0.18 for 3-bit keys and 4-bit values) on the LLAMA2-7B model. This matches the previous study on KV cache quantization [Hooper et al., 2024, Liu et al., 2024]. The results show that using 3-bit KV-caches results in a better accuracy (5.68 on LLAMA2-7B model) compared to keeping the keys in 4-bits and quantizing the values using 2-bits (with 5.75 perplexity on LLAMA2-7B model).

Table 9: WikiText-2 perplexity of 4-bit QuaRot with various group-sizes on LLAMA-2 models. We use GPTQ during the weight quantization. In all cases, we keep the KV cache group-size to 128 (which is the same as the head dimension).

Method	LLAMA-2		
	7B	13B	70B
Baseline	5.47	4.88	3.32
QuaRot	6.10	5.40	3.79
QuaRot-256G	5.98	5.28	3.63
QuaRot-128G	5.93	5.26	3.61
QuaRot-64G	5.88	5.25	3.58

Table 10: WikiText-2 perplexity with various KV cache precision using QuaRot.

K bits	V bits	LLAMA-2		
		7B	13B	70B
16	16	5.47	4.88	3.32
4	4	5.51	4.91	3.33
4	3	5.54	4.93	3.35
4	2	5.75	5.09	3.43
3	4	5.65	5.01	3.38
3	3	5.68	5.02	3.39
3	2	5.93	5.21	3.48
2	4	8.06	6.42	3.89
2	3	8.18	6.50	3.92
2	2	9.23	7.07	4.13

6 Conclusion

We introduce QuaRot: a method which uses Hadamard matrices to eliminate outliers in the activations and KV cache of pre-trained LLMs, enabling end-to-end 4-bit quantization for the first time (to the best of our knowledge). Quantizing LLAMA2-70B to 4 bits with QuaRot maintains 99% of the downstream task performance of the FP16 baseline, with a 2.16x speedup on RTX 3090 GPUs during the prefill stage (and up to 3.39x memory saving during the decoding stage). Quantizing all LLAMA-2 models to 6- and 8-bits is lossless.

Opportunities to build on QuaRot include quantizing the residuals and extending the method to mixture-of-experts architectures. In terms of hardware, end-to-end INT4 inference with QuaRot could be exploited to give similar speedups as that of the recently announced NVIDIA B200 GPU architecture, while being much cheaper to implement compared to the floating point (FP4) format.

References

- Saleh Ashkboos, Iliia Markov, Elias Frantar, Tingxuan Zhong, Xincheng Wang, Jie Ren, Torsten Hoefler, and Dan Alistarh. Towards end-to-end 4-bit inference on generative large language models. *arXiv preprint arXiv:2310.09259*, 2023.
- Saleh Ashkboos, Maximilian L Croci, Marcelo Gennari do Nascimento, Torsten Hoefler, and James Hensman. SliceGPT: Compress large language models by deleting rows and columns. *arXiv preprint arXiv:2401.15024*, 2024.
- Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. Piqa: Reasoning about physical commonsense in natural language. In *Thirty-Fourth AAAI Conference on Artificial Intelligence*, 2020.
- Jerry Chee, Yaohui Cai, Volodymyr Kuleshov, and Christopher M De Sa. Quip: 2-bit quantization of large language models with guarantees. *Advances in Neural Information Processing Systems*, 36, 2024.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *ArXiv*, abs/1803.05457, 2018. URL <https://api.semanticscholar.org/CorpusID:3922816>.
- Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. FlashAttention: Fast and memory-efficient exact attention with IO-awareness. In *Advances in Neural Information Processing Systems*, 2022.
- Tim Dettmers, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. Gpt3. int8 (): 8-bit matrix multiplication for transformers at scale. *Advances in Neural Information Processing Systems*, 35: 30318–30332, 2022.
- Tim Dettmers, Ruslan Svirschevski, Vage Egiazarian, Denis Kuznedelev, Elias Frantar, Saleh Ashkboos, Alexander Borzunov, Torsten Hoefler, and Dan Alistarh. Spqr: A sparse-quantized representation for near-lossless llm weight compression. *arXiv preprint arXiv:2306.03078*, 2023.
- Vage Egiazarian, Andrei Panferov, Denis Kuznedelev, Elias Frantar, Artem Babenko, and Dan Alistarh. Extreme compression of large language models via additive quantization. *arXiv preprint arXiv:2401.06118*, 2024.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. GPTQ: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- Leo Gao, Jonathan Tow, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Kyle McDonell, Niklas Muennighoff, et al. A framework for few-shot language model evaluation. *Version v0. 0.1. Sept*, 2021.
- Coleman Hooper, Sehoon Kim, Hiva Mohammadzadeh, Michael W Mahoney, Yakun Sophia Shao, Kurt Keutzer, and Amir Gholami. Kvquant: Towards 10 million context length llm inference with kv cache quantization. *arXiv preprint arXiv:2401.18079*, 2024.

- Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Xingyu Dang, and Song Han. Awq: Activation-aware weight quantization for llm compression and acceleration. *arXiv preprint arXiv:2306.00978*, 2023.
- Zirui Liu, Jiayi Yuan, Hongye Jin, Shaochen Zhong, Zhaozhuo Xu, Vladimir Braverman, Beidi Chen, and Xia Hu. Kivi: A tuning-free asymmetric 2bit quantization for kv cache. *arXiv preprint arXiv:2402.02750*, 2024.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models, 2016.
- NVIDIA. Nvidia cutlass library, 2023. URL <https://github.com/NVIDIA/cutlass/>.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. PyTorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32, 2019.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019.
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: An adversarial winograd schema challenge at scale. *Communications of the ACM*, 64(9):99–106, 2021.
- Wenqi Shao, Mengzhao Chen, Zhaoyang Zhang, Peng Xu, Lirui Zhao, Zhiqian Li, Kaipeng Zhang, Peng Gao, Yu Qiao, and Ping Luo. Omniquant: Omnidirectionally calibrated quantization for large language models. *arXiv preprint arXiv:2308.13137*, 2023.
- Ying Sheng, Lianmin Zheng, Binhang Yuan, Zhuohan Li, Max Ryabinin, Beidi Chen, Percy Liang, Christopher Ré, Ion Stoica, and Ce Zhang. Flexgen: High-throughput generative inference of large language models with a single gpu. In *International Conference on Machine Learning*, pages 31094–31116. PMLR, 2023.
- Neil J A Sloane. A library of hadamard matrices, 2024. URL <http://neilsloane.com/hadamard/>.
- Jianlin Su, Yu Lu, Shengfeng Pan, Bo Wen, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding. *CoRR*, abs/2104.09864, 2021. URL <https://arxiv.org/abs/2104.09864>.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models, 2023.
- Albert Tseng, Jerry Chee, Qingyao Sun, Volodymyr Kuleshov, and Christopher De Sa. Quip#: Even better llm quantization with hadamard incoherence and lattice codebooks. *arXiv preprint arXiv:2402.04396*, 2024.
- Xiuying Wei, Yunchen Zhang, Xiangguo Zhang, Ruihao Gong, Shanghang Zhang, Qi Zhang, Fengwei Yu, and Xianglong Liu. Outlier suppression: Pushing the limit of low-bit transformer language models. *Advances in Neural Information Processing Systems*, 35:17402–17414, 2022.

- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, et al. Huggingface’s transformers: State-of-the-art natural language processing. *arXiv preprint arXiv:1910.03771*, 2019.
- Guangxuan Xiao, Ji Lin, Mickael Seznec, Hao Wu, Julien Demouth, and Song Han. Smoothquant: Accurate and efficient post-training quantization for large language models. In *International Conference on Machine Learning*, pages 38087–38099. PMLR, 2023.
- Zihao Ye. FlashInfer: Kernel Library for LLM Serving. <https://github.com/flashinfer-ai/flashinfer>, 2023.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? *arXiv preprint arXiv:1905.07830*, 2019.
- Yilong Zhao, Chien-Yu Lin, Kan Zhu, Zihao Ye, Lequn Chen, Size Zheng, Luis Ceze, Arvind Krishnamurthy, Tianqi Chen, and Baris Kasikci. Atom: Low-bit quantization for efficient and accurate llm serving. *arXiv preprint arXiv:2310.19102*, 2023.

A Appendix

A.1 Clipping Ratio

We use the clipping ratio for both weights and activations during the quantization. During the weight quantization, we apply a linear search over the MSE error to extract the best clipping ratio for each column of the weight matrix. However, this is not possible as we quantize the inputs on the fly during the inference and we need to use a constant clipping ratio for such quantization. We conclude that using 0.95 and 0.9 are suitable during asymmetric (KV cache) and symmetric (inputs) quantization which matches the finding from [Zhao et al., 2023].

Table 11: WikiText perplexity of LLAMA2-7B with different clipping ratio. To study the effect of various clipping ratios, we keep the rest of the model in full precision.

	1.0	0.95	0.9	0.85
Input Quantization	5.938	5.910	5.828	5.850
KV Cache Quantization	5.513	5.510	5.517	5.532

A.2 Performance Analysis: Detailed Results

Table 12 shows the results of benchmarking our 4-bit linear layer. The layer sizes are extracted based on the linear layer sizes in LLAMA-2 models (for out-projection and down-projections). We apply both FP16 and FP32 Hadamard transformations and show the runtime on NVIDIA RTX GPU using 2048 sequence lengths. Table 13 shows the results of decoding a single token in the attention layer when we apply KV-cache quantization. We extract the size of the attention layer based on the LLAMA-2 models.

Layer Size	Batch Size	FP16	INT4	INT4 + FP32 Had	INT4 + FP16 Had
4096x4096	1	1.043	0.370	0.409	0.403
	2	1.902	0.696	0.790	0.789
	4	3.715	1.361	1.522	1.529
	8	7.200	2.675	2.999	3.011
	16	14.508	5.357	5.973	5.976
	32	29.029	10.641	11.900	11.911
5120x5120	1	1.418	0.464	0.552	0.547
	2	2.918	0.937	1.100	1.097
	4	5.852	1.888	2.206	2.207
	8	11.465	3.809	4.428	4.422
	16	22.807	7.547	8.755	8.759
	32	45.312	15.019	17.417	17.440
8192x8192	1	3.696	0.997	1.084	1.083
	2	7.191	1.944	2.099	2.099
	4	14.236	3.918	4.208	4.207
	8	28.508	7.944	8.460	8.415
	16	57.814	15.793	16.859	16.871
	32	115.462	31.693	33.780	33.791
11008x4096	1	2.569	0.749	0.798	0.801
	2	5.027	1.478	1.555	1.558
	4	9.752	2.990	3.140	3.144
	8	19.696	6.031	6.296	6.306
	16	38.883	11.978	12.503	12.527
	32	78.320	23.874	24.935	24.974
13824x5120	1	3.983	1.063	1.142	1.139
	2	7.869	2.148	2.291	2.293
	4	15.410	4.340	4.616	4.614
	8	30.761	8.719	9.231	9.240
	16	61.203	17.318	18.345	18.343
	32	122.926	34.816	36.953	36.940
28672x8192	1	12.450	2.881	2.911	2.911
	2	25.391	5.828	5.892	5.896
	4	50.742	11.938	11.947	11.976
	8	101.290	24.186	24.202	24.216
	16	202.909	48.238	48.325	48.356
	32	406.344	96.761	97.044	96.892

Table 12: Performance of 4-bit linear layer for 2048 sequence lengths with and without online Hadamard transformation on a NVIDIA RTX 3090 GPU. The matrix sizes correspond to the linear layer sizes in LLAMA-2 models. We averaged over 100 runs and report the numbers in milliseconds.

head_num x head_dim	Batch Size	FP16	INT4	INT4 + FP32 Had	INT4 + FP16 Had
32x128	1	0.713	1.033	1.163	1.117
	2	0.723	1.035	1.168	1.122
	4	0.781	1.033	1.168	1.118
	8	0.984	1.042	1.173	1.126
	16	1.348	1.018	1.153	1.102
	32	2.098	1.168	1.247	1.216
40x128	1	0.712	1.026	1.157	1.106
	2	0.726	1.035	1.173	1.121
	4	0.831	1.038	1.166	1.115
	8	1.065	1.048	1.181	1.128
	16	1.525	1.021	1.153	1.102
	32	2.480	1.244	1.320	1.287
64x128	1	0.715	1.028	1.160	1.108
	2	0.780	1.034	1.171	1.117
	4	0.984	1.034	1.171	1.120
	8	1.361	1.048	1.182	1.130
	16	2.071	1.147	1.223	1.192
	32	3.563	1.566	1.645	1.612

Table 13: Performance of decoding a single token with 4-bit KV cache for the attention layer for 2048 sequence lengths with and without online Hadamard transformation on an NVIDIA RTX 3090 GPU. We evaluate generating the last token when the 2047 tokens are already cached in the attention. We extract the number of heads (head_num) and their dimensions (head_dim) based on different LLAMA-2 models. We averaged over 100 runs to report the numbers in milliseconds.