

Towards Responsible and Reliable Traffic Flow Prediction with Large Language Models

Xusen Guo, Co-first authors

Ph.D. Student

Systems Hub, Intelligent Transportation Thrust

Hong Kong University of Science and Technology (Guangzhou), Guangzhou, China

xguo796@connect.hkust-gz.edu.cn

Qiming Zhang, Co-first authors

Ph.D. Student

Systems Hub, Intelligent Transportation Thrust

Hong Kong University of Science and Technology (Guangzhou), Guangzhou, China

qzhang255@connect.hkust-gz.edu.cn

Junyue Jiang

Ph.D. Student

Department of Civil and System Engineering

Johns Hopkins University

jjiang67@jhu.edu

Mingxing Peng

Ph.D. Student

Systems Hub, Intelligent Transportation Thrust

Hong Kong University of Science and Technology (Guangzhou), Guangzhou, China

mpeng060@connect.hkust-gz.edu.cn

Hao (Frank) Yang, Ph.D., Corresponding Author

Assistant Professor

Department of Civil and System Engineering

Johns Hopkins University

haofrankyang@jhu.edu

Meixin Zhu, Ph.D., Corresponding Author

Assistant Professor

Systems Hub, Intelligent Transportation Thrust

Hong Kong University of Science and Technology (Guangzhou), Guangzhou, China

meixin@ust.hk

Submission Date: April 23, 2024

ABSTRACT

Traffic forecasting is crucial for intelligent transportation systems. It has experienced significant advancements thanks to the power of deep learning in capturing latent patterns of traffic data. However, recent deep-learning architectures require intricate model designs and lack an intuitive understanding of the mapping from input data to predicted results. Achieving both accuracy and responsibility in traffic prediction models remains a challenge due to the complexity of traffic data and the inherent opacity of deep learning models. To tackle these challenges, we propose a **R**esponsible and **R**eliable **T**raffic flow forecasting model with **L**arge **L**anguage **M**odels (**R**²**T**-**L**LM), which leverages large language models (LLMs) to generate responsible traffic predictions. By transferring multi-modal traffic data into natural language descriptions, **R**²**T**-**L**LM captures complex spatial-temporal patterns and external factors from comprehensive traffic data. The LLM framework is fine-tuned using language-based instructions to align with spatial-temporal traffic flow data. Empirically, **R**²**T**-**L**LM shows competitive accuracy compared with deep learning baselines, while providing an intuitive and reliable explanation for predictions. We discuss the spatial-temporal and input dependencies for conditional future flow forecasting, showcasing **R**²**T**-**L**LM's potential for diverse city prediction tasks. This paper contributes to advancing accountable traffic prediction models and lays a foundation for future exploration of LLM applications in transportation. To the best of our knowledge, this is the first study to use LLM for accountable and reliable prediction of traffic flows.

Keywords: Traffic flow prediction, Large language models, Spatial-temporal prediction, Responsibility.

INTRODUCTION

Traffic network prediction is a critical component of transportation management systems, aiming to forecast future traffic conditions such as congestion, traffic volume, and travel time. It plays a vital role in various applications, including route planning, traffic management, and intelligent transportation systems (ITS) (1). Accurate predictions are crucial for providing valuable insights to stakeholders in traffic systems, aiding in informed decision-making. However, achieving reliability and precision in predictions is challenging due to the inherent nonlinear dynamics of traffic, spatial and temporal variability, and dynamic nature influenced by factors like accidents, weather conditions, and other events, necessitating models capable of capturing complex dependencies and rapid changes. As large-scale traffic data becomes more available and deep learning techniques advance, data-driven methods are increasingly favored for modeling complex traffic flow systems.

Deep learning-based traffic analysis (2) have been well researched, covering human mobility research (3, 4), traffic management (5, 6), and accident analysis (7). Typically, these issues are treated as spatio-temporal deep learning problems. Deep learning methods consistently learn hierarchical feature representations from spatial-temporal data, understand historical trends (8, 9), and employ graphs to illustrate the spatial relationships between locations (10, 11). The spatio-temporal-graph learning paradigm is the primary methodology for learning representations and capturing potential trends and relationships from traffic data.

Despite the comprehensive model architectures, this domain format still faces challenges. First, deep learning methods require specific network structure designs (12, 13), to consider the multi-modal dynamic nature and spatio-temporal complexity of traffic data. Although these designs can help the model improve the accuracy of predictions, they are generally artificially crafted, and abstract representations further obscure generalization ability. Additionally, some traffic forecasting studies (14–16) related to the reliability and robustness of models prioritize the degree of fit to actual values. They consider a variety of dynamic factors affecting traffic flow to improve the reliability of traffic flow predictions. However, these methodologies encounter difficulties in providing credentials for prediction and taking accountability for outcomes in real-world traffic prediction tasks that lack labeled data.

Recently, with the popularity of foundation models (17, 18), large language models provide more intuitive explainable trials in spatial-temporal domain tasks, benefiting from textual paradigms. Spatial-temporal learning tasks can be refined into language format for exploring the potential of LLMs in various application fields, including forecasting (19, 20), data imputation (21), and anomaly detection (22), as depicted in Figure 1. Considering multi-modalities in urban big data, the LLM framework transfers original data into natural language description and is capable of capturing latent relationships between inputs from complicated contexts. Also, LLMs can generate explanations of the reasoning process, which provides available supplements for prediction and decision-making. However, though LLMs have expertise in language-based tasks, how to formulate specific spatial-temporal tasks into LLM frameworks for accurate prediction remains challenging.

In response to the challenges mentioned above, we present R²T-LLM, a responsible and reliable traffic flow forecasting framework with LLMs. Our R²T-LLM excel in predicting future values based on multi-modal data and providing insightful explanations for the predicted results. Considering multi-modalities as input, our framework transferred the spatial-temporal traffic flow and external factors (PoIs, weather, date, holiday) as languages uniformly. With the language-based instruction fine-tuning, R²T-LLM performs well compared with deep learning SOTA base-

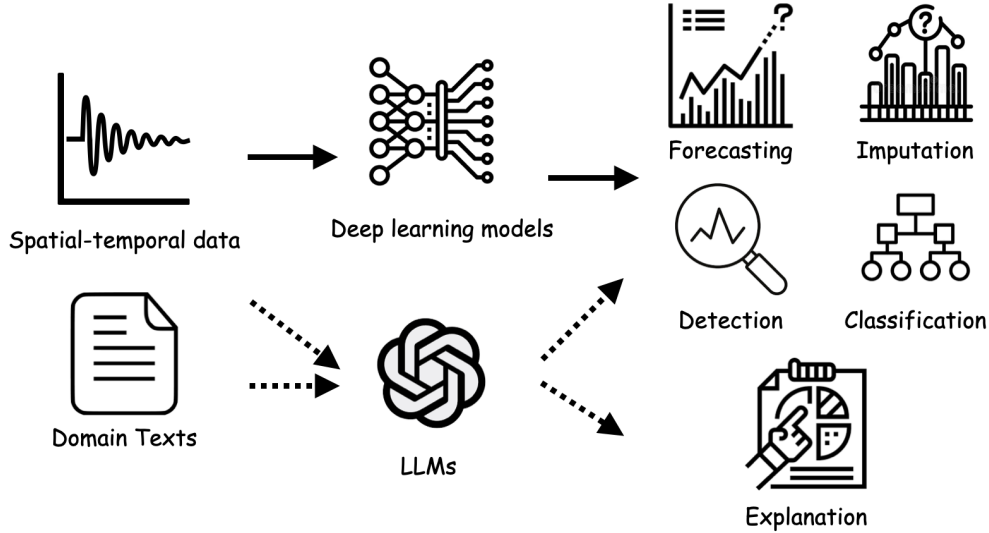


FIGURE 1: Spatial-temporal learning formats for deep learning models and LLMs: Compared with well-developed deep learning models, LLMs for spatial-temporal learning advance in adapting domain knowledge with urban multi-modal data and generate reasonable explanations.

lines, evaluated based on the traffic flow dataset from California. Also, spatial-temporal and input dependencies can be captured by R²T-LLM for explainable forecasting results. Hence, the main contributions of this work are as follows:

- We present a comprehensive multi-modality traffic flow dataset (CATraffic) from California, covering traffic sensors from various areas with weather, nearby PoIs, and holiday information, which can be used for future exploration in the combination of traffic flow prediction and LLMs.
- A traffic flow prediction method based on large language models - R²T-LLM is proposed to generate responsible and reliable traffic prediction results, still maintaining competitive accuracy with SOTAs.
- R²T-LLM demonstrates a language-based format considering multi-modalities and instruction spatial-temporal alignment, which provide an intuitive view and can be simply generalized to different city prediction tasks.

For the rest parts of this paper, the related works are involved in Section II and details about methodology are illustrated in Section III. Comparison results, ablation, and responsible studies are included in experimental results and analysis, as Section IV. Section V summarizes this paper and gives sights for future exploration of LLM applications in transportation.

RELATED WORK

In this section, we will first explore advancements in spatial-temporal prediction, emphasizing the integration of deep learning methodologies. Subsequently, we'll delve into the importance of reliable prediction, discussing methods for enhancing responsibility in spatial-temporal learning. Finally, we'll highlight the transformative role of LLMs across diverse domains, elucidating their pre-training and fine-tuning practices for domain-specific tasks.

Spatial-temporal prediction

Recently, the field of spatial-temporal learning has witnessed significant advancements, especially in the traffic, environment, and society field, due to the emergence of deep learning methodologies. These approaches have enabled the modeling of latent relationships among various features of urban data in diverse formats. These architectural designs are meticulously crafted to comprehend and represent the intricate interplay between spatial and temporal dimensions within datasets. Convolutional Neural Networks (CNNs) (3, 23), quite renowned for their efficacy in computer vision, are employed to discern the spatial relations among grid regions, by filtering the input data. Moreover, Recurrent Neural Networks (RNNs) (24) are usually leveraged to adeptly capture temporal dependencies, through the maintenance of a memory state, facilitating the reusing of information over time. Notably, more spatial-temporal learning frameworks introduce Graph Neural Networks (GNNs) (25–27), advanced in the representation of complex spatial relationships inherent in data structured as graphs, wherein nodes correspond to spatial locations and edges encapsulate the connections between them. Additionally, the adaptation of Transformers (28), originally proposed for natural language processing, has proven effective in long-sequence modeling to capture comprehensive information. Various Transformer blocks (29, 30) have been tailored for different dependencies among spatial-temporal features, enabling the modeling of intricate relationships. A notable trend in this domain is the combination of different model architectures, leveraging various modules for spatial or temporal features (31, 32). This amalgamation gradually becomes the prevailing paradigm, showcasing promising performance in prediction tasks. However, it's worth noting that while these methods perform excellent in prediction accuracy, they often fall short in terms of explainability and generalization.

Responsible prediction

The responsibility of spatial-temporal learning is also worthy of consideration for reliable prediction, which provides abundant views beyond prediction accuracy. Most recent works studied which features mostly affect decisions generated by models. (33) focuses on the dependency on latent variables of road forecasting based on black-box machine learning methods, including RNNs and Random Forests. The spatial-temporal causal graph inference, as presented in reference (34), offers an approximation of the Granger causality test, thereby enhancing the accessibility of forecasting. Counterfactual explanations for time series (35, 36) are also highly regarded, as they concentrate on generating alternative prediction outcomes by selecting time series data points from the training set and substituting them into the sample under analysis. This method allows for the illustration of results by examining a limited number of variables. Besides these methods focusing on model transparency, large language models offer an alternative approach to generate convincing explanations along with prediction results with greater intuitiveness (37–39). By mapping natural language-based inputs to outputs, this relationship can be studied simply by altering the input, without the requirements for complex feature engineering or model architecture adjustments.

Large language models

Large Language Models (LLMs) have achieved remarkable success across a wide range of tasks and fields, including natural language processing (40), vision-language tasks (41), and various other interdisciplinary domains (42–44). Originally designed as pre-trained language foundation models for addressing various natural language tasks, LLMs have exhibited the capacity to acquire intricate semantic and knowledge representations from extensive text corpora over time. This

newfound ability has been a profound source of inspiration within the community for addressing a variety of tasks. The success of models like GPT-4 (17) in natural language understanding and generation tasks has spurred interest in exploring their potential for handling complex, multi-modal datasets beyond traditional linguistic domains. They can extract valuable information and relationships from complex textual contexts, thereby enhancing the learning of city data. With the popularity of decoder-architecture LLMs, domain tasks are normally formulated into the next token generation, which provides a unified formulation to learn the map from the input to the output. To acquire large models for specific fields, the practices of pre-training and fine-tuning have become widely accepted in the model training process. Pre-training a foundation model from scratch necessitates substantial computing resources and domain-specific datasets, resulting in its superior performance within professional domains compared to baseline models. On the other hand, fine-tuning based on foundation models offers a more accessible approach, involving adjustments to only a few parameters (45). This method preserves most general knowledge while targeting expertise in domain-specific tasks. In some cases, researchers freeze all parameters of large language models and focus solely on training the extended encoders and decoders (19, 46). This strategy aims to extend the learning capabilities of LLMs to domain-specific tasks while leveraging their existing knowledge base.

METHODOLOGY

This paper presents a novel approach utilizing Large Language Models for traffic flow prediction. Our objective is to develop a predictive model that not only forecasts traffic flow patterns but also provides explanations for the predicted trends. In the following sections, we will provide a comprehensive overview of our approach. Firstly, we'll describe the problem formulation and the predictive framework. Next, we'll discuss the construction of prompts, which is crucial for fine-tuning Large Language Models. Finally, we'll talk about the fine-tuning technique and how to generate the explanation corresponding to the predicted result.

Problem Description

The traffic flow prediction problem as a part of spatial-temporal prediction problems, can be formulated as forecasting future values according to the historical data. In our framework, the goal is to predict future-step values and generate explanations based on historical values and external factors. We can represent this using the following formula:

$$X_{T:T+H}, \mathcal{S}_i = P_\theta(X_{T-H-1:T-1}, E_i) \quad (1)$$

Here, the function P_θ is the predictive model, that learns the mapping relationship between input and output. $X_{T-H-1:T-1}$, $X_{T:T+H}$ represent continuous historical values and future predicted values with H steps. E_i is external factors for data sample i , which includes date, holiday information, meteorological data and PoI data, etc. \mathcal{S}_i is the explanation corresponding to the predicted output $X_{T:T+H}$. In this work, we treat the large language model as the predictive model P_θ , and utilize the language tokenizer to transform the input and output data as a sequence of tokens, thus reframing the task of traffic flow prediction as a language modeling problem. Specifically, given the tokenized input sequence $S_{T-H-1:T-1}$ and tokenized external factors SE_i for data sample i , the tokenized output sequence $S_{T:T+H}$ is reconstructed autoregressively:

$$\hat{s}_{T+i} = \arg \max_{s_{T+i}} P_\theta(s_{T+i} | S_{T:T+i-1}, S_{T-H-1:T-1}, SE_i) \quad (2)$$

Here, \hat{s}_{T+i} represents the i -th predicted next token in output sequence. Similarly, the explanation can also be generated following the output sequence in this way. By incorporating the next token prediction into the framework, we enhance the language model’s ability to generate coherent and contextually relevant explanations alongside traffic flow predictions.

Prompt Construction


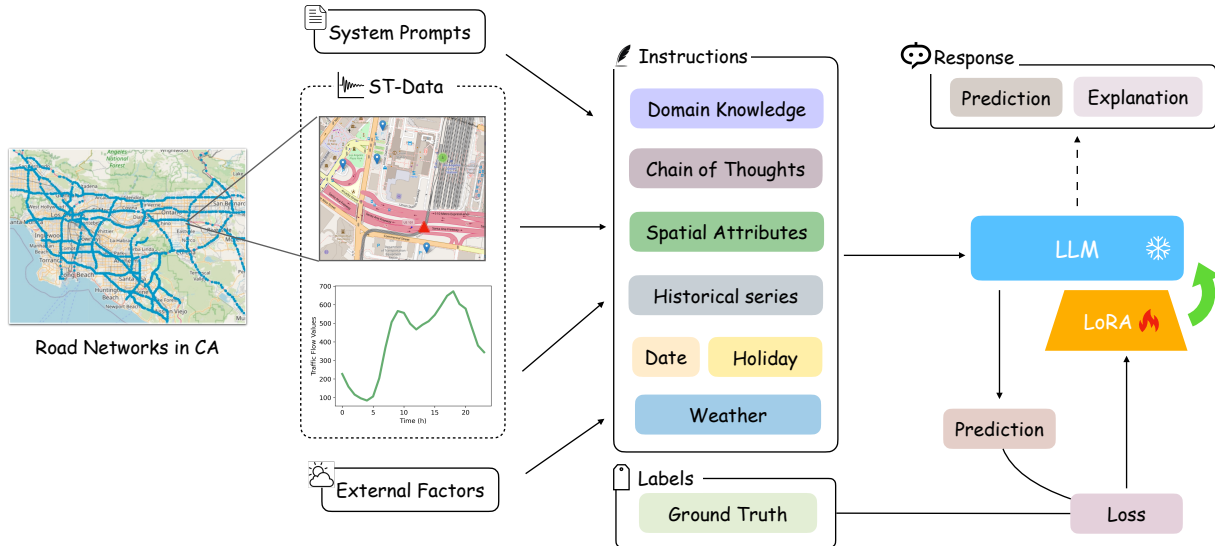



FIGURE 2: Framework of R²T-LLM: Multi-modal traffic flow data is converted into text-based prompts, leveraging task settings and domain knowledge to enable a Language Model (LLM) to discern latent relationships across diverse inputs and traffic patterns. Through fine-tuning, the LLM gains the ability to predict future values and furnish pertinent explanations. This refined model adeptly captures spatial-temporal patterns and dependencies on input factors, facilitating generalized predictions even in unseen datasets, thus enhancing its predictive capabilities.

This section demonstrates how to textualize multi-modal traffic data and construct instructions to inspire the reasoning and predicting abilities of LLMs. The instruction part of Figure 2 showcases a meticulously crafted prompt template, designed to capture essential details consistently and comprehensively, including system prompts, spatial-temporal information, and external factors. Empirically, this structured format is tailored to convey diverse data modalities, boost the model’s comprehension, and refine predictive accuracy.

- System Prompts.** To enhance the integration of LLMs into traffic prediction tasks, system prompts are structured with clear task descriptions and domain-specific knowledge, as shown in Figure 3a. Task settings explicitly outline the role of LLMs and leverage their pre-existing understanding of the traffic domain. Domain knowledge about traffic flow is embedded within the text description, incorporating few-shot examples to prompt LLMs to consider spatial-temporal factors and their interdependence. Spatial-specific traffic pattern cases are presented to assist models in establishing connections between geographical characteristics and traffic flow variations. For instance, residential areas may experience heightened traffic volume and increased travel activities during morning and evening rush hours.

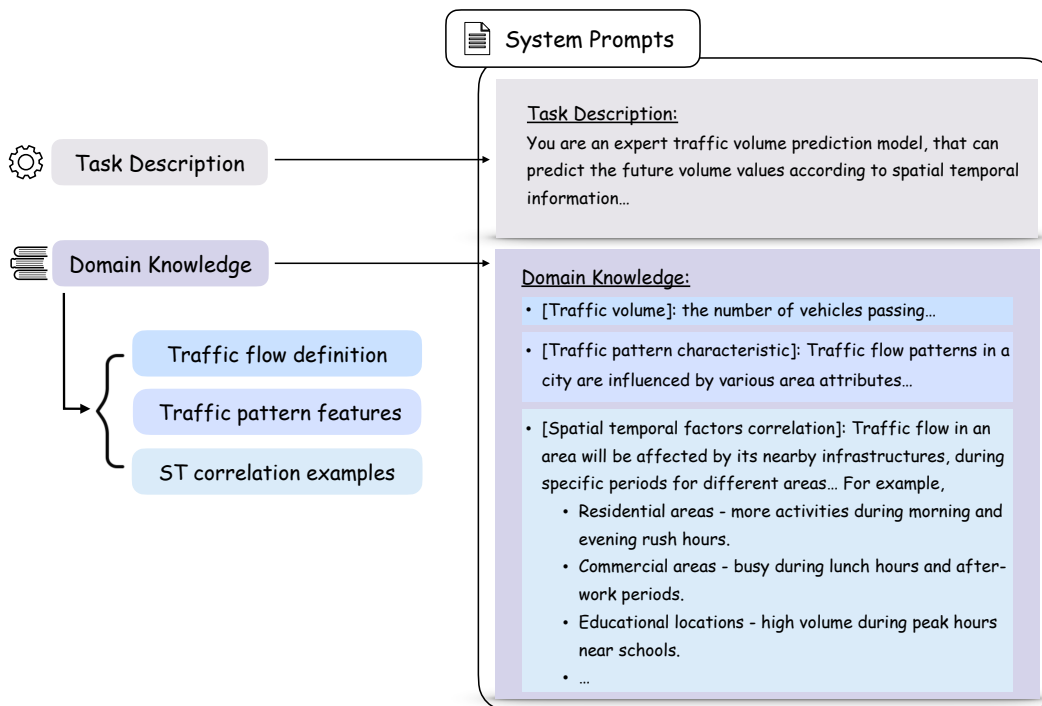

(a) System prompts. They encompass task descriptions of traffic flow prediction and domain knowledge, including definitions, traffic pattern features, and examples of spatial-temporal correlations. Equipped with these foundational settings and backgrounds, language models can tailor their knowledge and capabilities to the specific domain.

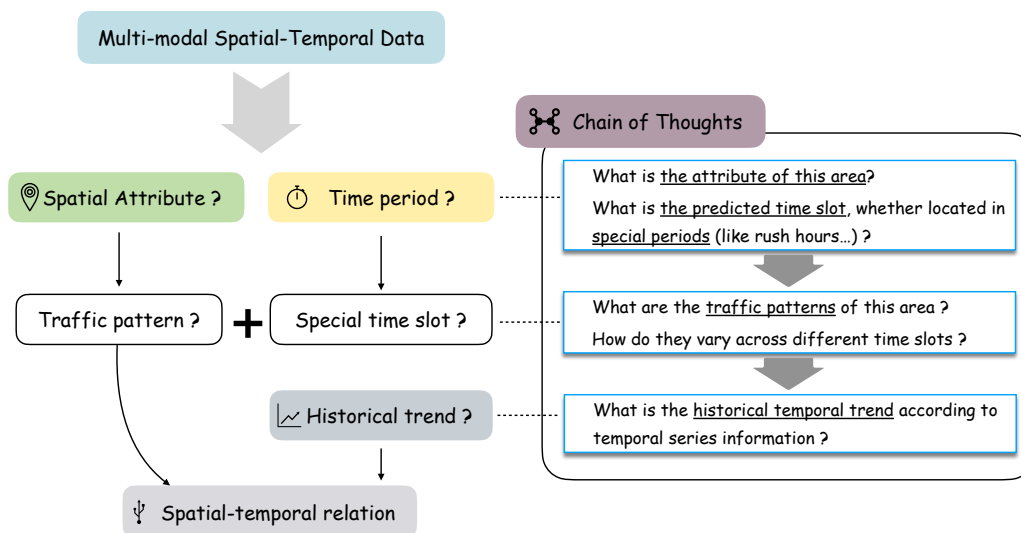

(b) Chain of Thoughts. Chain of Thought (CoT) prompts encourage LLMs to extract relevant factors from provided information, prompting deeper consideration of their potential spatial-temporal relationships with related knowledge. This process facilitates a comprehensive analysis and interpretation of the data.

FIGURE 3: System Prompts and Chain of Thoughts construction.

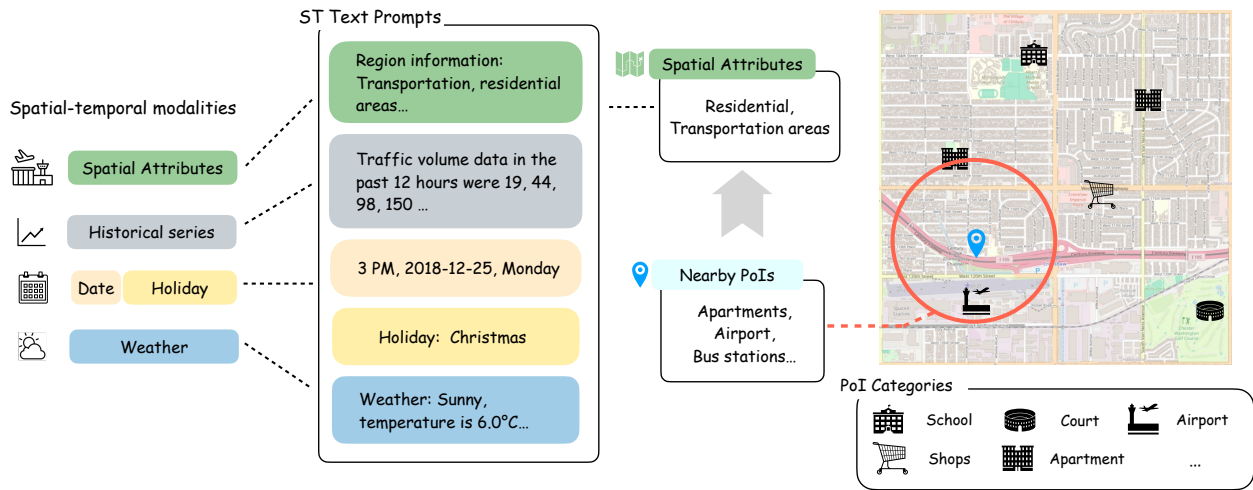


FIGURE 4: Multi-modal spatial-temporal(ST) text prompts. Spatial-temporal data is translated into text prompts consistently. To consider the spatial aspect of a region, nearby PoIs within a defined range are utilized to characterize its location features. For instance, consider a sensor positioned along the Century Freeway, surrounded by residential complexes and an airport, as illustrated in the above figure. This location can be classified as a blend of residential and transportation zones, reflecting the area’s geographical attributes. To incorporate historical flow data and external factors, we represent these datasets textually as the rest components.

- **Chain of Thoughts.** Chain of Thought (CoT) (47) prompts have been proven to improve LLMs’ reasoning capabilities in intricate problems, which promote models to think from shallow to deep. Inspired by zero-shot CoT (48), spatial-temporal CoT prompts in Figure 3b are strategically crafted to enhance the LLMs’ inference abilities. Initially, prompt questions guide LLMs to contemplate the spatial characteristics and potential traffic dynamics within a given area. Subsequently, LLMs assess whether the predicted time slot corresponds to special periods such as rush hours, weekdays, weekends, or holidays. After capturing spatial-temporal information, LLMs are directed to explore the profound connection between spatial data and the fluctuation of historical traffic flow, facilitating more precise predictions.

This approach ensures the adaptability of LLMs to the specific requirements of prediction tasks. Furthermore, to empower LLMs to glean informative factors from inputs, CoT prompts guide the model to first consider spatial attributes and temporal periods. Subsequently, the model is prompted to reason through potential traffic patterns within the specified area during the predicted time frame.

- **Spatial Attributes.** Multi-modal information prompts serve as the cornerstone of our approach. In this context, spatial attributes are derived from nearby Points of Interest (PoIs). We preprocess PoI category data within different proximity ranges (3km, 5km, 10km), aligning with the locations of traffic volume sensors. This ensures comprehensive coverage of diverse spatial attributes across the dataset, given the varied traffic patterns influenced by different locations. To achieve this, we employ clustering techniques to

group PoIs within each designated radius, ultimately organizing them into 1000 clusters. These clusters are then summarized into distinct categories such as transportation hubs, commercial zones, and residential areas, effectively representing the key characteristics of each geographical area. This approach facilitates the effective representation of spatial factors, enabling the model to grasp the intricate interplay between various factors impacting traffic flow dynamics. Also, regional data comprises details such as the city, and road location. Our R²T-LLM framework leverages this multifaceted information to recognize and integrate spatio-temporal patterns across diverse regions and periods.

- **Historical time series.** Historical series are transcribed into textual descriptions with direct numerical representation. Data from the past 12 hours are illustrated for each hour’s time slot, enabling LLMs to accurately perceive the temporal change of traffic flow. This approach empowers LLMs to generate insights, understanding, and explanations for emerging trends and patterns.
- **External Factors.** External factors influencing traffic flow, such as dates, holidays, weather conditions, temperature, and vehicle visibility, are systematically considered. These diverse data points are uniformly transformed into textual information for comprehensive analysis.

Overall, this integration ensures a holistic understanding of the surrounding environment, historical trends, and external influences, enriching the model’s contextual reasoning and enhancing its predictive capabilities.

Supervised Fine-tune

Our R²T-LLM model is built upon the renowned open-source large language model, Llama2-7B-chat (18), and is fine-tuned with LoRA technique (45). LoRA is a parameter-efficient fine-tuning method for large language models. It modifies the self-attention layers of Transformers (28) by introducing low-rank matrices A and B to represent the updates of the attention weights W , with $W' = W + BA$. This approach reduces the number of trainable parameters, as W remains frozen during fine-tuning, and A , B are much lower in dimension than W , facilitating quicker and less resource-intensive adaptations while retaining model performance.

During the fine-tuning phase, the traffic forecasting task is framed as a next-token generation task. The model predictions future traffic volumes autoregressively by optimizing the following objective function for the entire annotated dataset \mathcal{D} :

$$\mathcal{L}^{FT}(\mathcal{D}) = - \sum_{j=1}^n \log P(Y_j | Y_{1:j-1}; X_{1:n}). \quad (3)$$

Here Y_j is the ground truth of the next token, $X_{1:n}$ is the sequence of input historical tokens, and $Y_{1:j-1}$ is the previously generated tokens. Through this process, the model learns to make more accurate predictions tailored to the specific task or domain it is being fine-tuned for. This approach maximizes the learning potential of the LLM, enabling it to develop specialized proficiency in the target domain.

Responsible Output Generation

The chat models in Llama2 are tailored to excel in understanding and generating text in conversational contexts. Therefore, by incorporating explanation requirements into the prompts, our model can not only generate prediction results but also provide explanations simultaneously. Initially, we attempted to have the fine-tuned model directly output the texts that explain the predictions, but the

outcomes proved to be unsatisfactory. Although the generated explanations were coherent, they failed to align with the traffic flow prediction sequence. This discrepancy arose because the model fine-tuning process solely relied on traffic flow sequences for supervision, without incorporating any mechanisms to link the explanatory text with the output sequences. To address this issue, we employed the few-shot learning (14, 49) technique by providing several explanation examples in conversational contexts. The few-shot explanatory texts were generated through ChatGPT by providing the ground truth traffic flow sequences, followed by some manual corrections. This approach enabled the model to learn from a limited number of examples and improve its ability to generate coherent explanations alongside predictions.

EXPERIMENTAL SETTINGS AND RESULTS

In this section, we will start by introducing our experimental setups, which include the dataset we used, the evaluation methods we employed, the baseline models we compared against, and the parameter settings we used in the fine-tuning process. Subsequently, we will present the main results of our experiments, which involve comparing R²T-LLM with the baseline models, discussing how the performance of our model varied in the spatio-temporal domain, conducting ablation studies, and exploring the generalization capabilities of our model. Finally, we will discuss the responsible studies of R²T-LLM in the context of traffic flow prediction. This discussion will elucidate how the robust reasoning capability inherent in large language models enhances traffic forecasting tasks.

Dataset Description

Our experiments were conducted based on our proposed multi-modal traffic prediction dataset, named CATraffic. This dataset consists of traffic volume data from various regions in California, as well as meteorological information, nearby point of interests (PoIs) data, and holiday information. The traffic volume data is sourced from the LargeST dataset (50), which comprises five years (2017-2021) of traffic flow data in California, encompassing 8600 traffic sensors sampled at a 15-minute interval. We constructed CATraffic by selecting a subset of the LargeST dataset, focusing on 1000 sensors from the Greater Los Angeles (GLA) and Greater Bay Area (GBA). Our dataset spans two years from January 1, 2018, to December 30, 2019, with data sampled hourly. During the sensor selection process, to ensure a diverse representation of traffic patterns, we clustered all sensors into 1000 categories based on their nearby PoIs features. For each category, only one sensor is retained. The PoIs data is obtained through *OpenStreetMap*¹ with the help of the *Overpass Turbo API*². We calculated the number of PoIs within different ranges (3km, 5km, 10km) in four directions (East, West, North, South) to compose the final PoIs features. For the meteorological data, we collected information from the National Oceanic and Atmospheric Administration (NOAA³). These include factors such as reported weather events, temperature, and visibility, which are considered as they have direct impacts on traffic patterns.

We split the collected data into two parts: data from 2018 was used as the training set, while data from 2019 was reserved for model validation. All experiments were configured to predict traffic flows for the next 12 hours based on historical 12-hour traffic flow data. During the data preprocessing stage, we filtered out samples with zero values for 24 consecutive hours, which likely resulted from malfunctioning sensors. Additionally, to assess the model’s generalization

¹OpenStreetMap: <https://openmaptiles.org>

²Overpass Turbo: <https://overpass-turbo.eu>

³NOAA: <https://www.ncei.noaa.gov/>

capability, we created a zero-shot dataset derived from LargeST (50). This dataset comprises data from 100 sensors in San Diego (SD), covering the period from November 1, 2019, to December 31, 2019. These data were not utilized in the model fine-tuning process and served to the evaluation of the model’s generalization performance.

Evaluation Metrics

In time series forecasting tasks, researchers commonly employ Root Mean Square Error (RMSE), Mean Absolute Error (MAE), and Mean Absolute Percentage Error (MAPE), to evaluate the accuracy of forecasting results. These metrics are defined as follows:

$$RMSE = \sqrt{\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2} \quad (4)$$

$$MAE = \frac{1}{n} \sum_{i=1}^n |y_i - \hat{y}_i| \quad (5)$$

$$MAPE = \frac{1}{n} \sum_{i=1}^n \left| \frac{y_i - \hat{y}_i}{y_i} \right| \times 100\% \quad (6)$$

Here, y_i represents the ground truth value of the i -th data point, \hat{y}_i denotes the corresponding prediction value, and n stands for the total number of samples. RMSE is advantageous for emphasizing larger errors due to its square term, while MAE provides a straightforward interpretation by averaging absolute errors, treating all errors equally. On the other hand, MAPE measures the average percentage difference between predictions and ground truths, offering interpretability in terms of relative accuracy but being sensitive to zero values in the denominator. Researchers typically employ a combination of these metrics to comprehensively assess model performance.

Baseline Models

We extensively compared our proposed R²T-LLM with 9 advanced baseline models. Among these, LSTM (24) stands as a temporal-only deep model based on Recurrent Neural Networks (RNNs), disregarding spatial correlations. Additionally, we select DCRNN (51) and AGCRN (52) as the representation of RNNs-based methods. We also choose TCN-based methods such as STGCN (26) and GWNET (25), along with attention-based methods ASTGCN (27) and STTN (31). These models were proposed between 2018 and 2020, reflecting the prevalent research direction in time series forecasting during those years. Furthermore, we integrated three representative methods from recent years, including STGODE (53) and DSTAGNN (54). STGODE adeptly utilizes neural ordinary differential equations to capture the continuous changes of traffic signals, while DSTAGNN is specifically designed to capture the dynamic correlations among traffic sensors.

Experiment Settings

Our model is fine-tuned based on the well-known open-source large language model, Llama2 (18), specifically utilizing the chat version with a size of 7B. We load the base model in 8 bits for fine-tuning, with training parameters including a batch size of 8, a learning rate of 5e-4, a warm-up step of 400, gradient accumulation steps of 8, and a training epoch for 2. The LoRA parameters are configured with a rank of 64 and an alpha value of 16. During the inference phase, a temperature of 0.95 was applied.

Steps	Metrics	LSTM	DCRNN	STGCN	ASTGCN	GWNET	AGCRN	STTN	STGODE	DSTAGNN	R ² T-LLM
3	RMSE	62.65	61.12	43.43	66.60	<u>42.59</u>	43.92	43.41	52.30	51.79	40.34
	MAE	40.00	37.32	25.83	44.47	<u>25.56</u>	25.67	26.00	29.53	34.06	20.20
	MAPE(%)	24.75	24.52	16.09	28.36	15.96	<u>15.60</u>	16.22	19.69	23.90	9.94
6	RMSE	74.69	74.21	46.64	75.07	<u>45.91</u>	48.92	51.63	55.79	53.44	44.53
	MAE	48.10	45.83	<u>27.94</u>	49.47	28.27	28.94	30.79	32.97	33.72	22.70
	MAPE(%)	33.98	31.58	<u>15.75</u>	31.10	18.00	17.31	18.99	21.62	21.27	11.39
9	RMSE	77.61	78.22	50.04	81.76	<u>46.61</u>	52.06	56.19	59.97	56.21	45.89
	MAE	49.60	47.97	30.16	53.43	<u>28.70</u>	30.74	33.11	35.23	36.45	23.89
	MAPE(%)	39.26	32.22	<u>17.52</u>	35.35	19.88	18.38	20.69	22.44	24.00	12.09
12	RMSE	69.86	71.79	54.91	69.75	<u>49.79</u>	56.13	61.38	60.47	60.33	47.82
	MAE	42.05	43.08	33.20	43.40	<u>30.47</u>	32.70	38.27	36.22	37.91	24.99
	MAPE(%)	25.99	25.05	<u>19.27</u>	28.03	20.46	19.50	26.09	23.16	24.23	12.30
Avg.	RMSE	68.14	67.89	46.69	70.48	<u>43.97</u>	47.97	50.03	54.41	52.82	42.81
	MAE	43.23	41.45	28.02	46.17	<u>26.84</u>	28.22	30.04	31.95	34.02	21.91
	MAPE(%)	30.21	27.14	<u>16.68</u>	29.99	17.44	16.94	19.04	20.72	22.45	11.01

TABLE 1: Performance comparison between our proposed R²T-LLM and baseline models on our CATraffic dataset. The horizon for traffic flow prediction is 12, and we show the results in Steps 3, 6, 9, and 12 in the table. The last three rows are the average performance for all 12 steps. We highlight the best results in bold and the second best in underline.

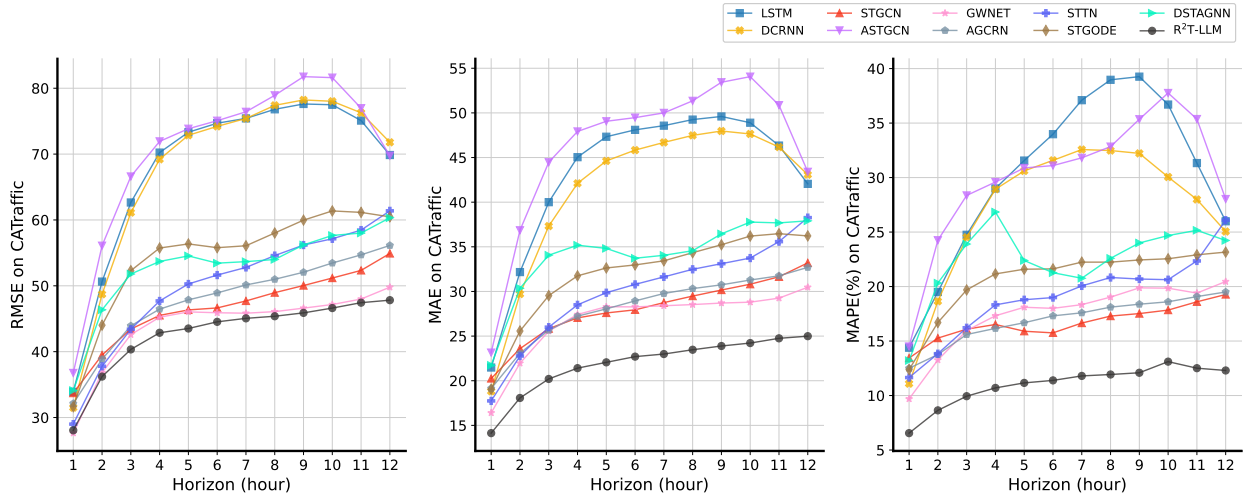


FIGURE 5: Time step-based prediction comparison with baseline models and our R²T-LLM. All experiments are conducted based on our CATraffic dataset. Results show that the performance of all models decreases with increasing prediction time, whereas our model significantly outperforms the others in all prediction steps.

Overall Performance

We report the performance comparison results between R²T-LLM and the baseline models in Table 1. All models are trained and evaluated based on our CATraffic dataset, with the same dataset settings. The task is to utilize traffic flow data from the historical 12 hours to forecast future traffic flows in the next 12 hours. We represent the results of horizons 3, 6, 9, and 12, as well as the average performance over all 12 steps in the table. The results demonstrate that the overall performance

of our proposed R²T-LLM exceeds that of the baseline models by a large margin, especially in the MAE and MAPE. For example, In terms of average performance of all 12 horizons, our model outperforms the best two baseline models, GWNEN (25) by 18.37% in MAE, and STGCN (26) by 34.00% in MAPE, which shows the impressive capability in traffic flow forecasting of our model.

We further demonstrate the results with different prediction horizons of the baseline models and R²T-LLM, depicted in Figure 5. From left to right, RMSE, MAE, and MAPE of compared models at different prediction steps are shown. The results yielded the following observations:

- As the prediction horizon increases, performance generally declines across all models, as longer-term forecasts inherently entail greater uncertainty and complexity. However, several models exhibit improved performance in longer-term forecasting, such as LSTM, ASTGCN, and DCRNN. This phenomenon may be attributed to these models' ability to capture and leverage the periodicity within the data, allowing them to make more accurate predictions over extended time horizons.
- Our proposed model consistently outperforms the comparison methods at each time step, showing significant advantages in both short-term and long-term traffic flow forecasting. This indicates the robustness of our model in various prediction horizons.
- Our proposed model shows a more significant advantage in MAE and MAPE than RMSE, which may be attributed to the amplification effect of RMSE on outliers, leading to inaccurate assessments. Compared to RMSE, MAE and MAPE are less sensitive to extreme errors because they measure the mean absolute error and the percentage error, respectively. The excellent performance of our model on MAE and MAPE suggests that it is effective in mitigating the effects of outliers and provides more accurate and stable predictions, especially in cases where extreme values may occasionally occur.


These findings underscore the effectiveness of our method in capturing complex temporal patterns in traffic flow data, leading to more accurate and reliable predictions.

Spatial and Temporal Homogeneity


Evaluating spatial and temporal homogeneity in traffic prediction is vital for evaluating model performance, generalizability, and robustness. It ensures that traffic flow prediction models can effectively adapt to diverse real-world conditions. Therefore, in this section, we will thoroughly analyze the performance of our proposed model in terms of spatio-temporal consistency.

Spatial homogeneity helps to assess the ability of different models to learn traffic patterns at different spatial locations. To evaluate this kind of capability, we tested our R²T-LLM as well as four baseline models (LSTM, AGCRN, STGCN and GWNEN) at different locations with varying urban characteristics in the Greater Los Angeles Area (GLA). The result, depicted in Figure 6 (a), illustrates MAPE values for four prediction horizons of 3h, 6h, 9h, and 12h, with darker colors indicating poorer performance. Overall, our R²T-LLM model exhibits relatively consistent prediction performance across different locations, effectively capturing traffic flow trends irrespective of varied spatial characteristics. In contrast, other models demonstrate inferior homogeneity, particularly in areas featuring complex road network intersections and intricate facility distributions. These findings underscore the robustness and adaptability of our proposed R²T-LLM model in effectively learning and predicting traffic patterns across diverse spatial contexts, thus highlighting its potential for real-world application in urban traffic management and planning scenarios.

In the analysis of temporal homogeneity, we evaluated models on a subset of the test dataset (traffic data in November 2019) and reported the daily averaged MAPE values. Illustrated in

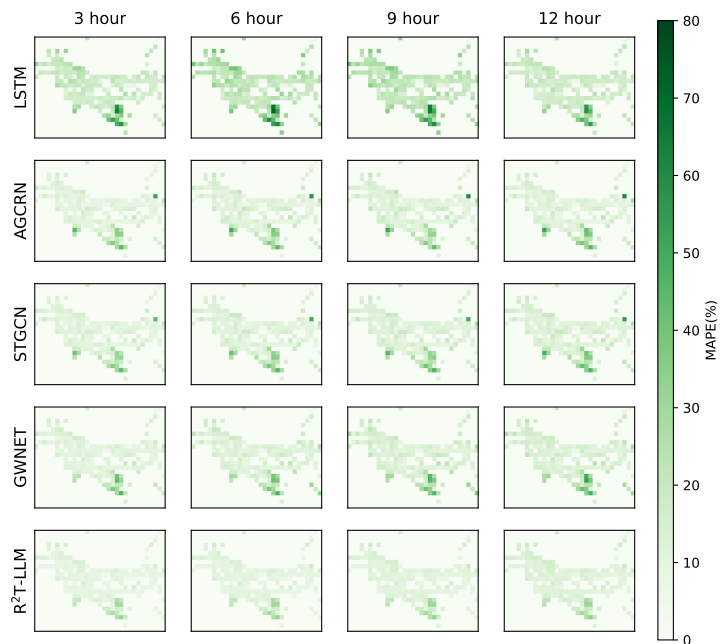

(a) Spatial MAPE map

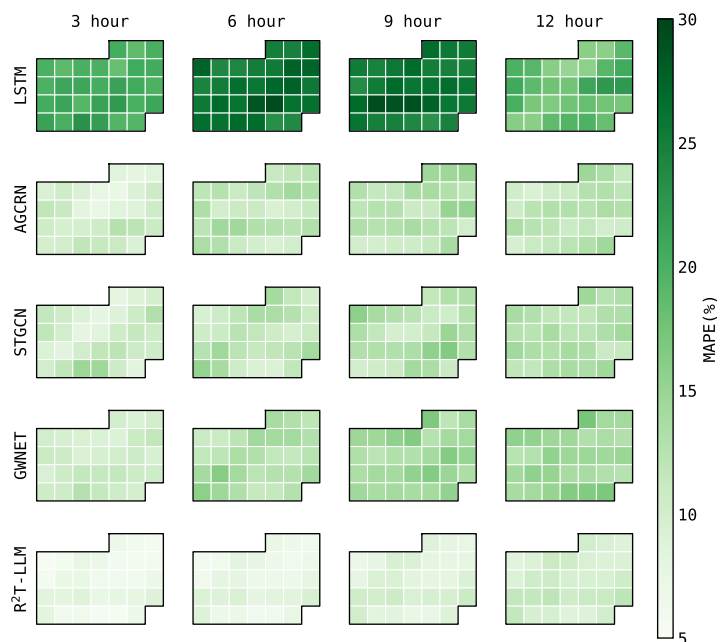

(b) Temporal MAPE map

FIGURE 6: Comparison of the spatial and temporal prediction error distributions among different models. Figure (a) presents the distribution of MAPE for our proposed R²T-LLM and four baseline models in various locations across the Greater Los Angeles (GLA), considering four different prediction horizons. Figure (b) illustrates the distribution of daily average MAPE over the whole November in 2019, with four different prediction horizons.

Figure 6 (b) as calendar heat maps, the results showcase the comparative performance across the month. Our model consistently exhibits lower daily average MAPE, demonstrating robustness in capturing temporal nuances of traffic flow patterns. Notably, it consistently outperforms others throughout the whole month, emphasizing its superior capability in handling diverse temporal dynamics inherent in real-world traffic scenarios.

Ablation Studies

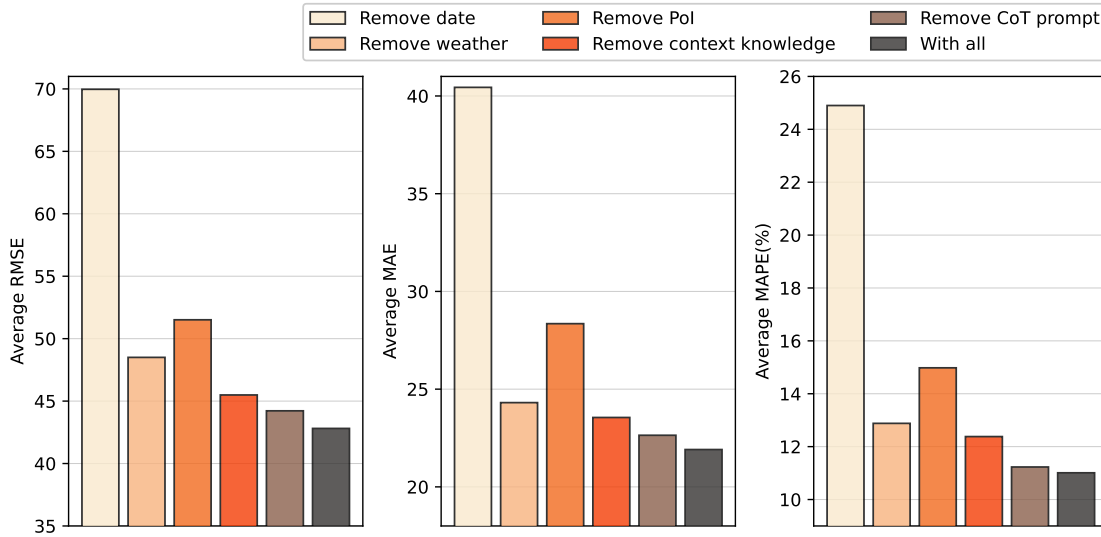


FIGURE 7: With the removal of different parts from the input prompt, the performance of our R²T-LLM decreases in different magnitudes. The results show that the date information has the greatest impact on the model’s performance, followed by PoI information and weather information.

It is worth noting that the exclusion of date information yields the worst results, showing a substantial increase in all error metrics, with RMSE of 69.97, MAE of 40.44, and MAPE of 24.90%. This indicates the crucial role of temporal context in traffic flow forecasting, which enables the model to capture periodic patterns and trends in traffic behavior. Similarly, weather conditions profoundly influence traffic dynamics, affecting factors such as road surface conditions, visibility, and driver behavior. Removal of weather information leads to a notable decrease in performance metrics, highlighting its importance in accurately modeling traffic flow. Interestingly, omitting PoIs information also led to moderate increases in prediction error. This shows that our R²T-LLM can exploit and leverage the spatial context from PoIs data which is useful in understanding traffic patterns and congestion dynamics.

In this study, we also validated the effect of prompting strategies on the model’s performance. Initially, we observed that the absence of context information led to performance degradation, indicating the importance of domain knowledge in enhancing the predictive capabilities of R²T-LLM. By leveraging insights into traffic volume, pattern characteristics, and spatial-temporal correlations, the model can better predict the changes in traffic flow dynamics, resulting in more reliable forecasts. Additionally, the CoT prompt strategy contributes to performance improvement. By incorporating insights into area attributes, predicted time slots, traffic patterns, and historical temporal trends, the model gains a more nuanced understanding of the factors influencing traffic

flow dynamics, thereby improving prediction performance.

These findings collectively emphasize the significance of incorporating comprehensive multi-modal data, particularly in a temporal and environmental context, to improve the accuracy of traffic flow predictions. While certain input components exhibit more substantial impacts than others, their synergistic integration contributes to the overall predictive capability of the model.

Generalization Studies

Model	CATraffic Zero-shot			TaxiBJ (Inflow)			TaxiBJ (Outflow)		
	RMSE	MAE	MAPE(%)	RMSE	MAE	MAPE(%)	RMSE	MAE	MAPE(%)
Llama2-7B-chat	273.02	226.64	126.00	255.00	151.57	172.60	218.44	135.39	151.96
Llama2-13B-chat	234.73	187.37	146.08	230.55	129.39	184.90	234.14	144.24	143.47
Llama2-70B-chat	222.02	168.04	122.72	205.67	123.46	136.83	209.05	125.39	139.89
GPT-3.5-turbo	168.93	135.34	74.49	150.71	95.08	196.00	150.91	94.77	195.31
GPT-4	121.02	103.32	61.85	91.86	57.05	165.40	99.05	59.50	137.21
R ² T-LLM	46.56	29.73	9.21	54.82	31.94	31.84	54.59	30.96	31.20

TABLE 2: Zero-shot performance comparison of our proposed R²T-LLM with other LLMs. We conducted tests on both the CATraffic zero-shot dataset and the TaxiBJ dataset to compare the zero-shot capabilities of different models. The results show that our model outperforms other LLMs significantly on both unseen datasets.

Large language models are well known for their excellent zero-shot capabilities. In this section, we delve into the generalization of our proposed R²T-LLM and compare it with other large language models. We conducted zero-shot experiments using two datasets: the first is our proposed CATraffic-based zero-shot dataset, and the other is the taxiBJ dataset (3). The TaxiBJ dataset comprises taxicab GPS data and meteorology data in Beijing from four time intervals within 2013-2016, focusing on the inflow/outflow prediction task. To ensure a fair comparison, we reorganized the taxiBJ dataset into the same format as our CATraffic dataset. The overall results are presented in Table 2, which indicate that our proposed model exhibits superior performance across all three tasks compared to the original Llama2 series models, as well as GPT-3.5-turbo and GPT-4. For the CATraffic zero-shot dataset, our R²T-LLM model exhibits notable improvements over the best-performing comparative model (GPT-4) by 61.53%, 71.22%, and 85.11% in RMSE, MAE, and MAPE, respectively. On the TaxiBJ dataset, our model achieves substantial performance enhancements in both inflow and outflow tasks. Compared to GPT-4, R²T-LLM shows improvements of 40.32% in RMSE, 44.01% in MAE and 80.75% in MAPE in inflow prediction task, and improvements of 44.89% in RMSE, 48.13% in MAPE and 77.26% in MAPE in outflow prediction task. These results distinctly underscore the superiority of our R²T-LLM model, and illustrate that our fine-tuned model surpasses even the state-of-the-art large language model (GPT-4) when tested on a dataset distinct from the one used for fine-tuning. This suggests that our model adeptly acquired the domain knowledge of traffic flow prediction and effectively generalized it to different scenarios.

We also provide visualization results in Figure 8, showing 12 test samples from three different sensors in four different time periods. The results highlight that our model not only captures the traffic trends of new scenarios effectively but also delivers accurate prediction values. In contrast, Llama2 series of LLMs struggle to capture the dynamic pattern of traffic flow; while GPT-3.5-turbo

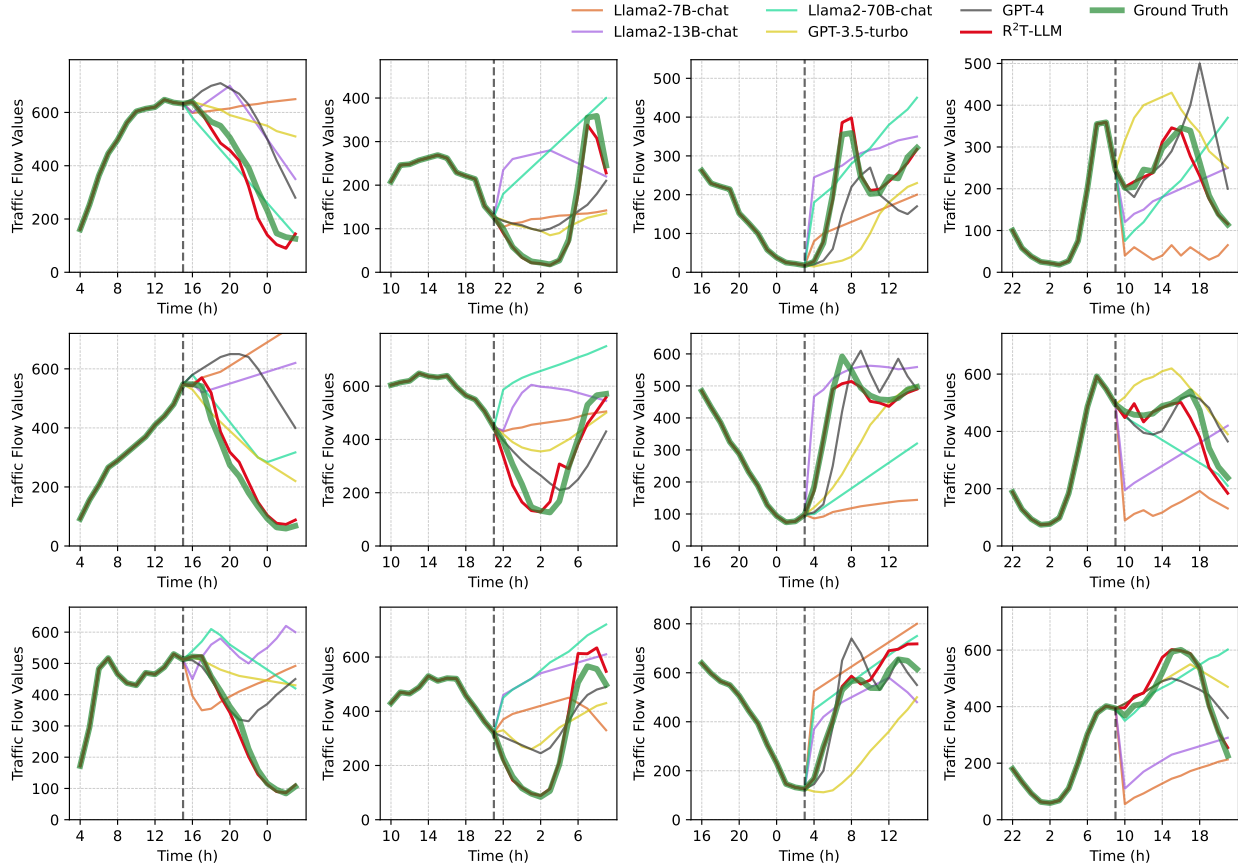


FIGURE 8: Visualization of traffic flow prediction results on CATraffic zero-shot dataset. We randomly select test samples of three sensors with four time periods and visualized the prediction results of our proposed R^2T -LLM, Llama2-chat models with three different sizes, GPT-3.5-turbo and GPT-4. The results show that our fine-tuned model performs significantly better than other LLMs.

and GPT-4 demonstrate the ability to describe some general trends in traffic, they perform inadequately in capturing nuances of variation, hindering their ability to provide accurate predictions. We attribute these discrepancies to our effective prompt design and model fine-tuning. Prompting inputs effectively describe the task context and align information from different modalities into a unified representation, while fine-tuning infuses domain knowledge into LLMs, thereby enhancing their performance in specific fields.

Responsible Studies

To illustrate the reliability and accountability of our model’s predictions, we report four cases with different prediction time slots and external factors in Table 3. In each example, the ground truths and predictions are displayed in the figure on the left (light red areas indicate the 95% confidence interval), with the corresponding explanatory texts on the right. The original result explanations are too long, so we used chatGPT to summarise them into a brief paragraph for presentation purposes. A complete output can be found in Appendix A.2 (corresponding to example (d) in Table 3).

Our proposed R^2T -LLM consistently delivers accurate traffic flow predictions across vari-

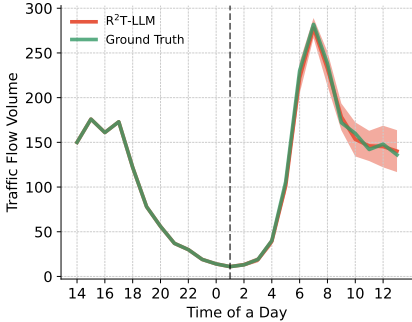
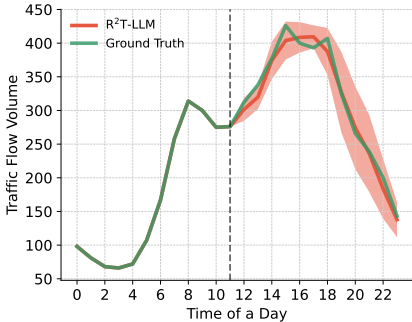
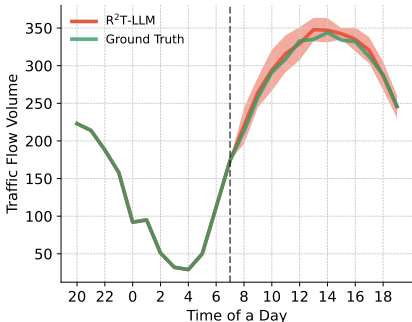
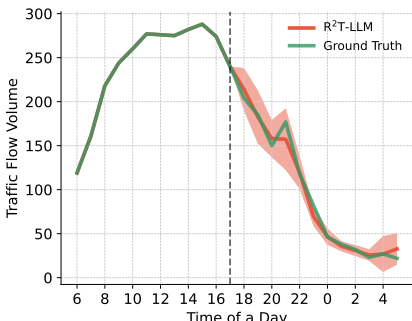
Prediction	Responsible Answer
	<p>(a): Traffic volume is expected to be low before dawn, then it is expected to increase gradually throughout the day. Since today is Wednesday, weekday patterns suggest higher traffic during rush hours and lower traffic during non-peak times. Nearby transportation areas and commercial districts will contribute to an increase in traffic volume during certain periods. Sunny weather can also contribute to increased traffic.</p>
	<p>(b): Traffic volume is expected to increase and then decrease in the next 12 hours. Sunny weather with a comfortable temperature will attract more day travelers. The onset of Sunday afternoon rush hour will further contribute to increased traffic. With no known holidays or events, historical data suggest that traffic volume will resemble previous Sundays, with a slight increase during the afternoon rush hour followed by a gradual decline at night.</p>
	<p>(c): Traffic volume is expected to steady increase in the rainy morning and then decrease in the afternoon. Activities at the morning rush hour in residential and commercial areas are likely to contribute to the initial rise. The rain might cause congestion, leading to a peak in volumes around midday. As the day progresses, the volume is expected to gradually decrease as people return home.</p>
	<p>(d): Traffic volume is expected to decrease significantly over the next 12 hours considering a rainy Christmas Day. As it is a holiday, commuter and commercial activities are minimal, leading to reduced traffic. Additionally, the rainy weather may further deter people from traveling or driving, contributing to the decline in traffic volumes. The focus on indoor celebrations and festivities is likely to keep the roads quiet at night.</p>

TABLE 3: Examples of responsible studies. We show the ground truth and our predicted result in the figure, with the 95% confidence interval represented in light red; and the generated explanations on the right, with predicted traffic trends highlighted in yellow. Since the original outputs are too long, we use ChatGPT to summarize them. A complete example can be found in Appendix A.2.

ous time periods, including weekdays, weekends, and holidays like Christmas. Notably, our model not only provides precise forecasts but also offers insightful explanations, considering a wide range of external factors. For instance, in example (a), our model predicts an initial increase followed by a decrease in traffic flow, aligning with typical weekday patterns. Moreover, in example (c), our model identifies rainy weather as an impact factor for traffic congestion, leading to a delayed peak traffic flow. Furthermore, example (d) highlights our model’s ability to factor in holiday impacts on traffic flow.

While our R²T-LLM excels in leveraging diverse external data for robust predictions, it faces challenges in capturing nuanced flow fluctuations, such as those occurring between 14-18 hours in Example 2 and 20-22 hours in Example (d). These complexities may stem from the dynamic nature of human activities and the intricacies of transportation systems. Nevertheless, although not good at capturing the full details of the traffic flow changes, our R²T-LLM provides textual rationales for its forecasts, which shows a high responsibility and reliability.

CONCLUSION AND FUTURE WORK

In conclusion, our research introduces R²T-LLM, a novel traffic prediction model designed for both responsibility and reliability. By incorporating multi-modal inputs and employing language-based representations, R²T-LLM achieves competitive performance compared to state-of-the-art models while offering insights into its predictions. R²T-LLM’s language-based framework, coupled with spatial-temporal alignment instructions, provides a transparent and adaptable approach suitable for various urban prediction tasks. In general, our work contributes to the advancement of effective and accountable traffic prediction methods, essential for informed decision-making in urban transportation planning and management.

In the future, we aim to delve into methods that enable LLMs to harness spatial information more effectively and to grasp how different sensors are related spatially. This will help models to make better predictions by considering data from nearby sensors. Moreover, further external factors can be considered, such as traffic accidents, human activities, and events, contributing to more accurate predictions. Additionally, exploring the development of LLM systems tailored for urban brains is also a very interesting but challenging topic. This entails integrating city-level data into LLMs to tackle various downstream tasks like urban planning, traffic management, and pollution control, etc. Achieving these involves the challenge of enabling LLMs to efficiently utilize city-level multi-modal data, alongside the need for substantial computational resources and exceptional engineering capabilities.

ACKNOWLEDGEMENTS

This research is funded by multiple sources, including the National Natural Science Foundation of China under Grant 52302379, the Guangzhou Basic and Applied Basic Research Projects under Grants 2023A03J0106 and 2024A04J4290, the Guangdong Province General Universities Youth Innovative Talents Project under Grant 2023KQNCX100, and the Guangzhou Municipal Science and Technology Project 2023A03J0011.

REFERENCES

1. Dimitrakopoulos, G. and P. Demestichas, Intelligent transportation systems. *IEEE Vehicular Technology Magazine*, Vol. 5, No. 1, 2010, pp. 77–84.
2. Wang, S., J. Cao, and S. Y. Philip, Deep learning for spatio-temporal data mining: A survey. *IEEE transactions on knowledge and data engineering*, Vol. 34, No. 8, 2020, pp. 3681–3700.
3. Zhang, J., Y. Zheng, and D. Qi, Deep spatio-temporal residual networks for citywide crowd flows prediction. In *Proceedings of the AAAI conference on artificial intelligence*, 2017, Vol. 31.
4. Jin, W., Y. Lin, Z. Wu, and H. Wan, Spatio-Temporal Recurrent Convolutional Networks for Citywide Short-term Crowd Flows Prediction. In *Proceedings of the 2nd International Conference on Compute and Data Analysis*, 2018.
5. Du, S., T. Li, X. Gong, and S.-J. Horng, A hybrid method for traffic flow forecasting using multimodal deep learning. *arXiv preprint arXiv:1803.02099*, 2018.
6. Ranjan, N., S. Bhandari, H. P. Zhao, H. Kim, and P. Khan, City-wide traffic congestion prediction based on CNN, LSTM and transpose CNN. *IEEE Access*, Vol. 8, 2020, pp. 81606–81620.
7. Yannis, G., A. Dragomanovits, A. Laiou, F. La Torre, L. Domenichini, T. Richter, S. Ruhl, D. Graham, and N. Karathodorou, Road traffic accident prediction modelling: a literature review. In *Proceedings of the institution of civil engineers-transport*, Thomas Telford Ltd, 2017, Vol. 170, pp. 245–254.
8. Yang, H.-F., T. S. Dillon, and Y.-P. P. Chen, Optimized Structure of the Traffic Flow Forecasting Model With a Deep Learning Approach. *IEEE Transactions on Neural Networks and Learning Systems*, 2017, p. 2371–2381.
9. Fan, Z., X. Song, T. Xia, R. Jiang, R. Shibasaki, and R. Sakuramachi, Online deep ensemble learning for predicting citywide human mobility. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, Vol. 2, No. 3, 2018, pp. 1–21.
10. Marblestone, A. H., G. Wayne, and K. P. Kording, Toward an integration of deep learning and neuroscience. *Frontiers in computational neuroscience*, Vol. 10, 2016, p. 94.
11. Gao, Q., G. Trajcevski, F. Zhou, K. Zhang, T. Zhong, and F. Zhang, Trajectory-based social circle inference. In *Proceedings of the 26th ACM SIGSPATIAL International Conference on Advances in Geographic Information Systems*, 2018, pp. 369–378.
12. Li, Y., R. Yu, C. Shahabi, and Y. Liu, Diffusion Convolutional Recurrent Neural Network: Data-Driven Traffic Forecasting. *arXiv: Learning, arXiv: Learning*, 2017.
13. Akbari Asanjan, A., T. Yang, K. Hsu, S. Sorooshian, J. Lin, and Q. Peng, Short-term precipitation forecast based on the PERSIANN system and LSTM recurrent neural networks. *Journal of Geophysical Research: Atmospheres*, Vol. 123, No. 22, 2018, pp. 12–543.
14. Dai, L. and L. Wang, Nonlinear analysis of high accuracy and reliability in traffic flow prediction. *Nonlinear Engineering*, Vol. 9, No. 1, 2020, pp. 290–298.
15. Zhou, Y., Y. Li, Q. Zhu, F. Chen, J. Shao, Y. Luo, Y. Zhang, P. Zhang, and W. Yang, A reliable traffic prediction approach for bike-sharing system by exploiting rich information with temporal link prediction strategy. *Transactions in GIS*, Vol. 23, No. 5, 2019, pp. 1125–1151.

16. Chen, Y., H. Chen, P. Ye, Y. Lv, and F.-Y. Wang, Acting as a decision maker: Traffic-condition-aware ensemble learning for traffic flow prediction. *IEEE transactions on intelligent transportation systems*, Vol. 23, No. 4, 2020, pp. 3190–3200.
17. Chang, E. Y., Examining GPT-4: Capabilities, Implications and Future Directions. In *The 10th International Conference on Computational Science and Computational Intelligence*, 2023.
18. Touvron, H., L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Barta, P. Bhargava, S. Bhosale, et al., Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
19. Jin, M., S. Wang, L. Ma, Z. Chu, J. Y. Zhang, X. Shi, P.-Y. Chen, Y. Liang, Y.-F. Li, S. Pan, et al., Time-llm: Time series forecasting by reprogramming large language models. *arXiv preprint arXiv:2310.01728*, 2023.
20. Shi, X., S. Xue, K. Wang, F. Zhou, J. Zhang, J. Zhou, C. Tan, and H. Mei, Language models can improve event prediction by few-shot abductive reasoning. *Advances in Neural Information Processing Systems*, Vol. 36, 2024.
21. Chen, Y., X. Wang, and G. Xu, Gatgpt: A pre-trained large language model with graph attention network for spatiotemporal imputation. *arXiv preprint arXiv:2311.14332*, 2023.
22. Wan, H., S. Feng, Z. Tan, H. Wang, Y. Tsvetkov, and M. Luo, DELL: Generating Reactions and Explanations for LLM-Based Misinformation Detection. *arXiv preprint arXiv:2402.10426*, 2024.
23. Liang, Y., S. Ke, J. Zhang, X. Yi, and Y. Zheng, Geoman: Multi-level attention networks for geo-sensory time series prediction. In *IJCAI*, 2018, Vol. 2018, pp. 3428–3434.
24. Graves, A. and A. Graves, Long short-term memory. *Supervised sequence labelling with recurrent neural networks*, 2012, pp. 37–45.
25. Wu, Z., S. Pan, G. Long, J. Jiang, and C. Zhang, Graph WaveNet for Deep Spatial-Temporal Graph Modeling. In *Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence*, 2019.
26. Yu, B., H. Yin, and Z. Zhu, Spatio-Temporal Graph Convolutional Networks: A Deep Learning Framework for Traffic Forecasting. In *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence*, 2018.
27. Guo, S., Y. Lin, N. Feng, C. Song, and H. Wan, Attention based spatial-temporal graph convolutional networks for traffic flow forecasting. In *Proceedings of the AAAI conference on artificial intelligence*, 2019, Vol. 33, pp. 922–929.
28. Vaswani, A., N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, Attention is all you need. *Advances in neural information processing systems*, Vol. 30, 2017.
29. Yu, C., X. Ma, J. Ren, H. Zhao, and S. Yi, Spatio-temporal graph transformer networks for pedestrian trajectory prediction. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XII 16*, Springer, 2020, pp. 507–523.
30. Cai, L., K. Janowicz, G. Mai, B. Yan, and R. Zhu, Traffic transformer: Capturing the continuity and periodicity of time series for traffic forecasting. *Transactions in GIS*, Vol. 24, No. 3, 2020, pp. 736–755.

31. Xu, M., W. Dai, C. Liu, X. Gao, W. Lin, G.-J. Qi, and H. Xiong, Spatial-Temporal Transformer Networks for Traffic Flow Forecasting. *arXiv: Signal Processing, arXiv: Signal Processing*, 2020.
32. Jiang, J., C. Han, W. X. Zhao, and J. Wang, Pdformer: Propagation delay-aware dynamic long-range transformer for traffic flow prediction. In *Proceedings of the AAAI conference on artificial intelligence*, 2023, Vol. 37, pp. 4365–4373.
33. Barredo-Arrieta, A., I. Laña, and J. Del Ser, What lies beneath: A note on the explainability of black-box machine learning models for road traffic forecasting. In *2019 IEEE Intelligent Transportation Systems Conference (ITSC)*, IEEE, 2019, pp. 2232–2237.
34. Zhang, L., K. Fu, T. Ji, and C.-T. Lu, Granger causal inference for interpretable traffic prediction. In *2022 IEEE 25th International Conference on Intelligent Transportation Systems (ITSC)*, IEEE, 2022, pp. 1645–1651.
35. Yan, J. and H. Wang, Self-interpretable time series prediction with counterfactual explanations. In *International Conference on Machine Learning*, PMLR, 2023, pp. 39110–39125.
36. Ates, E., B. Aksar, V. J. Leung, and A. K. Coskun, Counterfactual explanations for multivariate time series. In *2021 international conference on applied artificial intelligence (ICAPAI)*, IEEE, 2021, pp. 1–8.
37. Huang, S., S. Mamidanna, S. Jangam, Y. Zhou, and L. H. Gilpin, Can large language models explain themselves? a study of llm-generated self-explanations. *arXiv preprint arXiv:2310.11207*, 2023.
38. Peng, M., X. Guo, X. Chen, M. Zhu, K. Chen, X. Wang, Y. Wang, et al., LC-LLM: Explainable Lane-Change Intention and Trajectory Predictions with Large Language Models. *arXiv preprint arXiv:2403.18344*, 2024.
39. Gruver, N., M. Finzi, S. Qiu, and A. G. Wilson, Large language models are zero-shot time series forecasters. *Advances in Neural Information Processing Systems*, Vol. 36, 2024.
40. Ray, P. P., ChatGPT: A comprehensive review on background, applications, key challenges, bias, ethics, limitations and future scope. *Internet of Things and Cyber-Physical Systems*, 2023.
41. Liu, S., H. Cheng, H. Liu, H. Zhang, F. Li, T. Ren, X. Zou, J. Yang, H. Su, J. Zhu, et al., Llava-plus: Learning to use tools for creating multimodal agents. *arXiv preprint arXiv:2311.05437*, 2023.
42. Thirunavukarasu, A. J., D. S. J. Ting, K. Elangovan, L. Gutierrez, T. F. Tan, and D. S. W. Ting, Large language models in medicine. *Nature medicine*, Vol. 29, No. 8, 2023, pp. 1930–1940.
43. Da, L., M. Gao, H. Mei, and H. Wei, Prompt to Transfer: Sim-to-Real Transfer for Traffic Signal Control with Prompt Learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024, Vol. 38, pp. 82–90.
44. Wu, S., O. Irsoy, S. Lu, V. Dabrovolski, M. Dredze, S. Gehrmann, P. Kambadur, D. Rosenberg, and G. Mann, Bloomberggpt: A large language model for finance. *arXiv preprint arXiv:2303.17564*, 2023.
45. Hu, E. J., Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations*, 2022.

46. Zhu, D., J. Chen, X. Shen, X. Li, and M. Elhoseiny, Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.
47. Wei, J., X. Wang, D. Schuurmans, M. Bosma, F. Xia, E. Chi, Q. V. Le, D. Zhou, et al., Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, Vol. 35, 2022, pp. 24824–24837.
48. Kojima, T., S. S. Gu, M. Reid, Y. Matsuo, and Y. Iwasawa, Large language models are zero-shot reasoners. *Advances in neural information processing systems*, Vol. 35, 2022, pp. 22199–22213.
49. Radford, A., J. Wu, R. Child, D. Luan, D. Amodei, I. Sutskever, et al., Language models are unsupervised multitask learners. *OpenAI blog*, Vol. 1, No. 8, 2019, p. 9.
50. Liu, X., Y. Xia, Y. Liang, J. Hu, Y. Wang, L. Bai, C. Huang, Z. Liu, B. Hooi, and R. Zimmermann, LargeST: A Benchmark Dataset for Large-Scale Traffic Forecasting. In *Advances in Neural Information Processing Systems*, 2023.
51. Li, Y., R. Yu, C. Shahabi, and Y. Liu, Diffusion Convolutional Recurrent Neural Network: Data-Driven Traffic Forecasting. *arXiv: Learning, arXiv: Learning*, 2017.
52. Bai, L., L. Yao, C. Li, X. Wang, and C. Wang, Adaptive graph convolutional recurrent network for traffic forecasting. *Advances in neural information processing systems*, Vol. 33, 2020, pp. 17804–17815.
53. Fang, Z., Q. Long, G. Song, and K. Xie, Spatial-Temporal Graph ODE Networks for Traffic Flow Forecasting. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*, 2021.
54. Lan, S., Y. Ma, W. Huang, W. Wang, H. Yang, and P. Li, Dstagnn: Dynamic spatial-temporal aware graph neural network for traffic flow forecasting. In *International conference on machine learning*, PMLR, 2022, pp. 11906–11917.

APPENDIX

Prompt Design

The prompt for R²T-LLM in traffic flow prediction is carefully designed, as shown in Table 4. The complete prompt contains both a system prompt and a user input prompt. The system prompt sets the role of the LLM, and it also contains a context knowledge part that provides additional background information in traffic flow prediction, as well as the CoT prompt that guides LLMs through the human reasoning process. The system prompt remains the same throughout the dataset, and the change parts are the user input prompt as well as the corresponding ground truth.

Explanatory Example

A complete example of interpretative output is given in Table 5. This example shows the traffic flow prediction in the next 12 hours at 5 PM on Christmas Day 2019. By adding explanatory demand instructions to the original prompt (bold text in *Input Prompt* of Table 5), R²T-LLM can output both the prediction results as well as the explanatory text. It can be found that our model is capable of adjusting the traffic flow prediction strategy by taking into account holidays and the impact of weather on human activities, which shows that our model is highly reliable and accountable.

System Prompt:

You are an expert traffic volume prediction model, that can predict the future volume values according to spatial temporal information. We want you to perform the traffic volume prediction task, considering the nearby environment and historical traffic volume data.

Context knowledge:

Context knowledge you could consider:

- Traffic volume: the number of vehicles passing a specific region in an hour.
- Traffic pattern characteristic: Traffic flow patterns in a city are influenced by various area attributes. Also, traffic volume has a periodic daily and weekly pattern.
- Spatial temporal factors correlation: Traffic flow in an area will be affected by its nearby infrastructures, during specific periods for different areas. You should think about how the volume will change in a specific area, during a specific time. For example,
 - Airports, and train stations - increased volume on weekends and holidays.
 - Residential areas - more activities during morning and evening rush hours.
 - Commercial areas - busy during lunch hours and after-work periods.
 - Educational locations - high volume during peak hours near schools.

Chain of Thought:

Think carefully about the following questions about how spatial-temporal factors affect traffic flow.

- What is the attribute of this area and what is the predicted time zone located in special periods (like rush hours, weekdays, weekends, and holidays)?
- What are the traffic patterns of this area, and what is the change in different time slots?
- What is the historical temporal trend according to temporal information, considering the weekdays, around holidays?

Input Prompt:

Some important information is listed as follows:

- Location: District 3 in Yolo, California, USA, along the US50-E freeway, lane 4, direction of eastbound.
- Today's weather: Sunny. The temperature is 6.0°C and the visibility is 10.0 miles.
- Region information: including transportation areas, commercial areas, and educational areas within a range of 5 km.
- Current time: 3 PM, 2018-2-19, Monday, Washington's Birthday.
- Traffic volume data in the past 12 hours were 19, 44, 98, 150, 156, 178, 208, 246, 248, 257, 263 and 269, respectively.

According to the above information and careful reasoning, please predict traffic volumes in the next 12 hours (from 4 PM to 3 AM). Format the final answer in a single line as a JSON dictionary like: Traffic volume data in the next 12 hours: [V1, V2, V3, V4, V5, V6, V7, V8, V9, V10, V11, V12].

Ground Truth:

Traffic volume data in the next 12 hours: [262, 229, 221, 214, 152, 127, 100, 58, 38, 25, 22, 18].

TABLE 4: Details of our designed prompt in R²T-LLM for traffic flow prediction task, including system prompt, input prompt, as well as the ground truth.

System Prompt: (The same as in Table 4) ...

Input Prompt:

Some important information is listed as follows:

- District 3 in Yolo, California, USA, along the US50-W freeway, lane 3, direction of westbound.
- Today's weather: Rain. The temperature is 8.1°C and the visibility is 9.7 miles.
- Region information: including transportation areas, commercial areas and educational areas within a range of 5 km.
- Current time: 5 PM, 2019-12-25, Wednesday, Christmas Day.
- Traffic volume data in the past 12 hours were 119, 161, 218, 244, 260, 277, 276, 275, 282, 288, 274 and 240, respectively.

According to the above information and careful reasoning, please predict traffic volumes in the next 12 hours (from 2 AM to 1 PM) **and explain it**. Format the final answer in a single line as a JSON dictionary like: {Traffic volume data in the next 12 hours: [V1, V2, V3, V4, V5, V6, V7, V8, V9, V10, V11, V12], **Explanation: xxx**}. **Please think step by step.**

R²T-LLM's Response:

{"Traffic volume data in the next 12 hours": [214, 183, 158, 157, 119, 69, 47, 36, 31, 26, 27, 33],

"Explanation": I will provide a step-by-step explanation for predicting traffic volumes in the next 12 hours based on the given information.

1. Time and Date: It is 5 PM on a Wednesday, December 25th, 2019, which is Christmas Day, with rainy weather and good visibility.
 2. Historical Traffic Volume: In the past 12 hours, the traffic volumes were: [119, 161, 218, 244, 260, 277, 276, 275, 282, 288, 274, 240].
 3. Current Situation: Given the holiday, Christmas Day, and the rainy weather, traffic patterns may differ from regular weekdays.
 4. Christmas Day Factor: On holidays, traffic volume might be lower due to decreased commuter and commercial activities. People may stay indoors for celebrations.
 5. Rain Impact: The rain could further reduce traffic volume as people may prefer to avoid driving in adverse weather conditions.
 6. Traffic Trend Prediction:
 - The evening hours (6 PM to 9 PM): Traffic volume is likely to be significantly lower than usual as people prioritize holiday celebrations.
 - Late-night hours (10 PM to 5 AM): Traffic volume may remain low throughout the night. }
-

ChatGPT Summary:

Considering the current time at 5 PM on a rainy Christmas Day, traffic volume is expected to decrease significantly over the next 12 hours. As it is a holiday, commuter and commercial activities are minimal, leading to reduced traffic. Additionally, the rainy weather may further deter people from traveling or driving, contributing to the decline in traffic volumes. The focus on indoor celebrations and festivities is likely to keep the roads quiet throughout the night.

TABLE 5: An example of the complete response with explanatory output of our proposed R²T-LLM. This example corresponds to the example (d) in Table 3.