

Face-voice Association in Multilingual Environments (FAME) Challenge 2024 Evaluation Plan

Muhammad Saad Saeed¹, Shah Nawaz², Muhammad Salman Tahir¹, Rohan Kumar Das³, Muhammad Zaigham Zaheer⁴, Marta Moscati², Markus Schedl^{2,6}, Muhammad Haris Khan⁴, Karthik Nandakumar⁴, Muhammad Haroon Yousaf¹

¹Swarm Robotics Lab NCRA, University of Engineering and Technology Taxila,

²Institute of Computational Perception, Johannes Kepler University Linz, Austria

³Fortemedia Singapore, Singapore,

⁴Mohamed bin Zayed University of Artificial Intelligence

⁵Human-centered AI Group, AI Lab, Linz Institute of Technology, Austria

{mavceleb@gmail.com}

Abstract—The advancements of technology have led to the use of multimodal systems in various real-world applications. Among them, the audio-visual systems are one of the widely used multimodal systems. In the recent years, associating face and voice of a person has gained attention due to presence of unique correlation between them. The Face-voice Association in Multilingual Environments (FAME) Challenge 2024 focuses on exploring face-voice association under a unique condition of multilingual scenario. This condition is inspired from the fact that half of the world’s population is bilingual and most often people communicate under multilingual scenario. The challenge uses a dataset namely, Multilingual Audio-Visual (MAV-Celeb) for exploring face-voice association in multilingual environments. This report provides the details of the challenge, dataset, baselines and task details for the FAME Challenge.

I. INTRODUCTION

The face and voice of a person have unique characteristics and they are well used as biometric measures for person authentication either as a unimodal or multimodal [1]–[3]. A strong correlation has been found between face and voice of a person, which has attracted significant research interest [4]–[10], [10]. Though previous works have established association between faces and voices, none of these approaches investigated the effect of multiple languages on this task. As half of the population of world is bilingual and we are more often communicating in multilingual scenarios [11], therefore, it is essential to investigate the effect of language for associating faces with the voices. Thus, the goal of the FAME challenge 2024 is to analyze the impact of multiple languages on face-voice association using cross-modal verification task. Fig. 1 provides an overview of the challenge.

In response, our prior research [12] introduced a Multilingual Audio-Visual (MAV-Celeb) dataset to analyze the impact of language on face-voice association; it comprises of video and audio recordings of different celebrities speaking more than one language. For example, a celebrity named ‘Imran Khan’ has audio information in Urdu and English languages.

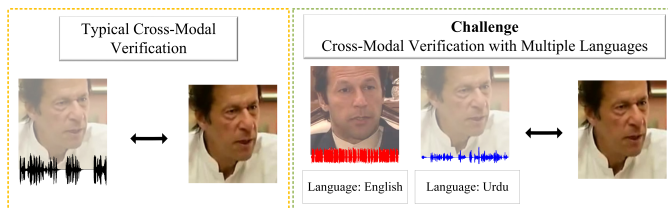


Fig. 1: (Left) Standard Face-voice association is established with a cross-modal verification task. (Right) The FAME challenge 2024 extends the verification task to analyze the impact of multiple of languages.

II. CHALLENGE OBJECTIVES

The FAME Challenge 2024 is planned with the primary objective to provide a common platform to academic and industrial researchers to develop and explore the impact of languages in face-voice association, which can be useful for various downstream tasks. The research conducted under this challenge is expected to spearhead the face-voice association task in one unique direction from the perspective of real-world scenarios. The challenge focuses on exploring the following, but not limited to:

- To study the influence of language information in face-voice association
- To explore language specific knowledge in face-voice association
- To explore language independent face-voice association models
- Any other related information with respect to language mismatch in face-voice association

III. DATASET

MAV-Celeb dataset provide data of 154 celebrities in 3 languages (English, Hindi, Urdu). These three languages have been selected because of several factors: i) They represent



Fig. 2: Audio-visual samples selected from MAV-Celeb dataset. The visual data contains various variations such as pose, lighting condition and motion. (Left) It contains information of celebrities speaking English and the (Right) block presents data of the same celebrity in Hindi.

approximately 1.4 Billion bilingual/trilingual people; ii) The population is highly proficient in two or more languages; iii) There is a relevant corpus of different media that can be extracted from available online repositories (e.g. YouTube). The collected videos cover a wide range of unconstrained, challenging multi-speaker environment including political debates, press conferences, outdoor interviews, quiet studio interviews, drama and movie clips. Note that the visual data spans over a vast range of variations including poses, motion blur, background clutter, video quality, occlusions and lighting conditions. Moreover, videos are degraded with real-world noise like background chatter, music, overlapping speech and compression artifacts. Fig. 2 shows some audio-visual samples while Table I shows statistics of the dataset. The dataset contains 2 splits English–Urdu (V1-EU) and English–Hindi (V2-EH) to analyze performance measure across multiple languages. Fig. 3 shows the file structure of both splits. The pipeline followed in creating the dataset is available in our prior work [12].

TABLE I: Summary of MAV-Celeb dataset

Dataset	E/U/V1-EU	E/H/V2-EH
# of Celebrities	70	84
# of male celebrities	43	56
# of female celebrities	27	28
# of videos	402/555/957	646/484/1130
# of hours	30/54/84	51/33/84
# of utterances	6850/12706/19556	12579/8136/20715
Avg # of videos/celebrity	6/8/14	8/6/14
Avg # of utterances/celebrity	98/182/280	150/97/247
Avg length of utterance	15.8/15.3/15.6	14.6/14.6/14.6

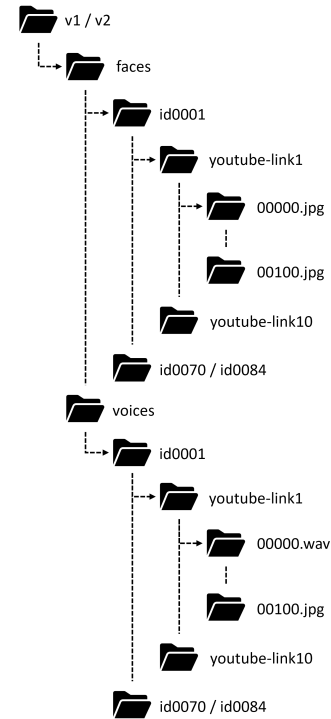


Fig. 3: MAV-Celeb file structure.

IV. CHALLENGE SETUP AND BASELINE

Challenge setup. The MAV-Celeb dataset is divided into train and test splits consisting of disjoint identities from the same language typically known as unseen-unheard configuration [13]. Fig. 1 shows evaluation protocol at train and test time. At test time, the network is evaluated on a *heard* and completely *unheard* language on cross-modal verification task. The dataset splits V1-EU, V2-EH contains 64–6, 78–6 identities for train and test respectively. V2-EH split will be use in the progress phase. While, the final evaluation will be carried out in on test set of V1-EU. Each line from test file in V1 and V2 has the following format.

- ysuvkz41 voices/English/00000.wav
faces/English/00000.jpg
- tog3zj45 voices/English/00001.wav
faces/English/00001.jpg
- ky5xfj1d voices/English/00002.wav
faces/English/00002.jpg
- yx4nfa35 voices/English/01062.wav
faces/English/01062.jpg
- bowsaf5e voices/English/01063.wav
faces/English/01063.jpg

MAV-Celeb dataset is publicly available. We provided features from state-of-the-art methods representing faces and voices. Moreover, we created FAME Challenge website for additional information on the task.

Evaluation Metric. We are considering equal error rate (EER) as the metric for evaluating the challenge performance. We expect the challenge participants to submit a output score

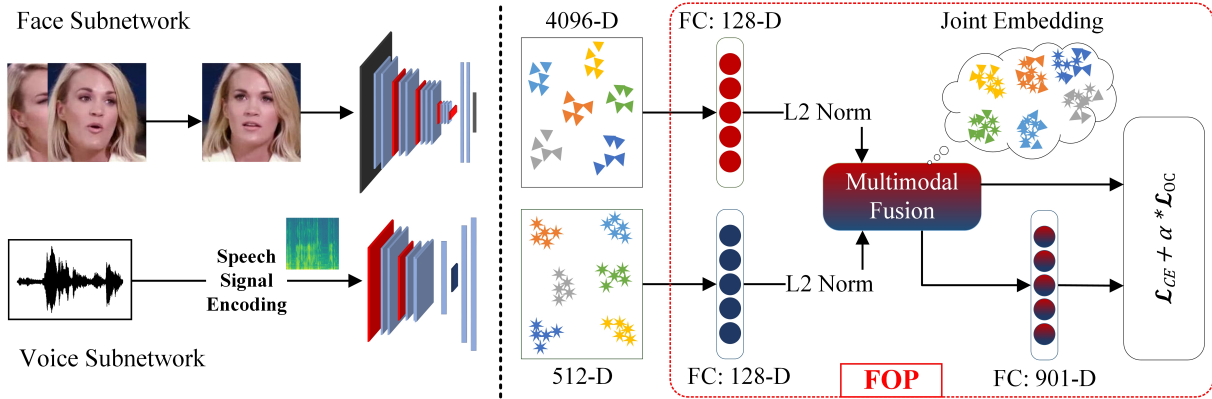


Fig. 4: Overall architecture of our baseline method. Fundamentally, it is a two-stream pipeline which generates face and voice embeddings. We propose a light-weight, plug-and-play mechanism, dubbed as fusion and orthogonal projection (FOP) (shown in dotted red box).

TABLE II: Cross-modal verification between faces and voices across multiple language on various test configurations of MAV-Celeb dataset. (EER: lower is better)

V2-EH				
Method	Configuration	Eng. test (EER)	Hindi test (EER)	Overall score (EER)
FOP [8]	Eng. train	20.8	24.0	22.0
	Hindi train	24.0	19.3	
V1-EU				
		Eng. test (EER)	Urdu test (EER)	Overall score (EER)
FOP [8]	Eng. train	29.3	37.9	33.4
	Urdu train	40.4	25.8	

file for every test pairs to indicate how confident the system believes to have a match between the face and voice or in other words, the face and voice belongs to the same person. The higher the score is, the larger is the confidence of being the face and voice from the same person. In real-world applications, people may set a threshold to determine the if the pair belongs to same or different person as binary output. With the threshold higher, the false acceptance rate (FAR) will become lower, and the false rejection rate (FRR) will become higher. The EER is that optimal point when both the errors FAR and FRR are equal. Therefore, EER becomes suitable to evaluate the performance of systems than the conventional accuracy since it independent of the threshold. Finally, the lower the EER it can characterize a better system.

Baseline method. The baseline method employ a two-stream pipeline to obtain the respective embeddings of both face and voice inputs. The first stream corresponds to a pre-trained convolutional neural network (CNN) on face modality [14]. We take the penultimate layer’s output of this CNN as the feature embeddings for an input face image. Likewise, the second stream is a pre-trained audio encoding network that outputs a feature embedding for an input audio signal (typically a short-term spectrogram) [15]. The baseline method

exploits complementary cues from both modality embeddings to form enriched fused embeddings and imposes orthogonal constraints on them for learning discriminative joint face-voice embeddings, as shown in Fig 4. More information is available in our prior work [8] and [GitHub repository](#).

Baseline results. Table II provides the baseline face-voice association results with the impact of multiple languages on both splits of MAV-Celeb. The FAME challenge 2024 encourages participants to explore novel ideas to improve performance on heard and unheard languages.

V. RULES FOR SYSTEM DEVELOPMENT

- A pretrained model on heard language is allowed.
- A pretrained model on unheard language is not allowed. The evaluation follows unheard-unseen and completely *unheard* protocol. Each celebrity in the split has audio information in two languages; the model will be trained on one language (say Hindi) and then tested on heard language (Hindi) and completely *unheard* language (English).
- The participants are required to submit a 2 page system description in the ACM template to the challenge organizers. Teams without system description will be disqualified from the challenge.

VI. REGISTRATION PROCESS

The following Google Form to be used by participating teams for registration of their respective teams in the challenge. [Registration form](#)

VII. SUBMISSION OF RESULTS

Within the directory containing the submission files, use zip archive.zip *.txt and do not zip the folder. Files should be named as:

- sub_score_English_heard.txt
- sub_score_English_unheard.txt
- sub_score_Urdu_heard.txt
- sub_score_Urdu_unheard.txt

TABLE III: Configuration to analyze the impact of multiple languages on face-voice association with nomenclature.

V2-EH		
Configuration	Eng. test	Hindi test
Eng. train	sub_score_English_heard.txt	sub_score_Hindi_unheard.txt
Hindi train	sub_score_English_unheard.txt	sub_score_Hindi_heard.txt
V1-EU		
Configuration	Eng. test	Urdu test
Eng. train	sub_score_English_heard.txt	sub_score_Urdu_unheard.txt
Urdu train	sub_score_English_unheard.txt	sub_score_Urdu_heard.txt

Moreover, Table III provides nomenclature of submission files. For each file, we have kept the ground truth for fair evaluation during FAME challenge. Participants are expected to compute and submit text files including the id and L2 scores in the following format:

- ysuvkz41 0.9988
- tog3zj45 0.1146
- ky5xfj1d 0.6514
- yx4nfa35 1.5321
- bowsaf5e 1.6578

Each file is submitted through [Codalab](#). In the progress phase, each team will have 100 submissions with maximum 10 per day. While, we will overall 5 submission in the evaluation phase. The overall score will be computed as:

$$\text{Overall Score} = (\text{Sum of all EERs})/4 \quad (1)$$

VIII. PAPER SUBMISSION

The FAME 2024 challenge is one of the Grand Challenges in ACM Multimedia 2024. The participants of the challenge are invited to grand challenge papers to ACM Multimedia following the official website.

IX. IMPORTANT DATES

Tentative timeline of the challenge following ACM Grand Challenge submission:

- Registration Period: 15 April-1 June 2024
- Progress Phase: 15 April- 14 June 2024
- Evaluation Phase: 15 June- 21 June 2024
- Challenge Results: 27 June 2024
- Submission of System Descriptions: 30 June 2024
- ACM Grand Challenge Paper Submission: 24 July 2024

REFERENCES

- [1] A.K. Jain, A. Ross, and S. Prabhakar, "An introduction to biometric recognition," *IEEE Transactions on Circuits and Systems for Video Technology*, vol. 14, no. 1, pp. 4–20, 2004.
- [2] Arun Ross and Anil K. Jain, "Multimodal biometrics: An overview," in *12th European Signal Processing Conference 2004*, 2004, pp. 1221–1224.
- [3] Saqlain Hussain Shah, Muhammad Saad Saeed, Shah Nawaz, and Muhammad Haroon Yousaf, "Speaker recognition in realistic scenario using multimodal data," *arXiv preprint arXiv:2302.13033*, 2023.
- [4] Miyuki Kamachi, Harold Hill, Karen Lander, and Eric Vatikiotis-Bateson, "'putting the face to the voice': Matching identity across modality," *Current Biology*, vol. 13, no. 19, pp. 1709–1714, 2003.
- [5] Arsha Nagrani, Samuel Albanie, and Andrew Zisserman, "Seeing voices and hearing faces: Cross-modal biometric matching," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 8427–8436.
- [6] Shota Horiguchi, Naoyuki Kanda, and Kenji Nagamatsu, "Face-voice matching using cross-modal embeddings," in *ACM Multimedia Conference on Multimedia Conference 2018*, Susanne Boll, Kyoung Mu Lee, Jiebo Luo, Wenwu Zhu, Hyeran Byun, Chang Wen Chen, Rainer Lienhart, and Tao Mei, Eds. 2018, pp. 1011–1019, ACM.
- [7] Ruijie Tao, Rohan Kumar Das, and Haizhou Li, "Audio-Visual Speaker Recognition with a Cross-Modal Discriminative Network," in *Proc. Interspeech 2020*, 2020, pp. 2242–2246.
- [8] Muhammad Saad Saeed, Muhammad Haris Khan, Shah Nawaz, Muhammad Haroon Yousaf, and Alessio Del Bue, "Fusion and orthogonal projection for improved face-voice association," in *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2022, pp. 7057–7061.
- [9] Shah Nawaz, Muhammad Kamran Janjua, Ignazio Gallo, Arif Mahmood, and Alessandro Calefati, "Deep latent space learning for cross-modal mapping of audio and visual signals," in *2019 Digital Image Computing: Techniques and Applications (DICTA)*. IEEE, 2019, pp. 1–7.
- [10] Muhammad Saad Saeed, Shah Nawaz, Muhammad Haris Khan, Muhammad Zaigham Zaheer, Karthik Nandakumar, Muhammad Haroon Yousaf, and Arif Mahmood, "Single-branch network for multimodal training," in *ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2023, pp. 1–5.
- [11] Jay Mathews, "Half of the world is bilingual. What's our problem?," www.washingtonpost.com/local/education/half-the-world-is-bilingual-whats-our-problem/2019/04/24/1c2b0cc2-6625-11e9-a1b6-b29b90efa879_story/, 2019, [Online; accessed 16-April-2021].
- [12] Shah Nawaz, Muhammad Saad Saeed, Pietro Morerio, Arif Mahmood, Ignazio Gallo, Muhammad Haroon Yousaf, and Alessio Del Bue, "Cross-modal speaker verification and recognition: A multilingual perspective," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 1682–1691.
- [13] Arsha Nagrani, Samuel Albanie, and Andrew Zisserman, "Learnable pins: Cross-modal embeddings for person identity," in *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 71–88.
- [14] Omkar M Parkhi, Andrea Vedaldi, and Andrew Zisserman, "Deep face recognition," 2015.
- [15] Weidi Xie, Arsha Nagrani, Joon Son Chung, and Andrew Zisserman, "Utterance-level aggregation for speaker recognition in the wild," in *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2019, pp. 5791–5795.