


# Graphical Abstract

## Low-Cost Language Models: Survey and Performance Evaluation on Python Code Generation

Jessica López Espejel, Mahaman Sanoussi Yahaya Alassan, Merieme Bouhandi, Walid Dahhane, El Hassane Ettifouri

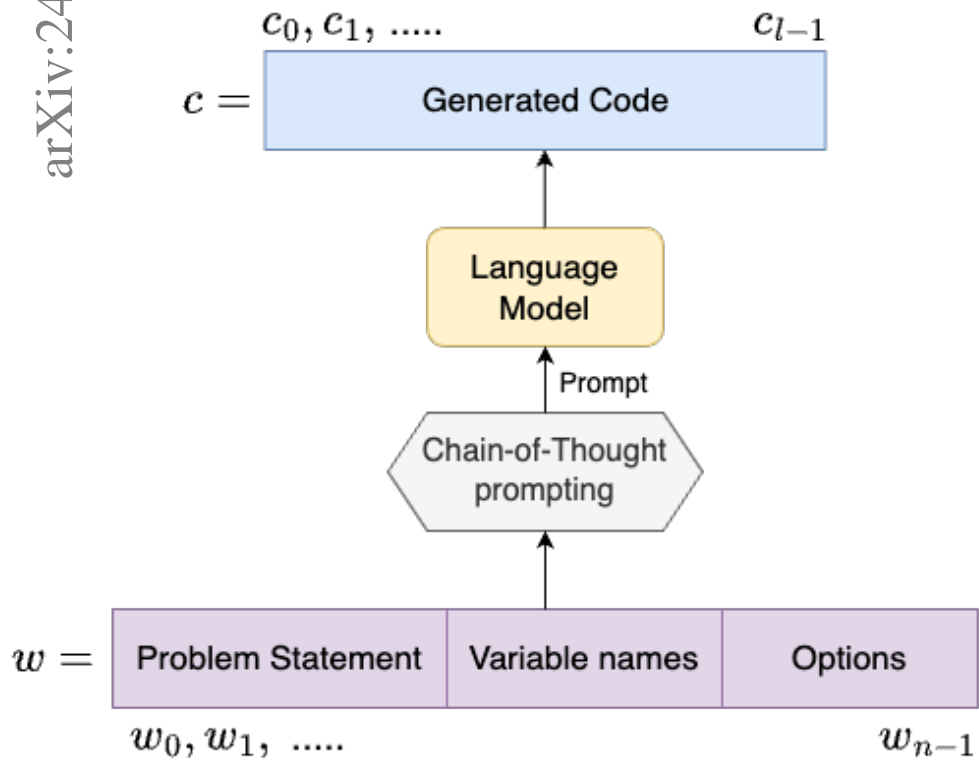

## Highlights

### **Low-Cost Language Models: Survey and Performance Evaluation on Python Code Generation**

Jessica López Espejel, Mahaman Sanoussi Yahaya Alassan, Merieme Bouhandi, Walid Dahhane, El Hassane Ettifouri

- CPU-friendly models achieve competitive scores compared to advanced chatbot models like ChatGPT-3.5, ChatGPT-4, and Gemini, which require significant GPU resources.
- Some models, such as dolphin-2.6-mistral-7b, excel in generating Python code but lag in meeting the required output formats. Often, even if the generated code is correct, these models are penalized for not returning the wanted options from the input prompt.
- In contrast, models like mistral demonstrate consistent performance in understanding prompts and generating code, leading to superior results on our dataset. However, they perform worse on HumanEval and EvalPlus datasets.
- Remarkably, llama.cpp project has achieved competitive outcomes using standard computers, a development that seemed very unlikely just a few months ago. This progress highlights the feasibility of running sophisticated language models on CPUs today.

# Low-Cost Language Models: Survey and Performance Evaluation on Python Code Generation

Jessica López Espejel<sup>a</sup>, Mahaman Sanoussi Yahaya Alassan<sup>a</sup>, Merieme Bouhandi<sup>a</sup>, Walid Dahhane<sup>a</sup>, El Hassane Ettifouri<sup>a</sup>

<sup>a</sup>*Novelis Research and Innovation Lab, 40 Av. des Terroirs de France, Paris, 75012, , France*

---

## Abstract

Large Language Models (LLMs) have become the go-to solution for many Natural Language Processing (NLP) tasks due to their ability to tackle various problems and produce high-quality results. Specifically, they are increasingly used to automatically generate code, easing the burden on developers by handling repetitive tasks. However, this improvement in quality has led to high computational and memory demands, making LLMs inaccessible to users with limited resources. In this paper, we focus on Central Processing Unit (CPU)-compatible models and conduct a thorough semi-manual evaluation of their strengths and weaknesses in generating Python code. We enhance their performance by introducing a Chain-of-Thought prompt that guides the model in problem-solving. Additionally, we propose a dataset of 60 programming problems with varying difficulty levels for evaluation purposes. Our assessment also includes testing these models on two state-of-the-art datasets: HumanEval and EvalPlus. We commit to sharing our dataset and experimental results publicly to ensure transparency.

*Keywords:* Python Code Generation, Natural Language Processing, Large Language Models, Low-Cost models, Chain-of-Thought Prompting

*Preprint submitted to Engineering Applications of Artificial Intelligence April 18, 2024*

---

## 1. Introduction

In recent years, automatic code generation has gained importance in the Natural Language Processing (NLP) domain, because it automates the programming tasks, especially the most repetitive ones (Ahmad et al., 2021). Particularly, Python code generation has garnered extensive attention in programming language studies for being one of the top three most used languages worldwide (Coursera, 2023; Vailshery, 2024). In parallel, Large Language Models (LLMs) have made significant strides in NLP tasks (OpenIA, 2022, 2023; Manyika, 2023), making them the go-to solution for many application domains including Python code generation. Despite their mind-blowing performance, several existing LLMs are closed-source or require powerful GPUs for inference, hindering accessibility and cost challenges, especially for individuals and small institutions. In addition, when they are freely accessible, there is a risk of privacy leakage (Wu et al., 2023).

To address these issues, research community has focused on models with fewer parameters. For example, while large-scale models like GPT-3 (Brown et al., 2020), PALM (Chowdhery et al., 2022), and ChatGPT-4 (OpenIA, 2023) boast 175B, 540B, and 1.7T parameters respectively, smaller models such as Mistral (Jiang et al., 2023) and LLaMa (Touvron et al., 2023a,b) demonstrate competitive or superior performance with only 7B parameters.

In addition to proposing smaller architectures, the community showed also interest in quantization techniques to accelerate models inference. One of the most popular quantization techniques are GPTQ (Frantar et al., 2023) and AWQ (Lin et al., 2023), which compress LLMs while preserving most of

their accuracy on downstream tasks. Unfortunately, these two algorithms are not optimized for CPU. For this reason, we focus on GGUF (GPT-Generated Unified Format) (Gerganov, 2024), an advanced binary file format for efficient storage and inference with GGML. The latter is a tensor library written in C/C++ which was designed to be used in conjunction with the llama.cpp library (Gerganov, 2023), to run quantized LLMs on CPUs.

In this paper, we evaluate the performance of CPU-friendly open-source models for Python code generation from Natural Language (NL). For this, we propose a new dataset for Python code generation, made of 60 programming problems crafted using GPT-3.5-Turbo API. We design it in such a way that the input text consists of three keywords: problem, variables, and options. The problem describes the desired code function, variables specify names of variables to use, and options define return values for conditional statements. There are three levels of difficulty in the dataset (easy, intermediate, challenging). Problems range from basic tasks (e.g., even/odd number check) to complex ones requiring problem understanding, background knowledge (e.g., math), and code structure creation. For sake of completeness, we also provide results on two state-of-the-art datasets: HumanEval (Chen et al., 2021), and EvalPlus (Liu et al., 2023b).

Furthermore, we improve the performance of these models by proposing a Chain-of-Thought (CoT) (Wei et al., 2022b) prompt that specifically guides the model into the problem solving. The prompt specifies to the model its role, the keywords it needs to focus on, and describes the target task. Then, a single example is provided to validate the process (one-shot inference). Finally, the prompt mentions that the goal is to have only one solving function,

without any additional explanations or comments.

Our main contributions are:

- We propose a Python code generation dataset composed of 60 programming problems with three levels of difficulty. Each programming sample in our dataset is expressed as a problem, variables, and options (Section 4).
- We introduce a carefully engineered prompt designed to enhance the performance of the evaluated models, drawing on insights from state-of-the-art practices (Section 5).
- We conducted an extensive semi-manual evaluation of the Python coding abilities of multiple CPU-friendly models from the state of the art. We used for evaluation our proposed dataset, HumanEval (Chen et al., 2021), and EvalPlus (Liu et al., 2023b). Here, we propose a quality-assessment prompt that is used to guide a GPT-3.5-Turbo (OpenAI, 2022) to evaluate the CPU-friendly models, then we manually correct the mistakes done by the GPT model (Sections 7 and 8).
- We make public our dataset and the set of conducted experiments to facilitate future research.

The rest of the paper is organized as follows: in Section 2, we present the related work. Section 3 describes the problem formulation, and the models used within the llama.cpp project. Section 4 presents the datasets used for the evaluation. Section 5 describes our proposed engineered prompts to enhance CPU models performance. Section 6 describes our evaluation

methodology. We discuss the results in Sections 7 and 8, and finally conclude and provide some perspectives in Section 9.

## 2. Related Work

### 2.1. Python code generation

Python code generation has become a popular and challenging task in recent years. One pivotal advancement in this field was spearheaded by Chen et al. (2021). They introduced the Codex model, and the HumanEval dataset. On the one hand, Codex is a fine-tuned GPT model containing up to 12 billion parameters. On the other hand, the HumanEval dataset was proposed as a benchmark for evaluating the proficiency of Python code generation models (Chowdhery et al., 2022; Li et al., 2023a; Rozière et al., 2024). Codex has sparked the emergence of other powerful code generation Language Models (LMs). We can categorize the study of these models into two groups: closed-source and open-source.

***Closed-source models.*** A prominent example of closed-source models is Alphacode (Li et al., 2022), a model built upon the encoder-decoder transformer architecture (Vaswani et al., 2017), boasting a staggering 41 billion parameters. The authors used the standard cross-entropy loss for next-token prediction in the decoder, alongside a Masked Language Modeling (MLM) loss (Devlin et al., 2019) for the encoder during training. In contrast to Alphacode, LaMDA (Thoppilan et al., 2022) relies on a decoder-only Transformer architecture (Vaswani et al., 2017), comprising 137 billion parameters. Moreover, LaMDA was pre-trained to predict the next token in a text corpus.

Furthermore, Gopher (Rae et al., 2021) and PALM (Pathways Language Model) (Chowdhery et al., 2022) share LaMDA’s architecture but with 280 billion and 540 billion parameters, respectively. Although Gopher used autoregressive Transformer architecture (Radford et al., 2018b), the authors employ two key changes: RMSNorm (Zhang and Sennrich, 2019) instead of LayerNorm (Ba et al., 2016), and relative positional encodings (Dai et al., 2019) instead of absolute ones. Meanwhile, PALM incorporates modifications such as SwiGLU activations (Shazeer, 2020) over Rectified Linear Units (Agarap, 2019), GeLU (Gated Linear Units) (Dauphin et al., 2017), or Swish activations (Ramachandran et al., 2017), and parallel layers (Wang and Komatsuzaki, 2021) within each Transformer block rather than the traditional serialized approach.

Hoffmann et al. (2022) found that for compute-optimal training, the model size and the number of training tokens should be scaled equally: for every doubling of model size, the number of training tokens should also be doubled. The study revealed that for compute-efficient training, the model size should scale proportionally with the number of training tokens—doubling the model size necessitates doubling the training tokens. Consequently, Chinchilla used the same compute budget as Gopher but with only 70B parameters, and four times more data. Chinchilla surpassed its predecessors like Gopher with 280 billion parameters, GPT-3 (Brown et al., 2020) with 175 billion parameters, and Megatron-Turing NLG (Smith et al., 2022) with 530 billion parameters, across various downstream evaluation tasks.

Additionally, chatbot models have exhibited outstanding performance in tasks involving Python code generation. Particularly, ChatGPT-3.5 (Ope-



nIA, 2022) is built upon the GPT-3.5 model (Radford et al., 2018a,b; Ouyang et al., 2022) and marks a watershed moment in the evolution of AI, excelling in NLP tasks like code generation (Dong et al., 2023; Liu et al., 2023a,c), and text generation (Mulia et al., 2023; Lancaster, 2023). Afterwards, OpenAI has introduced ChatGPT-4 (OpenAI, 2023), an upgraded version of the chatbot built upon the GPT-4 model. While the number of parameters in ChatGPT-3.5 remains unknown, a recent revelation disclosed that ChatGPT-4 contains a total of 1.7 trillion parameters (Leswing, 2024).

Following the release of ChatGPT-3.5 (OpenAI, 2022) and before ChatGPT-4 (OpenAI, 2023), Google introduced BARD (Manyika, 2023) as an enhanced iteration of LaMDA (Thoppilan et al., 2022). BARD enhances predictive abilities through the use of Reinforcement Learning from Human Feedback (RLHF) (Christiano et al., 2017). According to Ahmed et al. (2023) and López Espejel et al. (2023), ChatGPT-4 demonstrates reasoning capabilities that surpassed those of BARD. Lastly, Google unveiled Gemini (Team et al., 2023), an advanced series of models that enhance the capabilities of BARD. Built upon Transformer decoders (Vaswani et al., 2017), Gemini models support a context length of 32,000. Notably, Gemini Ultra has distinguished itself as the first model to surpass human experts in the MMLU (Massive Multitask Language Understanding) benchmark (Hendrycks et al., 2021).

***Open-source models.*** Concurrently, open-source models emerged to provide an alternative to the private models. These open-source models have also showcased remarkable performance in Python code generation tasks. For instance, InCoder (Fried et al., 2023) and Starcoder (Li et al., 2023a) are models specifically trained on programming code. Diverging from other

coding models (Brown et al., 2020; Chen et al., 2021), InCoder employs a causal masking objective during its training phase (Aghajanyan et al., 2022). This approach combines the strengths of both causal and masked language models (Devlin et al., 2019), enhancing its learning capabilities. Conversely, StarCoder adopts the FlashAttention mechanism (Dao et al., 2022) in its training process, which accelerates attention computations and reduces memory usage, thereby optimizing performance.

Similar to InCoder, Code Llama-Python (Rozière et al., 2024) employs the causal masking technique to train infilling models. This model builds upon the LLaMA 2 architecture (Touvron et al., 2023b), incorporating fine-tuning adjustments. Rozière et al. (2024) introduced a Long Context Fine-Tuning (LCFT) stage, where models handle sequences up to 16,384 tokens, significantly exceeding the typical 4,096 tokens in earlier LLaMA 2 stages. Despite having only 7B parameters, Code Llama-Python surpasses the 70B parameter Llama 2 in performance on the HumanEval (Chen et al., 2021) and MBPP (Austin et al., 2021) datasets, showcasing its efficiency and effectiveness in handling large-scale coding challenges.

In addition to efforts to open source language models, the introduction of the Phi model family (Gunasekar et al., 2023; Li et al., 2023b) highlights a growing interest in creating models that compete in scale as well. The initial model, Phi-1 (Gunasekar et al., 2023), is a 1.3 billion parameter Transformer-based model designed for basic Python coding tasks, emphasizing textbook-quality training data. An enhanced version, Phi-1.5 (Li et al., 2023b), builds upon Phi-1 by incorporating a next-word prediction objective and utilizing a dataset of 30 billion tokens and training on 150 billion tokens. This version

extends Phi-2, a 2.7 billion parameter model trained with the combined data from Phi-1.5 and a new source of synthetic NLP texts and filtered websites. Therefore, in the next subsection, we will delve exclusively into small models.

## 2.2. *Small Language Models*

Since the inception of ChatGPT (OpenIA, 2022), numerous chatbots have emerged aiming to tackle similar tasks while prioritizing efficient resource usage and delivering competitive performance. In this subsection, we will discuss models with up to 13 billion parameters.

One of the models that open the possibility to have powerful and small models is LLaMA (Touvron et al., 2023a). LLaMA stands out as a set of LMs with sizes that vary from 7B to 65B parameters that outperform GPT-3 (175B parameters) (Brown et al., 2020) on most of the benchmarks. Inspired by LLaMA and the success of instruction-following models like ChatGPT <sup>1</sup>, Claude <sup>2</sup>, and Microsoft BingChat <sup>3</sup>, Stanford University launched Alpaca (Taori et al., 2023). Alpaca is a 7-billion-parameter model fine-tuned from LLaMa-7B using 52K instruction-following demonstrations. Alpaca exhibits similar behavior to OpenAI’s text-davinci-003 despite being significantly smaller in size. It’s worth highlighting that Vicuna (Chiang et al., 2023) surged by leveraging the strengths of both LLaMa and Alpaca. However, it slightly exceeds Alpaca in parameter count, boasting 13 billion parameters.

Despite the fact that models mentioned earlier feature up to 13 billion

---

<sup>1</sup><https://chat.openai.com/>

<sup>2</sup><https://claude.ai>

<sup>3</sup><https://www.bing.com/chat>

parameters, a groundbreaking model has emerged: Mistral (Jiang et al., 2023). Mistral is a 7-billion-parameter LM that enhances inference speed through the use of Grouped-Query Attention (GQA) (Ainslie et al., 2023), while simultaneously cost-effectively managing sequences of arbitrary length via Sliding Window Attention (SWA) (Beltagy et al., 2020). Mistral outperforms the performance of LLaMA-2 13B (Touvron et al., 2023b) on all assessed benchmarks, including code generation tasks, as well as the best among released 34B LLaMA-2 variants. Building on the success of Mistral, the improved Mixtral 8x7B (Jiang et al., 2024) utilizes a Sparse Mixture of Experts (SMoE) approach. This enhancement not only enables Mixtral to outperform or match the capabilities of the 70B-parameter Llama 2 and GPT-3.5 model across all benchmarks, but also maintains the same foundational architecture as the Mistral 7B. The key difference lies in its structure: each layer in Mixtral consists of eight feedforward blocks, or “experts”, which refine its processing efficiency and model response capability.

Furthermore, Zephyr (Tunstall et al., 2023) is an enhanced version of Mistral-7B, refined through fine-tuning with the  $\sim 200,000$  samples UltraChat dataset (Ding et al., 2023; Tunstall et al., 2023). It has been further aligned using the  $\sim 64,000$  samples UltraFeedback dataset (Cui et al., 2023) and optimized through the Direct Preference Optimization (DPO) algorithm (Rafailov et al., 2023). This model outperforms LLaMA2 70B on the MT-Bench benchmark (Zheng et al., 2023). However, the MiniCPM model (Inc. and TsinghuaNLP, 2024) notably surpassed Zephyr-7B-alpha in MT-Bench performance. Like Zephyr-7B, it employs supervised fine-tuning and the DPO algorithm, but it is more compact, with only 2 billion param-

eters.

Beyond Zephyr, several significant models were refined using Mistral-7B as their foundation, including mistral-7b-openorca (Mukherjee et al., 2023), dolphin-2.6-mistral (Ma et al., 2023), and openhermes-2.5-mistral (Teknium, 2023). The mistral-7b-openorca model leverages the OpenOrca dataset, focusing on the interaction triad of “System message, User query, LFM response”. In contrast, dolphin-2.6-mistral enriches its training with three diverse datasets: Capybara (Daniele and Suphavadeeprasit, 2023), Magicoder-Evol-Instruct-110K (Wei et al., 2023), and Dolphin (Hartford, 2023). Openhermes-2.5-mistral also builds upon Mistral-7B but distinguishes itself by training on a variety of code benchmarks, including TruthfulQA (Lin et al., 2021), AGIEval (Zhong et al., 2023), and the GPT4All suite (Anand et al., 2023).

### *2.3. Quantization for model acceleration*

Efforts to shrink models for CPU compatibility did not solely focus on reducing the number of parameters, but also employed techniques like quantization. The llama.cpp open-source project (Gerganov, 2023) emerged to support this endeavor. Initially, the project only supported llama models, but thanks to contributions from the open-source community, it expanded to include quantization support for various models. As our experiments primarily focus on these types of models, we provide more detailed information in Subsection 3.2.

### 3. Python Code Generation using Low-Cost CPU Models

#### 3.1. Problem Definition

Given a natural language input text  $w = \{w_0, w_1, \dots, w_{n-1}\}$  of length  $|w| = n$ , a Python code generation model seeks to generate an equivalent Python source code sequence  $c = \{c_0, c_1, \dots, c_{l-1}\}$  of length  $|c| = l$ , where  $w_i$  and  $c_i$  are input and output tokens respectively. For the sake of clarity, we consider CPU-friendly models which are able to run on CPU during inference (not necessarily during training).

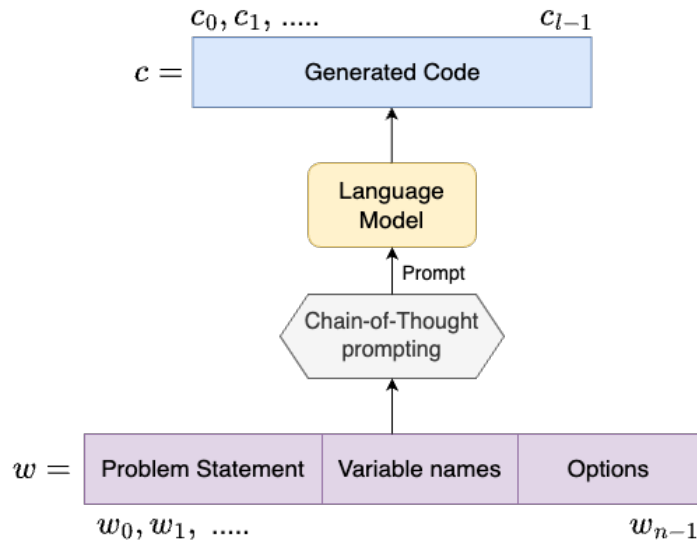


Figure 1: Overview of Python code generation with our system.

We provide in Figure 1 an overview of our system. As mentioned in the introduction, the input text (purple) comprises three key elements: problem statement, variable names, and a set of options. We feed this input into our Chain-of-Thought prompting module (grey) to generate an efficient prompt that guides the model in its generation. Then, we provide this prompt to the

CPU-friendly Language Model (yellow), and the latter finally provides the output Python code (blue). More details about the dataset and the Chain-of-Thought prompting module are provided in Sections 4, and 5, respectively.

### 3.2. Evaluation Protocol within llama.cpp Project

We conducted an assessment using GGUF format model files sourced from the llama.cpp (Gerganov, 2023) project, which is a C++ library primarily optimized for CPU usage. This library effectively implements several LLM architectures, including noteworthy models such as LLaMA (Touvron et al., 2023a,b), Mistral (Jiang et al., 2023), Mixtral (Jiang et al., 2024), StarCoder (Li et al., 2023a), and Gemma (Team et al., 2024). These models come in various quantized versions, ranging from 2 to 8 bits, and are designed to support both CPU and GPU inference, demonstrating the versatility of llama.cpp in different computing environments. The lightweight design of llama.cpp ensures portability and speed, enabling rapid responses across a wide range of devices. Its customizable low-level features empower developers to deliver effective real-time coding assistance.

We evaluate many model variants noted as *model-name.Q<sub>j</sub>-K-Size*, where:

- *model-name* is the model name and can be one of the following: llama-2-coder-7b, phi-2, mistral-7b-instruct-v0.2, mistral-7b-openorca, zephyr-7b-beta, dolphin-2.6-mistral-7b, openhermes-2.5-mistral-7b, and MiniCPM-2B-dpo-bf16.
- *Q<sub>j</sub>-K-Size* refers to a specific type of quantization method. *j* is the bit-width used, *K* refers to the use of K-means clustering in the quan-

tization, *Size* is the size of the model after quantization, where *S*, *M*, *L* refer to Small, Medium, and Large, respectively.

To conduct our experiments on the CPU, we used a machine equipped with the following hardware: Processor: 11th Gen Intel(R) Core(TM) i7-11850H @ 2.50GHz, RAM: 32.0 GB, Operating System: 64-bit, x64-based processor.

## 4. Datasets

We evaluate the models using three Python datasets: our dataset, HumanEval (Chen et al., 2021), and EvalPlus (Liu et al., 2023b).

### 4.1. Proposed dataset

To assess the functional accuracy of code generated by various models, we designed a dataset composed of 60 crafted programming problems, each consisting of a problem statement, variable names, and a set of options. The *problem statement* describes the conditions and constraints of the user’s requirements. The *variables* keyword, as implied by their name, defines the names of variables to be utilized in the Python code. Lastly, the *options* represent the possibilities for each condition outlined in the problem statement. All our dataset samples are generated with the help of GPT-3.5-Turbo API, and manually verified afterwards.

The samples are categorized into three levels of difficulty: the initial 20 samples represent an easy level, the subsequent 20 samples constitute an intermediate level, and the final 20 samples present a challenging level. The samples include mathematical, logic and reasoning problems. At the



challenging level, there are problems that involve graphs, trees, and other complex structures. We provide an example of each difficulty level hereafter:

- Easy:
  - Problem: Determine if a given number is positive, negative, or zero.
  - Variables: given\_number
  - Options: a) Positive   b) Negative   c) Zero
- Intermediate:
  - Problem: Check if a given sentence is a pangram.
  - Variables: input\_sentence
  - Options: a) Pangram   b) Not a pangram
- Challenging:
  - Problem: Check if a directed graph is acyclic.
  - Variables: directed\_graph\_acyclic\_check
  - Options: a) Acyclic graph   b) Cyclic graph

An example of output for the first easy example is:

```
def determine_number_sign(given_number):
    if given_number > 0:
        return 'Positive'
    elif given_number < 0:
        return 'Negative'
    else:
        return 'Zero'
```

#### 4.2. *HumanEval and EvalPlus datasets*

HumanEval (Chen et al., 2021) is a hand-written dataset, developed by OpenAI. It consists of 164 Python problems. Each prompt input contains a function signature and a docstring. Each problem in this dataset is associated with a canonical solution and an average of 7.7 unit tests. The dataset aims to evaluate models ability to accurately complete functions based on their signatures and docstrings. The performance of the models is determined by how successfully they pass the given unit tests, ensuring a strict evaluation of the code’s functional correctness.

EvalPlus (Liu et al., 2023b) is an improved version of the original HumanEval dataset. The authors identified that HumanEval did not encompass all potential scenarios for testing the functional correctness of LLM-synthesized code. To address this issue, they significantly expanded the dataset by increasing the number of test cases. EvalPlus comprises an average of 764.1 tests per problem, providing a more robust and comprehensive framework for assessing code correctness.

### 5. **Prompt Engineering to Improve Generation**

To design our prompt meticulously, we incorporate insights from the research of Yu et al. (2023). Specifically, they suggest incorporating a Chain-of-Thought (CoT) approach (Wei et al., 2022b) to guide the model in generating adequate responses for specific tasks. Importantly, they highlight that effective CoT prompts typically include either CoT demonstrations or textual instructions. To ensure our prompt’s effectiveness, we include both an example input with its corresponding output and textual instructions to

direct the language model (LM). Furthermore, drawing inspiration from the findings of Chen (2023), we decided to use a single example in our prompt. Their research demonstrates that LLMs can deliver robust performance even with a minimal, 1-shot demonstration, underscoring the efficiency of this streamlined approach. This is our full approach to design the prompt:

- We designate a specific role for the chatbot: *You are an expert python programmer.*
- We identify the keywords the chatbot should pay attention to: *You will receive three keywords: problem, variables, and options.*
- We boldly describe the task that needs to be performed: *Your task consists of resolving the problem statement using python code.*
- We used a single example to show to the model how to effectively execute the task. Chen (2023) suggests that just one example is enough for the models, and it helps to keep the prompt short.
- We reiterate at the end of the prompt the specific format in which we expect the model to return its output. In our case, we specify that we require only a function code to be returned.

Table 1 displays the complete prompt we propose.

## 6. Evaluation methodology

In this section, we provide a comprehensive breakdown of the metrics and criteria used to evaluate our dataset, HumanEval (Chen et al., 2021), and EvalPlus (Liu et al., 2023b).

You are an expert Python programmer. You will receive three keywords: problem, variables, and options. Your task consists of resolving the problem statement using Python code. There are two important keys:

1. The Python code should use the variable names given in the 'Variables'.
2. The Python code should return the string of the option items.

Example 1:  
 Problem: If the sum of the price and VAT exceeds 10, click on the Cancel button. Otherwise, click on the Accept button.  
 Variables: price, VAT, total  
 Options: a) click on Cancel button    b) click on Accept button

Code:

```
def compute_sum(price, VAT):
    if price + VAT > 10:
        return "click on Cancel button"
    else:
        return "click on Accept button"
```

Write Python code given:  
 Problem: \$problem,  
 Context: \$context,  
 Options: \$options

Provide only Python code; do not include any additional comments.

Table 1: Proposed prompt to guide the models in their Python code generation

### 6.1. Proposed dataset

To assess the performance of CPU-friendly models in generating Python code, we employ semi-manual evaluation. First, we provide the evaluation prompt (Table 2) augmented with the answer generated by the model to GPT-3.5-Turbo (OpenAI, 2022) through its API. The latter returns a correctness score of 0 (wrong answer), 0.5 (passable answer), or 1 (correct an-

swer). Second, we manually verify the process and correct the score in case GPT-3.5-Turbo makes a mistake in the evaluation. Below, we outline the criteria considered for each score.

- **Score = 0 (wrong)**- A score of zero is assigned when the generated code demonstrates no comprehension of the input prompt, indicated by a lack of correlation between the function name, its algorithm, and the requirements specified in the prompt. Additionally, a score of zero is also given when the function body is empty.
- **Score = 0.5 (passable)** - A score of 0.5 is awarded when the generated code understands the input prompt and attempts to address the problem but fails to deliver the expected response due to syntax issues or logical oversights. For instance, omitting a base case in recursive problems can lead to inefficiency or infinite loops, although the remainder of the algorithm suggests an understanding of the task. Additionally, the code might technically be correct but returns an unexpected output. For example, when asked whether a number is prime with options “a) Prime number, or b) Not a prime number”, the model might simply return True or False, indicating a lack of deep understanding of the prompt.
- **Score = 1 (correct)**- A score of 1 is assigned to the code generation when the model’s output matches the gold standard code in functionality, despite possible syntactical differences. It’s worth noting that the evaluation criteria are overall not rigid. For instance, if the correct answer is “a) Prime number”, but the evaluated model omits the “a)” and simply returns “Prime number” (or vice versa), the generated code

is still considered correct.

```
Please compare both codes, referred to as Code 1 and Code 2. They
aim to yield identical results, disregarding the implementation
details. If both codes successfully produce the same results,
return 1. If the second code maintains the logic but falls short
of replicating the results of Code 1, return 0.5. If the codes are
entirely different, return 0. The codes are supposed to describe
the code's objective or intention.
Please refrain from adding any comments.
### Code 1
### Code 2
```

Table 2: Proposed Prompt to evaluate our results

Our evaluation approach aims to be more flexible. This is achieved by focusing not only on whether the code passes unit tests, but also on understanding the challenges that different models face when generating code across various levels of difficulty.

### 6.2. *HumanEval and EvalPlus datasets*

To evaluate model performance on these datasets, we used the pass@ $k$  metric (Kulal et al., 2019). It was introduced to assess functional correctness, where  $k$  denotes the number of code samples generated for each problem. A problem is considered solved if any of these  $k$  samples successfully pass the unit tests. The resulting score indicates the proportion of problems solved correctly.

A slight modification to this metric was proposed by Chen et al. (2021). They suggest generating  $n$  total samples per task, then counting the correct samples  $c \leq n$  that pass the unit tests, and computing the unbiased estimator using Equation 1.

$$pass@k = \mathbb{E}_{Problems} \left[ 1 - \frac{\binom{n-c}{k}}{\binom{n}{k}} \right] \quad (1)$$

However, this estimator often yields large values. Thus, in practice, the score is computed using  $1 - (1 - \hat{p})^k$ , where  $\hat{p}$  represents the empirical estimate of  $pass@1$ .

In our case, we employ the  $pass@1$  metric. This entails generating a single code sample per problem.

## 7. Results and Discussion: Our dataset

Models	Size (GB) ↓	Required RAM (GB) ↓	Inference Time (ms) ↓	Correct (%) ↑	Passable (%) ↑	Wrong (%) ↓	Correct+Passable (%) ↑
ChatGPT-4	×	×	×	86.67	11.67	1.67	92.50
ChatGPT-3.5	×	×	×	<b>93.33</b>	6.67	<b>0</b>	<b>96.67</b>
ChatGemini	×	×	×	80.00	<b>18.33</b>	1.67	89.17
llama-2-coder-7b.Q3_K_M	3.30 GB	5.80 GB	215.51	<b>16.67</b>	16.67	<b>66.67</b>	<b>25.00</b>
llama-2-coder-7b.Q3_K_L	<b>3.60 GB</b>	<b>6.10 GB</b>	<b>268.36</b>	11.67	<b>20.00</b>	68.33	21.67
phi-2.Q5_K_M	<b>2.07</b>	<b>4.57</b>	147.48	28.33	26.67	45.00	41.67
phi-2.Q6_K	2.29	4.79	<b>145.41</b>	26.67	<b>41.67</b>	31.67	47.50
phi-2.Q8_0	2.96	5.46	182.52	<b>30.00</b>	<b>41.67</b>	<b>28.33</b>	<b>50.83</b>
mistral-7b-instruct-v0.2.Q2_K	<b>3.08</b>	<b>5.58</b>	209.85	33.33	<b>40.00</b>	26.67	53.33
mistral-7b-instruct-v0.2.Q3_K_S	3.16	5.66	200.09	56.67	20.00	23.33	66.67
mistral-7b-instruct-v0.2.Q3_K_M	3.52	6.02	250.16	55.00	35.00	10.00	72.50
mistral-7b-instruct-v0.2.Q3_K_L	3.82	6.32	261.95	50.00	21.67	28.33	60.83
mistral-7b-instruct-v0.2.Q4_K_S	4.14	6.64	278.04	73.33	16.67	10.00	81.67
mistral-7b-instruct-v0.2.Q4_K_M	4.37	6.87	304.72	<b>86.67</b>	8.33	<b>5.00</b>	<b>90.83</b>
mistral-7b-instruct-v0.2.Q5_K_M	5.13	7.63	330.64	58.33	20.00	21.67	68.33
mistral-7b-openorca.Q3_K_L	<b>3.82</b>	<b>6.32</b>	<b>252.96</b>	<b>28.33</b>	<b>40.00</b>	<b>31.67</b>	<b>48.33</b>
zephyr-7b-beta.Q4_K_M	<b>4.37</b>	<b>6.87</b>	<b>240.36</b>	<b>45.00</b>	38.33	16.67	<b>64.17</b>
zephyr-7b-beta.Q5_K_M	5.13	7.63	281.22	41.67	33.33	25.00	58.33
zephyr-7b-beta.Q6_K	5.94	8.44	329.11	36.67	46.67	16.67	60.00
zephyr-7b-beta.Q8_0	7.70	10.20	416.54	36.67	<b>53.33</b>	<b>10.00</b>	63.33
dolphin-2.6-mistral-7b.Q5_K_M	<b>5.13</b>	<b>7.63</b>	<b>358.30</b>	48.33	36.67	15.00	66.67
dolphin-2.6-mistral-7b.Q6_K	5.94	8.44	393.90	30.00	<b>55.00</b>	15.00	57.50
dolphin-2.6-mistral-7b.Q8_0	7.70	10.20	422.94	<b>50.00</b>	40.00	<b>10.00</b>	<b>70.00</b>
openhermes-2.5-mistral-7b.Q4_K_M	<b>4.37</b>	<b>6.87</b>	<b>260.72</b>	53.33	21.67	25.00	64.17
openhermes-2.5-mistral-7b.Q5_K_M	5.13	7.63	298.93	55.00	<b>25.00</b>	20.00	67.50
openhermes-2.5-mistral-7b.Q6_K	5.94	8.44	325.59	<b>58.33</b>	<b>25.00</b>	<b>16.67</b>	<b>70.83</b>
openhermes-2.5-mistral-7b.Q8_0	7.7	10.20	413.84	<b>58.33</b>	21.67	20.00	69.17
MiniCPM-2B-dpo-bf16	<b>5.45</b>	<b>10.9</b>	<b>510.25</b>	<b>50.00</b>	<b>36.67</b>	<b>13.33</b>	<b>68.33</b>

Table 3: Evaluation on our dataset.  $Q_j$ : quantization using  $j$  bit width, K: the use of k-means clustering in the quantization,  $S, M, L$ : Small, Medium, and Large model size after quantization. Best results of each category are in bold.

Table 3 presents the outcomes of our experiments on our dataset. It is noteworthy to notice that, for comparison, we also included performance scores for renowned chatbots like ChatGPT-3.5, ChatGPT-4, and Gemini. We regroup together the discussion of the same family (or type) of models. Note that, in Table 3,  $Correct + Passable + Wrong = 100\%$ .

***ChatGPT-3.5 vs ChatGPT-4 vs Gemini.*** Our findings reveal that for our specific task and input problem formulation, ChatGPT-3.5 surprisingly outperforms ChatGPT-4, despite the latter’s proven superiority in other tasks such as reasoning (López Espejel et al., 2023) and solving mathematical and logic problems (Plevris et al., 2023). Considering the confidential development processes of these models and the absence of detailed information on OpenAI’s versioning strategy, it is difficult to understand exactly this behavior. However, we hypothesize that the more frequent usage of ChatGPT-3.5, facilitated by its free access, contributes to its superior understanding of diverse human prompts.

The scores indicate that ChatGPT-3.5 gets a 6.66% higher rate of correct answers compared to ChatGPT-4. Moreover, ChatGPT-3.5 achieved 0% of wrong answers, while ChatGPT-4 obtained 1.67%. Gemini is the model that performs the worst in this category. GPT-4 accomplished 86.87% of correct answers, while Gemini achieved 80.0%. Interestingly, both ChatGPT-4 and Gemini got the same percentage of wrong answers (1.67%), but ChatGPT-4 attained less rate of passable answers (11.67%), while Gemini obtained 18.33%. It is noteworthy to mention that the ChatGPT family adheres strictly to the instruction “*Provide only Python code; do not include additional comments*”. Gemini often adds unnecessary explanations to almost



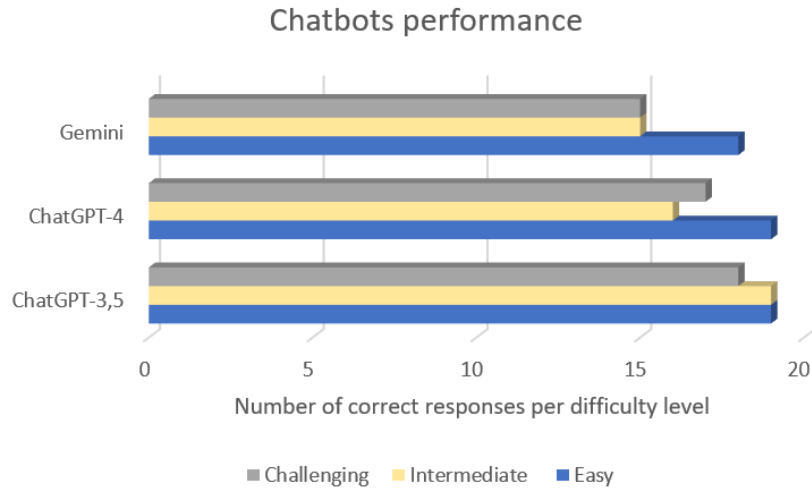


Figure 2: Number of correct answers obtained by Gemini, ChatGPT-4, and ChatGPT-3.5 across easy, intermediate, and challenging levels.

every line of code, and does not maintain the code indentation. As a result, it's not possible to easily copy and paste the generated code.

Figure 2 illustrates the number of correct answers obtained by ChatGPT-3.5, ChatGPT-4, and Gemini across easy, intermediate, and challenging levels. It shows that ChatGPT-3.5 and ChatGPT-4 both scored 19/20 on the easy level, slightly outperforming Gemini, which scored 18/20. At the intermediate level, ChatGPT-3.5 took the lead with a score of 19/20, while ChatGPT-4 and Gemini scored 16/20 and 15/20, respectively. In the challenging category, ChatGPT-3.5 continued to excel with 18/20, followed by ChatGPT-4 with 17/20 and Gemini with 15/20. This comparison highlights the relative strengths and challenges of each model across varying levels of difficulty.

**LLaMA models.** We examined the medium and large versions of the LLaMA model using 3-bit quantization. Contrary to expectations set by Wei et al. (2022a) and Cobbe et al. (2021), who argue that larger models perform better, our findings prove that this is not always the case. According to Table 3, the large LLaMA model (llama-2-coder-7b.Q3\_K\_L) performs worse than the medium-sized one (llama-2-coder-7b.Q4\_K\_M) in terms of correct responses. Overall, the large model scored 21.67%, considering both correct and passable answers, compared to 25% obtained by the medium-sized one. Interestingly, this finding was previously confirmed by the comparison between ChatGPT-3.5 and ChatGPT-4.

The primary weakness observed in the LLaMA models is a flaw in their background knowledge. For instance, when asked to determine whether a specific month falls within the winter season, the model generated the following code: `if (input_month  $\geq$  12 and input_month  $\leq$  21): return "Winter"`. This response shows a misunderstanding of the problem or a lack of knowledge that a year comprises only 12 months, making the model incorrectly extend beyond this range. Furthermore, the LLaMA models tend to produce verbose code and struggle with presenting a range of options for answers, opting instead to provide direct responses.

**Phi-2 models.** Our evaluation of Phi-2 models with different quantization levels (5, 6, and 8 bits) revealed that Phi-2.Q\_8 achieved the highest accuracy (30%) in correctly generating Python code from prompts, as shown in Table 3. This surpassed the performance of Phi-2 models quantized to 5 and 6 bits, which obtained 28.33% and 26.67% correct answers, respectively. Interestingly, both Phi-2.Q6\_K and Phi-2.Q\_8 models achieved an identical success rate of

41.67% in providing passable responses. Overall, the Phi-2.Q\_8 model exhibits superior performance, with a combined correct and passable accuracy rate of 50.83%.

The primary limitations of the Phi-2 models are their verbosity, including unnecessary comments and often incomplete code, where the models generate the function header and docstring but leave the body empty. Additionally, many comments unrelated to the prompt indicate the models' tendency to hallucinate. Specifically, the Phi-2.Q5\_K\_M model struggles with proper Python code indentation, making it difficult to read and interpret.

***Mistral models.*** In our study, we evaluated the performance of 7 Mistral model variants obtained through quantization. We varied the quantization level from 2 to 5 bits and investigated three model sizes: small, medium, and large. We also evaluate one Openorca large variant obtained with a 3-bit quantization.

According to Table 3, the mistral-7b-instruct-v0.2.Q4\_K\_M model achieved the highest accuracy (86.67%), followed by the mistral-7b-instruct-v0.2.Q4\_K\_S model (73.33%). Interestingly, both top-performing models were quantized to 4 bits. This finding contradicts the hypothesis that models quantized with more bits would necessarily provide higher accuracy. In fact, the mistral-7b-instruct-v0.2.Q5\_K\_M model, quantized with 5 bits, achieved a 28.34% lower accuracy than the mistral-7b-instruct-v0.2.Q4\_K\_M model. Furthermore, the accuracy of the remaining evaluated models (2 and 3 bits) consistently fell below 55.00%.

The last column of Table 3 provides the total performance of the model considering both the correct and the passable answers. Once again, both

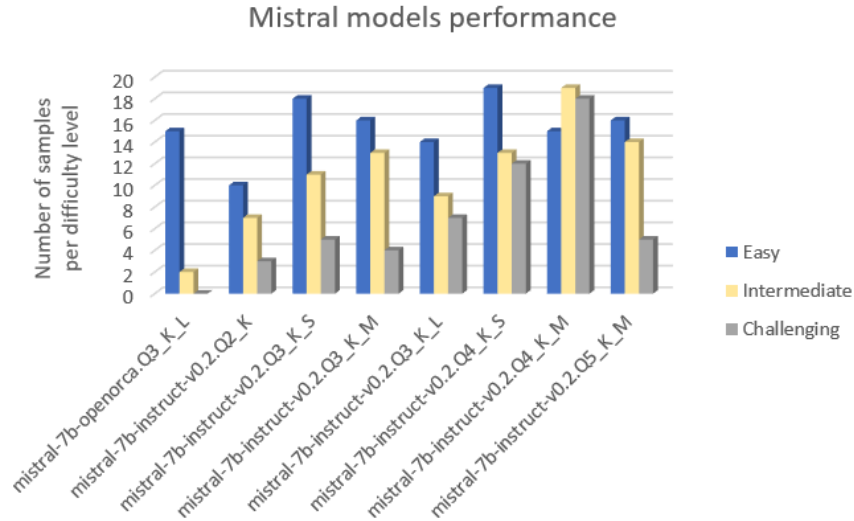


Figure 3: Number of correct answers obtained by mistral models across easy, intermediate, and challenging levels.

mistral-7b-instruct-v0.2.Q4\_K\_M and mistral-7b-instruct-v0.2.Q4\_K\_S achieved the highest scores of 90.83% and 81.67%, respectively. Surprisingly, the third-best performer was not the model quantized with 5 bits, but the mistral-7b-instruct-v0.2.Q3\_K\_M model with 72.50% of accuracy. This result confirms that the performance of the models in Python generation does not solely depend on the number of bits used to quantize the model.

Further analysis of Figure 3 revealed interesting trends in correct responses by difficulty level. While mistral-7b-instruct-v0.2.Q4\_K\_S excelled at handling easy samples, mistral-7b-instruct-v0.2.Q4\_K\_M dominated in generating correct responses for intermediate and challenging samples. This suggests that mistral-7b-instruct-v0.2.Q4\_K\_M may be better suited for handling complex Python code generation.

After finding comparable performance between mistral-7b-instruct-v0.2.Q4\_K\_M

and ChatGPT-3.5, we explored the performance of other mistral-based models. Notably, we examined the capabilities of Mistral-7b-openorca quantized to 3-bits and found that it underperformed compared to the original Mistral model. It’s important to note that this model was fine-tuned on the OpenOrca dataset, which is not specifically designed for coding tasks. Nonetheless, it achieved 28.33% correct responses and 40% passable answers.

In addition, we delved deeper into other models that were fine-tuned on top of Mistral, such as zephyr-7b-beta, dolphin-2.6-mistral, and openhermes-2.5-mistral. We discuss these models in the following sections, and compare their performance at different quantization levels of 4 bits and higher, allowing us to assess how such adjustments impact their efficiency and output quality.

***zephyr-7b-beta models.*** Our tests on Zephyr models (4, 5, 6, and 8 bits) showed lower performance compared to mistral-7b-instruct-v0.2.Q4\_K\_M and some other quantized mistral variants. While zephyr-7b-beta.Q4\_K\_M achieved the highest score (45%) within the Zephyr family, it lagged behind mistral-7b-instruct-v0.2.Q4\_K\_M and ChatGPT-3.5 by 41.67% and 48.33%, respectively.

Zephyr-7b-beta.Q5\_K\_M achieved the second-best performance of 41.67% accuracy. Interestingly, both 6-bit and 8-bit Zephyr models obtained the same score (36.67%). However, considering overall performance within the Zephyr family, zephyr-7b-beta.Q4\_K\_M is the best performer, followed by zephyr-7b-beta.Q8\_0. This is because the 8-bit Zephyr model achieved the highest percentage of passable responses, demonstrating an understanding of the prompt and code logic, albeit with syntactic inaccuracies. It is notewor-

thy to mention that zephyr-7b-beta.Q8\_0 showcases distinct advantages, such as generating optimized and compact code by leveraging existing libraries like NumPy and utilizing list comprehensions. Contrary to its 5- and 6-bit-width counterparts, zephyr-7b-beta.Q8\_0 seldom produces empty functions.

Zephyr is fine-tuned on top of Mistral, but worsens its results in Python Code generation. Zephyr is designed to align with user intent and handle natural prompts effectively. Moreover, it was fine-tuned on the UltraChat 200k dataset (Ding et al., 2023; Tunstall et al., 2023). UltraChat focuses on three broad areas: understanding real-world concepts, generating various text formats, and working with existing text (rewriting, translation, etc.). Since code generation isn't a core focus in UltraChat, the dataset likely contains minimal code content, which could explain Zephyr's weaker performance.

***dolphin-2.6-mistral.*** We conducted tests on three quantized versions of the dolphin-2.6-mistral model, using 5, 6, and 8 bits. Among these variants, the dolphin-2.6-mistral-7b.Q8\_0 model, with the highest bit width, achieved the highest percentage of correct responses at 50%. This is closely followed by dolphin-2.6-mistral-7b.Q5\_K\_M with a score of 48.33%. In addition, the dolphin-2.6-mistral-7b.Q8\_0 model provides the lowest rate of wrong responses at 10%, suggesting a stronger comprehension of natural language inputs compared to the other two dolphin models, which obtained the same error rate of 15%.

When considering only correct responses, Figure 4 highlights the superior performance of the dolphin-2.6-mistral-7b.Q8\_0 model compared to the other two variants across difficult and intermediate levels. However, it is worth noting that dolphin-2.6-mistral-7b.Q5\_K\_M achieved the highest number of

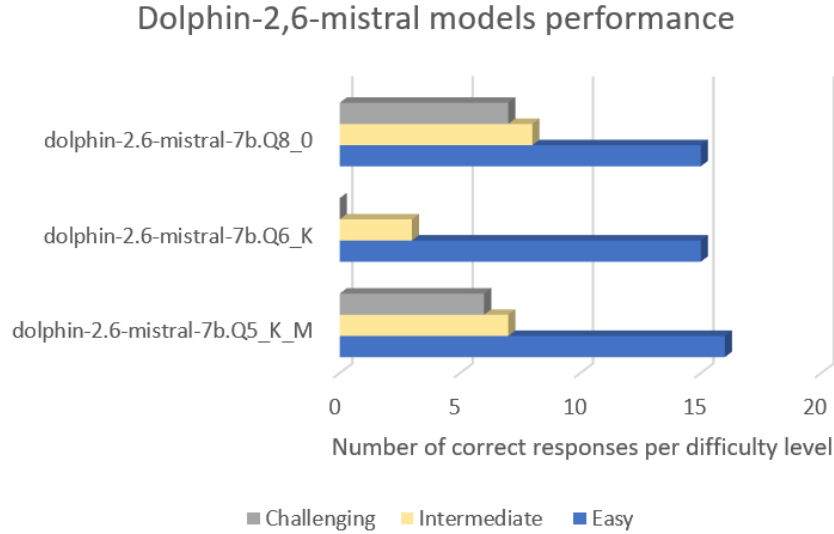


Figure 4: Number of correct answers obtained by dolphin-2.6-mistral models across easy, intermediate, and challenging levels.

correct answers in the easy level (16/20), while the remaining two models demonstrated closely aligned scores (both achieving 15/20). While dolphin-2.6-mistral models with 8 and 5 bits remained consistent in their correct response rates in the intermediate level (8/20 and 7/20 respectively) and challenging level (7/20 and 6/20 respectively), dolphin-2.6-mistral-7b.Q6\_K\_M experienced a sharp decline in performance, failing to generate any correct answers in the challenging level (0/20).

The enhanced performance of the Dolphin-2.6-Mistral models over Zephyr models can be explained by the datasets used for fine-tuning. Zephyr models were fine-tuned using the UltraChat 200k dataset (Ding et al., 2023; Tunstall et al., 2023), which has a limited portion of source code. In contrast, Dolphin-2.6-Mistral models benefited from a fine-tuning with Magicoder-Evol-Instruct-110K (Wei et al., 2023) and Magicoder-OSS-Instruct-75K datasets (Team,

2024b), among others. This selection of datasets is a key factor in Dolphin-2.6-Mistral being better than Zephyr models.

***openhermes-2.5-mistral***. We evaluated four quantized versions of the openhermes-2.5-mistral model, utilizing 4, 5, 6, and 8 bits. The analysis revealed that the 4-bit version and the 5-bit version yielded accuracy rates of 53.33% and 55% in the correct responses, respectively. In contrast, both the 6-bit and 8-bit versions demonstrated superior accuracy, achieving a rate of 58.33%. However, as shown in Table 3, the 6-bit model (openhermes-2.5-mistral-7b.Q6\_K) outperforms the 8-bit model (openhermes-2.5-mistral-7b.Q8\_0) in terms of overall quality. This is because the 6-bit model produced more passable responses and fewer incorrect answers. While the 8-bit model achieved a combined accuracy of 69.17% (correct + passable), the 6-bit model reached a higher accuracy of 70.83%.

Examining correct answers across different difficulty levels (Figure 5), the findings indicate that both the openhermes-2.5-mistral-7b.Q4\_K\_M and openhermes-2.5-mistral-7b.Q8\_0 models excelled in the easy category, each securing 17 correct responses. They were closely followed by the 5-bit model with 16 correct responses, while the 6-bit version recorded the lowest success rate in this category. Furthermore, the openhermes-2.5-mistral-7b.Q4\_K\_M and openhermes-2.5-mistral-7b.Q5\_K\_M models secured the highest success rate in the challenging category, each achieving 8 out of 20 correct responses. While not the best in either easy or challenging categories, the 6-bit openhermes-2.5-mistral-7b.Q6\_K\_M model achieves consistent performance across all difficulty levels. This stability makes it the overall best choice, considering both correct and passable responses.



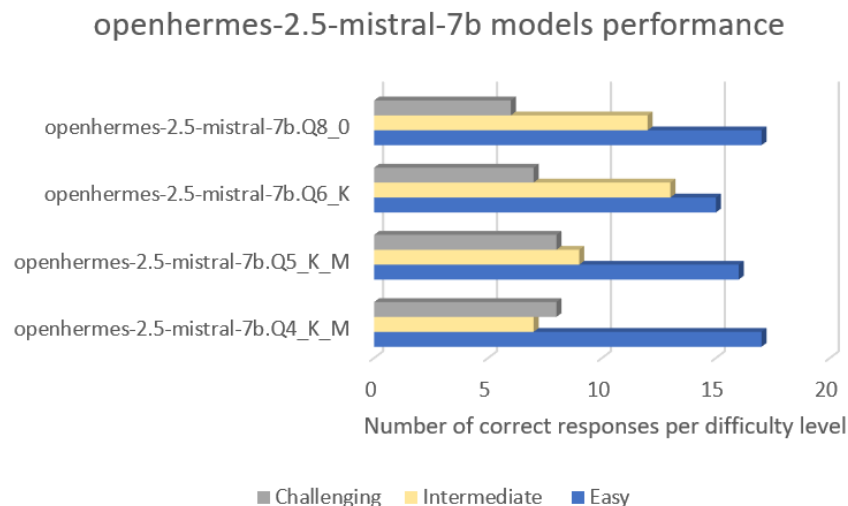


Figure 5: Number of correct answers obtained by openhermes-2.5-mistral models across easy, intermediate, and challenging levels.

The main weaknesses of the openhermes-5.5-mistral family are hallucinations and lack of code conciseness. For instance, the model references nonexistent NumPy functions or incorrectly attributes SciPy functions to the NumPy library. Moreover, the generated code lacks compactness; for example, rather than employing the more concise condition:  $18.5 \leq \text{bmi} \leq 24.9$ , it opts for the lengthier `if bmi  $\geq$  18.5 and bmi  $\leq$  24.9`. Additionally, it’s noteworthy that the openhermes-2.5-mistral 4-bit version tends to leverage native structures more effectively for algorithm development, in contrast to the 6 and 8-bit versions, which more frequently utilize library functions.

***MiniCPM-2B-dpo-bf16***. Lastly, we assessed the performance of the MiniCPM model, which outperformed models like Llama2-7B, Mistral-7B, and Llama2-13B in code and mathematical reasoning (Inc. and TsinghuaNLP, 2024), including on the HumanEval dataset. While MiniCPM also surpassed Llama2-

7B in our dataset, it did not consistently outperform all Mistral variants. Specifically, MiniCPM scored higher in terms of correct responses compared to Mistral models up to 3 bits. However, Mistral models from 4 bits and above achieved better results. It is important to note that MiniCPM evaluation was impacted by its non-compliance to the expected output format. Despite this penalization, MiniCPM achieved 50% of correct responses, 36.67% of passable responses, and 13.33% of incorrect answers.

***Size, RAM and Inference Time.*** The analysis presented in Table 3 offers an overview of the performances and system requirements of various models. Notably, the heaviest models are zephyr-7b-beta.Q8\_0 , dolphin-2.6-mistral-7b.Q8\_0, and openhermes-2.5-mistral-7b.Q8\_0, with a size of 7.70 GB, which is still manageable on a conventional machine. The sizes of the other models do not exceed 6 GB. In terms of RAM usage, MiniCPM is the most demanding, requiring 10.9 GB. In contrast, the model requiring the least RAM is phi-2.Q5\_K\_M, which uses only 4.57 GB. This moderate use of resources allows for the possibility of performing other tasks in parallel, thus optimizing machine utilization.

Furthermore, the inference times vary among the models. The Phi family of models are the fastest, followed by Mistral and Llama. Conversely, MiniCPM exhibits the longest inference time, followed by the Dolphin family and OpenHermes. Overall, Mistral stands out as offering the best balance between size, RAM usage, inference speed, and overall performance on this dataset.

Models	Inference Time (ms) ↓	HumanEval	EvalPlus
		Pass@1 0-shot ↑	Pass@1 0-shot ↑
GPT-4-Turbo (April 2024)	×	<b>90.2</b>	<b>86.6</b>
GPT-3.5-Turbo (Nov 2023)	×	76.8	70.7
Gemini Pro 1.0	×	63.4	55.5
llama-2-coder-7b.Q3_K_M	209.93	11.52	10.21
llama-2-coder-7b.Q3_K_L	224.33	12.52	10.87
llama-2-coder-7b.Q4_K_M	279.63	14.12	11.36
mistral-7b-instruct-v0.2.Q2_K	188.38	15.85	14.02
mistral-7b-instruct-v0.2.Q3_K_S	207.47	<b>32.92</b>	<b>28.65</b>
mistral-7b-instruct-v0.2.Q3_K_M	233.43	27.40	25.00
mistral-7b-instruct-v0.2.Q3_K_L	240.58	23.78	21.34
mistral-7b-instruct-v0.2.Q4_K_S	242.29	23.17	21.95
mistral-7b-instruct-v0.2.Q4_K_M	245.57	23.17	24.39
mistral-7b-instruct-v0.2.Q5_K_M	292.74	13.41	12.19
mistral-7b-openorca.Q3_K_L	219.98	<b>34.75</b>	<b>32.31</b>
dolphin-2.6-mistral-7b.Q5_K_M	288.57	51.82	45.12
dolphin-2.6-mistral-7b.Q6_K	332.83	<b>54.26</b>	<b>48.17</b>
dolphin-2.6-mistral-7b.Q8_0	425.05	49.39	44.51
openhermes-2.5-mistral-7b.Q4_K_M	265.82	43.29	35.97
openhermes-2.5-mistral-7b.Q5_K_M	294.62	<b>45.12</b>	<b>37.80</b>
openhermes-2.5-mistral-7b.Q6_K	328.12	43.90	36.58
openhermes-2.5-mistral-7b.Q8_0	426.11	39.63	32.31

Table 4: Evaluation on HumanEval and EvalPlus datasets.  $Q_j$ : quantization using  $j$  bit width, K: the use of k-means clustering in the quantization,  $S$ ,  $M$ ,  $L$ : Small, Medium, and Large model size after quantization. Best results of each category are in bold.

## 8. Results and Discussion: HumanEval and EvalPlus dataset

In this section, we discuss the results obtained by the evaluated models on the HumanEval and EvalPlus datasets. Our primary reference for comparison is the EvalPlus Leaderboard (Team, 2024a), as outlined by Liu et al. (2023b). However, it is noteworthy that the samples in this leaderboard were generated from scratch and were pre-processed with a sanitizer script.

To ensure a fair comparison with the scores reported on the EvalPlus

Leaderboard, we used the greedy search decoding algorithm to generate code outputs, as presented in Table 4. Additionally, we employed the pass@1 metric to assess the correctness of LLM-synthesized code and adopted a 0-shot approach in the input prompts.

***ChatGPT-3.5 vs ChatGPT-4 vs Gemini.*** Based on the results reported in the EvalPlus Leaderboard and displayed in Table 4, ChatGPT-4 outperforms both ChatGPT-3.5 and Gemini on the HumanEval dataset. ChatGPT-4 achieved an impressive 90.2% accuracy in the correctness of LLM-synthesized code, followed by ChatGPT-3.5 with 76.8%, and Gemini with 63.4%. This ranking remains consistent on the EvalPlus dataset, where the models scored 80.6%, 70.7%, and 55.5%, respectively. These results highlight the progressive improvements in language model capabilities through time.

***LLaMA models.*** In accordance with the findings reported by Rozière et al. (2024), the Llama2-7B model achieved an accuracy of 12.2% on the HumanEval dataset, while Code Llama 7B reached 33.5%. Table 4 shows that, the Llama2-Coder recorded accuracies of 11.52%, 12.52%, and 14.12% on 3-bit quantization for medium and large sizes, and in 4-bit quantization for the medium size, respectively on the HumanEval dataset. Moreover, as expected, performance on the EvalPlus dataset was lower, yet the Llama2-Coder-7B.Q4\_K\_M emerged as the most effective model, achieving an accuracy of 11.36%. These results indicate that the quantized versions of the Code Llama models significantly compromised the quality and correctness of the code.

**Mistral.** According to the Mixtral 8x7B paper (Jiang et al., 2024), Mistral 7B achieved a 26.00% accuracy in zero-shot tasks on the HumanEval dataset, while EvalPlus Leaderboard study (Team, 2024a) reported a slightly higher accuracy of 28.7%, both using the non-quantized version.

Table 4 compares these scores with the performance of various quantized versions of Mistral-7B, indicating competitive but varied results. The best performance was achieved by the Mistral-7B-Instruct-v0.2.Q3\_K\_S model with a pass@1 score of 32.92%, followed by Mistral-7B-Instruct-v0.2.Q3\_K\_M at 27.40%. Surprisingly, the lowest scores were obtained by Mistral-7B-Instruct-v0.2.Q2\_K and Mistral-7B-Instruct-v0.2.Q5\_K\_M, with pass@1 scores of 15.85% and 13.41% respectively. This finding confirms once more that quantizing with more bits does not necessarily lead to better results.

Unsurprisingly, the quantized Mistral models showed inferior performance on the EvalPlus dataset, which contains more unit tests. Models scored on average 1.6 points lower than on the HumanEval dataset. However, the overall ranking of the tested models remained consistent between the two datasets.

Finally, we evaluated the performance of the Mistral-7b-openorca.Q3\_K\_L model, where it surpassed other quantized Mistral variants with accuracies of 34.75% and 32.31%, respectively. However, as detailed in Section 7, its performance on our dataset was significantly lower than that of other quantized Mistral models due to penalties for failing to generate outputs in the correct format. This discrepancy highlights the model’s difficulties in interpreting input prompts with restrictive conditions for generating Python code.

***dolphin-2.6-mistral-7b***. In our evaluation, we considered models quantized at 5, 6, and 8 bits. These models outperformed mistral models. Notably, on the HumanEval dataset, the 6-bit model achieved the highest score of 54.26, followed by the 5-bit model at 51.82, then followed by the *dolphin-2.6-mistral-7b.Q8\_0* which scored 49.39. Similarly, in the EvalPlus dataset, the *dolphin-2.6-mistral-7b.Q6\_K* model scored highest with 48.17, while the 8-bit model had the lowest score of 44.51.

These results demonstrate the superior performance of *dolphin-2.6-mistral-7b* in Python generation over mistral in both the HumanEval and EvalPlus datasets. As a reminder, on our dataset, the *dolphin-2.6-mistral-7b* model scored lower than mistral. It's important to note that although *dolphin-2.6-mistral-7b* generates correct code, it was penalized for not following the specific output format we provided. This highlights the importance to adhere to the correct format, even if the code is functionally correct. Thus, while mistral excels in understanding the required output format, *dolphin-2.6* demonstrates a high capability in generating Python code but often fails to deliver it in the prescribed format.

***openhermes-2.5-mistral-7***. The evaluation results on the HumanEval and EvalPlus datasets show the effectiveness of the *openhermes-2.5-mistral-7b* in Python code generation, surpassing other mistral models. However, it scores lower than the *dolphin-2.6-mistral-7b* models, which is expected since the latter were trained using code datasets, enhancing their performance in such tasks. Although mistral models achieved better scores in our dataset but lower scores on HumanEval and EvalPlus, it's important to note that *openhermes-2.5-mistral-7b* also produces correct and functional codes. How-

ever, similarly to dolphin-2.6-mistral-7b models, these were also penalized due to not adhering to the required output format, resulting in a reduced score of 0.5.

***Inference Time.*** Table 4 shows minimal differences in inference times among the evaluated models. Mistral and LLaMa are the fastest, with a small difference of 104.36 milliseconds between Mistral’s 2-bit and 8-bit quantized versions. The openhermes family of models have longer inference times on average, with the 8-bit quantized version being the slowest at 426.11 milliseconds. These results highlight the efficiency and practicality of these CPU-friendly models in terms of both inference speed and performance.

## 9. Conclusions and Future Directions

In this paper, we examine the efficiency of CPU-friendly models in generating Python code across various scenarios. Specifically, our dataset tasked models with generating Python code from a given problem statement, using predetermined variable names and returning a specified set of options included in the input prompt. On the contrary, in the HumanEval and EvalPlus datasets, the challenge was to generate Python code from the function’s signature and docstring, allowing us to assess the functional correctness of LLM-synthesized code.

Our evaluation of CPU-friendly models across different datasets assesses not only their ability to generate correct Python code but also their adherence to specified variable names and output formats. The findings reveal two key points: 1) CPU-friendly models achieve competitive scores compared to advanced chatbot models like ChatGPT-3.5, ChatGPT-4, and Gemini,

which require significant GPU resources for processing; 2) some models, such as `dolphin-2.6-mistral-7b`, excel in generating Python code but fall short in meeting the required output formats. Often, even if the generated code is correct, these models are penalized for not returning the specified options from the input prompt. A similar issue affects the `openhermes-2.5-mistral-7b` model, albeit with slightly lower scores than `dolphin-2.6-mistral-7b`. In contrast, models like `mistral` demonstrate consistent performance in understanding prompts and generating code, leading to superior results on our dataset, though they perform worse on HumanEval and EvalPlus datasets.

Remarkably, `llama.cpp` project has achieved competitive outcomes using standard computers, a development that seemed highly unlikely just a few months or years ago. This progress highlights the feasibility of running sophisticated language models on CPUs today. However, it is important to note that we did not utilize more powerful models such as `mixtral`, an enhanced version of `mistral`. Despite existing quantized versions, `mixtral` still requires considerable computational resources which our machines could not support. For instance, the 2-bit quantized version of `mixtral` requires 15.6 GB of storage and 18.14 GB of RAM, while the 8-bit version needs 49.62 GB of storage and 52.12 GB of RAM. Thus, these models do not align with our goal of demonstrating the performance of CPU-friendly models on conventional machines.

In our future work, we plan to explore additional capabilities of CPU-friendly models in various tasks, including defect detection in code, cloze tests, code refinement, and code translation.



## Acknowledgments

We would like to acknowledge Novelis for their support in publishing this article. We are especially grateful for the assistance and contributions of their research team.

## References

- Agarap, A.F., 2019. Deep learning using rectified linear units (relu). [arXiv:1803.08375](https://arxiv.org/abs/1803.08375).
- Aghajanyan, A., Huang, B., Ross, C., Karpukhin, V., Xu, H., Goyal, N., Okhonko, D., Joshi, M., Ghosh, G., Lewis, M., Zettlemoyer, L., 2022. Cm3: A causal masked multimodal model of the internet. [arXiv:2201.07520](https://arxiv.org/abs/2201.07520).
- Ahmad, W., Chakraborty, S., Ray, B., Chang, K.W., 2021. Unified pre-training for program understanding and generation, in: Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Association for Computational Linguistics, Online. pp. 2655–2668. URL: <https://aclanthology.org/2021.naacl-main.211>, doi:10.18653/v1/2021.naacl-main.211.
- Ahmed, I., Roy, A., Kajol, M., Hasan, U., Datta, P.P., Reza, M.R., 2023. Chatgpt vs. bard: a comparative study. Authorea Preprints .
- Ainslie, J., Lee-Thorp, J., de Jong, M., Zemlyanskiy, Y., Lebron, F., Sanghai, S., 2023. GQA: Training generalized multi-query transformer models from multi-head checkpoints, in: Bouamor, H., Pino, J., Bali, K. (Eds.),

- Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, Association for Computational Linguistics, Singapore. pp. 4895–4901. URL: <https://aclanthology.org/2023.emnlp-main.298>, doi:10.18653/v1/2023.emnlp-main.298.
- Anand, Y., Nussbaum, Z., Duderstadt, B., Schmidt, B., Mulyar, A., 2023. Gpt4all: Training an assistant-style chatbot with large scale data distillation from gpt-3.5-turbo. <https://github.com/nomic-ai/gpt4all>.
- Austin, J., Odena, A., Nye, M., Bosma, M., Michalewski, H., Dohan, D., Jiang, E., Cai, C., Terry, M., Le, Q., Sutton, C., 2021. Program synthesis with large language models. [arXiv:2108.07732](https://arxiv.org/abs/2108.07732).
- Ba, J.L., Kiros, J.R., Hinton, G.E., 2016. Layer normalization. [arXiv:1607.06450](https://arxiv.org/abs/1607.06450).
- Beltagy, I., Peters, M.E., Cohan, A., 2020. Longformer: The long-document transformer. URL: <https://arxiv.org/abs/2004.05150>, [arXiv:2004.05150](https://arxiv.org/abs/2004.05150).
- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J.D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G., Henighan, T., Child, R., Ramesh, A., Ziegler, D., Wu, J., Winter, C., Hesse, C., Chen, M., Sigler, E., Litwin, M., Gray, S., Chess, B., Clark, J., Berner, C., McCandlish, S., Radford, A., Sutskever, I., Amodei, D., 2020. Language models are few-shot learners, in: Larochelle, H., Ranzato, M., Hadsell, R., Balcan, M., Lin, H. (Eds.), Advances in Neural Information Processing Systems, Curran Associates, Inc..

pp. 1877–1901. URL: [https://proceedings.neurips.cc/paper\\_files/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf).

Chen, M., Tworek, J., Jun, H., Yuan, Q., Pinto, H.P.d.O., Kaplan, J., Edwards, H., Burda, Y., Joseph, N., Brockman, G., Ray, A., Puri, R., Krueger, G., Petrov, M., Khlaaf, H., Sastry, G., Mishkin, P., Chan, B., Gray, S., Ryder, N., Pavlov, M., Power, A., Kaiser, L., Bavarian, M., Winter, C., Tillet, P., Such, F.P., Cummings, D., Plappert, M., Chantzis, F., Barnes, E., Herbert-Voss, A., Guss, W.H., Nichol, A., Paino, A., Tezak, N., Tang, J., Babuschkin, I., Balaji, S., Jain, S., Saunders, W., Hesse, C., Carr, A.N., Leike, J., Achiam, J., Misra, V., Morikawa, E., Radford, A., Knight, M., Brundage, M., Murati, M., Mayer, K., Welinder, P., McGrew, B., Amodei, D., McCandlish, S., Sutskever, I., Zaremba, W., 2021. Evaluating large language models trained on code. ArXiv abs/2107.03374. URL: <https://api.semanticscholar.org/CorpusID:235755472>.

Chen, W., 2023. Large language models are few(1)-shot table reasoners. [arXiv:2210.06710](https://arxiv.org/abs/2210.06710).

Chiang, W.L., Li, Z., Lin, Z., Sheng, Y., Wu, Z., Zhang, H., Zheng, L., Zhuang, S., Zhuang, Y., Gonzalez, J.E., Stoica, I., Xing, E.P., 2023. Vicuna: An open-source chatbot impressing gpt-4 with 90%\* chatgpt quality. URL: <https://lmsys.org/blog/2023-03-30-vicuna/>.

Chowdhery, A., Narang, S., Devlin, J., Bosma, M., Mishra, G., Roberts, A., Barham, P., Chung, H.W., Sutton, C., Gehrmann, S., Schuh, P., Shi, K., Tsvyashchenko, S., Maynez, J., Rao, A., Barnes, P., Tay, Y., Shazeer, N., Prabhakaran, V., Reif, E., Du, N., Hutchinson, B., Pope, R., Bradbury, J.,

- Austin, J., Isard, M., Gur-Ari, G., Yin, P., Duke, T., Levskaya, A., Ghemawat, S., Dev, S., Michalewski, H., Garcia, X., Misra, V., Robinson, K., Fedus, L., Zhou, D., Ippolito, D., Luan, D., Lim, H., Zoph, B., Spiridonov, A., Sepassi, R., Dohan, D., Agrawal, S., Omernick, M., Dai, A.M., Pillai, T.S., Pellat, M., Lewkowycz, A., Moreira, E., Child, R., Polozov, O., Lee, K., Zhou, Z., Wang, X., Saeta, B., Diaz, M., Firat, O., Catasta, M., Wei, J., Meier-Hellstern, K., Eck, D., Dean, J., Petrov, S., Fiedel, N., 2022. Palm: Scaling language modeling with pathways. [arXiv:2204.02311](https://arxiv.org/abs/2204.02311).
- Christiano, P.F., Leike, J., Brown, T., Martic, M., Legg, S., Amodei, D., 2017. Deep reinforcement learning from human preferences. *Advances in Neural Information Processing Systems* 30. URL: [https://proceedings.neurips.cc/paper\\_files/paper/2017/file/d5e2c0adad503c91f91df240d0cd4e49-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2017/file/d5e2c0adad503c91f91df240d0cd4e49-Paper.pdf).
- Cobbe, K., Kosaraju, V., Bavarian, M., Chen, M., Jun, H., Kaiser, L., Plappert, M., Tworek, J., Hilton, J., Nakano, R., Hesse, C., Schulman, J., 2021. Training verifiers to solve math word problems. [arXiv:2110.14168](https://arxiv.org/abs/2110.14168).
- Coursera, 2023. Most popular programming languages in 2024. URL: <https://www.coursera.org/articles/popular-programming-languages>.
- Cui, G., Yuan, L., Ding, N., Yao, G., Zhu, W., Ni, Y., Xie, G., Liu, Z., Sun, M., 2023. Ultrafeedback: Boosting language models with high-quality feedback. [arXiv:2310.01377](https://arxiv.org/abs/2310.01377).
- Dai, Z., Yang, Z., Yang, Y., Carbonell, J., Le, Q.V., Salakhutdinov, R., 2019.

- Transformer-xl: Attentive language models beyond a fixed-length context. `arXiv:1901.02860`.
- Daniele, L., Suphavadeeprasit, 2023. Amplify-instruct: Synthetically generated diverse multi-turn conversations for efficient llm training. arXiv preprint `arXiv:(coming soon)` URL: <https://huggingface.co/datasets/LDJnr/Capybara>.
- Dao, T., Fu, D., Ermon, S., Rudra, A., Ré, C., 2022. Flashattention: Fast and memory-efficient exact attention with io-awareness. *Advances in Neural Information Processing Systems* 35, 16344–16359.
- Dauphin, Y.N., Fan, A., Auli, M., Grangier, D., 2017. Language modeling with gated convolutional networks, in: *Proceedings of the 34th International Conference on Machine Learning - Volume 70*, JMLR.org. p. 933–941.
- Devlin, J., Chang, M.W., Lee, K., Toutanova, K., 2019. BERT: Pre-training of deep bidirectional transformers for language understanding, in: Burstein, J., Doran, C., Solorio, T. (Eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, Association for Computational Linguistics, Minneapolis, Minnesota. pp. 4171–4186. URL: <https://aclanthology.org/N19-1423>, doi:10.18653/v1/N19-1423.
- Ding, N., Chen, Y., Xu, B., Qin, Y., Zheng, Z., Hu, S., Liu, Z., Sun, M.,

- Zhou, B., 2023. Enhancing chat language models by scaling high-quality instructional conversations. [arXiv:2305.14233](https://arxiv.org/abs/2305.14233).
- Dong, Y., Jiang, X., Jin, Z., Li, G., 2023. Self-collaboration code generation via chatgpt. [arXiv:2304.07590](https://arxiv.org/abs/2304.07590).
- Frantar, E., Ashkboos, S., Hoeffler, T., Alistarh, D., 2023. Gptq: Accurate post-training quantization for generative pre-trained transformers. [arXiv:2210.17323](https://arxiv.org/abs/2210.17323).
- Fried, D., Aghajanyan, A., Lin, J., Wang, S., Wallace, E., Shi, F., Zhong, R., Yih, S., Zettlemoyer, L., Lewis, M., 2023. Incoder: A generative model for code infilling and synthesis. The Eleventh International Conference on Learning Representations URL: <https://openreview.net/forum?id=hQwb-1bM6EL>.
- Gerganov, G., 2023. llama.cpp. URL: <https://github.com/ggerganov/llama.cpp>.
- Gerganov, G., 2024. Gguf. <https://huggingface.co/docs/hub/en/gguf>.
- Gunasekar, S., Zhang, Y., Aneja, J., Mendes, C.C.T., Giorno, A.D., Gopi, S., Javaheripi, M., Kauffmann, P., de Rosa, G., Saarikivi, O., Salim, A., Shah, S., Behl, H.S., Wang, X., Bubeck, S., Eldan, R., Kalai, A.T., Lee, Y.T., Li, Y., 2023. Textbooks are all you need. [arXiv:2306.11644](https://arxiv.org/abs/2306.11644).
- Hartford, E., 2023. Dolphin dataset. URL: <https://huggingface.co/datasets/cognitivecomputations/dolphin>.

- Hendrycks, D., Burns, C., Basart, S., Zou, A., Mazeika, M., Song, D., Steinhardt, J., 2021. Measuring massive multitask language understanding. [arXiv:2009.03300](#).
- Hoffmann, J., Borgeaud, S., Mensch, A., Buchatskaya, E., Cai, T., Rutherford, E., de Las Casas, D., Hendricks, L.A., Welbl, J., Clark, A., Hennigan, T., Noland, E., Millican, K., van den Driessche, G., Damoc, B., Guy, A., Osindero, S., Simonyan, K., Elsen, E., Rae, J.W., Vinyals, O., Sifre, L., 2022. Training Compute-Optimal Large Language Models. [arXiv e-prints](#).
- Inc., M., TsinghuaNLP, 2024. Minicpm: Unveiling the potential of end-side large language models.
- Jiang, A.Q., Sablayrolles, A., Mensch, A., Bamford, C., Chaplot, D.S., de las Casas, D., Bressand, F., Lengyel, G., Lample, G., Saulnier, L., Lavaud, L.R., Lachaux, M.A., Stock, P., Scao, T.L., Lavril, T., Wang, T., Lacroix, T., Sayed, W.E., 2023. Mistral 7b. [arXiv:2310.06825](#).
- Jiang, A.Q., Sablayrolles, A., Roux, A., Mensch, A., Savary, B., Bamford, C., Chaplot, D.S., de las Casas, D., Hanna, E.B., Bressand, F., Lengyel, G., Bour, G., Lample, G., Lavaud, L.R., Saulnier, L., Lachaux, M.A., Stock, P., Subramanian, S., Yang, S., Antoniak, S., Scao, T.L., Gervet, T., Lavril, T., Wang, T., Lacroix, T., Sayed, W.E., 2024. Mixtral of experts. [arXiv:2401.04088](#).
- Kulal, S., Pasupat, P., Chandra, K., Lee, M., Padon, O., Aiken, A., Liang, P.S., 2019. Spoc: Search-based pseudocode to code, in: Wallach, H.,

Larochelle, H., Beygelzimer, A., d'Alché-Buc, F., Fox, E., Garnett, R. (Eds.), Advances in Neural Information Processing Systems, Curran Associates, Inc. URL: [https://proceedings.neurips.cc/paper\\_files/paper/2019/file/7298332f04ac004a0ca44cc69ecf6f6b-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2019/file/7298332f04ac004a0ca44cc69ecf6f6b-Paper.pdf).

Lancaster, T., 2023. Artificial intelligence, text generation tools and chatgpt—does digital watermarking offer a solution? International Journal for Educational Integrity 19, 10.

Leswing, K., 2024. Nvidia ceo jensen huang announces new ai chips: ‘we need bigger gpus’. URL: <https://www.cnbc.com/2024/03/18/nvidia-announces-gb200-blackwell-ai-chip-launching-later-this-year.html>.

Li, R., allal, L.B., Zi, Y., Muennighoff, N., Kocetkov, D., Mou, C., Marone, M., Akiki, C., LI, J., Chim, J., Liu, Q., Zheltonozhskii, E., Zhuo, T.Y., Wang, T., Dehaene, O., Lamy-Poirier, J., Monteiro, J., Gontier, N., Yee, M.H., Umapathi, L.K., Zhu, J., Lipkin, B., Oblokulov, M., Wang, Z., Murthy, R., Stillerman, J.T., Patel, S.S., Abulkhanov, D., Zocca, M., Dey, M., Zhang, Z., Bhattacharyya, U., Yu, W., Luccioni, S., Villegas, P., Zhdanov, F., Lee, T., Timor, N., Ding, J., Schlesinger, C.S., Schoelkopf, H., Ebert, J., Dao, T., Mishra, M., Gu, A., Anderson, C.J., Dolan-Gavitt, B., Contractor, D., Reddy, S., Fried, D., Bahdanau, D., Jernite, Y., Ferrandis, C.M., Hughes, S., Wolf, T., Guha, A., Werra, L.V., de Vries, H., 2023a. Starcoder: may the source be with you! Transactions on Machine Learning Research URL: <https://openreview.net/forum?id=KoF0g41haE>. reproducibility Certification.



- Li, Y., Bubeck, S., Eldan, R., Giorno, A.D., Gunasekar, S., Lee, Y.T., 2023b. Textbooks are all you need ii: phi-1.5 technical report. [arXiv:2309.05463](https://arxiv.org/abs/2309.05463).
- Li, Y., Choi, D., Chung, J., Kushman, N., Schrittwieser, J., Leblond, R., Eccles, T., Keeling, J., Gimeno, F., Dal Lago, A., Hubert, T., Choy, P., de Masson d’Autume, C., Babuschkin, I., Chen, X., Huang, P.S., Welbl, J., Goyal, S., Cherepanov, A., Molloy, J., Mankowitz, D.J., Sutherland Robson, E., Kohli, P., de Freitas, N., Kavukcuoglu, K., Vinyals, O., 2022. Competition-level code generation with alphacode. *Science* 378, 1092–1097. URL: <http://dx.doi.org/10.1126/science.abq1158>, doi:10.1126/science.abq1158.
- Lin, J., Tang, J., Tang, H., Yang, S., Dang, X., Gan, C., Han, S., 2023. Awq: Activation-aware weight quantization for llm compression and acceleration. [arXiv:2306.00978](https://arxiv.org/abs/2306.00978).
- Lin, S., Hilton, J., Evans, O., 2021. Truthfulqa: Measuring how models mimic human falsehoods. [arXiv:2109.07958](https://arxiv.org/abs/2109.07958).
- Liu, C., Bao, X., Zhang, H., Zhang, N., Hu, H., Zhang, X., Yan, M., 2023a. Improving chatgpt prompt for code generation. [arXiv:2305.08360](https://arxiv.org/abs/2305.08360).
- Liu, J., Xia, C.S., Wang, Y., ZHANG, L., 2023b. Is your code generated by chatGPT really correct? rigorous evaluation of large language models for code generation. Thirty-seventh Conference on Neural Information Processing Systems URL: <https://openreview.net/forum?id=1qvx610Cu7>.
- Liu, J., Xia, C.S., Wang, Y., ZHANG, L., 2023c. Is your code generated by chatgpt really correct? rigorous evaluation of large language models

- for code generation, in: Oh, A., Neumann, T., Globerson, A., Saenko, K., Hardt, M., Levine, S. (Eds.), *Advances in Neural Information Processing Systems*, Curran Associates, Inc.. pp. 21558–21572. URL: [https://proceedings.neurips.cc/paper\\_files/paper/2023/file/43e9d647ccd3e4b7b5baab53f0368686-Paper-Conference.pdf](https://proceedings.neurips.cc/paper_files/paper/2023/file/43e9d647ccd3e4b7b5baab53f0368686-Paper-Conference.pdf).
- López Espejel, J., Ettifouri, E.H., Yahaya Alassan, M.S., Chouham, E.M., Dahhane, W., 2023. Gpt-3.5, gpt-4, or bard? evaluating llms reasoning ability in zero-shot setting and performance boosting through prompts. *Natural Language Processing Journal* 5, 100032. URL: <https://www.sciencedirect.com/science/article/pii/S2949719123000298>, doi:<https://doi.org/10.1016/j.nlp.2023.100032>.
- Ma, Y., Cao, Y., Sun, J., Pavone, M., Xiao, C., 2023. Dolphins: Multimodal language model for driving. *arXiv:2312.00438*.
- Manyika, J., 2023. An overview of bard: an early experiment with generative ai.
- Mukherjee, S., Mitra, A., Jawahar, G., Agarwal, S., Palangi, H., Awadallah, A., 2023. Orca: Progressive learning from complex explanation traces of gpt-4. *arXiv:2306.02707*.
- Mulia, A.P., Piri, P.R., Tho, C., 2023. Usability analysis of text generation by chatgpt openai using system usability scale method. *Procedia Computer Science* 227, 381–388. URL: <https://www.sciencedirect.com/science/article/pii/S1877050923017040>, doi:<https://doi.org/>

10.1016/j.procs.2023.10.537. 8th International Conference on Computer Science and Computational Intelligence (ICCSCI 2023).

OpenIA, 2022. Introducing chatgpt. <https://openai.com/blog/chatgpt>.

OpenIA, 2023. Gpt-4 technical report. arxiv URL: <https://arxiv.org/pdf/2303.08774.pdf>.

Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C.L., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., Schulman, J., Hilton, J., Kelton, F., Miller, L.E., Simens, M., Aspell, A., Welinder, P., Christiano, P.F., Leike, J., Lowe, R.J., 2022. Training language models to follow instructions with human feedback. ArXiv abs/2203.02155.

Plevris, V., Papazafeiropoulos, G., Jiménez Rios, A., 2023. Chatbots put to the test in math and logic problems: A comparison and assessment of chatgpt-3.5, chatgpt-4, and google bard. AI 4, 949–969.

Radford, A., Narasimhan, K., Salimans, T., Sutskever, I., 2018a. Improving language understanding by generative pre-training. arxiv .

Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., 2018b. Language models are unsupervised multitask learners. arxiv URL: <https://d4mucfpksywv.cloudfront.net/better-language-models/language-models.pdf>.

Rae, J.W., Borgeaud, S., Cai, T., Millican, K., Hoffmann, J., Song, F., Aslanides, J., Henderson, S., Ring, R., Young, S., Rutherford, E., Hennigan, T., Menick, J., Cassirer, A., Powell, R., van den Driessche, G., Hendricks, L.A., Rauh, M., Huang, P.S., Glaese, A., Welbl, J., Dhariwal, S.,

- Huang, S., Uesato, J., Mellor, J., Higgins, I., Creswell, A., McAleese, N., Wu, A., Elsen, E., Jayakumar, S., Buchatskaya, E., Budden, D., Sutherland, E., Simonyan, K., Paganini, M., Sifre, L., Martens, L., Li, X.L., Kuncoro, A., Nematzadeh, A., Gribovskaya, E., Donato, D., Lazaridou, A., Mensch, A., Lespiau, J.B., Tsimpoukelli, M., Grigorev, N., Fritz, D., Sottiaux, T., Pajarskas, M., Pohlen, T., Gong, Z., Toyama, D., de Masson d’Autume, C., Li, Y., Terzi, T., Mikulik, V., Babuschkin, I., Clark, A., de Las Casas, D., Guy, A., Jones, C., Bradbury, J., Johnson, M., Hechtman, B., Weidinger, L., Gabriel, I., Isaac, W., Lockhart, E., Osindero, S., Rimell, L., Dyer, C., Vinyals, O., Ayoub, K., Stanway, J., Bennett, L., Hassabis, D., Kavukcuoglu, K., Irving, G., 2021. Scaling Language Models: Methods, Analysis & Insights from Training Gopher. arXiv e-prints , arXiv:2112.11446doi:10.48550/arXiv.2112.11446, arXiv:2112.11446.
- Rafailov, R., Sharma, A., Mitchell, E., Ermon, S., Manning, C.D., Finn, C., 2023. Direct preference optimization: Your language model is secretly a reward model. arXiv:2305.18290.
- Ramachandran, P., Zoph, B., Le, Q.V., 2017. Swish: a self-gated activation function. arXiv: Neural and Evolutionary Computing URL: <https://api.semanticscholar.org/CorpusID:196158220>.
- Rozière, B., Gehring, J., Gloeckle, F., Sootla, S., Gat, I., Tan, X.E., Adi, Y., Liu, J., Sauvestre, R., Remez, T., Rapin, J., Kozhevnikov, A., Evtimov, I., Bitton, J., Bhatt, M., Ferrer, C.C., Grattafiori, A., Xiong, W., Défossez, A., Copet, J., Azhar, F., Touvron, H., Martin, L., Usunier, N., Scialom,

- T., Synnaeve, G., 2024. Code llama: Open foundation models for code. [arXiv:2308.12950](https://arxiv.org/abs/2308.12950).
- Shazeer, N., 2020. Glu variants improve transformer. [arXiv:2002.05202](https://arxiv.org/abs/2002.05202).
- Smith, S., Patwary, M., Norick, B., LeGresley, P., Rajbhandari, S., Casper, J., Liu, Z., Prabhunoye, S., Zerveas, G., Korthikanti, V., Zhang, E., Child, R., Aminabadi, R.Y., Bernauer, J., Song, X., Shoeybi, M., He, Y., Houston, M., Tiwary, S., Catanzaro, B., 2022. Using deepspeed and megatron to train megatron-turing nlg 530b, a large-scale generative language model. [arXiv:2201.11990](https://arxiv.org/abs/2201.11990).
- Taori, R., Gulrajani, I., Zhang, T., Dubois, Y., Li, X., Guestrin, C., Liang, P., Hashimoto, T.B., 2023. Stanford alpaca: An instruction-following llama model. [https://github.com/tatsu-lab/stanford\\_alpaca](https://github.com/tatsu-lab/stanford_alpaca).
- Team, G., Anil, R., Borgeaud, S., Wu, Y., Alayrac, J.B., Yu, J., Soricut, R., Schalkwyk, J., Dai, A.M., Hauth, A., Millican, K., Silver, D., Petrov, S., Johnson, M., Antonoglou, I., Schrittwieser, J., Glaese, A., Chen, J., Pitler, E., Lillicrap, T., Lazaridou, A., Firat, O., Molloy, J., Isard, M., Barham, P.R., Hennigan, T., Lee, B., Viola, F., Reynolds, M., Xu, Y., Doherty, R., Collins, E., Meyer, C., Rutherford, E., Moreira, E., Ayoub, K., Goel, M., Tucker, G., Piqueras, E., Krikun, M., Barr, I., Savinov, N., Danielhelka, I., Roelofs, B., White, A., Andreassen, A., von Glehn, T., Yagati, L., Kazemi, M., Gonzalez, L., Khalman, M., Sygnowski, J., Frechette, A., Smith, C., Culp, L., Proleev, L., Luan, Y., Chen, X., Lottes, J., Schucher, N., Lebron, F., Rrustemi, A., Clay, N., Crone, P., Kocisky, T., Zhao, J., Perz, B., Yu, D., Howard, H., Bloniarz, A., Rae, J.W., Lu, H., Sifre, L.,

Maggioni, M., Alcober, F., Garrette, D., Barnes, M., Thakoor, S., Austin, J., Barth-Maron, G., Wong, W., Joshi, R., Chaabouni, R., Fatiha, D., Ahuja, A., Liu, R., Li, Y., Cogan, S., Chen, J., Jia, C., Gu, C., Zhang, Q., Grimstad, J., Hartman, A.J., Chadwick, M., Tomar, G.S., Garcia, X., Senter, E., Taropa, E., Pillai, T.S., Devlin, J., Laskin, M., de Las Casas, D., Valter, D., Tao, C., Blanco, L., Badia, A.P., Reitter, D., Chen, M., Brennan, J., Rivera, C., Brin, S., Iqbal, S., Surita, G., Labanowski, J., Rao, A., Winkler, S., Parisotto, E., Gu, Y., Olszewska, K., Zhang, Y., Addanki, R., Miech, A., Louis, A., Shafey, L.E., Teplyashin, D., Brown, G., Catt, E., Attaluri, N., Balaguer, J., Xiang, J., Wang, P., Ashwood, Z., Briukhov, A., Webson, A., Ganapathy, S., Sanghavi, S., Kannan, A., Chang, M.W., Stjerngren, A., Djolonga, J., Sun, Y., Bapna, A., Aitchison, M., Pejman, P., Michalewski, H., Yu, T., Wang, C., Love, J., Ahn, J., Bloxwich, D., Han, K., Humphreys, P., Sellam, T., Bradbury, J., Godbole, V., Samangooei, S., Damoc, B., Kaskasoli, A., Arnold, S.M.R., Vasudevan, V., Agrawal, S., Riesa, J., Lepikhin, D., Tanburn, R., Srinivasan, S., Lim, H., Hodkinson, S., Shyam, P., Ferret, J., Hand, S., Garg, A., Paine, T.L., Li, J., Li, Y., Giang, M., Neitz, A., Abbas, Z., York, S., Reid, M., Cole, E., Chowdhery, A., Das, D., Rogozińska, D., Nikolaev, V., Sprechmann, P., Nado, Z., Zilka, L., Prost, F., He, L., Monteiro, M., Mishra, G., Welty, C., Newlan, J., Jia, D., Allamanis, M., Hu, C.H., de Liedekerke, R., Gilmer, J., Saroufim, C., Rijhwani, S., Hou, S., Shrivastava, D., Baddepudi, A., Goldin, A., Ozturel, A., Cassirer, A., Xu, Y., Sohn, D., Sachan, D., Amplayo, R.K., Swanson, C., Petrova, D., Narayan, S., Guez, A., Brahma, S., Landon, J., Patel, M., Zhao, R., Villela, K., Wang, L., Jia, W., Rahtz,

M., Giménez, M., Yeung, L., Lin, H., Keeling, J., Georgiev, P., Mincu, D., Wu, B., Haykal, S., Saputro, R., Vodrahalli, K., Qin, J., Cankara, Z., Sharma, A., Fernando, N., Hawkins, W., Neyshabur, B., Kim, S., Hutter, A., Agrawal, P., Castro-Ros, A., van den Driessche, G., Wang, T., Yang, F., Yiin Chang, S., Komarek, P., McIlroy, R., Lučić, M., Zhang, G., Farhan, W., Sharman, M., Natsev, P., Michel, P., Cheng, Y., Bansal, Y., Qiao, S., Cao, K., Shakeri, S., Butterfield, C., Chung, J., Rubenstein, P.K., Agrawal, S., Mensch, A., Soparkar, K., Lenc, K., Chung, T., Pope, A., Maggiore, L., Kay, J., Jhakra, P., Wang, S., Maynez, J., Phuong, M., Tobin, T., Tacchetti, A., Trebacz, M., Robinson, K., Katariya, Y., Riedel, S., Bailey, P., Xiao, K., Ghelani, N., Aroyo, L., Slone, A., Houlsby, N., Xiong, X., Yang, Z., Gribovskaya, E., Adler, J., Wirth, M., Lee, L., Li, M., Kagohara, T., Pavagadhi, J., Bridgers, S., Bortsova, A., Ghemawat, S., Ahmed, Z., Liu, T., Powell, R., Bolina, V., Iinuma, M., Zablotskaia, P., Besley, J., Chung, D.W., Dozat, T., Comanescu, R., Si, X., Greer, J., Su, G., Polacek, M., Kaufman, R.L., Tokumine, S., Hu, H., Buchatskaya, E., Miao, Y., Elhawaty, M., Siddhant, A., Tomasev, N., Xing, J., Greer, C., Miller, H., Ashraf, S., Roy, A., Zhang, Z., Ma, A., Filos, A., Besta, M., Blevins, R., Klimenko, T., Yeh, C.K., Changpinyo, S., Mu, J., Chang, O., Pajarskas, M., Muir, C., Cohen, V., Lan, C.L., Haridasan, K., Marathe, A., Hansen, S., Douglas, S., Samuel, R., Wang, M., Austin, S., Lan, C., Jiang, J., Chiu, J., Lorenzo, J.A., Sjöstrand, L.L., Cevey, S., Gleicher, Z., Avrahami, T., Boral, A., Srinivasan, H., Selo, V., May, R., Aisopos, K., Hussenot, L., Soares, L.B., Baumli, K., Chang, M.B., Recasens, A., Caine, B., Pritzel, A., Pavetic, F., Pardo, F., Gergely, A., Frye, J., Ramasesh, V., Horgan, D.,

Badola, K., Kassner, N., Roy, S., Dyer, E., Campos, V., Tomala, A., Tang, Y., Badawy, D.E., White, E., Mustafa, B., Lang, O., Jindal, A., Vikram, S., Gong, Z., Caelles, S., Hemsley, R., Thornton, G., Feng, F., Stokowiec, W., Zheng, C., Thacker, P., Çağlar Ünlü, Zhang, Z., Saleh, M., Svensson, J., Bileschi, M., Patil, P., Anand, A., Ring, R., Tsihlas, K., Vezer, A., Selvi, M., Shevlane, T., Rodriguez, M., Kwiatkowski, T., Daruki, S., Rong, K., Dafoe, A., FitzGerald, N., Gu-Lemberg, K., Khan, M., Hendricks, L.A., Pellat, M., Feinberg, V., Cobon-Kerr, J., Sainath, T., Rauh, M., Hashemi, S.H., Ives, R., Hasson, Y., Li, Y., Noland, E., Cao, Y., Byrd, N., Hou, L., Wang, Q., Sottiaux, T., Paganini, M., Lespiau, J.B., Moufarek, A., Hassan, S., Shivakumar, K., van Amersfoort, J., Mandhane, A., Joshi, P., Goyal, A., Tung, M., Brock, A., Sheahan, H., Misra, V., Li, C., Rakićević, N., Dehghani, M., Liu, F., Mittal, S., Oh, J., Noury, S., Sezener, E., Huot, F., Lamm, M., Cao, N.D., Chen, C., Elsayed, G., Chi, E., Mahdieh, M., Tenney, I., Hua, N., Petrychenko, I., Kane, P., Scandinaro, D., Jain, R., Uesato, J., Datta, R., Sadovsky, A., Bunyan, O., Rabiej, D., Wu, S., Zhang, J., Vasudevan, G., Leurent, E., Alnahlawi, M., Georgescu, I., Wei, N., Zheng, I., Chan, B., Rabinovitch, P.G., Stanczyk, P., Zhang, Y., Steiner, D., Naskar, S., Azzam, M., Johnson, M., Paszke, A., Chiu, C.C., Elias, J.S., Mohiuddin, A., Muhammad, F., Miao, J., Lee, A., Vieillard, N., Potluri, S., Park, J., Davoodi, E., Zhang, J., Stanway, J., Garmon, D., Karmarkar, A., Dong, Z., Lee, J., Kumar, A., Zhou, L., Evens, J., Isaac, W., Chen, Z., Jia, J., Levskaya, A., Zhu, Z., Gorgolewski, C., Grabowski, P., Mao, Y., Magni, A., Yao, K., Snaider, J., Casagrande, N., Suganthan, P., Palmer, E., Irving, G., Loper, E., Faruqui, M., Arkatkar, I., Chen, N.,



Shafran, I., Fink, M., Castaño, A., Giannoumis, I., Kim, W., Rybiński, M., Sreevatsa, A., Prendki, J., Soergel, D., Goedeckemeyer, A., Gierke, W., Jafari, M., Gaba, M., Wiesner, J., Wright, D.G., Wei, Y., Vashisht, H., Kulizhskaya, Y., Hoover, J., Le, M., Li, L., Iwuanyanwu, C., Liu, L., Ramirez, K., Khorlin, A., Cui, A., LIN, T., Georgiev, M., Wu, M., Aguilar, R., Pallo, K., Chakladar, A., Repina, A., Wu, X., van der Weide, T., Ponnappalli, P., Kaplan, C., Simsa, J., Li, S., Dousse, O., Yang, F., Piper, J., Ie, N., Lui, M., Pasumarthi, R., Lintz, N., Vijayakumar, A., Thiet, L.N., Andor, D., Valenzuela, P., Paduraru, C., Peng, D., Lee, K., Zhang, S., Greene, S., Nguyen, D.D., Kurylowicz, P., Velury, S., Krause, S., Hardin, C., Dixon, L., Janzer, L., Choo, K., Feng, Z., Zhang, B., Singhal, A., Latkar, T., Zhang, M., Le, Q., Abellan, E.A., Du, D., McKinnon, D., Antropova, N., Bolukbasi, T., Keller, O., Reid, D., Finchelstein, D., Raad, M.A., Crocker, R., Hawkins, P., Dadashi, R., Gaffney, C., Lall, S., Franko, K., Filonov, E., Bulanova, A., Leblond, R., Yadav, V., Chung, S., Askham, H., Cobo, L.C., Xu, K., Fischer, F., Xu, J., Sorokin, C., Alberti, C., Lin, C.C., Evans, C., Zhou, H., Dimitriev, A., Forbes, H., Banarse, D., Tung, Z., Liu, J., Omernick, M., Bishop, C., Kumar, C., Sterneck, R., Foley, R., Jain, R., Mishra, S., Xia, J., Bos, T., Cideron, G., Amid, E., Piccinno, F., Wang, X., Banzal, P., Gurita, P., Noga, H., Shah, P., Mankowitz, D.J., Polozov, A., Kushman, N., Krakovna, V., Brown, S., Bateni, M., Duan, D., Firoiu, V., Thotakuri, M., Natan, T., Mohananey, A., Geist, M., Mudgal, S., Girgin, S., Li, H., Ye, J., Roval, O., Tojo, R., Kwong, M., Lee-Thorp, J., Yew, C., Yuan, Q., Bagri, S., Sinopalnikov, D., Ramos, S., Mellor, J., Sharma, A., Severyn, A., Lai, J., Wu, K., Cheng,

H.T., Miller, D., Sonnerat, N., Vnukov, D., Greig, R., Beattie, J., Cave-  
ness, E., Bai, L., Eisenschlos, J., Korchemniy, A., Tsai, T., Jasarevic, M.,  
Kong, W., Dao, P., Zheng, Z., Liu, F., Yang, F., Zhu, R., Geller, M., Teh,  
T.H., Sanmiya, J., Gladchenko, E., Trdin, N., Sozanschi, A., Toyama, D.,  
Rosen, E., Tavakkol, S., Xue, L., Elkind, C., Woodman, O., Carpenter, J.,  
Papamakarios, G., Kemp, R., Kafle, S., Grunina, T., Sinha, R., Talbert,  
A., Goyal, A., Wu, D., Owusu-Afriyie, D., Du, C., Thornton, C., Pont-  
Tuset, J., Narayana, P., Li, J., Fatehi, S., Wieting, J., Ajmeri, O., Uria, B.,  
Zhu, T., Ko, Y., Knight, L., Héliou, A., Niu, N., Gu, S., Pang, C., Tran,  
D., Li, Y., Levine, N., Stolovich, A., Kalb, N., Santamaria-Fernandez, R.,  
Goenka, S., Yustalim, W., Strudel, R., Elqursh, A., Lakshminarayanan,  
B., Deck, C., Upadhyay, S., Lee, H., Dusenberry, M., Li, Z., Wang, X.,  
Levin, K., Hoffmann, R., Holtmann-Rice, D., Bachem, O., Yue, S., Arora,  
S., Malmi, E., Mirylenka, D., Tan, Q., Koh, C., Yeganeh, S.H., Pöder, S.,  
Zheng, S., Pongetti, F., Tariq, M., Sun, Y., Ionita, L., Seyedhosseini, M.,  
Tafti, P., Kotikalapudi, R., Liu, Z., Gulati, A., Liu, J., Ye, X., Chrzaszcz,  
B., Wang, L., Sethi, N., Li, T., Brown, B., Singh, S., Fan, W., Parisi, A.,  
Stanton, J., Kuang, C., Koverkathu, V., Choquette-Choo, C.A., Li, Y.,  
Lu, T., Ittycheriah, A., Shroff, P., Sun, P., Varadarajan, M., Bahargam,  
S., Willoughby, R., Gaddy, D., Dasgupta, I., Desjardins, G., Cornero, M.,  
Robenek, B., Mittal, B., Albrecht, B., Shenoy, A., Moiseev, F., Jacobsson,  
H., Ghaffarkhah, A., Rivière, M., Walton, A., Crepy, C., Parrish, A., Liu,  
Y., Zhou, Z., Farabet, C., Radebaugh, C., Srinivasan, P., van der Salm,  
C., Fidjeland, A., Scellato, S., Latorre-Chimoto, E., Klimczak-Plucińska,  
H., Bridson, D., de Cesare, D., Hudson, T., Mendolicchio, P., Walker, L.,

Morris, A., Penchev, I., Mauger, M., Guseynov, A., Reid, A., Odoom, S., Loher, L., Cotruta, V., Yenugula, M., Grewe, D., Petrushkina, A., Duerig, T., Sanchez, A., Yadlowsky, S., Shen, A., Globerson, A., Kurzrok, A., Webb, L., Dua, S., Li, D., Lahoti, P., Bhupatiraju, S., Hurt, D., Qureshi, H., Agarwal, A., Shani, T., Eyal, M., Khare, A., Belle, S.R., Wang, L., Tekur, C., Kale, M.S., Wei, J., Sang, R., Saeta, B., Liechty, T., Sun, Y., Zhao, Y., Lee, S., Nayak, P., Fritz, D., Vuyyuru, M.R., Aslanides, J., Vyas, N., Wicke, M., Ma, X., Bilal, T., Eltyshev, E., Balle, D., Martin, N., Cate, H., Manyika, J., Amiri, K., Kim, Y., Xiong, X., Kang, K., Luisier, F., Tripuraneni, N., Madras, D., Guo, M., Waters, A., Wang, O., Ainslie, J., Baldridge, J., Zhang, H., Pruthi, G., Bauer, J., Yang, F., Mansour, R., Gelman, J., Xu, Y., Polovets, G., Liu, J., Cai, H., Chen, W., Sheng, X., Xue, E., Ozair, S., Yu, A., Angermueller, C., Li, X., Wang, W., Wiesinger, J., Koukoumidis, E., Tian, Y., Iyer, A., Gurumurthy, M., Goldenson, M., Shah, P., Blake, M., Yu, H., Urbanowicz, A., Palomaki, J., Fernando, C., Brooks, K., Durden, K., Mehta, H., Momchev, N., Rahimtoroghi, E., Georgaki, M., Raul, A., Ruder, S., Redshaw, M., Lee, J., Jalan, K., Li, D., Perng, G., Hechtman, B., Schuh, P., Nasr, M., Chen, M., Milan, K., Mikulik, V., Strohman, T., Franco, J., Green, T., Hassabis, D., Kavukcuoglu, K., Dean, J., Vinyals, O., 2023. Gemini: A family of highly capable multimodal models. [arXiv:2312.11805](https://arxiv.org/abs/2312.11805).

Team, G., Mesnard, T., Hardin, C., Dadashi, R., Bhupatiraju, S., Pathak, S., Sifre, L., Rivière, M., Kale, M.S., Love, J., Tafti, P., Hussenot, L., Chowdhery, A., Roberts, A., Barua, A., Botev, A., Castro-Ros, A., Slone, A., Héliou, A., Tacchetti, A., Bulanova, A., Paterson, A., Tsai, B., Shahri-

ari, B., Lan, C.L., Choquette-Choo, C.A., Crepy, C., Cer, D., Ippolito, D., Reid, D., Buchatskaya, E., Ni, E., Noland, E., Yan, G., Tucker, G., Muraru, G.C., Rozhdestvenskiy, G., Michalewski, H., Tenney, I., Grishchenko, I., Austin, J., Keeling, J., Labanowski, J., Lespiau, J.B., Stanway, J., Brennan, J., Chen, J., Ferret, J., Chiu, J., Mao-Jones, J., Lee, K., Yu, K., Millican, K., Sjoesund, L.L., Lee, L., Dixon, L., Reid, M., Mikula, M., Wirth, M., Sharman, M., Chinaev, N., Thain, N., Bachem, O., Chang, O., Wahltinez, O., Bailey, P., Michel, P., Yotov, P., Sessa, P.G., Chaabouni, R., Comanescu, R., Jana, R., Anil, R., McIlroy, R., Liu, R., Mullins, R., Smith, S.L., Borgeaud, S., Girgin, S., Douglas, S., Pandya, S., Shakeri, S., De, S., Klimenko, T., Hennigan, T., Feinberg, V., Stokowiec, W., hui Chen, Y., Ahmed, Z., Gong, Z., Warkentin, T., Peran, L., Giang, M., Farabet, C., Vinyals, O., Dean, J., Kavukcuoglu, K., Hassabis, D., Ghahramani, Z., Eck, D., Barral, J., Pereira, F., Collins, E., Joulin, A., Fiedel, N., Senter, E., Andreev, A., Kenealy, K., 2024. Gemma: Open models based on gemini research and technology. [arXiv:2403.08295](https://arxiv.org/abs/2403.08295).

Team, H., 2024a. Evalplus leaderboard. <https://evalplus.github.io/leaderboard.html>.

Team, H., 2024b. Magicoder-oss-instruct-75k. <https://huggingface.co/datasets/ise-uiuc/Magicoder-OSS-Instruct-75K>.

Teknum, 2023. Openhermes 2.5 mistral 7b - gguf. URL: <https://huggingface.co/teknum/OpenHermes-2.5-Mistral-7B>.

Thoppilan, R., Freitas, D., Hall, J., Shazeer, N., Kulshreshtha, A., Cheng, H.T., Jin, A., Bos, T., Baker, L., Du, Y., Li, Y., Lee, H., Zheng, H.,

- Ghafouri, A., Menegali, M., Huang, Y., Krikun, M., Lepikhin, D., Qin, J., Le, Q., 2022. Lamda: Language models for dialog applications. [arXiv](#) .
- Touvron, H., Lavril, T., Izacard, G., Martinet, X., Lachaux, M.A., Lacroix, T., Rozière, B., Goyal, N., Hambro, E., Azhar, F., Rodriguez, A., Joulin, A., Grave, E., Lample, G., 2023a. Llama: Open and efficient foundation language models. [arXiv:2302.13971](#).
- Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., Bikel, D., Blecher, L., Ferrer, C.C., Chen, M., Cucurull, G., Esiobu, D., Fernandes, J., Fu, J., Fu, W., Fuller, B., Gao, C., Goswami, V., Goyal, N., Hartshorn, A., Hosseini, S., Hou, R., Inan, H., Kardas, M., Kerkez, V., Khabsa, M., Kloumann, I., Korenev, A., Koura, P.S., Lachaux, M.A., Lavril, T., Lee, J., Liskovich, D., Lu, Y., Mao, Y., Martinet, X., Mihaylov, T., Mishra, P., Molybog, I., Nie, Y., Poulton, A., Reizenstein, J., Rungta, R., Saladi, K., Schelten, A., Silva, R., Smith, E.M., Subramanian, R., Tan, X.E., Tang, B., Taylor, R., Williams, A., Kuan, J.X., Xu, P., Yan, Z., Zarov, I., Zhang, Y., Fan, A., Kambadur, M., Narang, S., Rodriguez, A., Stojnic, R., Edunov, S., Scialom, T., 2023b. Llama 2: Open foundation and fine-tuned chat models. [arXiv:2307.09288](#).
- Tunstall, L., Beeching, E., Lambert, N., Rajani, N., Rasul, K., Belkada, Y., Huang, S., von Werra, L., Fourrier, C., Habib, N., Sarrazin, N., Sanseviero, O., Rush, A.M., Wolf, T., 2023. Zephyr: Direct distillation of lm alignment. [arXiv:2310.16944](#).
- Vailshery, L.S., 2024. Most used programming languages among developers

worldwide as of 2023. URL: <https://www.statista.com/statistics/793628/worldwide-developer-survey-most-used-languages/>.

Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, L.u., Polosukhin, I., 2017. Attention is all you need. Advances in Neural Information Processing Systems 30. URL: [https://proceedings.neurips.cc/paper\\_files/paper/2017/file/3f5ee243547dee91fbd053c1c4a845aa-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2017/file/3f5ee243547dee91fbd053c1c4a845aa-Paper.pdf).

Wang, B., Komatsuzaki, A., 2021. Gpt-j-6b: A 6 billion parameter autoregressive language model. <https://github.com/kingoflolz/mesh-transformer-jax>. URL: <https://github.com/kingoflolz/mesh-transformer-jax>.

Wei, J., Tay, Y., Bommasani, R., Raffel, C., Zoph, B., Borgeaud, S., Yogatama, D., Bosma, M., Zhou, D., Metzler, D., Chi, E.H., Hashimoto, T., Vinyals, O., Liang, P., Dean, J., Fedus, W., 2022a. Emergent abilities of large language models. arXiv:2206.07682.

Wei, J., Wang, X., Schuurmans, D., Bosma, M., hsin Chi, E.H., Xia, F., Le, Q., Zhou, D., 2022b. Chain of thought prompting elicits reasoning in large language models. ArXiv abs/2201.11903. URL: <https://api.semanticscholar.org/CorpusID:246411621>.

Wei, Y., Wang, Z., Liu, J., Ding, Y., Zhang, L., 2023. Magicoder: Source code is all you need. arXiv preprint arXiv:2312.02120 .

Wu, X., Duan, R., Ni, J., 2023. Unveiling security, privacy, and ethical concerns of chatgpt. Journal of Information and Intelli-

gence URL: <https://www.sciencedirect.com/science/article/pii/S2949715923000707>, doi:<https://doi.org/10.1016/j.jiixd.2023.10.007>.

Yu, Z., He, L., Wu, Z., Dai, X., Chen, J., 2023. Towards better chain-of-thought prompting strategies: A survey. [arXiv:2310.04959](https://arxiv.org/abs/2310.04959).

Zhang, B., Sennrich, R., 2019. Root mean square layer normalization. [arXiv:1910.07467](https://arxiv.org/abs/1910.07467).

Zheng, L., Chiang, W.L., Sheng, Y., Zhuang, S., Wu, Z., Zhuang, Y., Lin, Z., Li, Z., Li, D., Xing, E.P., Zhang, H., Gonzalez, J.E., Stoica, I., 2023. Judging llm-as-a-judge with mt-bench and chatbot arena. [arXiv:2306.05685](https://arxiv.org/abs/2306.05685).

Zhong, W., Cui, R., Guo, Y., Liang, Y., Lu, S., Wang, Y., Saied, A., Chen, W., Duan, N., 2023. Agieval: A human-centric benchmark for evaluating foundation models. [arXiv:2304.06364](https://arxiv.org/abs/2304.06364).