

Regional Style and Color Transfer

1st Zhicheng Ding

*Fu Foundation School of Engineering and Applied Science
Columbia University
New York, USA
zhicheng.ding@columbia.edu*

3rd Qikai Yang

*Department of Computer Science
University of Illinois Urbana-Champaign
Urbana, USA
qikai2@illinois.edu*

5th Qingtian Gong

*Fu Foundation School of Engineering and Applied Science
Columbia University
New York, USA
qg2159@columbia.edu*

2nd Panfeng Li

*Department of Electrical and Computer Engineering
University of Michigan
Ann Arbor, USA
pfli@umich.edu*

4th Siyang Li

*Lubin School of Business
Pace University
New York, USA
lisiyang98@hotmail.com*

Abstract—This paper presents a novel contribution to the field of regional style transfer. Existing methods often suffer from the drawback of applying style homogeneously across the entire image, leading to stylistic inconsistencies or foreground object twisted when applied to images with foreground elements such as person figures. To address this limitation, we propose a new approach that leverages a segmentation network to precisely isolate foreground objects within the input image. Subsequently, style transfer is applied exclusively to the background region. The isolated foreground objects are then carefully reintegrated into the style-transferred background. To enhance the visual coherence between foreground and background, a color transfer step is employed on the foreground elements prior to their reincorporation. Finally, we utilize feathering techniques to achieve a seamless amalgamation of foreground and background, resulting in a visually unified and aesthetically pleasing final composition. Extensive evaluations demonstrate that our proposed approach yields significantly more natural stylistic transformations compared to conventional methods.

Index Terms—Object Segmentation, Style Transfer, Color Transfer

I. INTRODUCTION

In the domain of computer vision, recent advancements in image segmentation techniques [1–4] have had a profound impact. These advancements facilitate the precise delineation of objects and regions within images. Traditional segmentation methods primarily relied on handcrafted features and heuristic algorithms. However, the emergence of deep learning-based approaches, particularly convolutional neural networks (CNNs) [5–12], has revolutionized this field. CNN-based models like U-Net and Mask R-CNN [13–23] have demonstrated exceptional performance in segmenting objects with intricate shapes and diverse appearances. This paves the way for more accurate and efficient image understanding tasks.

In parallel, The field of style transfer has concurrently witnessed significant progress in recent years, fueled by the growing interest in neural style transfer algorithms. These algorithms aim to apply the artistic style of a reference

image to a target image while faithfully preserving content of the target image. Early methods employed optimization-based approaches. However, with the advent of deep learning, neural style transfer has evolved to leverage pre-trained CNNs like VGG and ResNet [24–33], enabling the achievement of impressive results in real-time style transfer applications. These advancements have unveiled new avenues for creative expression and artistic rendering within the realm of digital media.

Similarly, color transfer techniques have also undergone remarkable developments, particularly within the context of image enhancement and color harmonization. These techniques aim to transfer the color distribution of a source image to a target image while maintaining its content and structural integrity. Traditional color transfer algorithms often relied on histogram matching and statistical methods. However, modern approaches leverage deep learning architectures to learn intricate mappings between color distributions [34]. These deep learning-based color transfer models offer superior performance and flexibility, enabling the creation of more natural and aesthetically pleasing color adjustments in images.

To address the limitations associated with unnatural style transfer, this paper presents a novel regional artistic style and color transfer approach. We first employ object segmentation to process the image and generate a mask. This mask facilitates the division of the foreground object (e.g., person) and the background (e.g., scenic view, road, room). Subsequently, color transfer and style transfer are applied to the foreground and background regions, respectively. Finally, the two stylistically altered images are seamlessly blended together.

In summary, our paper makes the following key contributions:

- We propose a regional style and color transfer approach specifically designed to overcome the unnatural effects associated with global style or color transfer applied to the entire image.

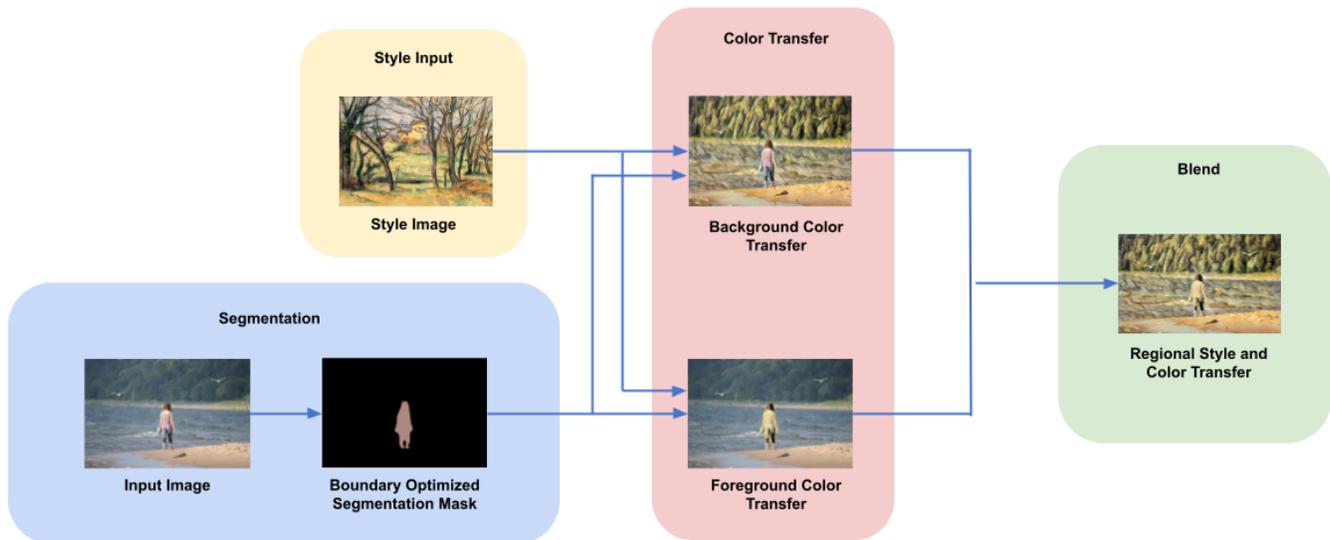


Fig. 1: Regional style and color transfer framework

- Through extensive experimentation, we demonstrate the advantages of applying style and color transfer within distinct image regions, resulting in a more natural aesthetic outcome.
- Our method possesses the inherent capability to be extended to establish a correspondence between painted images and video frames, thereby enabling the creation of stylized films.
- Leveraging effective segmentation techniques, our approach offers a concise and effective framework for seamlessly applying and switching between style transfer algorithms.

II. METHODS

This section details the comprehensive approach adopted in this study to elucidate the influence of regionally applied stylistic and chromatic alterations. The proposed framework at fig 1 takes two input images: a content image and a style image. The model strategically partitions the style transfer process, applying the stylistic elements to the background region and the color transfer to the foreground region. To achieve this regional manipulation, semantic segmentation [35–37] is leveraged to delineate the person foreground. Subsequently, the style-transferred background and color-transferred foreground are seamlessly integrated using a blending technique, effectively mitigating any potential artifacts at the boundary.

A. Segmentation and Boundary Optimization

Semantic Segmentation Our image segmentation approach leverages the DeepLabv3+ [38]. This model incorporates Atrous Spatial Pyramid Pooling (ASPP) [39] alongside an encoder-decoder structure to capture rich contextual information. ASPP employs a series of atrous convolutions with varying dilation rates, enabling the model to learn features at



(a) No Boundary Optimization (b) With Boundary Optimization

Fig. 2: Comparison of Segmentation Boundary with or without Optimization

diverse scales. The encoder progressively encodes these features across scales, while the decoder refines them to generate high-resolution segmentation masks. We trained the model on the PASCAL VOC 2012 dataset [40], encompassing 20 object classes including "person". This dataset comprises 11,530 images with 27,450 annotated objects and 6,929 segmentation. A ResNet-101 backbone was utilized with a stride of 16 to expedite the training process. This configuration achieved a segmentation performance of 82.1% mean Intersection-over-Union (mIoU) on the PASCAL VOC 2012 validation set. Notably, with 64 channels, the model attained an mIoU of 78.21%.

Boundary Optimization Person object boundaries extracted from segmentation masks often exhibit noise. To facilitate independent style and color application to distinct regions, precise boundaries are crucial. We address this by employing a two-step boundary optimization process. Initially, Canny edge detection is applied to the original image. Subsequently, a Breadth-First Search (BFS) algorithm traverses each point on the binary person mask, starting from the periphery and moving inwards. For each point, 1) If the closest edge point resides within the mask, the point is removed, and its unvisited

neighbors are added to a First-In-First-Out (FIFO) queue. 2) If the nearest edge point lies outside the mask, the point is skipped, and the traversal continues. Finally, Euclidean distance-based smoothing is applied to refine the extracted boundary.

B. Artistic Style Transfer

We followed the idea of fast style transfer [41] to train the style transfer. This method reduces the total amount of parameters in the model to achieve faster style transfers with pre-trained style. Given a layer l of the model, N_l is the number of feature maps, and M_l is the size of each feature map. The output of a layer can be stored in a matrix $F^l \in R^{N_l \times M_l}$ where F_{ij}^l is the activation of the i^{th} filter at position j in layer l . The Gram Matrix from style representation is expressed: $G_{ij}^l = \sum_k F_{ik}^l F_{jk}^l$.

The squared-error loss between the original image and the generated images is defined as following:

$$L_{content} = \frac{1}{2} \sum_{i,j} (F_{ij}^l - P_{ij}^l)^2 \quad (1)$$

$$L_{style} = \sum_{l=0}^L \frac{w_l}{4N_l^2 M_l^2} \sum_{i,j} (G_{ij}^l - A_{ij}^l)^2 \quad (2)$$

where P_{ij}^l indicates original image in layer l , and w_l are weighting factors compared to the total loss. A^l is the style presentation in layer l . Hereby, we get the total loss function: $L_{total} = \alpha L_{content} + \beta L_{style}$, in which α and β are weighting factors for content and style construction, respectively. Through times of training, the ratio $\frac{\alpha}{\beta} = \frac{15}{85}$ gave us the best result. Therefore, we adopt this ratio in this method.

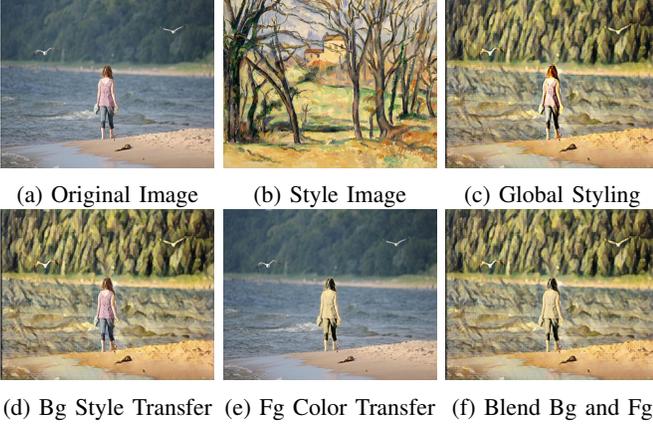


Fig. 3: showcases the effects of global style transfer (Fig 3c, background style transfer (Fig 3d), foreground color transfer (Fig 3e) and final blend image (Fig 3f).

C. Color Transfer

This work proposes a method for color transfer specifically targeted at the foreground region of an image. This approach aims to achieve color harmony between the foreground (e.g., a person) and a style-transferred background while preserving

the integrity of the portrait. To achieve this, we leverage the $l\alpha\beta$ color space, which aligns well with the statistics of natural scenes and human visual perception, for color representation. The conversion from the original RGB space to $l\alpha\beta$ follows the established method by Reinhard *et al.* [34]:

$$\begin{bmatrix} L \\ M \\ S \end{bmatrix} = \begin{bmatrix} 0.3811 & 0.5783 & 0.0402 \\ 0.1967 & 0.7244 & 0.0782 \\ 0.0241 & 0.1288 & 0.8444 \end{bmatrix} \begin{bmatrix} R \\ G \\ B \end{bmatrix} \quad (3)$$

$$\begin{bmatrix} l \\ \alpha \\ \beta \end{bmatrix} = \begin{bmatrix} \frac{1}{\sqrt{3}} & 0 & 0 \\ 0 & \frac{1}{\sqrt{6}} & 0 \\ 0 & 0 & \frac{1}{\sqrt{2}} \end{bmatrix} \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & -2 \\ 1 & -1 & 0 \end{bmatrix} \begin{bmatrix} \log L \\ \log M \\ \log S \end{bmatrix} \quad (4)$$

Within the $l\alpha\beta$ space, each pixel is represented as a three-dimensional vector. To reduce dimension and capture the dominant color variations, we employ Principal Component Analysis (PCA) in this 3D space for both the image and the style representation. This involves eigenvalue decomposition of the covariance matrix $X^T X$, where X is an $n \times 3$ matrix containing all pixel vectors of an image in $l\alpha\beta$ space. The first principal component vector, q , corresponding to the largest eigenvalue, captures the most significant color variation direction. By calculating the dot product with q , all pixel vectors in an image are projected onto a one-dimensional line, effectively capturing the main color distribution.

For each pixel i on the original image, our task is to find the equivalent pixel j on the style image and transfer its RGB color:

$$(R_{T^i}, G_{T^i}, B_{T^i}) \leftarrow (R_{S_j}, G_{S_j}, B_{S_j}) \quad (5)$$

We use the pixel j such that

$$F[(l_{T^i}, \alpha_{T^i}, \beta_{T^i}) \cdot q_T] = F[(l_{S_j}, \alpha_{S_j}, \beta_{S_j}) \cdot q_S] \quad (6)$$

in which $F(x)$ indicates the cumulative density function and q_T and q_S indicate the first principal components of the original image and the style, respectively.

D. Blending Style and Color

In the preceding stages, a background style-transferred image, a foreground color-transferred image, and an optimized person segmentation mask were generated. To create the final result, these elements are seamlessly combined leveraging the optimized segmentation mask.

We employ alpha blending, a well-established technique in computer graphics, to achieve a seamless integration of the aforementioned images. As detailed in Section II-A, the Euclidean distance metric was previously utilized to generate a feathered boundary within the segmentation mask. This inherent property of the mask provides a range of values between 0.0 and 1.0, perfectly suited for alpha blending. The following equation mathematically represents the pixel-wise blending process:

$$C_{blend} = \alpha \cdot C_{color} + (1 - \alpha) \cdot C_{style} \quad (7)$$

where α is the pixel value of boundary, C_{style} denotes the pixel value of global style transfer image, and C_{color} represents the pixel value of global color transfer image.

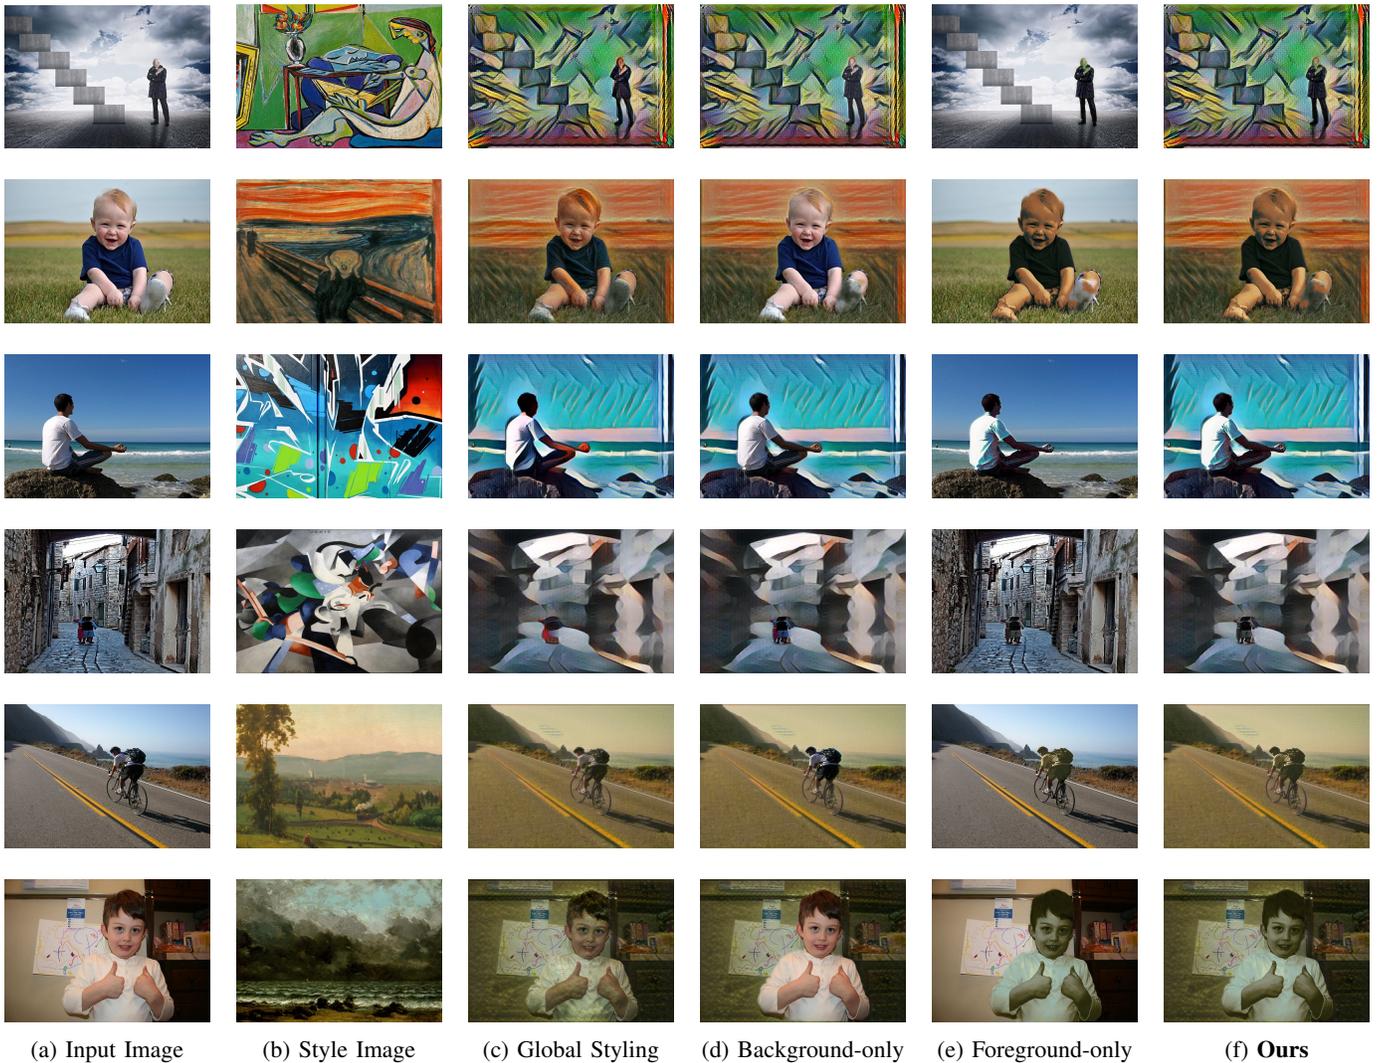


Fig. 4: illustrates a qualitative comparison of the results obtained for six sets of input image (a) and their corresponding style image (b). The comparison includes four images manipulation techniques: global style transfer (c), background-only style transfer (d), foreground-only color transfer (e), and our proposed method – regional style and color transfer (f), which combines background style transfer with foreground color transfer.

III. RESULTS

A. Segmentation and Boundary Optimization

We evaluated the impact of boundary optimization on regional style transfer. To isolate the effect of boundary optimization, color transfer to the foreground region was intentionally omitted from the analysis. As illustrated in Fig 2, the proposed boundary optimization algorithm demonstrably improved boundary preservation, highlighting its effectiveness.

B. Background Style Transfer

In the context of neural style transfer, we employ a loss function that balances the contributions of the content image and the style reference image. This optimization process leads to a trade-off parameter that determines the relative influence of each image on the final output. Leveraging the segmentation mask obtained in the preceding step, we achieve selective

style transfer by applying the artistic style solely to the background region, while preserving the foreground content of the original image. As illustrated in Fig 3d, the resulting image successfully integrates the content of the original image with the style of the reference image, applied exclusively to the background.

C. Foreground Color Transfer

To achieve visual harmony between the style-transferred background and the foreground object (e.g., person), we perform a color transfer operation specifically on the foreground region. This process aims to adapt the color palette of the foreground to better complement the stylized background, while maintaining the integrity of the portrait itself. Fig 3e demonstrates the successful integration of the original image content with the color characteristics of the style image,

applied selectively to the foreground element.

D. Image Blending

Leveraging the strengths of both style transfer and color transfer, our approach meticulously separates the foreground and background regions. This enables the creation of a final output where the artistic style from the reference image is seamlessly integrated into the background, while the foreground portraits retain their original color characteristics with rigorous fidelity. Fig 3f exemplifies this meticulous approach, showcasing the generation of an aesthetically unified image. The foreground elements appear to harmoniously co-exist with the artistically rendered background, achieving a visually compelling and perceptually convincing outcome.

To comprehensively evaluate the effectiveness of our proposed method, we conducted a series of experiments utilizing diverse input and style images. Fig 4 showcases a comparative analysis of various image manipulation techniques. As can be observed, global style transfer exhibits a significant limitation: the style is indiscriminately applied across the entire image, resulting in a visually distorted and unnatural appearance for both the foreground and background. Background-only style transfer, while successful in preserving the integrity of the foreground portraits, introduces a visual inconsistency, where the portraits appear in-congruent with the artistically transformed background. In contrast, our proposed regional style and color transfer method stands out as a groundbreaking advancement. It achieves the remarkable feat of seamlessly integrating the artistic style from the reference image into the background, while meticulously preserving the natural color fidelity of the foreground portraits. This results in a visually harmonious image where the foreground elements organically co-exist with the artistically rendered background, creating an aesthetically pleasing and perceptually convincing outcome.

IV. CONCLUSIONS

This paper presents a novel approach to regional style and color transfer, effectively addressing the limitations of global style transfer methods that often produce unnatural results. Our proposed technique leverages the power of regional style and color transfer within selective image regions, demonstrably leading to better visual quality and enhanced realism.

Extensive experimentation underscores the effectiveness of our method in controlling style and color transfer across various regions, culminating in a significantly more natural aesthetic. The elegance and efficiency of our approach lie in its seamless integration with existing segmentation techniques, enabling style and color transfer to designated image areas.

Furthermore, our framework exhibits inherent scalability, readily adaptable to establish stylistic correspondences between painted images and video frames, paving the way for the creation of stylized films. While our current implementation demonstrates minimal computational overhead, future research directions include extending the framework's applicability beyond human segmentation to encompass diverse object categories (e.g., vehicles, animals). Additionally, we

aim to optimize inference speed and efficiency to address the exponential growth in computational cost associated with larger input images. These advancements will constitute the cornerstone of our ongoing research efforts.

REFERENCES

- [1] P. Li, Y. Lin, and E. Schultz-Fellenz, "Contextual hourglass network for semantic segmentation of high resolution aerial imagery," *arXiv preprint arXiv:1810.12813*, 2019.
- [2] L. Li, "Cpseg: Finer-grained image semantic segmentation via chain-of-thought language prompting," in *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, 2024, pp. 513–522.
- [3] H. Peng, X. Xie, K. Shivdakar, M. A. Hasan, J. Zhao, S. Huang, O. Khan, D. Kaeli, and C. Ding, "Maxk-gnn: Extremely fast gpu kernel design for accelerating graph neural networks training," in *Proceedings of the 29th ACM International Conference on Architectural Support for Programming Languages and Operating Systems, Volume 2*, 2024, pp. 683–698.
- [4] L. Li, "Segment any building," in *Computer Graphics International Conference*. Springer, 2023, pp. 155–166.
- [5] Q. Yang, P. Li, Z. Ding, W. Zhou, Y. Nian, and X. Xu, "A comparative study on enhancing prediction in social network advertisement through data augmentation," *arXiv preprint arXiv:2404.13812*, 2024.
- [6] M. Xiao, Y. Li, X. Yan, M. Gao, and W. Wang, "Convolutional neural network classification of cancer cytopathology images: taking breast cancer as an example," *arXiv preprint arXiv:2404.08279*, 2024.
- [7] Y. Li, X. Yan, M. Xiao, W. Wang, and F. Zhang, "Investigation of creating accessibility linked data based on publicly available accessibility datasets," in *Proceedings of the 2023 13th International Conference on Communication and Network Security*, ser. ICCNS '23. New York, NY, USA: Association for Computing Machinery, 2024, p. 77–81.
- [8] W. Dai, J. Tao, X. Yan, Z. Feng, and J. Chen, "Addressing unintended bias in toxicity detection: An lstm and attention-based approach," in *2023 5th International Conference on Artificial Intelligence and Computer Applications (ICAICA)*, 2023, pp. 375–379.
- [9] H. Peng, S. Huang, T. Zhou, Y. Luo, C. Wang, Z. Wang, J. Zhao, X. Xie, A. Li, T. Geng *et al.*, "Autorep: Automatic relu replacement for fast private network inference," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 5178–5188.
- [10] C.-H. Chang, X. Wang, and C. C. Yang, "Explainable ai for fair sepsis mortality predictive model," *arXiv preprint arXiv:2404.13139*, 2024.
- [11] Y. Li, A. Dao, W. Bao, Z. Tan, T. Chen, H. Liu, and Y. Kong, "Facial affective behavior analysis with instruction tuning," *arXiv preprint arXiv:2404.05052*, 2024.
- [12] D. Li, S. Yang, Z. Tan, J. Y. Baik, S. Yun, J. Lee, A. Chacko, B. Hou, D. Duong-Tran, Y. Ding, H. Liu, L. Shen, and T. Chen, "Dalk: Dynamic co-augmentation of llms and kg to answer alzheimer's disease questions with scientific literature," *arXiv preprint arXiv:2405.04819*, 2024.
- [13] C. Yao, M. Nagao, and A. Datta-Gupta, "A deep-learning based accelerated workflow for robust co2 plume imaging at the illinois basin-decatur carbon sequestration project," 12 2023.
- [14] T. Deng, G. Shen, T. Qin, J. Wang, W. Zhao, J. Wang, D. Wang, and W. Chen, "Plgslam: Progressive neural scene representation with local to global bundle adjustment," *arXiv preprint arXiv:2312.09866*, 2023.
- [15] Y. Xin, J. Du, Q. Wang, K. Yan, and S. Ding, "Mmap: Multi-modal alignment prompt for cross-domain multi-task learning," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 38, no. 14, 2024, pp. 16 076–16 084.
- [16] Y. Xin, S. Luo, H. Zhou, J. Du, X. Liu, Y. Fan, Q. Li, and Y. Du, "Parameter-efficient fine-tuning for pre-trained vision models: A survey," *arXiv preprint arXiv:2402.02242*, 2024.
- [17] C. Jin, T. Che, H. Peng, Y. Li, and M. Pavone, "Learning from teaching regularization: Generalizable correlations should be easy to imitate," *arXiv preprint arXiv:2402.02769*, 2024.
- [18] C. Yan, "Predict lightning location and movement with atmospherical electrical field instrument," in *2019 IEEE 10th Annual Information Technology, Electronics and Mobile Communication Conference (IEMCON)*, 2019, pp. 0535–0537.
- [19] Z. Li, P. Zhou, Y. Zhang, and L. Gao, "Joint coverage and power control in highly dynamic and massive uav networks: An aggregative game-theoretic learning approach," *ArXiv*, vol. abs/1907.08363, 2019.
- [20] X. Yan, W. Wang, M. Xiao, Y. Li, and M. Gao, "Survival prediction

across diverse cancer types using neural networks,” *arXiv preprint arXiv:2404.08713*, 2024.

- [21] C. Yan, Y. Qiu, and Y. Zhu, “Predict oil production with lstm neural network,” in *Proceedings of the 9th International Conference on Computer Engineering and Networks*. Singapore: Springer Singapore, 2021, pp. 357–364.
- [22] C. Zhou, Y. Zhao, J. Cao, Y. Shen, J. Gao, X. Cui, C. Cheng, and H. Liu, “Optimizing search advertising strategies: Integrating reinforcement learning with generalized second-price auctions for enhanced ad ranking and bidding,” *arXiv preprint arXiv:2405.13381*, 2024.
- [23] C. Zhou, Y. Zhao, Y. Zou, J. Cao, W. Fan, Y. Zhao, and C. Cheng, “Predict click-through rates with deep interest network model in e-commerce advertising,” *arXiv preprint arXiv:2406.10239*, 2024.
- [24] Z. Ding, Z. Lai, S. Li, P. Li, Q. Yang, and E. Wong, “Confidence trigger detection: Accelerating real-time tracking-by-detection systems,” *arXiv preprint arXiv:1902.00615*, 2024.
- [25] J. Yao, C. Li, K. Sun, Y. Cai, H. Li, W. Ouyang, and H. Li, “Ndc-scene: Boost monocular 3d semantic scene completion in normalized devicecoordinates space,” in *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE Computer Society, 2023, pp. 9421–9431.
- [26] X. Liu, R. Wang, D. Sun, J. Li, C. Youn, Y. Lyu, J. Zhan, D. Wu, X. Xu, M. Liu, X. Lei, Z. Xu, Y. Zhang, Z. Li, Q. Yang, and T. Abdelzaher, “Influence pathway discovery on social media,” in *2023 IEEE 9th International Conference on Collaboration and Internet Computing (CIC)*. IEEE Computer Society, 2023, pp. 105–109.
- [27] T. Deng, H. Xie, J. Wang, and W. Chen, “Long-term visual simultaneous localization and mapping: Using a bayesian persistence filter-based global map prediction,” *IEEE Robotics & Automation Magazine*, vol. 30, no. 1, pp. 36–49, 2023.
- [28] X. Chen, K. Li, T. Song, and J. Guo, “Few-shot name entity recognition on stackoverflow,” *arXiv preprint arXiv:2404.09405*, 2024.
- [29] T. Deng, N. Wang, C. Wang, S. Yuan, J. Wang, D. Wang, and W. Chen, “Incremental joint learning of depth, pose and implicit scene representation on monocular camera in large-scale scenes,” *arXiv preprint arXiv:2404.06050*, 2024.
- [30] P. Li, Q. Yang, X. Geng, W. Zhou, Z. Ding, and Y. Nian, “Exploring diverse methods in visual question answering,” *arXiv preprint arXiv:2404.13565*, 2024.
- [31] B. Jiang, L. Cheng, Z. Tan, R. Guo, and H. Liu, “Media bias matters: Understanding the impact of politically biased news on vaccine attitudes in social media,” *arXiv preprint arXiv:2403.04009*, 2024.
- [32] T. Deng, Y. Zhou, W. Wu, M. Li, J. Huang, S. Liu, Y. Song, H. Zuo, Y. Wang, Y. Yue *et al.*, “Multi-modal uav detection, classification and tracking algorithm—technical report for cvpr 2024 ug2 challenge,” *arXiv preprint arXiv:2405.16464*, 2024.
- [33] S. Wang, Z. Tan, X. Zhao, T. Chen, H. Liu, and J. Li, “Graphrgc: Self-conditioned graph generation via bootstrapped representations,” *arXiv preprint arXiv:2403.01071*, 2024.
- [34] E. Reinhard, M. Adhikhmin, B. Gooch, and P. Shirley, “Color transfer between images,” *IEEE Computer Graphics and Applications*, vol. 21, no. 5, pp. 34–41, 2001.
- [35] P. Li, M. Abouelenien, R. Mihalcea, Z. Ding, Q. Yang, and Y. Zhou, “Deception detection from linguistic and physiological data streams using bimodal convolutional neural networks,” *arXiv preprint arXiv:2311.10944*, 2023.
- [36] L. Li, “Hierarchical edge aware learning for 3d point cloud,” in *Computer Graphics International Conference*. Springer, 2023, pp. 81–92.
- [37] T. Deng, S. Liu, X. Wang, Y. Liu, D. Wang, and W. Chen, “Prosgnerf: Progressive dynamic neural scene graph with frequency modulated auto-encoder in urban scenes,” *arXiv preprint arXiv:2312.09076*, 2023.
- [38] L.-C. Chen, Y. Zhu, G. Papandreou, F. Schroff, and H. Adam, “Encoder-decoder with atrous separable convolution for semantic image segmentation,” in *ECCV*, 2018.
- [39] H. Zhao, J. Shi, X. Qi, X. Wang, and J. Jia, “Pyramid scene parsing network,” in *IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*, 2017, pp. 2881–2890.
- [40] M. Everingham, L. Van Gool, C. K. I. Williams, J. Winn, and A. Zisserman, “The PASCAL Visual Object Classes Challenge 2012 (VOC2012) Results,” <http://www.pascal-network.org/challenges/VOC/voc2012/workshop/index.html>.
- [41] L. Engstrom, “Fast style transfer,” <https://github.com/lengstrom/fast-style-transfer/>, 2016.