

Unsupervised Dynamics Prediction with Object-Centric Kinematics

Yeon-Ji Song¹, Suhyung Choi¹, Jaemin Kim¹,
Jin-Hwa Kim^{2,3,*}, and Byoung-Tak Zhang^{1,2,*}

¹Seoul National University ²AIIS ³NAVER AI Lab
{yjsong, s.choi, jykim}@snu.ac.kr,
jinhwa.kim@navercorp.com, btzhang@bi.snu.ac.kr

Abstract. Human perception involves discerning complex multi-object scenes into time-static object appearance (*i.e.*, size, shape, color) and time-varying object motion (*i.e.*, location, velocity, acceleration). This innate ability to unconsciously understand the environment is the motivation behind the success of dynamics modeling. Object-centric representations have emerged as a promising tool for dynamics prediction, yet they primarily focus on the objects’ appearance, often overlooking other crucial attributes. In this paper, we propose Object-Centric Kinematics (OCK), a framework for dynamics prediction leveraging object-centric representations. Our model utilizes a novel component named object kinematics, which comprises low-level structured states of objects’ position, velocity, and acceleration. The object kinematics are obtained via either implicit or explicit approaches, enabling comprehensive spatiotemporal object reasoning, and integrated through various transformer mechanisms, facilitating effective object-centric dynamics modeling. Our model demonstrates superior performance when handling objects and backgrounds in complex scenes characterized by a wide range of object attributes and dynamic movements. Moreover, our model demonstrates generalization capabilities across diverse synthetic environments, highlighting its potential for broad applicability in vision-related tasks.

Keywords: Dynamics Prediction · Object-centric Representations · Transformers

1 Introduction

Human-level intelligent system requires an understanding of the environments and spatiotemporal interactions of the surrounding objects [10]. This proficiency holds paramount importance as it underpins the human ability to perceive visual scenes as a geometric composition of objects’ components, thereby recognizing objects in a dynamically changing world [15]. Accordingly, object-centric representation learning has emerged to model the compositional structure of a scene into a set of object representations, similar to how humans instinctively

* Corresponding authors.

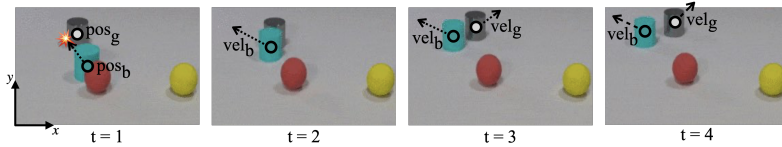


Fig. 1: Object-Centric Kinematics (OCK) decompose input video frames into a set of object kinematics, comprising position (pos) and velocity (vel). OCK is trained to comprehend the dynamics of input video frames and predict changes in object motion and appearance to generate future frames. In Fig. 1, the model predicts a collision between the blue (b) and grey (g) objects. Consequently, the blue object alters its direction of movement and the grey object makes a rebound.

understand their surroundings. The advent of object-centric learning has demonstrated value in scenarios where the set of objects encountered may be diverse and constantly changing, or even not previously encountered. It has presented remarkable performance across a wide range of domains such as scene understanding [14,30,31], object tracking [13,47], and reinforcement learning [44,45]. Particularly, object-centric representations have shown promising results in dynamics modeling, as they not only predict future frames but also learn spatiotemporal dynamics of object interactions based on their motion and appearance [18,32,41].

Among diverse approaches in dynamics modeling, transformers have been successful in solving problems that involve long-term spatiotemporal object reasoning, establishing them as a promising tool [27,33]. Within the realm of dynamics prediction, the attention mechanism and its sequential positional encoding play a pivotal role in enabling the model to selectively focus on distinct segments within input sequences during prediction. This functionality empowers the model to discern dependencies among different video frames, dynamically attending to pertinent frames across diverse positions within the sequence.

While prior works have demonstrated outstanding performance, certain approaches utilizing transformers have been limited to highly simplistic environments as they deal with implicit object appearance information [18]. Conversely, others have navigated complex scenes by focusing on permutation equivariance among objects, often associated with only short-form videos [34,41,42]. The absence of either or both of these considerations compromises robustness against *long-term* dependencies and scene *complexity*, which are the pith and marrow of dynamics modeling with transformers. Therefore, the convergence of these features necessitates a new dynamics prediction model that effectively captures explicit physical interactions and temporal dependencies within videos, specifically for long-term predictions encompassing complex object dynamics.

In this paper, we present Object-Centric Kinematics (OCK), a framework for unsupervised object-centric dynamics modeling that predicts future frames given a video using object-centric representations (Fig. 1). We utilize a novel component named object kinematics, encapsulating a low-level structured state space of objects, including position, velocity, and acceleration, which plays a central role in facilitating long-term prediction via object-centric representations.

The object kinematics are derived through two approaches: one explicitly utilizes the input frame to anticipate subsequent states, acting as guidance information for future frame generation; the other implicitly utilizes the given information, focusing on its implicit learning. We employ diverse transformer architectures to fuse the object kinematics with object slots, which are a set of object-centric representations extracted from the Slot Attention framework [20]. We analyze the capacity of our model to predict long-term dynamics in complex environments, where object dynamics, such as motion and appearance, vary repeatedly. The utilization of diverse transformers advances the understanding of spatiotemporal relationships between objects, thereby enhancing the efficiency of our model, particularly in tasks relying on large visual data. We investigate the impact of integrating the kinematics information on dynamics modeling by comparing our model with prior works that employ transformers for object-centric dynamics prediction [18,41]. Our analysis focuses on enhancements that lead to significant improvement in long-term dynamics modeling, particularly in handling complex object motion and appearance to effectively capture temporal dynamics.

In summary, we make the following contributions:

- We introduce a framework for object-centric dynamics prediction that leverages object kinematics to comprehend object attributes and make predictions about their movements using time-varying motion states (*i.e.* position, velocity) and time-static object appearances (*i.e.* size, color, texture).
- We empirically assess two recent Slot Attention based methods across six diverse datasets. Our framework notably enhances accuracy in predicting longer sequences within highly complex scenarios and exhibits better generalization to longer sequences during test time.
- We investigate the impact of utilizing additional low-level object kinematics in sequential dynamics modeling through various ablation studies.

2 Related Work

2.1 Dynamics Prediction

Video generation and prediction, often referred to as dynamics prediction, are challenging tasks that have gained significant attention in recent years. Approaches in video generation include object-agnostic models, utilizing 3D convolutions [7,36] or RNNs [25,37], and those employing structured or object-centric models, using probabilistic modeling techniques [32] or transformers [24,34,41]. The object-agnostic models often require explicit human supervision, may be restricted to simple 2D datasets, and typically concentrate on modeling temporal changes using image features. These approaches neglect explicit consideration of the composition of video frames or images. In contrast, approaches utilizing object-centric representations to disentangle image frames into object attributes provide a more nuanced and comprehensive understanding beyond general representations. Despite advancements in video prediction, generalization remains limited, with significant challenges in applying these models to unannotated

data [40]. Inspired by object-centric video prediction models using transformers, our work diverges by investigating the architecture and functioning of the transformer mechanisms through the introduction of a novel component named object kinematics. Our work contributes to the advancement of dynamics modeling, demonstrating successful performance in long-term predictions.

2.2 Object-centric Representation Learning

Recent investigations in unsupervised object-centric representation learning for visual inputs can be split into three approaches. Spatial attention approaches employ spatial transformer networks to crop rectangular regions from an image, enabling the extraction of object attributes such as position and scale [3, 9, 19]. However, these approaches often rely on a fixed-size sampling grid, which may not be suitable for scenes featuring diverse object sizes, potentially compromising training efficacy when the sampling grid fails to overlap with any object. Sequential attention models, exemplified by RNN-based frameworks, sequentially attend to different regions in an image [2, 6], resulting in a suboptimal understanding of interrelationships between objects and regions. As a result, these models often struggle to capture the global context of the entire image. Lastly, iterative attention methods initialize a set of object representations, namely *object slots*, and iteratively refine them to associate these slots with distinct regions of an image [30, 31, 35]. Predominantly inspired by Slot Attention [20], the iterative approach fosters competition among object representations by employing attention along the object dimension. Our work notably focuses on the interactive attention approaches, given their widespread usage in the field of dynamics modeling, by combining object kinematics with object slots extracted from the Slot Attention framework for long-term video prediction and generation.

2.3 Sequential Modeling with Transformers

Our research builds on the foundations of SlotFormer [41] and OCVP [34], both rooted in transformer architectures, to advance object-centric video prediction. OCVP extends SlotFormer by slightly modifying the spatiotemporal attention block. The recurrent transformer strategy facilitates long-term dynamics prediction while mitigating the information loss on spatial object motion [29]. Additionally, the object-centric representations they employ introduce an inductive bias for understanding object attributes within a sequence [22]. However, their object-wise contents are highly biased toward invariable visual cues, leading to a narrow focus on learning implicit changes in video frames. This limited scope results in a lack of depth in capturing advanced object motion and appearances. Accordingly, the key strength of dynamics modeling lies in overcoming these inherent limitations, in which the utilization of objects’ kinematics information plays a vital role in predicting spatiotemporal dynamics, significantly enhancing the model’s capabilities [23]. Extensive research has explored the generalization capabilities of transformers, particularly in symbolic mathematical modeling and compositional reasoning [5, 39]. Building upon this area of research, our method

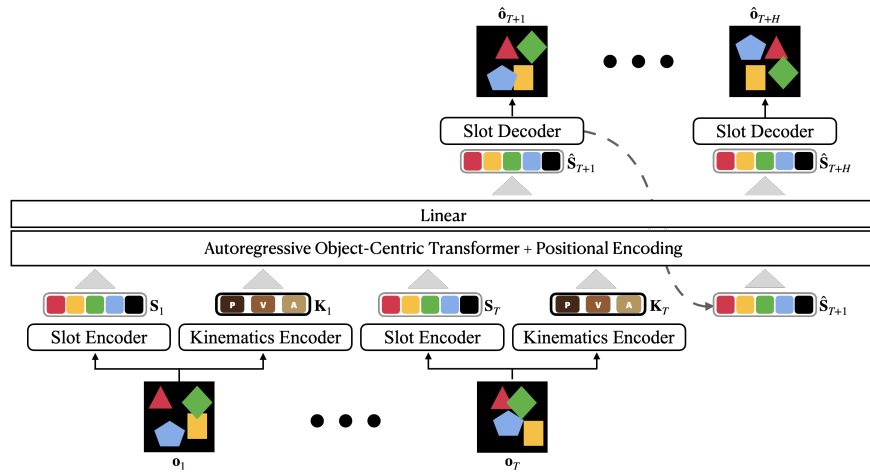


Fig. 2: Object-Centric Kinematics (OCK) overview. Our model utilizes object slots obtained from the slot encoder and object kinematics computed from the kinematics encoder to generate future frames in an autoregressive manner.

leverages object kinematics with transformers to comprehend and predict the explicit sequence of objects for dynamics modeling, considering both time-varying object motion (*i.e.*, location, velocity, acceleration) and time-static object appearance (*i.e.*, size, shape, color) properties across various time steps.

3 Method

OCK is built upon an autoregressive object-centric transformer as summarized in Fig. 2. The input to the OCK is obtained through two modules, involving the extraction of slot-based object-centric representation in Sec. 3.1 and object-centric kinematics in Sec. 3.2. We demonstrate how they are subsequently fed into a transformer module in Sec. 3.3, forming the basis for spatiotemporal future frame prediction and generation in an autoregressive way, as described in Sec. 3.4.

3.1 Slot-based Object-centric Encoder

We leverage the Slot Attention framework to map image features to object slots (*ref.* Sec. 2.2). A convolutional neural network extracts a grid of image features from a video frame \mathbf{o}_t , which are then flattened into a set of feature map $\mathbf{h}_t \in \mathbb{R}^{M \times D_{ft}}$ that represent its semantic information, where M is the size of the flattened $H \times W$ feature grid and D_{ft} is the dimensionality of the extracted feature maps. At each iteration, the model randomly initializes N object slots $\mathcal{S}_0 \in \mathbb{R}^{N \times D_{slot}}$ and performs Slot Attention [20] to update the object slots via iterative Scaled Dot-Product Attention [33]. This attention mechanism computes softmax over object slots and updates them with the weighted average to represent a part of the visual input. The final output \mathcal{S}_t is a set of object slots.

3.2 Object-centric Kinematics Encoder

Simultaneously, we perform object kinematics extraction, which involves a convolutional network and a numerical velocity calculation, to estimate the numerical features of object motion. Initially, we transform video frame \mathbf{o}_t into a structured state embedding of each object that encompasses *position*, *velocity*, and *acceleration*. The set of object states is fed to the transformer module along with the object slots \mathcal{S}_t . The intuition behind this is to preserve the explicit properties of objects, thereby preventing the model from learning incorrect object motions in the initial stages of training when scaling up to complex datasets, which is a phenomenon often observed when relying solely on the Slot Encoder [18, 41].

The convolutional network ϕ encodes a video frame \mathbf{o}_t into low dimensional object features \mathbf{x}_t . Note that any operation performed on these sets remains equivariant to the permutation of their objects. The object features are passed through an MLP to ensure consistent encodings. The resulting encoded object features form the *position* state $\mathbf{x}_t^{\text{pos}}$. The *velocity* state $\mathbf{x}_t^{\text{vel}}$ is derived by computing the difference between two consecutive position states, $\mathbf{x}_t^{\text{pos}}$ and $\mathbf{x}_{t-1}^{\text{pos}}$. To maintain consistency in the unified kinematic representation, we incorporate a learnable parameter λ to scale the velocity relative to the position. The *acceleration* $\mathbf{x}_t^{\text{acc}}$ is achieved by measuring the differences between $\mathbf{x}_t^{\text{vel}}$ and $\mathbf{x}_{t-1}^{\text{vel}}$.

$$\mathbf{x}_t^{\text{pos}} = \phi(\mathbf{o}_t), \quad \mathbf{x}_t^{\text{vel}} = \lambda(\mathbf{x}_t^{\text{pos}} - \mathbf{x}_{t-1}^{\text{pos}}), \quad \mathbf{x}_t^{\text{acc}} = \mathbf{x}_t^{\text{vel}} - \mathbf{x}_{t-1}^{\text{vel}}, \quad (1)$$

$$\mathbf{K}_t = [\mathbf{x}_t^{\text{pos}}, \mathbf{x}_t^{\text{vel}}, \mathbf{x}_t^{\text{acc}}]. \quad (2)$$

The object kinematics $\mathbf{K}_t \in \mathbb{R}^{N \times D_{\text{kin}}}$ is constructed by a linear concatenation of the object states, and trained independently of explicit object labels or loss functions, such as frame reconstruction or state space transition.

Modeling kinematics directly from the 2D image space is deliberate, as extending it to 3D space using an additional network is computationally inefficient, primarily due to the substantial computational costs associated with employing a pretrained optical flow model or frame reconstruction model to convert the 2D datasets into 3D depth images [11, 16]. Accordingly, the object kinematics are calculated in two ways: analytical approach and empirical approach.

Analytical. Leveraging object kinematics information from the current frame at time t , this approach forecasts the object kinematics of the subsequent frame at time $t + 1$ based on the premise that objects will continue their motion patterns shortly. The model calculates the expected future position state $\mathbf{x}_{t+1}^{\text{pos}'}$ by leveraging previously acquired object kinematics information as follows:

$$\mathbf{x}_{t+1}^{\text{pos}'} = \mathbf{x}_t^{\text{pos}} + \mathbf{x}_t^{\text{vel}} \times \delta_T \quad (3)$$

where δ_t is the time difference between two consecutive timesteps. The corresponding velocity and acceleration states are calculated using Eq. (1).

Based on the following deduction, our model combines the current kinematics $\mathbf{x}_t^{\text{pos}}$ with the anticipated kinematics $\mathbf{x}_{t+1}^{\text{pos}'}$ to predict the actual object kinematics of the subsequent video frame $\mathbf{x}_{t+1}^{\text{pos}}$. This approach highlights the continuous

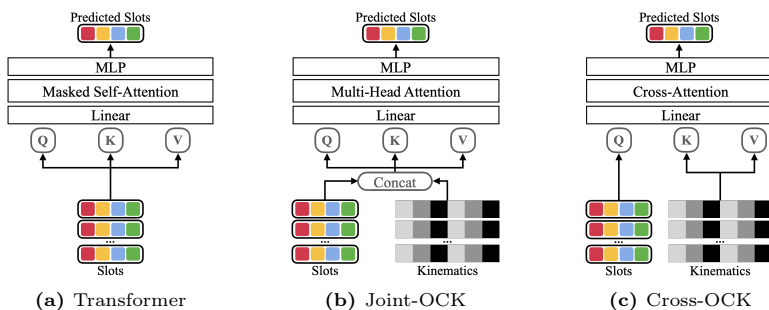


Fig. 3: Overview of two distinct dynamics modeling schemes (Figs. 3b and 3c), and a traditional transformer framework (Fig. 3a).

motion patterns for accurately predicting future frames and efficiently forecasting object kinematics in complex and dynamic environments.

Empirical. The empirical approach underscores the capability of transformers to extract information implicitly from observed video frames, emphasizing the significance of utilizing intrinsic knowledge acquired during the learning process without explicit instruction. This approach extracts object kinematics from Eq. (1) in a similar manner, focusing solely on the kinematics derived from the current frame \mathbf{K}_t . By utilizing the inferred patterns of motion and behavior, it predicts object kinematics for the subsequent time step \mathbf{K}_{t+1} , consequently generating the corresponding video frame. The quantitative evaluation of the analytical approach and the empirical approach can be found in Sec. 4.6 providing a more detailed description in the supplementary material.

3.3 Autoregressive Transformer Modules

The object-centric transformer utilizes the object slots \mathcal{S}_t and the object kinematics \mathbf{K}_t to predict object slots at the next timestep $\hat{\mathcal{S}}_{t+1}$, while maintaining temporal consistency of object representations. Subsequently, the predicted object slots $\hat{\mathcal{S}}_{t+1}$ are fed back into the transformer, ensuring an autoregressive prediction of future object slots $\hat{\mathcal{S}}_{t+h}$. This iterative sequence enables the model to dynamically adapt and refine its future predictions. Our method employs two transformer mechanisms, Joint-OCK (Fig. 3b) and Cross-OCK (Fig. 3c), each of which is integrated to enrich the comprehension of spatiotemporal dependencies.

Joint-OCK. Inspired by SlotFormer [41], Joint-OCK adopts a standard transformer encoder. The input sequence, comprising the object slots and the object kinematics, undergoes a linear projection to align with the inner dimension of the transformer. Subsequently, we apply temporal positional encodings to maintain permutation equivariance, ensuring object slots at the same timestep share the positional encodings for consistent object representations.

Cross-OCK. Alternatively, Cross-OCK employs cross-attention [4, 21] that integrates the object slots \mathcal{S}_t and the object kinematics \mathbf{K}_t as the input query and

keys. Initially, we linearly project the object features into a set of latent spaces and apply positional embeddings in the same manner as above. The object kinematics are normalized across the object slots along the last dimension, ensuring that the features possess unit length, thereby enhancing the stability of subsequent operations. The cross-attention then operates along the object slots \mathcal{S}_t , acting as **queries**, over the object kinematics \mathbf{K}_t , serving as **keys** and **values**. In this way, the object slots engage with the attended value representation obtained from the object kinematics to generate meaningful future frames:

$$\mathbf{q} = \mathcal{S}_t \mathbf{W}_q, \quad \mathbf{k} = \mathbf{K}_t \mathbf{W}_k, \quad \mathbf{v} = \mathbf{K}_t \mathbf{W}_v. \quad (4)$$

Consequently, softmax is applied along the last dimension, resulting in an attention matrix that represents the significance of each **key-value** pairs for every **query**. The values are then combined via a weighted sum to generate video frames. Unlike prior works that scale down weights based on the dimension of **keys**, our transformer framework modulates weights by a temperature parameter τ , which adjusts the inner products before the softmax operation for achieving precise calibration within the attention mechanisms [1]. The overall cross-attention (CA) mechanism can be expressed as follows:

$$\text{Attention}(\mathbf{k}, \mathbf{q}) = \text{softmax}\left(\frac{\mathbf{k}^\top \cdot \mathbf{q}}{\tau}\right), \quad \text{CA}(\mathbf{v}, \mathbf{k}, \mathbf{q}) = \mathbf{v} \cdot \text{Attention}(\mathbf{k}, \mathbf{q}). \quad (5)$$

Diverse attention strategies enable the model to handle complex datasets effectively, ensuring robust performance across various inputs. Consequently, the model exhibits high proficiency in capturing dependencies and interrelationships among objects. This advancement enhances its ability to discern intricate patterns and object dynamics, thereby generating meaningful future frames.

3.4 Model Training

OCK is trained in two steps utilizing a pretrained SAVi model. Initially, we train SAVi [17] to decompose video frames into object slots. Then, our model is trained by feeding the extracted object slots into an object-centric transformer to predict future object slots. The predicted slots are transformed into object images and masks using the pretrained SAVi model for video frame reconstruction.

Our model undergoes training by taking the last N output slot features from the transformer. These features are then fed into a linear layer to output object slots at the subsequent timestep. To ensure the continuity of future predictions, following prior works [34, 41], the generated object slots $\hat{\mathcal{S}}_{T+1}$ serve as input for the subsequent prediction $\hat{\mathcal{S}}_{T+2}$ along with the ground-truth object slots in an autoregressive way, facilitating the generation of any number of future frames H . The model predicts the object slots by minimizing both object reconstruction loss and image reconstruction loss with a hyperparameter α :

$$\mathcal{L} = \mathcal{L}_{\text{object}} + \alpha \mathcal{L}_{\text{image}}. \quad (6)$$

The object reconstruction loss $\mathcal{L}_{\text{object}}$ is computed as the L2 loss between the ground-truth object slots \mathcal{S}_{T+h} and the reconstructed object slots $\hat{\mathcal{S}}_{T+h}$:

$$\mathcal{L}_{\text{object}} = \frac{1}{N \cdot H} \sum_{n=1}^N \sum_{h=1}^H \|\hat{\mathcal{S}}_{T+h}^n - \mathcal{S}_{T+h}^n\|^2. \quad (7)$$

The image reconstruction loss $\mathcal{L}_{\text{image}}$ is calculated using a frozen SAVi decoder f_{θ}^{SAVi} to transform the predicted object slots $\hat{\mathcal{S}}_{T+h}$ into an image, which is then compared to the corresponding ground-truth video frame \mathbf{o}_{T+h} :

$$\mathcal{L}_{\text{image}} = \frac{1}{H} \sum_{h=1}^H \|f_{\theta}^{\text{SAVi}}(\hat{\mathcal{S}}_{T+h}) - \mathbf{o}_{T+h}\|^2. \quad (8)$$

4 Experiments

In this section, we evaluate our model across six different datasets, each characterized by varying levels of object motion and appearance complexity. First, we briefly introduce the datasets and baselines in Secs. 4.1 and 4.2, respectively. We then evaluate the visual quality of the predicted dynamics for effective video prediction in Sec. 4.3 and the video decomposition results from our model’s future predictions in Sec. 4.4. Additionally, we assess the efficacy of our model for long-term prediction in Sec. 4.5. Lastly, we conduct ablation studies on the kinematics modules and the transformer components to explore the potential impact of architectural differences on overall performance in Sec. 4.6.

4.1 Datasets

We employ six well-established, challenging multi-object datasets to evaluate our model, ensuring a comprehensive assessment across a spectrum of visual complexities. We utilize the **OBJ3D** [18] dataset, inspired by CLEVRER [43], which consists of static 3D geometric objects placed in synthetic scenes, where these objects are set in motion to simulate dynamic environments. Additionally, we incorporate the **Multi-Object Video (MOVi)** [8] datasets, ranging from MOVi-A to MOVi-E. The datasets progressively increase in complexity from A to E, introducing a broader variety of objects, motions, and backgrounds. These datasets vary from simple to complex synthetic scenarios, specifically designed to test object discovery and tracking models in dynamic environments. For complete details of each dataset please refer to the supplementary material.

4.2 Baselines

G-SWM [18] is one of the representative models in the domain of dynamics prediction from images, placing particular emphasis on object-centric representations. It models the object interactions using a graph neural network and employs hierarchical latent modeling to address the dynamics over time.

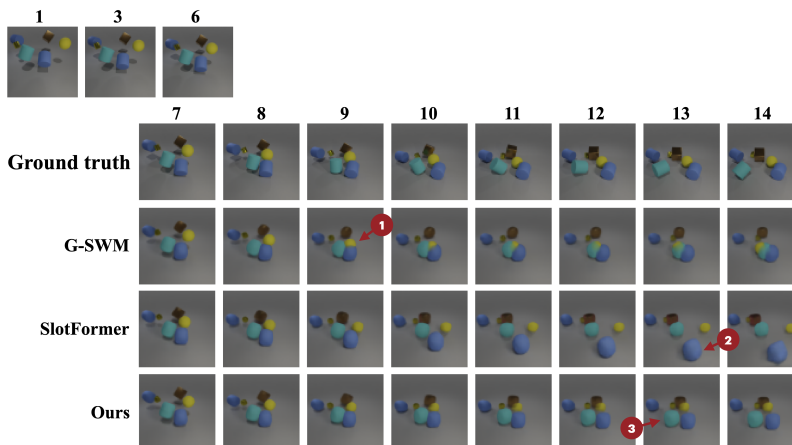


Fig. 4: Generation results on MOVi-A. We train the model with 6 frames and generate 8 frames, which is claimed sufficient for the model to learn accurate dynamics. We display the prediction results of two baseline models and Cross-OCK version of ours for a comparison between generated frames and ground-truth frames.

Table 1: Evaluation of visual quality across six datasets with two baseline models and both approaches of our model, denoted as Joint-OCK and Cross-OCK.

Model	OBJ3D			MOVi-A			MOVi-B			MOVi-C			MOVi-D			MOVi-E		
	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow
G-SWN	31.142	0.900	0.039	26.140	0.784	0.133	21.850	0.677	0.247	19.466	0.451	0.554	20.567	0.548	0.355	21.166	0.534	0.359
SlotFormer	33.083	<u>0.932</u>	<u>0.024</u>	25.180	0.785	0.134	21.329	0.690	0.215	19.482	0.456	0.534	20.675	<u>0.565</u>	0.332	21.269	0.547	<u>0.335</u>
OCVP-Seq	33.100	<u>0.932</u>	0.025	26.240	0.789	0.127	21.978	<u>0.701</u>	0.219	19.945	0.515	0.431	Diverge			Diverge		
OCVP-Par	32.990	0.931	0.025	26.310	0.788	0.127	<u>21.909</u>	0.688	0.226	19.941	0.502	0.450	Diverge			Diverge		
Joint-OCK	35.125	0.958	0.019	<u>27.259</u>	<u>0.811</u>	<u>0.124</u>	21.646	0.695	0.198	<u>21.038</u>	0.593	0.370	<u>22.087</u>	0.557	<u>0.282</u>	<u>22.394</u>	<u>0.569</u>	0.302
Cross-OCK	<u>34.097</u>	0.925	0.019	27.576	0.812	0.123	21.482	0.703	<u>0.209</u>	21.040	<u>0.592</u>	<u>0.376</u>	22.338	0.568	0.236	22.340	0.572	0.302

SlotFormer [41] is designed for dynamics prediction from images via object-centric representations. It employs the Slot Attention framework, which isolates and extracts a set of slots representing various components of a visual scene. These slots encapsulate information about object attributes and their spatial relationships. This model provides a comprehensive understanding of how objects interact and move within the scene, and thus enables the model to process and reason about their attributes and interactions in a structured manner.

OCVP [34] is an extension of SlotFormer that further explores the transformer architecture by separating the attention block into specialized temporal and relational attention blocks in two different ways. OCVP-Seq refers to the sequential processing of temporal and relational attention blocks, while OCVP-Par refers to the parallel processing of temporal and relational attention blocks.

4.3 Evaluation on Video Prediction

Metrics. To assess the visual quality of the predicted videos, we report PSNR [12], SSIM [38], and LPIPS [46], where LPIPS demonstrates the highest percep-

tual similarity to human perception compared to PSNR and SSIM. Despite the acknowledged limitations of PSNR and SSIM in accurately assessing the video quality [28], our model demonstrates strong performance across all metrics.

Results. Table 1 presents the quantitative results on the visual quality of predicted frames across six different datasets. Both of our models demonstrate significant performance, indicating their capability to generate perceptually realistic predictions close to human perception. The performance is notable when employing Cross-OCK compared to Joint-OCK on complex datasets, such as MOVi-D and MOVi-E, as the cross-attention mechanism enables the model to target relevant features for specific objects. This targeted strategy ensures prioritization of the most pertinent features, rather than spreading attention evenly, which assists in extracting object slots by linking high-level object embeddings with low-level visual cues. We present qualitative results in Fig. 4, where OCK successfully generates future frames despite the subtle differences in certain object locations compared to the ground-truth frames, marked as ③. These minor differences do not significantly impact the overall performance of future frame prediction. Conversely, the baseline models struggle to generate plausible frames, where several objects collapse into formless shape, denoted as ①, or where an object loses its shape and generates wrong dynamics, denoted as ②. OCK exhibits the most credible performance in predicting dynamics within complex environments.

4.4 Evaluation on Object Dynamics

Metrics. We calculate the foreground Adjusted Rand Index (FG-ARI) and mean Intersection over Union (mIoU) to evaluate the predicted object dynamics using per-slot object masks generated by the SAVi [17] decoder. FG-ARI is a similarity metric employed to assess the correspondence between foreground objects’ predicted segmentation masks and ground-truth masks in a permutation-invariant manner, renowned for its comprehensive evaluation of predicted dynamics.

Results. We assess the quality of video decomposition using the segmentation decoded from future predictions. In our evaluation, we exclude the OBJ3D due to the absence of segmentation masks, which are necessary to generate the decomposition of individual slots. As can be seen in Tab. 2, our model exhibits comparable performance to the baseline models. Accordingly, this underscores the positive trend of our model achieving performance surpassing well-established benchmarks. We present qualitative per-slot attention results in Fig. 5.

4.5 Evaluation on Long-term Prediction

To test for long-term generalization capabilities, we evaluate OCK over longer horizon length in Fig. 6. Even without additional regularization or augmentation, OCK demonstrates strong generalization performance for longer sequences during testing, surpassing the settings used in training. This is noteworthy as we train both datasets using only six frames, which is significantly shorter than the full length of the videos. In Figs. 6a and 6b, the perceptual similarity of all

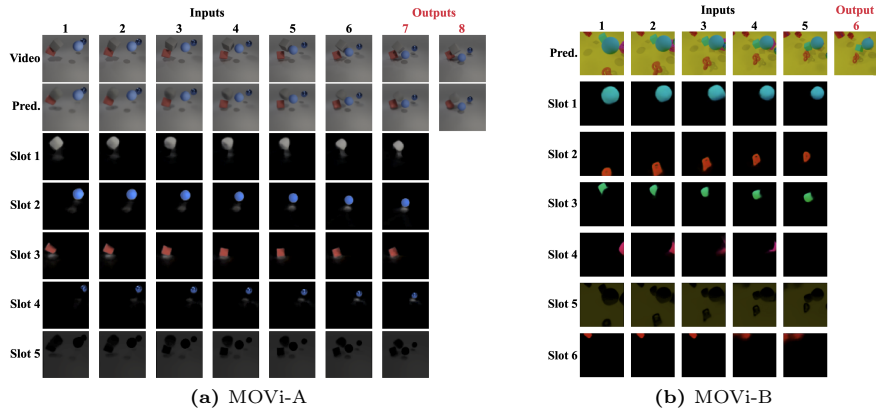


Fig. 5: Per-slot decomposition results on Cross-OCK. We visualize the reconstruction of individual object slots based on the input predicted scene (Pred.), where Slot 5 denotes the background slot for both datasets. Please zoom in for the best view.

Table 2: Comparative evaluation of both of our model and two baseline models on unsupervised video decomposition using SAVi decoder across five MOVi datasets.

Model	MOVi-A		MOVi-B		MOVi-C		MOVi-D		MOVi-E	
	FG-ARI \uparrow	mIOU \uparrow	FG-ARI \uparrow	mIOU \uparrow	FG-ARI \uparrow	mIOU \uparrow	FG-ARI \uparrow	mIOU \uparrow	FG-ARI \uparrow	mIOU \uparrow
G-SWN	0.431	0.500	0.350	0.443	0.238	0.414	0.239	<u>0.327</u>	0.374	0.012
SlotFormer	0.452	0.502	0.379	0.444	0.240	0.415	0.235	0.325	0.368	0.011
Joint-OCK	<u>0.560</u>	<u>0.541</u>	0.483	0.453	0.347	0.528	<u>0.429</u>	0.482	<u>0.379</u>	0.019
Cross-OCK	0.563	0.547	<u>0.481</u>	<u>0.452</u>	<u>0.339</u>	<u>0.515</u>	0.430	0.482	0.380	0.020

four models maintains stability at the beginning but begins to diverge, where both of our model’s long-term predictions significantly surpass that of the baseline models. As anticipated, the baseline models, which lack explicit knowledge about objects, suffer from low quality and performance degradation over time as errors accumulate. In contrast, our model generalizes well to changes in objects’ motion and appearances, leading to enhanced long-term prediction capabilities.

4.6 Ablation Studies

In this section, we conduct ablation studies on the two distinct approaches for computing object kinematics in Tab. 3. We further analyze how each component of our model influences the performance of dynamics prediction Tab. 4.

Object Kinematics Analysis. We evaluate our approaches for computing object kinematics using both transformer architectures to investigate the potential impact of kinematics computation variations on overall performance in Tab. 3. We train our model using six frames to predict eight subsequent frames and report the results for predicting 10 frames. Our analysis reveals a slight performance advantage for the analytical approach over the empirical approach (*ref.*

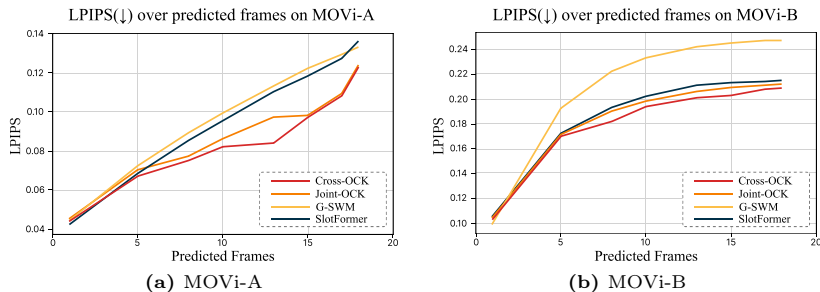


Fig. 6: Long-term generalization results on MOVi datasets. Both MOVi datasets are trained using 6 input frames and 8 future frames. Each video consists of a sequence with a fixed length of 24 frames. Consequently, we assess generalization capabilities up to the 18th frame, considering that the initial 6 frames serve as input.

Table 3: Kinematics ablation on two MOVi datasets. (A) represents the analytical approach and (E) denotes the empirical approach.

Method	MOVi-A			MOVi-B		
	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow
Cross-OCK(A)	27.576	0.812	0.123	21.482	0.703	0.209
Joint-OCK(A)	27.259	0.811	0.124	21.494	0.695	0.212
Cross-OCK(E)	27.536	0.791	0.125	21.480	0.693	0.213
Joint-OCK(E)	26.750	0.801	0.125	21.482	0.694	0.213
Transformer	25.180	0.785	0.134	21.329	0.690	0.215

Table 4: Ablation study of transformer components on MOVi-A.

Method	MOVi-A		
	PSNR \uparrow	SSIM \uparrow	LPIPS \downarrow
Cross-OCK(A)	27.576	0.812	0.123
Joint-OCK(A)	27.259	0.811	0.124
Input Frame = 4	27.012	0.801	0.125
Input Frame = 8	27.122	0.806	0.125
Trans. Layer = 6	26.924	0.796	0.130
Trans. Layer = 8	26.503	0.784	0.133
Vanilla P.E.	23.600	0.591	0.205
Teacher Forcing	23.583	0.589	0.207

Sec. 3.2). This is attributed to the fact that utilizing the temporal positional state of the current frame for guidance can be advantageous, but object dynamics in complex environments are often aperiodic, such that guidance based solely on the current frame may introduce confusion. Therefore, the analytical approach, which calculates the anticipated object kinematics of the subsequent video frame and incorporates it with the current frame kinematics, predicts better kinematics. This is especially significant in complex environments with occlusions or dynamic shape changes among objects, which empowers the model to accurately predict dynamics with even greater precision in complex scenes.

Input Frame. Our default setting for training MOVi-A involves utilizing six input frames and eight predicted frames. Increasing the number of input frames enhances model performance, however, a slight decline is observed when it further extends to eight frames. This phenomenon is due to the adequacy of a six frame history length for accurately capturing the object dynamics on MOVi-A.

Transformer (Trans.) Layer. We utilize four transformer layers as the default setting for the MOVi-A dataset. Additional layers results in unstable model

training and further augmentation results in diverging loss metrics. This underscores the crucial balance between the depth of the transformer model and training stability in addressing the complexities of object dynamics.

Vanilla Positional Encoding (P.E.) Our work incorporates temporal positional encoding such that object slots at the same timestep receive identical positional encoding. To assess its importance, we train our model using sinusoidal positional encoding, which disrupts the permutation equivariance among object slots. As shown in Tab. 4, preservation of permutation equivariance serves as a valuable prior for object-centric dynamics modeling. Therefore, maintaining the equivariance is essential to ensure accurate long-term dynamics modeling.

Teacher Forcing. We replace our model to incorporate a teacher forcing strategy [26] by feeding ground-truth slots instead of predicted object slots during training. Surprisingly, this leads to a significant decline in performance, particularly affecting performance over longer prediction horizons. Thus, it highlights the importance of learning to handle its imperfect predictions for accurate long-term dynamics modeling during training to optimize real-world performance.

5 Limitations

An inherent limitation of our work is the exclusive evaluation on synthetic datasets, which limits its scalability in real-world environments. Additionally, the two-stage training strategy may render our model inefficient, emphasizing the necessity for joint training strategies. Scaling up our work in this manner holds significant promise in expanding it to various downstream tasks, including visual question answering, action planning, and robotics applications. Furthermore, despite our model surpassing the baselines, the overall performance remains unsatisfactory, particularly in complex datasets, such as MOVi-E, where FG-ARI and mIOU are in general low. It is highly probable that the object slots may not have been accurately extracted. Thus, a different object-centric model may be required, one that can disentangle objects in highly complex scenes.

6 Conclusion

In this paper, we present OCK, a dynamics prediction framework that captures intricate object relationships by leveraging both time-static object slots and time-varying object kinematics in an unsupervised manner. We propose a novel component named object kinematics which are seamlessly integrated with object slots through various transformer architectures of OCK, making it particularly well-suited for long-term dynamics modeling tasks. Our model demonstrates superior performance compared to baseline object-centric models in complex synthetic environments. This superiority is attributed to our model’s ability to comprehend spatiotemporal patterns of objects utilizing time-varying object

attributes, as opposed to prior works that predominantly focus on modeling explicit scene-level interactions from time-static object appearances. We believe that the utilization of additional time-varying object information as guidance holds substantial potential for object-centric dynamics modeling, paving the way for the simulation and prediction of real-world environments.

References

1. Ali, A., Touvron, H., Caron, M., Bojanowski, P., Douze, M., Joulin, A., Laptev, I., Neverova, N., Synnaeve, G., Verbeek, J., et al.: Xcit: Cross-covariance image transformers. *Advances in neural information processing systems* **34**, 20014–20027 (2021)
2. Burgess, C.P., Matthey, L., Watters, N., Kabra, R., Higgins, I., Botvinick, M., Lerchner, A.: Monet: Unsupervised scene decomposition and representation. *arXiv preprint arXiv:1901.11390* (2019)
3. Chakravarthy, A., Nguyen, T., Goyal, A., Bengio, Y., Mozer, M.C.: Spotlight attention: Robust object-centric learning with a spatial locality prior. *arXiv preprint arXiv:2305.19550* (2023)
4. Chen, C.F.R., Fan, Q., Panda, R.: Crossvit: Cross-attention multi-scale vision transformer for image classification. In: *Proceedings of the IEEE/CVF international conference on computer vision*. pp. 357–366 (2021)
5. Dziri, N., Lu, X., Sclar, M., Li, X.L., Jiang, L., Lin, B.Y., West, P., Bhagavatula, C., Le Bras, R., Hwang, J.D., et al.: Faith and fate: Limits of transformers on compositionality (2023). *arXiv preprint arXiv:2305.18654* (2023)
6. Engelcke, M., Kosiorek, A.R., Jones, O.P., Posner, I.: Genesis: Generative scene inference and sampling with object-centric latent representations. *arXiv preprint arXiv:1907.13052* (2019)
7. Gao, Z., Tan, C., Wu, L., Li, S.Z.: Simvp: Simpler yet better video prediction. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 3170–3180 (2022)
8. Greff, K., Belletti, F., Beyer, L., Doersch, C., Du, Y., Duckworth, D., Fleet, D.J., Gnanapragasam, D., Golemo, F., Herrmann, C., Kipf, T., Kundu, A., Lagun, D., Laradji, I., Liu, H.T.D., Meyer, H., Miao, Y., Nowrouzezahrai, D., Oztireli, C., Pot, E., Radwan, N., Rebain, D., Sabour, S., Sajjadi, M.S.M., Sela, M., Sitzmann, V., Stone, A., Sun, D., Vora, S., Wang, Z., Wu, T., Yi, K.M., Zhong, F., Tagliasacchi, A.: Kubric: A scalable dataset generator. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. pp. 3749–3761 (2022)
9. Greff, K., Kaufman, R.L., Kabra, R., Watters, N., Burgess, C., Zoran, D., Matthey, L., Botvinick, M., Lerchner, A.: Multi-object representation learning with iterative variational inference. In: *International Conference on Machine Learning*. pp. 2424–2433. PMLR (2019)
10. Hamilton, K., Nayak, A., Božić, B., Longo, L.: Is neuro-symbolic ai meeting its promise in natural language processing? a structured. *arXiv preprint arXiv:2202.12205* (2022)
11. Hu, X., Huang, Z., Huang, A., Xu, J., Zhou, S.: A dynamic multi-scale voxel flow network for video prediction. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 6121–6131 (2023)

12. Huynh-Thu, Q., Ghanbari, M.: Scope of validity of psnr in image/video quality assessment. *Electronics letters* **44**(13), 800–801 (2008)
13. Jiang, J., Ahn, S.: Generative neurosymbolic machines. *Advances in Neural Information Processing Systems* **33**, 12572–12582 (2020)
14. Jiang, J., Janghorbani, S., De Melo, G., Ahn, S.: Scalor: Generative world models with scalable object representations. *arXiv preprint arXiv:1910.02384* (2019)
15. Kahneman, D., Treisman, A., Gibbs, B.J.: The reviewing of object files: Object-specific integration of information. *Cognitive psychology* **24**(2), 175–219 (1992)
16. Karnewar, A., Vedaldi, A., Novotny, D., Mitra, N.J.: Holodiffusion: Training a 3d diffusion model using 2d images. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 18423–18433 (2023)
17. Kipf, T., Elsayed, G.F., Mahendran, A., Stone, A., Sabour, S., Heigold, G., Jonschkowski, R., Dosovitskiy, A., Greff, K.: Conditional object-centric learning from video. *arXiv preprint arXiv:2111.12594* (2021)
18. Lin, Z., Wu, Y.F., Peri, S., Fu, B., Jiang, J., Ahn, S.: Improving generative imagination in object-centric world models (2020)
19. Lin, Z., Wu, Y.F., Peri, S.V., Sun, W., Singh, G., Deng, F., Jiang, J., Ahn, S.: Space: Unsupervised object-oriented scene representation via spatial attention and decomposition. *arXiv preprint arXiv:2001.02407* (2020)
20. Locatello, F., Weissenborn, D., Unterthiner, T., Mahendran, A., Heigold, G., Uszkoreit, J., Dosovitskiy, A., Kipf, T.: Object-centric learning with slot attention. *Advances in Neural Information Processing Systems* **33**, 11525–11538 (2020)
21. Luong, M.T., Pham, H., Manning, C.D.: Effective approaches to attention-based neural machine translation. *arXiv preprint arXiv:1508.04025* (2015)
22. Ming, R., Huang, Z., Ju, Z., Hu, J., Peng, L., Zhou, S.: A survey on video prediction: From deterministic to generative approaches (2024)
23. Mohnhaupt, M., Neumann, B.: Understanding object motion: Recognition, learning and spatiotemporal reasoning. *Robotics and Autonomous Systems* **8**(1-2), 65–91 (1991)
24. Ning, S., Lan, M., Li, Y., Chen, C., Chen, Q., Chen, X., Han, X., Cui, S.: Mimo is all you need: A strong multi-in-multi-out baseline for video prediction. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. vol. 37, pp. 1975–1983 (2023)
25. Oliu, M., Selva, J., Escalera, S.: Folded recurrent neural networks for future video prediction. In: *Proceedings of the European Conference on Computer Vision*. pp. 716–731 (2018)
26. Radford, A., Narasimhan, K., Salimans, T., Sutskever, I., et al.: Improving language understanding by generative pre-training (2018)
27. Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al.: Language models are unsupervised multitask learners. *OpenAI blog* **1**(8), 9 (2019)
28. Sara, U., Akter, M., Uddin, M.S.: Image quality assessment through fsim, ssim, mse and psnr—a comparative study. *Journal of Computer and Communications* **7**(3), 8–18 (2019)
29. Selva, J., Johansen, A.S., Escalera, S., Nasrollahi, K., Moeslund, T.B., Clapés, A.: Video transformers: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence* (2023)
30. Singh, G., Deng, F., Ahn, S.: Illiterate dall-e learns to compose. *arXiv preprint arXiv:2110.11405* (2021)
31. Singh, G., Wu, Y.F., Ahn, S.: Simple unsupervised object-centric learning for complex and naturalistic videos. In: *Advances in Neural Information Processing Systems* (2022)

32. Tang, Q., Zhu, X., Lei, Z., Zhang, Z.: Intrinsic physical concepts discovery with object-centric predictive models. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 23252–23261 (2023)
33. Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A.N., Kaiser, Ł., Polosukhin, I.: Attention is all you need. *Advances in neural information processing systems* **30** (2017)
34. Villar-Corrales, A., Wahdan, I., Behnke, S.: Object-centric video prediction via decoupling of object dynamics and interactions. *arXiv preprint arXiv:2302.11850* (2023)
35. Wang, Y., Liu, L., Dauwels, J.: Slot-vae: Object-centric scene generation with slot attention. *arXiv preprint arXiv:2306.06997* (2023)
36. Wang, Y., Jiang, L., Yang, M.H., Li, L.J., Long, M., Fei-Fei, L.: Eidetic 3d lstm: A model for video prediction and beyond. In: International conference on learning representations (2018)
37. Wang, Y., Wu, H., Zhang, J., Gao, Z., Wang, J., Philip, S.Y., Long, M.: Predrnn: A recurrent neural network for spatiotemporal predictive learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence* **45**(2), 2208–2225 (2022)
38. Wang, Z., Bovik, A.C., Sheikh, H.R., Simoncelli, E.P.: Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing* **13**(4), 600–612 (2004)
39. Welleck, S., West, P., Cao, J., Choi, Y.: Symbolic brittleness in sequence models: on systematic generalization in symbolic mathematics. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 36, pp. 8629–8637 (2022)
40. Wu, Y., Wen, Q., Chen, Q.: Optimizing video prediction via video frame interpolation. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 17814–17823 (2022)
41. Wu, Z., Dvornik, N., Greff, K., Kipf, T., Garg, A.: Slotformer: Unsupervised visual dynamics simulation with object-centric models. *arXiv preprint arXiv:2210.05861* (2022)
42. Ye, Y., Singh, M., Gupta, A., Tulsiani, S.: Compositional video prediction. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 10353–10362 (2019)
43. Yi, K., Gan, C., Li, Y., Kohli, P., Wu, J., Torralba, A., Tenenbaum, J.B.: Clevrer: Collision events for video representation and reasoning. *arXiv preprint arXiv:1910.01442* (2019)
44. Zadaianchuk, A., Martius, G., Yang, F.: Self-supervised reinforcement learning with independently controllable subgoals. In: Conference on Robot Learning. pp. 384–394. PMLR (2022)
45. Zadaianchuk, A., Seitzer, M., Martius, G.: Self-supervised visual reinforcement learning with object-centric representations. In: International Conference on Learning Representations (2021)
46. Zhang, R., Isola, P., Efros, A.A., Shechtman, E., Wang, O.: The unreasonable effectiveness of deep features as a perceptual metric. In: Proceedings of the IEEE conference on computer vision and pattern recognition. pp. 586–595 (2018)
47. Zhao, Z., Wang, J., Horn, M., Ding, Y., He, T., Bai, Z., Zietlow, D., Simon-Gabriel, C.J., Shuai, B., Tu, Z., et al.: Object-centric multiple object tracking. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 16601–16611 (2023)