

Towards Generalist Robot Learning from Internet Video: A Survey

Robert McCarthy
University College London

ROBERT.MCCARTHY.22@UCL.AC.UK

Daniel C.H. Tan
University College London

DANIEL.TAN.22@UCL.AC.UK

Dominik Schmidt
Weco AI

DOMINIK@WECO.AI

Fernando Acero
University College London

FERNANDO.ACERO@UCL.AC.UK

Nathan Herr
University College London

NATHAN.HERR.19@UCL.AC.UK

Yilun Du
Massachusetts Institute of Technology

YILUNDU@MIT.EDU

Thomas G. Thuruthel
University College London

T.THURUTHEL@UCL.AC.UK

Zhibin Li
University College London

ALEX.LI@UCL.AC.UK

Abstract

Scaling deep learning to huge internet-scraped datasets has yielded remarkably general capabilities in natural language processing and visual understanding and generation. In contrast, data is scarce and expensive to collect in robotics. This has seen robot learning struggle to match the generality of capabilities observed in other domains. *Learning from Videos* (LfV) methods seek to address this data bottleneck by augmenting traditional robot data with large internet-scraped video datasets. Such video data may provide the model with foundational information regarding physical behaviours and the physics of the world. This holds great promise for improving the generality of our robots.

In this survey, we present an overview of the emerging field of LfV. We outline fundamental concepts, including the benefits and challenges of LfV. We provide a comprehensive review of current methods for: extracting knowledge from large-scale internet video; tackling key LfV challenges; and boosting downstream reinforcement and robot learning via the use of video data. LfV datasets and benchmarks are also reviewed. The survey closes with a critical discussion of challenges and opportunities. Here, we advocate for scalable foundation model approaches that can leverage the full range of available internet video to aid the learning of robot policies and dynamics models. We hope this survey can inform and catalyse further LfV research, facilitating progress towards the development of general-purpose robots.

Contents

1	Introduction	4
2	Background	6
3	Preliminaries	8
3.1	Reinforcement Learning (RL)	8
3.2	Learning from Videos (LfV): Formalism and Assumptions	9
3.3	Benefits of LfV	10
3.4	Fundamental Challenges	11
4	Methods	12
4.1	Video Foundation Models	12
4.1.1	Video Encoders	14
4.1.2	Video Prediction Models	14
4.1.3	Video-to-Text Models	16
4.1.4	Challenges	17
4.2	Tackling LfV Challenges	18
4.2.1	Action Representations	18
4.2.2	Representations to Address LfV Distribution-Shift	22
4.3	Applications to RL and Robot Learning	24
4.3.1	Policies	24
4.3.2	Dynamics Models	28
4.3.3	Reward Functions	30
4.3.4	Value Functions	32
5	Datasets & Benchmarks	34
5.1	Datasets	34
5.1.1	Desiderata	34
5.1.2	Curating Video Data	35
5.1.3	Existing Datasets	37
5.2	Benchmarks	38
5.2.1	Designing Benchmarks for LfV	39
5.2.2	Existing Benchmarks	40
6	Challenges & Opportunities	41
6.1	High-level Recommendations	41
6.2	Video Foundation Models for LfV	42
6.3	Overcoming LfV Challenges	44
6.4	Other Generalist Robot Challenges: Is Scaling Enough?	45
7	Conclusion	46
	References	47

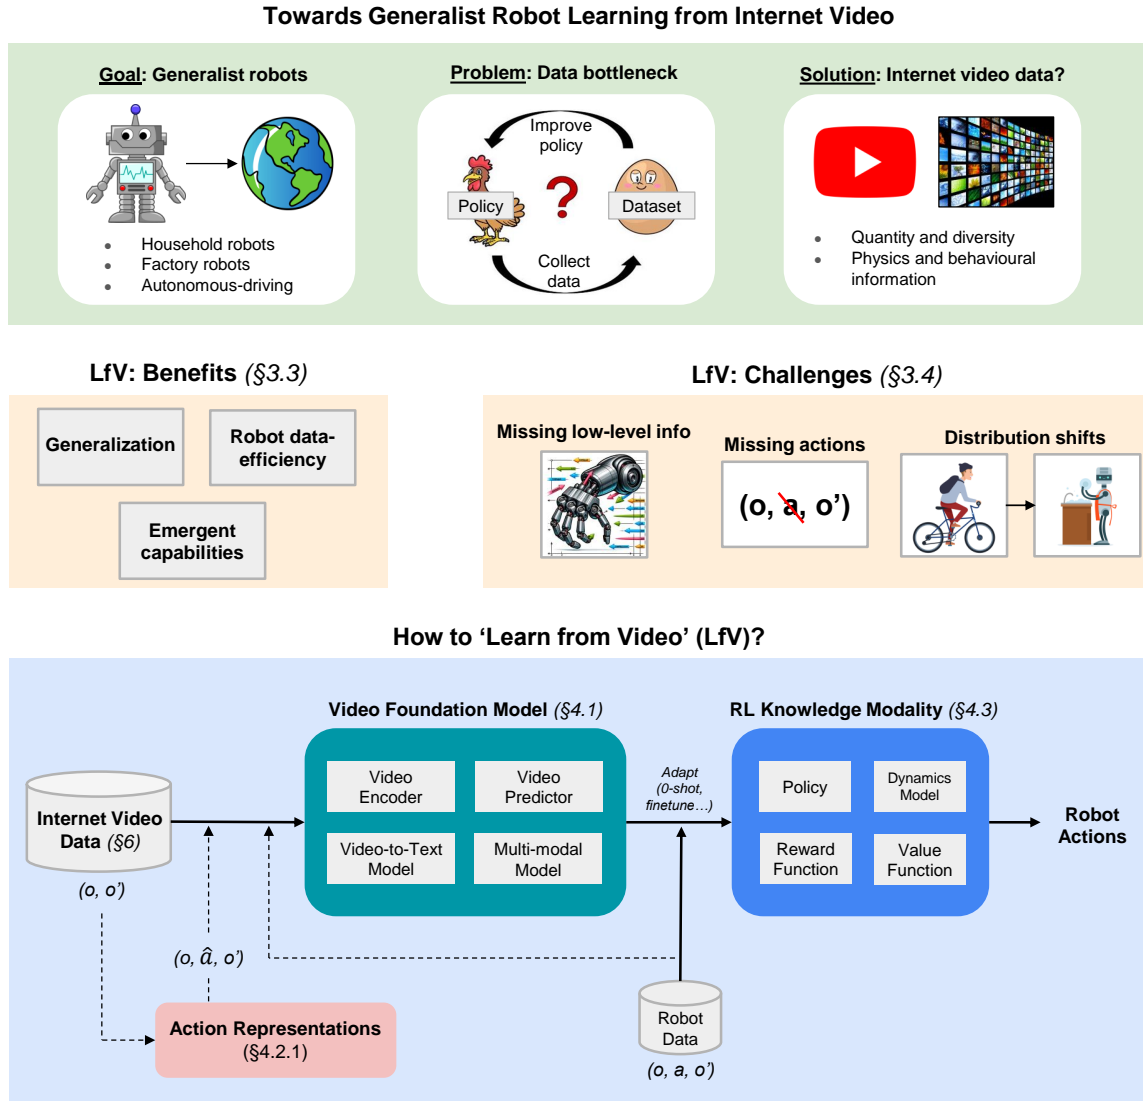


Figure 1: An overview of the key concepts and taxonomies in this survey. The top green box presents the high-level motivation behind LfV. The middle orange boxes highlight the benefits (Section 3.3) and challenges (Section 3.4) of LfV. The bottom blue box visualises possible components in a pipeline for learning from large-scale internet video, as per the taxonomies presented in the survey. Large internet video datasets (Section 5.1) can be used to pretrain (video) foundation models (Section 4.1). These models can be adapted (e.g., via zero-shot transfer or finetuning) into reinforcement learning (RL) ‘knowledge modalities’ (Wulfmeier et al., 2023) for use in the robot domain (Section 4.3). The diagram additionally highlights that action representations (Section 4.2.1) can be used to mitigate the issue of missing action labels in video.

1. Introduction

A *generalist robot* should be capable of performing a broad range of physical tasks in unstructured real-world environments. It should maintain high-level reasoning and planning abilities, along with low-level physical skills, such as dexterous manipulation. It should adapt to unseen and unexpected scenarios. It should operate in unstructured settings by perceiving the world through imperfect partial observations (e.g., visual and tactile sensing).

Such a robot would be highly useful in many practical applications (e.g., household or factory tasks). Nevertheless, obtaining generalist robots remains a grand challenge in robotics. Classical robotics techniques are insufficient as they cannot handle unseen and unstructured scenarios (Krotkov et al., 2018). More recent machine learning (i.e., robot learning) techniques are more promising (Peters et al., 2016; Ibarz et al., 2021). These approaches have achieved skillful robot control in narrow settings (Zhuang et al., 2023; Kaufmann et al., 2023a), but generalization to unseen settings remains a challenge.

Robot learning can take inspiration from advances in other domains. Deep learning has recently provided remarkable improvements in natural language processing (OpenAI, 2023), image generation (Betker et al., 2023), and video generation (Brooks et al., 2024). This has been achieved by training expressive architectures (Vaswani et al., 2017) on massive, diverse datasets scraped from the internet. Here, performances have been shown to consistently and predictably improve with increased computing power and data (Kaplan et al., 2020). This use of diverse internet data has facilitated a transition from task-specific models to monolithic ‘foundation models’ with more general capabilities (OpenAI, 2023).

Scaling-up robot learning in a similar fashion is certainly a promising avenue towards obtaining more general-purpose robot capabilities (Brohan et al., 2022; Team et al., 2023c). However, obtaining large-scale data is a challenge in robotics. Robotics faces a *chicken-and-egg* problem: we cannot easily collect robot data due to limited robot capabilities (deploying these robots to collect real-world data can be ineffective and dangerous), and we cannot easily improve capabilities due to the lack of data (see Figure 1).

How can we overcome this critical data bottleneck? One possibility is to use human-teleoperation to collect robot data (Brohan et al., 2022; Khazatsky et al., 2024). However, this is expensive and can be difficult in tasks requiring skill or dexterity. Another option is to leverage simulation (Zhuang et al., 2023; Kaufmann et al., 2023a). However, simulation comes with several issues, including inaccurate simulated physics and difficulties regarding creating a suitable diversity of simulated environments and tasks. A final option is, like previous deep learning successes (OpenAI, 2023; Betker et al., 2023), to leverage the vast quantities of data already available on the internet.

While any practical approach may leverage all of the above complementary sources of data, in this survey we focus on learning from internet data. Specifically, our interest lies in *internet video data*. Our reasoning here is threefold:

1. *Relevant information content.* The information content of internet video is highly relevant to a general-purpose robot. In contrast to text or image data, internet video can uniquely offer information regarding the physics and dynamics of the world, and information regarding human behaviours and actions (Yang et al., 2024). Crucially, internet video has excellent coverage over many relevant behaviours and tasks (e.g., household chores).

2. *High in quantity and diversity.* There are huge quantities of video data freely available on the internet (Sjöberg, 2023). Importantly, this data is highly diverse. The largest open-source robot dataset (Padalkar et al., 2023) pales in comparison, both in terms of quantity and diversity of the data (see Figure 8).
3. *Internet video is relatively untapped.* The use of real and simulated robot data has been extensively explored (Brohan et al., 2022; Team et al., 2023c; Akkaya et al., 2019; Kaufmann et al., 2023a). Meanwhile, leveraging pretrained text and image foundation models has become increasingly common in robotics (Ahn et al., 2022; Liang et al., 2023; Brohan et al., 2023; Shah et al., 2023). However, the use of internet video data in robotics is in more nascent stages.

By leveraging large, diverse internet video data during robot learning, we hope to obtain significantly better generalization beyond the robot data than approaches that rely solely on small, narrow robot datasets (see Figure 2 and Section 3.3). Indeed, recent progress in the emerging field of Learning from Videos (LfV) has been promising, demonstrating evidence of this. This has included work leveraging large-scale video prediction models to act as robot dynamics models (Yang et al., 2023c; Bruce et al., 2024), and work leveraging both robot data and internet video to train foundational robot policies (Sohn et al., 2024).

Nevertheless, leveraging internet video comes with a number of challenges (Section 3.4). First, video is a challenging data modality: it is high-dimensional, noisy, and poorly labelled. Second, video lacks information critical to robotics, including action labels and low-level force and proprioceptive information. Moreover, there may be various distribution shifts between internet video and the robot domain. Given these challenges, two key questions for LfV research are: ‘How to extract relevant knowledge from internet video?’ and ‘How to apply video-extracted knowledge to robotics?’.

In this survey, we review literature that attempts to answer these questions ¹. For the first question, we survey video foundation model techniques promising for extracting knowledge from large-scale internet video (Section 4.1). For the second, we perform a thorough analysis of literature that addresses LfV challenges (Section 4.2) and that utilises video data to aid robot learning (Section 4.3). We conclude the survey by discussing challenges and opportunities for future LfV research (Section 3.4). Here, we recommend future research to focus on scalable approaches that can leverage the full range of available internet video data, and to target the learning of policies and dynamics models data in order to best obtain the benefits of LfV.

Existing LfV research has shown promising signs of life, and this is a field ripe for further progress. While it is unclear whether scaling deep learning will take us all the way to general-purpose robots, it seems highly likely that scaling, with the help of internet video data, can provide significant gains in the near-future. We hope this comprehensive survey can encourage and inform future LfV research, serving to facilitate our progress towards the creation of generalist robots.

1. See Figure 1 and the Table of Contents for more detail regarding the survey’s structure.

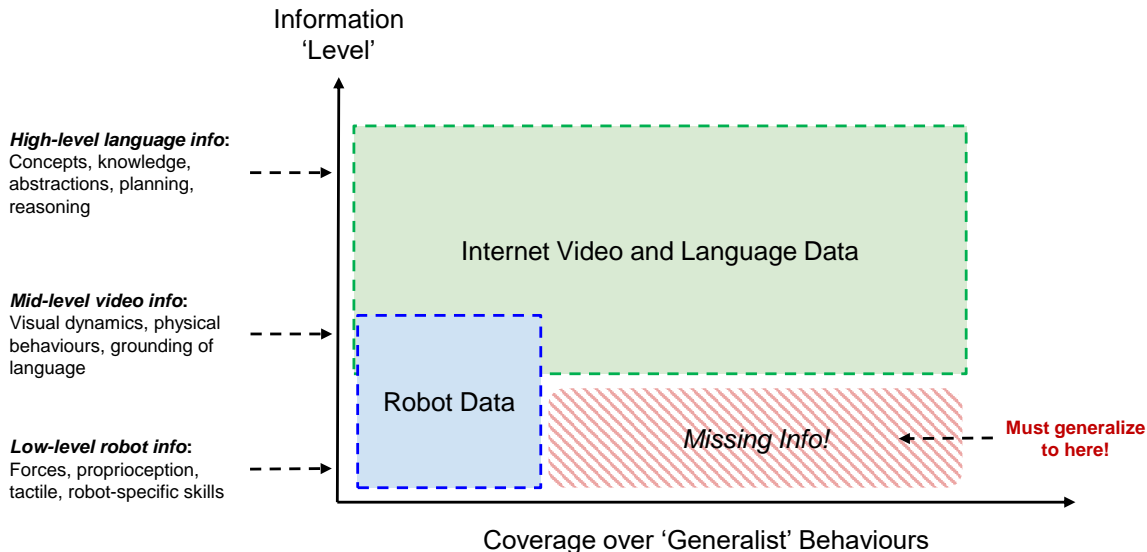


Figure 2: Generalization in the Learning from Videos (LfV) setting. The x-axis indicates the range of behaviours expected from a generalist robot. The y-axis indicates the ‘levels’ of information contained in data. The figure demonstrates that internet data has better coverage over desired behaviours than narrow robot datasets, but lacks crucial low-level information essential to robotics. Generalising beyond the robot data despite this missing low-level information is a key LfV challenge. See Sections 3.3 and 3.4 for further discussion.

2. Background

This section provides further details on prior literature in deep learning and robot learning. This serves to add context regarding where LfV approaches (and our survey) fit into the broader research landscape.

Scaling Deep Learning. Recent successes in deep learning (Brown et al., 2020; OpenAI, 2023; Dubey et al., 2024; Betker et al., 2023) have largely been driven by: (i) scaling dataset sizes; (ii) scaling model parameter sizes; (iii) improved model architectures – e.g., transformer (Vaswani et al., 2017) and diffusion models (Ho et al., 2020); (iv) and the use of self-supervised objective functions that allow for the use of large-scale, but unlabelled, internet data. Empirically-derived ‘scaling laws’ have shown deep learning performances to consistently and predictably improve with increased computation, model parameter count, and data (Kaplan et al., 2020). The term ‘foundation model’ is commonly used to refer to a large general-purpose model, pretrained on large diverse data, that can be used to solve wide varieties of downstream tasks (Bommasani, Hudson, Adeli, Altman, Arora, von Arx, Bernstein, Bohg, Bosselut, Brunskill, et al., 2021).

Scaling deep learning has led to remarkable progress in natural language processing. Large language models (LLMs) are transformer models with billions of parameters, pretrained via a simple next-token prediction objective on huge textual datasets scraped from the internet (Brown et al., 2020; Narang & Chowdhery, 2022). This pretraining scheme allows the model to learn a ‘foundation’ of declarative and procedural knowledge. The pre-

trained LLM can be finetuned via supervised learning on high-quality curated data and/or via reinforcement learning from human (or AI) feedback (RLHF) (Ouyang et al., 2022; Bai et al., 2022). This finetuning creates a more functional product for the end-user.

Similar trends can be seen in the domain of images and video. Image generation has benefited from the use of large-scale internet data and diffusion architectures (Rombach et al., 2021; Betker et al., 2023). Meanwhile, multi-modal vision-language models (VLMs), trained on large-scale data to take both images and text as input, have led to progress in image understanding (Alayrac et al., 2022; OpenAI, 2023; Team et al., 2023b). Note, we detail *video* foundation models efforts in Section 4.1.

Scaling Robot Learning. There is a hope that scaling robot learning may lead to successes similar to those seen in other domains, and thus improve the generality of our robots (Padalkar et al., 2023). However, there are well-known challenges here. Standard online reinforcement learning from scratch is not an easily scalable solution for real-world robotics: it is time-consuming, costly, and potentially dangerous (Tang et al., 2024). Offline learning (Levine et al., 2020; Brohan et al., 2022) offers a potential solution, but obtaining suitably large-scale and diverse datasets is non-trivial (Ahn et al., 2024). In light of these issues, a number of proposed approaches have been proposed.

Simulation. The use of simulation allows us to avoid the difficulties associated with real-world online learning (Zhuang et al., 2023; Kaufmann et al., 2023a; Nasiriany et al., 2024a). However, simulation presents a number of issues. (1) Inaccuracies in low-level simulation physics creates a ‘sim-to-real’ gap (Zhao et al., 2020) that must be overcome. A partial solution here is to employ domain randomization (Tobin et al., 2017). (2) Manually creating a suitable diversity of simulated environments and tasks for generalist robotics is a challenge. Recent works seek to tackle this using procedurally generated environments (Deitke et al., 2022; Team et al., 2023a) and foundation-model-assisted environment design (Xian et al., 2023; Faldor et al., 2024; Wang et al., 2023). (3) We often lack a policy capable of collecting high-quality data in the simulated environment. Solutions here have included using humans to collect the data (Mees et al., 2022), or using LLMs with access to privileged simulation information as policies (Ha et al., 2023).

Scaling real world data collection. Data collected via human teleoperation (Brohan et al., 2022; Khazatsky et al., 2024) and pooled data from multiple academic labs (Padalkar et al., 2023) have been used to train robot foundation models (Brohan et al., 2022; Team et al., 2023c). Other works have investigated methods for automating data collection to improve scalability (Bousmalis et al., 2023; Ahn et al., 2024; Yang et al., 2023a). Several commercial companies have demonstrated evidence of infrastructure suitable for large-scale robot data-collection (Sohn et al., 2024; Jang, 2024). However, the largest open-source robot dataset (Padalkar et al., 2023) is still significantly smaller and less diverse than internet-scale data (see Figure 8).

Internet data. Robot learning has benefited from the use of internet data. Image and video data have been used to pretrain visual representations for robotics (Wang et al., 2022; Nair et al., 2022). Foundational VLMs and LLMs have been used to help define reward functions for the robot learner (Tam et al., 2022; Du et al., 2023c; Yu et al., 2023b; Klissarov et al., 2023). LLMs have been employed as high-level planners in long-horizons tasks (Ahn

et al., 2022; Huang et al., 2022). Some works have finetuned a standard internet-pretrained foundation model into a robot foundation model (Brohan et al., 2023; Kim et al., 2024). Others have jointly pretrained on both internet data and action-labelled robot data (Reed et al., 2022; Sohn et al., 2024). We elaborate on how *internet video* data has been used to aid robot learning in Section 4.3.

Related Surveys. To the best of our knowledge, we are the first survey focusing explicitly on approaches that can scale-up general-purpose robot learning via the use of large quantities of diverse internet video data. Ravichandar et al. (2020), Gavenski et al. (2024) survey imitating learning methods, Prudencio et al. (2023) review of offline RL methods, while Wulfmeier et al. (2023) highlight the promise of transferring pretrained knowledge from a source to a target domain in RL. Yang et al. (2023d), Hu et al. (2023a) review methods for utilising and developing foundation models for decision-making and robotic applications. Schiappa et al. (2023) review self-supervised learning methods for video data, Madan et al. (2024) review the use of foundation models for video understanding, while Tang et al. (2023), Zhang et al. (2024) provide details on how LLMs can aid video understanding.

Torabi et al. (2019) review imitation learning from observational data, while Yang et al. (2024) advocate for the use of video (and video generation methods in particular) as a unified interface to absorb internet knowledge and represent diverse tasks. Eze and Crick (2024) present a survey of video-based learning approaches for robot manipulation. In contrast to this work, we place a stronger focus on approaches that: (i) can scale to large, diverse internet video data, and (ii) can yield general-purpose robotic capabilities.

3. Preliminaries

In this section, we introduce useful preliminary concepts related to LfV. First, the reinforcement learning (Section 3.1) and LfV (Section 3.2) settings are formalized. Next, we perform a deeper dive into the potential benefits of LfV (Section 3.3) and the fundamental challenges that come with learning from videos in robotics (Section 3.4).

3.1 Reinforcement Learning (RL)

Formalism. In reinforcement learning (RL), an agent observes its environment, takes an action, and receives a reward after the state of the environment changes. This can be formalised as a Markov Decision Process (MDP) consisting of the state space \mathcal{S} , the action space \mathcal{A} , and the transition probability $p(s_{t+1}|s_t, a_t)$ of reaching state $s_t + 1$ from state s_t when executing action a_t . The agent’s behaviour is given in terms of a policy $\pi(a_t|s_t)$. When aspects of the state cannot be observed, the environment is termed a Partially Observable MDP (POMDP) and the agent only has access to observations $o_t \in \mathcal{O}$ that are partial mappings of the state $o_t = f(s_t)$. Unless stated otherwise, we will use always a POMDP setting.

The agent aims to maximise its sum of discounted future rewards, commonly referred to as its ‘returns’. This is captured by the objective in Equation 1:

$$J(\pi) = \mathbb{E}_{[p(s_0), p(s_{t+1}|s_t, a_t), \pi(a_t|s_t)]_{t=0\dots T}} \left[\sum_{t=0}^{\infty} \gamma^t r_t \right] \quad (1)$$

where γ is the discount factor, $r_t = r(s_t, a_t)$ is the reward, and $\rho(s_0)$ is the initial state distribution. The optimal policy $\pi^*(a_t|s_t)$ maximises Equation 1.

Knowledge Modalities. An RL Knowledge Modality (KM) is some function learned from data that represents specific types of RL-related knowledge (see the work of Wulfmeier et al., 2023 for more details). We make use of the notion of a KM throughout our paper, including to help define our main taxonomy of LfV methods in Section 4.3. We will commonly refer to the following KMs:

- A *policy*, $\pi(a_t|s_t)$ is a mapping from states to actions directly describing the agent’s behaviour.
- A *state or state-action value function*, $V_\pi(s_t)$ or $Q_\pi(s_t, a_t)$ maps from states or state-action pairs to the expected future return when acting under a particular policy π .
- A *dynamics model*, $p(s_{t+1}|s_t, a_t)$ predicts the next state given the current state and action.
- A *reward model*, $r(s_t, a_t)$ predicts the reward provided by the environment for a specific state-action pair.

Transfer Mechanisms. RL KMs can be pretrained on a source MDP or dataset and can then be subsequently transferred to a target MDP (Wulfmeier et al., 2023). In the case of LfV, this involves learning a KM from a video dataset and adapting it to the robot MDP (usually via the use of robot data). We will commonly refer to the following transfer mechanisms in our paper (see the work of Wulfmeier et al., 2023 for more details): *Generalisation and zero-shot transfer* involves using a pretrained KM directly in the target setting, without further fine-tuning or adaptation (Escontrela et al., 2023). We use *Fine-tuning* and *Representation transfer* interchangeably in this survey to refer to methods that train a model in the robot domain that is partially composed of parts of a pretrained KM (Nair et al., 2022; Majumdar et al., 2023). *Hierarchy: conditioning* involves using a pretrained KM to condition a new KM being trained in the target MDP (Schmidt & Jiang, 2023; Wang et al., 2023a; Wen et al., 2023).

3.2 Learning from Videos (LfV): Formalism and Assumptions

Formalism. We assume an LfV method has access to a video dataset D_{video} . We denote a video clip as $\tau = (o_0, o_1, \dots, o_T)$, where τ is the full clip and each o is an RGB image observation. Optionally, D_{video} may come paired with language annotations or annotations of other modalities. In general, we will also assume access to a robot dataset D_{robot} . This contains trajectories of transition tuples (o_t, a_t, r_t, o_{t+1}) , where r_t may be missing, and where each o contains an image observation and may also contain other information (e.g., tactile information). The goal of LfV is to leverage D_{video} to improve robot performances versus when learning from D_{robot} alone.

LfV in the Generalist Robot Setting. Though D_{video} may come from any source, in this survey we are interested in methods that can leverage large-scale video data gathered from the internet. We will generally assume that such a dataset consists primarily of videos

of humans and has broad coverage over many common physical tasks that humans perform. We assume the robot must perform tasks that, to some extent, seen in D_{video} .

We loosely define a ‘generalist’/general-purpose robot as one that can perform a diverse range of every-day physical human tasks in unstructured real-world settings. Such settings are POMDPs, where the robot must rely heavily on visual observations. Throughout the survey, unless stated otherwise, we assume the general-purpose robot has an embodiment and affordances similar to those of a human. We subsequently assume the robot can execute tasks in a physically similar manner to how a human would.

Under the above assumptions, internet video can be particularly informative to the robot: it provides extensive information regarding how relevant embodiments can perform relevant tasks and behaviours.

Limitations of these assumptions. First, for certain robot tasks, embodiments very different from that of a human may prove more effective. Second, D_{video} may not in fact have coverage over all the tasks we want the robot to perform: some important human actions and tasks may be underrepresented in the video dataset. Additionally, the robot may need to perform tasks not commonly performed by humans. Nevertheless, even in these cases internet video may still provide generally information regarding the world and physical behaviour.

3.3 Benefits of LfV

Robotic datasets are expensive to acquire and thus are currently task-specific or relatively narrow (Padalkar et al., 2023). In contrast, diverse video data is freely available in vast quantities on the internet. In this section, we outline the specific benefits we hope to obtain from methods that leverage this video data.

Generalization beyond D_{robot} . LfV offers the exciting possibility of generalizing beyond narrow robot datasets, D_{robot} , to the full space of tasks covered in D_{video} . The rationale behind this expectation is as follows. First, consider a D_{robot} that contains most of the low-level skills or ‘atomic’ actions required from the robot (e.g., specific grasping motions or locomotion skills). Now consider a task unseen in D_{robot} but seen in D_{video} . In this case, our combined dataset ($D_{\text{combined}} = D_{\text{robot}} + D_{\text{video}}$) contains most information required to complete the task. D_{robot} provides information regarding how to execute the low-level skills, whilst D_{video} provides higher-level information regarding how to complete the overall task (e.g., visual information regarding required movements and steps). Thus, a suitable LfV method may be capable of leveraging D_{video} to generalise beyond D_{robot} and solve the task. There is preliminary evidence of this in LfV-related literature (Brohan et al., 2023; Du et al., 2023a; Wu et al., 2023a; Wang et al., 2023a). Figure 2 explores this generalization setting in more detail.

Emergent Capabilities. Learning from internet-scale video may yield capabilities qualitatively beyond what can be obtained when learning only from a narrow D_{robot} . We expect this for two reasons. First, in other domains large quantities of internet data have allowed for unexpected ‘emergent’ capabilities (Radford et al., 2019; Brown et al., 2020). Second, diverse internet video paired with language annotations offers a path towards stitching

together the lower-level knowledge obtained from robot and video data with the rich abstractions and world knowledge that can be obtained from text data (OpenAI, 2023).

Improvements in-distribution of D_{robot} . Finally, we also expect video data to yield improvements in tasks that are in-distribution of the robot dataset. Utilising a large video dataset can allow for improved data-efficiency with respect to D_{robot} (Nair et al., 2022). Additionally, LfV approaches may obtain higher absolute task performance (e.g., higher success rates) in settings in-distribution of D_{robot} , versus non-LfV approaches (Wu et al., 2023a).

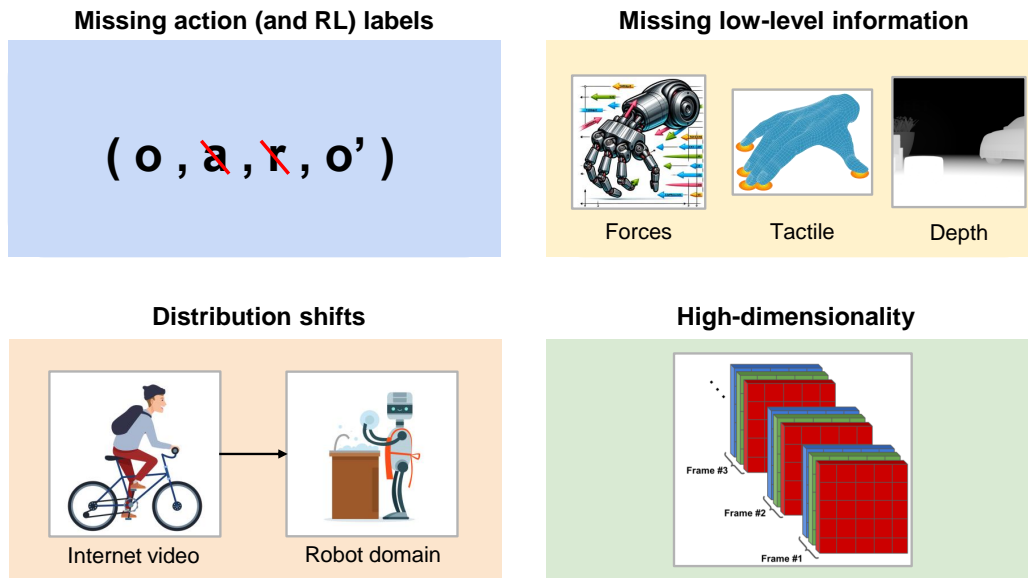


Figure 3: Key challenges in LfV (see Section 3.4) are visualised, including: missing (action and low-level) information in video, LfV distribution shifts, and the high-dimensional nature of video data.

3.4 Fundamental Challenges

We now discuss the key fundamental challenges that may be encountered when attempting to learn from internet video for robotics (see Figure 3 for visualizations). This provides context to understand the motivation behind specific LfV methods proposed in the literature (as we detail in Section 4).

Missing Action Labels. Raw video data lacks the action labels required by existing imitation (Brohan et al., 2022) and offline RL (Chebotar et al., 2023) methods for learning from demonstrations. Moreover, adding robot-action labels retrospectively to internet video data is generally not an option: the low-level actions of a robot are incompatible with the unrestricted action space of heterogeneous video data. Raw video data also lacks other RL-relevant metadata, such as reward labels (which can inform on the quality of the data), goal labels (which can be useful for goal-conditioning), or end-of-episode labels.

Distribution-shift. There may be a distributional shift between an internet video dataset and the downstream robot domain. This can include differences in physical embodiments, camera viewpoints, or environments. Additionally, humans in videos may perform behaviours which are sub-optimal or irrelevant to the downstream robot task. These shifts present a challenge to deep learning methods.

Missing Low-level Information. For certain skillful or dexterous behaviours, robots require low-level percepts such as tactile sensing, forces, proprioception, or depth sensing. This crucial low-level information is not explicitly available in internet video. A key challenge in LfV is to obtain generalization beyond D_{robot} despite the missing low-level information in D_{video} (see Figure 2).

Controllability, Stochasticity, and Partial Observability. In unlabelled video, it is impossible to distinguish which parts of a transition are affected (i.e., controlled) by a specific agent’s actions and which are simply due to the external environment or noise. This can be problematic for methods that attempt to extract action information from video (Section 4.2.1). Furthermore, the stochastic nature and partial-observability of the underlying environments in video can make accurate video prediction a challenge.

High-dimensionality, Noise, and Redundancy. Methods that learn from or generate video data are typically computationally demanding due to the high-dimensional nature of video data. Additionally, video can contain significant noise and redundant information. These characteristics make it challenging to extract meaningful information and representations from video data (Bardes et al., 2023).

4. Methods

This section reviews methods for learning from video data for robotics. We first review video foundation models as a general-purpose means for extracting knowledge from internet video (Section 4.1), noting that advances in these approaches will directly serve advances in scalable LfV methods. We then review common methods used to tackle key LfV challenges (Section 4.2). Finally, we move to our primary taxonomy of the LfV literature, categorizing LfV methods according to which RL knowledge modality benefits from the use of video data (Section 4.3).

4.1 Video Foundation Models

Foundation models are large deep learning models trained on large, diverse datasets. They maintain general knowledge and capabilities useful in a wide range of downstream settings. This has most notably been demonstrated in natural language processing with large language models (LLMs) (OpenAI, 2023; Team et al., 2023b). In this section, we focus on *video foundation model* techniques, which can act as a general means for extracting robotics-relevant knowledge (e.g., knowledge regarding physics and behaviours) from large-scale internet video data. We are interested in these models and techniques in LfV due to the following use-cases (see Figure 4):

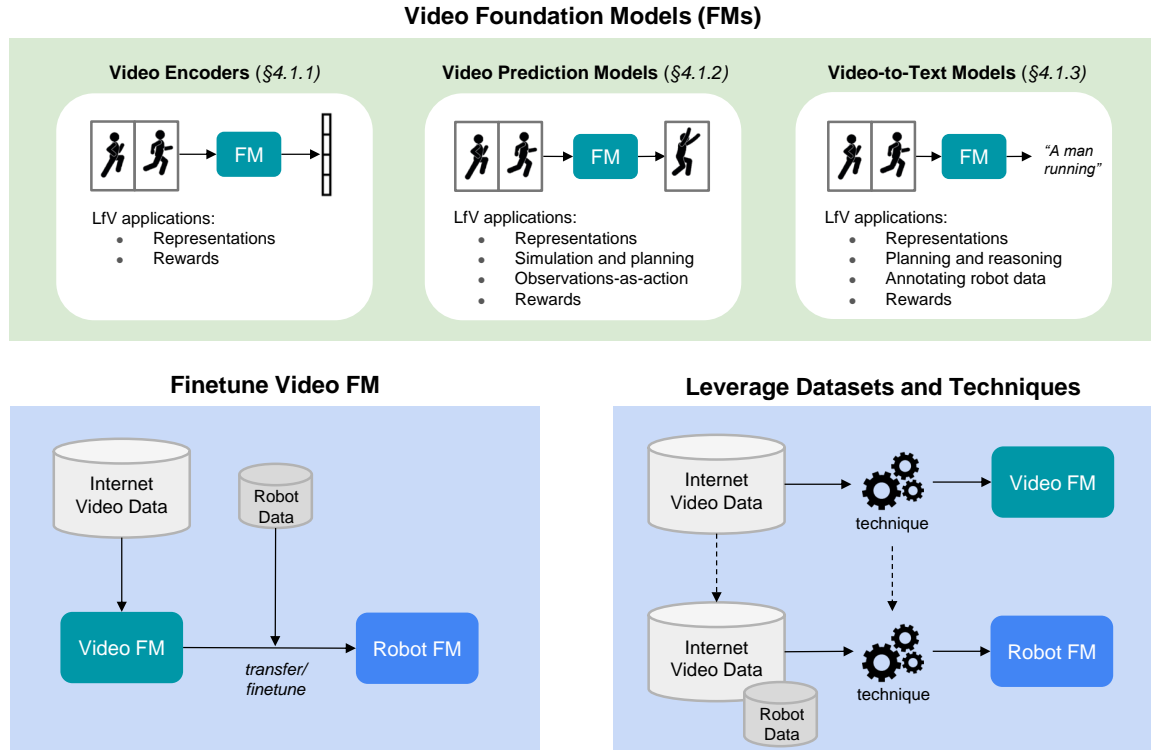


Figure 4: Video Foundation Models (see Section 4.1) for LfV. The top green box outlines different categories of video foundation models and their applications to robotics. The bottom blue boxes illustrate ways video foundation models can contribute to LfV: (left) pretrained video foundation models can be finetuned into robot foundation models; (right) video foundation model techniques and datasets can be used to train robot foundation models.

- *Using pretrained video foundation models:* A pretrained video foundation model can be adapted for downstream robot applications. For example, a video prediction model can be adapted into a robot dynamics model (Yang et al., 2023c).
- *Using video foundation model techniques and datasets:* Techniques and datasets used originally for video foundation models can be customized for robotics purposes. For example, a robot foundation model can be trained on both video and robot data, using techniques inspired by video foundation modelling (Sohn et al., 2024).

We loosely categorise the video foundation model literature into video encoding methods (Section 4.1.1), video prediction methods (Section 4.1.2), and video-to-text generation methods (Section 4.1.3). In each subsection we give a very brief overview of different approaches after initially explaining why each method is relevant to LfV.

4.1.1 VIDEO ENCODERS

Foundational video encoders ($p(z|\tau)$, where z is a representation and τ is a video clip) can provide rich and robust video representations for downstream robotic applications. Specifically, they can be useful as follows.

- *Representations*: LfV representation transfer approaches take a pretrained video encoder and finetune it into an RL KM (e.g., into a policy, see Section 4.3.1).
- *Rewards*: LfV approaches have used frozen pretrained video representations to help define robot reward functions (Fan et al., 2022; Sontakke et al., 2023; Nair et al., 2022) (see Section 4.3.3).

Methods. We now provide a general overview of representation learning from video, before providing more details on state-of-the-art (SOTA) approaches.

Overview of video representation learning. Let \bar{X} be a video clip X paired with some corresponding labels and data modalities. Most methods for learning video encoders can be framed as first deriving a ‘label’ Y from \bar{X} and then using Y to define a learning objective. Y could be some transform of the video X itself (e.g., a masked version of the video, see Wang et al., 2023c). Otherwise, Y could be derived from additional information paired with the video such as: labels (e.g., object masks and bounding boxes, see Ding et al., 2023a); meta-data (Schiappa et al., 2023); or corresponding data of another modality (e.g., language annotations, see Grauman et al., 2021). Once Y is obtained, there are a number of ways it can be used. Prediction objectives predict Y from X . For example, predicting the next frame from the previous frame (i.e., video prediction) (Gao et al., 2022; Jang et al., 2024). Joint-embedding approaches first embed X and Y before calculating the loss (Oord et al., 2018; Xu et al., 2021; Bardes et al., 2023). Here, contrastive learning approaches have been heavily explored (Schiappa et al., 2023).

SOTA Approaches. The literature has proposed a number of approaches for learning rich spatio-temporal representations from video in a *scalable* manner. Video-text losses leverage text annotations to learn semantic representations from video. This can include: video-text contrastive losses (Xu et al., 2021; Zhao et al., 2024; Papalampidi et al., 2023; Li et al., 2023; Wang et al., 2023b), video-text matching (Li et al., 2023), masked language modelling (Li et al., 2023), and video-to-text losses (Yan et al., 2022; Papalampidi et al., 2023). Auto-encoding approaches have also proven popular. State-of-the-art methods have used masked auto-encoding (MAE) (Tong et al., 2022; Wang et al., 2023c; Girdhar et al., 2022) and vector-quantized auto-encoding (VQ-AE) (Seo et al., 2022b; Yan et al., 2021; Yu et al., 2022; Villegas et al., 2022; Bruce et al., 2024). A number of works have explored the use of student-teacher distillation losses (Wang et al., 2022; Zhao et al., 2024; Li et al., 2023). Joint-embedding prediction architectures (JEPA) have been proposed to better mitigate issues related to video’s high-dimensionality and noise in video (Bardes et al., 2023).

4.1.2 VIDEO PREDICTION MODELS

This section is primarily concerned with models that can perform next-frame video prediction: $p(o_{t+1}|o_{t-k:t})$. Also relevant are models that can more generally perform some form

of conditional video generation: $p(\tau|c)$ (where τ is a video clip and c is some conditioning information) (Yang et al., 2024). Via training on internet video, such models can learn information regarding the world dynamics and human behaviours. They can thus be useful for downstream robotic applications in the following ways:

- *Dynamics*: A video prediction model can be adapted into a robot dynamics model $p(o_{t+1}|o_{t-k:t}, a_t)$ to serve as a planner (Du et al., 2023b) or simulator (Yang et al., 2023c) (see Section 4.3.2).
- *Policies*: The video prediction objective implicitly models the distribution of behaviours in the video dataset (Escontrela et al., 2023). As such, video prediction models can act as policies by generating ‘observations-as-actions’, videos of future behaviours the robot should execute (Du et al., 2023a) (see Section 4.3.1).
- *Representations*: Due to the relevant information they represent, video predictors can be used for LfV representation transfer approaches (Wu et al., 2023a).
- *Rewards*: Finally, a reward signal can be defined that encourages the robot to match the behaviour expected by the video predictor (Escontrela et al., 2023) (see Section 4.3.3).

Methods. Diffusion models, autoregressive transformers, and masking transformers have proven to be particularly effective and scalable architectures in recent years.

Diffusion models can easily model continuous output spaces and can sample multiple frames in parallel. However, their sampling speeds can be slow and long video generation remains a challenge (Yang et al., 2024). Computational efficiency can be aided by performing the diffusion process in a learned latent space (Brooks et al., 2024; Bar-Tal et al., 2024; Blattmann et al., 2023a) rather than in pixel space (Ho et al., 2022; Singer et al., 2022; Ho et al., 2022). Many diffusion video prediction models augment their training data by making use of image data (which can come in higher quality and quantity than video data) (Ho et al., 2022, 2022; Bar-Tal et al., 2024; Ge et al., 2023; Blattmann et al., 2023b; Dai et al., 2023). The diffusion video prediction pipeline can often involve several intermediate steps, including: key-frame generation, interpolation between key-frames, and spatial super-resolution upsampling (Ho et al., 2022; Ge et al., 2023; Zhou et al., 2022). However, Bar-Tal et al. (2024) generate the entire temporal duration in a single forward pass, obtaining improved global temporal consistency.

Autoregressive and masking transformers tend to make predictions in a learned latent-space (Yan et al., 2021; Yu et al., 2023; Ge et al., 2022; Kondratyuk et al., 2023). Predicting in latent space can improve computational efficiency and can mitigate issues related to pixel-level noise and redundancy (Yan et al., 2021). The latent space is generally pretrained via vector-quantized auto-encoding (VQ-AE), providing a discrete token-space suitable for the transformer architecture. Versus autoregressive methods (Yan et al., 2021; Hu et al., 2023; Bruce et al., 2024), masking transformers train the model to decode masked tokens in parallel (Yu et al., 2022, 2023b; Gupta et al., 2022). This is usually achieved via the use of MaskGIT decoding (Chang et al., 2022). Masked models are more computationally

efficient and do not suffer from the ‘drifting’ effect that can occur in auto-regressive models (Yang et al., 2024).

Conditioning information can simplify the video prediction problem and allow for more control over generated videos. Such conditioning is valuable for downstream robotics: it can allow us to simulate the effects of different ‘action’ strategies. Yang et al. (2024) outline various popular conditioning schemes for video generation models $p(\tau|c)$. In particular, language conditioning can allow for flexible and intuitive control over generated video, at varying levels of detail (Brooks et al., 2024; Bar-Tal et al., 2024; Kondratyuk et al., 2023). Amongst other possibilities, video generation can also be conditioned on future images (i.e. video in-filling, see Höppe et al., 2022) or on action information (Bruce et al., 2024). We outline various action representations that may be suitable for conditioning video predictions in Section 4.2.1.

4.1.3 VIDEO-TO-TEXT MODELS

This section details to models with video-to-text capabilities. A capable video-to-text model can perform, for example, video question-answering or video summarization. A capable video-to-text foundation model could be valuable to robotics in the following ways.

- *High-quality representations:* A capable video-to-text model will have robust, high-quality video representations. Compared to a video-only model, it will likely have improved high-level semantic representations. Compared to an image-to-text model, it will have improved temporal-dynamic representations. Robotics can bootstrap from such models via representation transfer (Brohan et al., 2023), or by adding robot data directly into the model’s pretraining corpus (Reed et al., 2022).
- *Grounded reasoning and planning:* LLMs have proven useful as planning modules in robotics (Ahn et al., 2022), but their lack of grounding in the physical world is limiting. In contrast, video-to-text models can perceive the environment through information-rich video, allowing for improved and closed-loop reasoning and planning.
- *Annotating robot data:* High-quality language annotations can provide valuable conditioning information in many ML domains (Betker et al., 2023; Brooks et al., 2024). Robotics is no different (Team et al., 2023c). Capable video-to-text models could serve as useful language annotators for robotic datasets (Blank et al., 2024).
- *Rewards:* A sufficiently capable video-to-text model can provide reward or value estimates for a robot learner. For example, this could be achieved through a visual-question answering framework (Du et al., 2023c), or via an RL-from-AI-feedback framework (Klissarov et al., 2023) (see Section 4.3.3).

Methods. We now give an overview of existing video-to-text methods and models. We note that research here is somewhat preliminary: low-quality video captions and the difficulties of the video modality mean progress lags behind foundation models in other domains.

Compositional approaches have often been used to obtain video-to-text pipelines (Chen et al., 2023; Shang et al., 2024; Zeng et al., 2022; Li et al., 2022). For example, Chen et al.

(2023) use an image-language model to answer questions about individual video frames, and an LLM to synthesize this information to produce a global summary of the video. However, the lack of end-to-end video training in compositional approaches mean they can lack rich, nuanced video representations.

Leveraging pretrained LLMs via adaptors and finetuning. Approaches here typically first obtain a pretrained LLM and an (often) pretrained video encoder, and then define an adaptor module to channel information from the video encoder output into the LLM (Lin et al., 2023; Maaz et al., 2023; Zhang et al., 2023; Papalampidi et al., 2023). Once the new video-to-text architecture is defined, a common training scheme is: (i) convert large, diverse video-text data into token sequences and perform next-token-prediction pretraining, then (ii) perform supervised instruction-tuning on small, high-quality instruction datasets (Lin et al., 2023; Zhang et al., 2023). Following trends in LLMs, future work may investigate a third RLHF finetuning stage (Kaufmann et al., 2023b). During training the LLM and video encoder may be finetuned (Lin et al., 2023), or kept frozen (Maaz et al., 2023).

Natively multi-modal models. Previously discussed methods have involved combining and finetuning models not initially intended for video-to-text purposes. Recent multi-modal any-to-any sequence models—where video-to-text is formulated as an interleaved video and text sequence modelling problem—represent a step towards more *natively* multi-modal models. Liu et al. (2024b), Team et al. (2023b), Jin et al. (2023) all train multi-modal any-to-any (or any-to-text) autoregressive transformers via next token prediction.

4.1.4 CHALLENGES

Scaling of datasets and model sizes has recently lead to impressive advances in video ML (Zhao et al., 2024; Yang et al., 2023c; Wang et al., 2024). Most notably, the recent Sora model (Yang et al., 2023c) demonstrated significant improvements in video prediction visual quality, physical realism, and generation lengths. However, there are still major limitations in the capabilities of current video foundation models. Models can hallucinate, and can struggle with spatial relationships, fine-grained spatio-temporal details, and long-term understandings and generation (Lin et al., 2023; Maaz et al., 2023; Yang et al., 2023c).

One bottleneck to further progress here is the quality (and quantity) of available video-data (see Section 5.1). In particular, improved annotations with precise low-level details will enhance robotics-relevant fine-grained understandings. The computational demands of processing high-dimensional and long video data present another issue. Improved model architectures can help here (Yang et al., 2024). For example, progress in long video understanding will be aided by more efficient architectures for handling longer contexts (Liu et al., 2023a; Gu & Dao, 2023; Balažević et al., 2024). Other directions to improve video foundation models include using RL finetuning to address hallucination issues (Black et al., 2023a), and leveraging 3D information to improve the physical realism of video generations (Zhen et al., 2024). Improved methods for fine-grained, single-step conditioning of video predictions will be relevant to robotics (Bruce et al., 2024). Finally, we advocate for progress in open-sourced foundational video prediction models: open-sourced models make LfV research more accessible to the wider community.

4.2 Tackling LfV Challenges

The fundamental challenges associated with LfV are outlined in Section 3.4. In this section, we detail two categories of techniques that each address a fundamental challenge: (1) The use of action representations to mitigate missing action labels in video data (Section 4.2.1). (2) The use of representations designed to explicitly address LfV distribution-shift issues (Section 4.2.2). These techniques are often used as a single component within a larger LfV pipeline. We thus describe these technique in isolation here, in advance of our main analysis of the LfV literature in Section 4.3.


4.2.1 ACTION REPRESENTATIONS

Video data transition tuples are missing action labels: they come in the form of (o_t, o_{t+1}) . In this section, we review works that define or learn some representation space that is analogous to the notion of an action; an *alternative action representation*. We use $\hat{a} \in \hat{\mathcal{A}}$ to denote a single alternative-action and its underlying alternative-action space. With $\hat{\mathcal{A}}$, video data can be relabelled from (o_t, o_{t+1}) to $(o_t, \hat{a}_t, o_{t+1})$ and used to train an ‘alternative-action’ version of an RL KM (see Figure 5a). Alternative-action policies $\pi_{\text{alt}}(\hat{a}_t|o_t)$ (Schmidt & Jiang, 2023), dynamics models $p_{\text{alt}}(o_{t+1}|\hat{a}_t, o_t)$ (Bruce et al., 2024), and value functions $Q_{\text{alt}}(o_t, \hat{a}_t)$ (Bhateja et al., 2023) have all been previously trained. These alternative-action KMs can be useful downstream if a mapping to the robot action-space, $f : \mathcal{A} \rightarrow \hat{\mathcal{A}}$, is obtained (Wang et al., 2023a; Wen et al., 2023; Du et al., 2023a). Otherwise, their representations can prove highly useful (Bhateja et al., 2023; Schmidt & Jiang, 2023).


There are a number of characteristics we desire from our action representations $\hat{\mathcal{A}}$:

- *$\hat{\mathcal{A}}$ should be inferable from video data.* Action representations that can be obtained from raw, unlabelled video are appealing as they can leverage the full range of available video data. However, $\hat{\mathcal{A}}$ ’s that require labelled video (e.g., language captions) are also valid.
- *$\hat{\mathcal{A}}$ should contain ‘action’ information.* We can operationalize this in two ways. First, $\hat{\mathcal{A}}$ should be predictive of future video frames: learning $p_{\text{alt}}(o_{t+1}|\hat{a}_t, o_t)$ should be easier than $p(o_{t+1}|o_t)$. Second, $\hat{\mathcal{A}}$ should be predictive of robot actions: learning $\pi(a_t|\hat{a}_t, o_t)$ should be easier than $\pi(a_t|o_t)$.
- *$\hat{\mathcal{A}}$ should be transferable across embodiments.* It should capture a high-level, general notion of an action, and transfer from the embodiments in the video data (i.e., humans) to the target robot embodiment(s).
- *$\hat{\mathcal{A}}$ should be well-structured.* It may be beneficial for $\hat{\mathcal{A}}$ to contain minimal information, to be well disentangled, and to maintain consistent meaning across the state space. This can allow $\pi(\hat{a}_t|o_t)$ and $\pi(a_t|\hat{a}_t, o_t)$ to be learned in a more data-efficient and generalizable manner (Rybkin et al., 2018; Bruce et al., 2024).

We now outline the main categories of $\hat{\mathcal{A}}$ we have identified in the literature (see Figure 5b). We focus on detailing how $\hat{\mathcal{A}}$ can be defined and learned from video data. More details on how $\hat{\mathcal{A}}$ can be used downstream for robotics are found throughout Section 4.3.

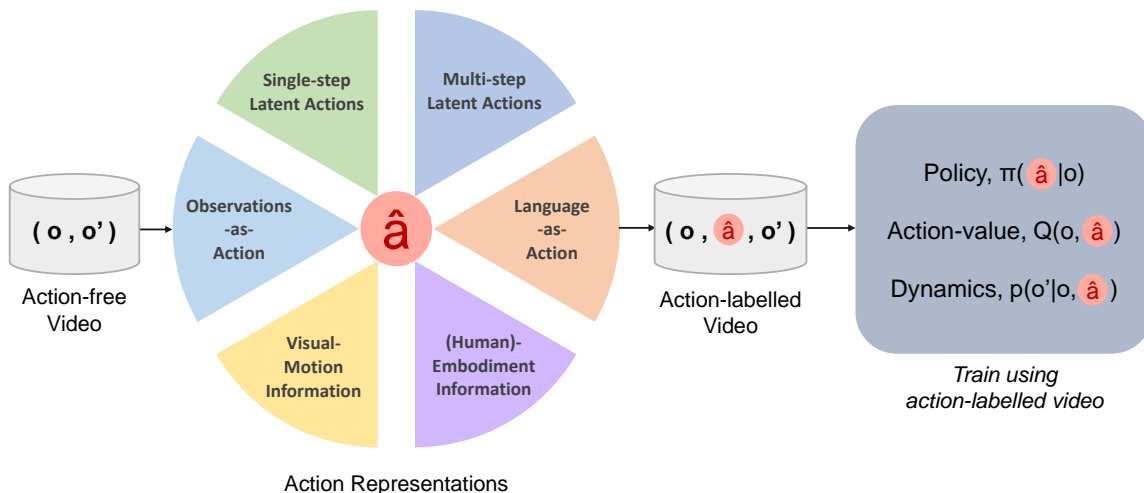

(a) Action-free videos can be labelled with alternative-action representations \hat{a} . This labelled data can be used to train an alternative-action RL knowledge modality (e.g., a policy, value function, or dynamics model).

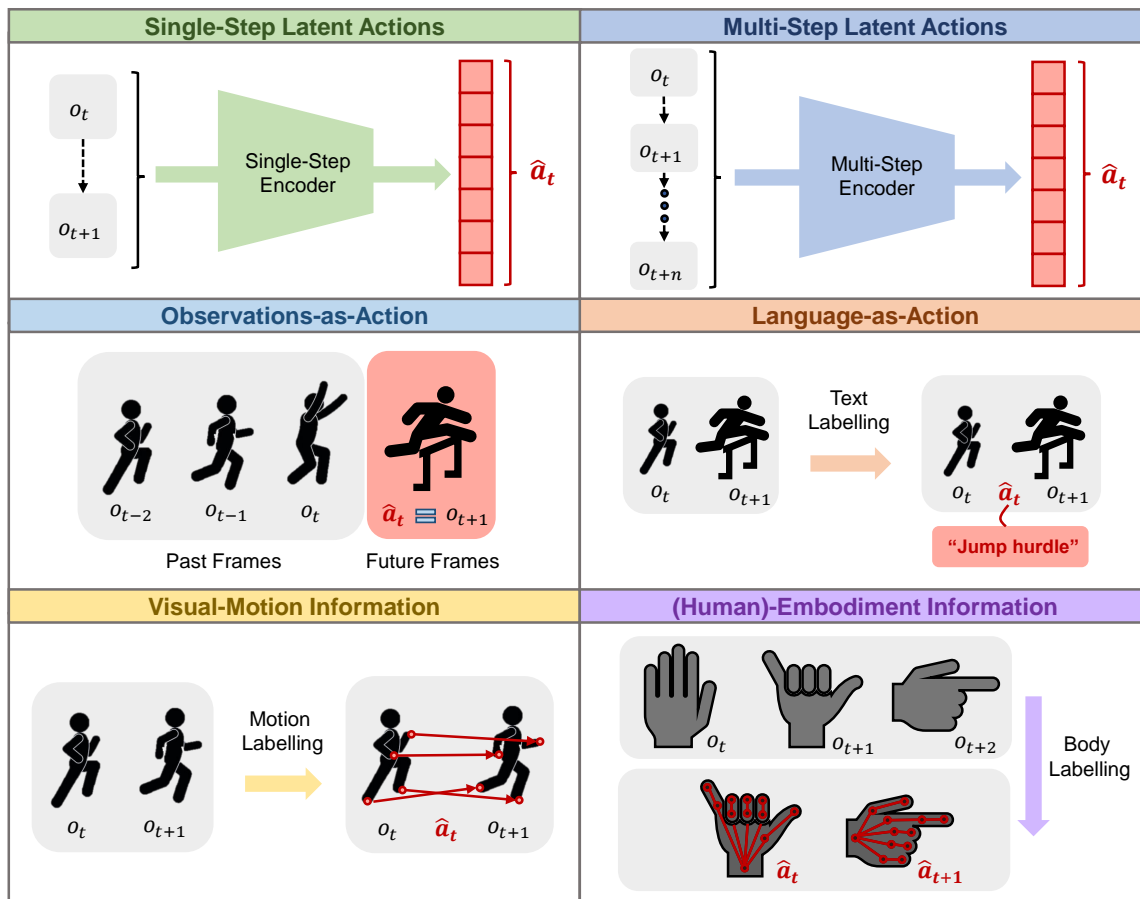

(b) Categories of action representations that can be learned or obtained from video data.

Figure 5: Recovering action representations from video to overcome the missing action-label problem in LfV (Section 4.2.1).

Single-step Latent Actions. Here, we consider *learned* representations where \hat{a}_t (i.e., the latent action) only contains information regarding the action that took us from o_t to o_{t+1} . Such a latent representation is commonly learned using a next-observation prediction objective $p(o_{t+1}|\hat{a}_t, o_t)$, such that \hat{a}_t is informative for the predictions of a forward dynamics model (FDM) (Edwards et al., 2018; Rybkin et al., 2018; Schmidt & Jiang, 2023; Bruce et al., 2024). A trainable (latent) inverse dynamics model (IDM) can be used to encode past-frames and infer \hat{a}_t (Rybkin et al., 2018; Bruce et al., 2024). Here, some form of regularisation, such as a vector-quantization bottleneck (Schmidt & Jiang, 2023; Bruce et al., 2024), can be employed to prevent the IDM from copying the entire observation o_{t+1} into the latent action.

We note some potential limitations of these approaches. First, these latent actions model all visual changes that occur in a video. Ideally, \hat{a}_t would only represent changes due to actions taken by a single agent. Second, as these approaches model environment transitions on a visual level, thus they may omit important non-visual low-level information (such as forces). We finally note that more research into learning single-step latent action-spaces from realistic internet video is required.

Multi-step Latent Actions. This refers to *learned* action representations, \hat{a} , that contain information regarding the actions taken across *multiple* time-steps of a video (i.e., from o_t to o_{t+k}). Any means of representing video segments could be applicable here, including the video representation methods seen in Section 4.1.1. Here, we only detail methods used directly in the LfV literature. Building upon the ‘latent plans’ literature (Lynch et al., 2020; Cui et al., 2022; Rosete-Beas et al., 2022), Wang et al. (2023a) learn latent plan representations from action-free videos via variational auto-encoding. However, they use 3D human hand trajectories as the decoder target (rather than raw video). Fan et al. (2022), Lifshitz et al. (2023), Sontakke et al. (2023) use video-language contrastive losses on language-captioned video. Chane-Sane et al. (2023), Chen et al. (2021) perform supervised contrastive learning on video labelled with the action being performed. Xu et al. (2023) use a self-supervised learning clustering approach to learn video representations. Further approaches for learning multi-step latent actions are seen in the works of Tomar et al. (2023), Pertsch et al. (2022), Cai et al. (2023).

Observations-as-action. Future observations (or an encoding thereof) provide information regarding what actions will be taken next in a video. Thus, they can be used as action representations. Observations-as-actions can be implemented on varying time-horizons, as we now describe. (1) *Next-observation-as-action*: These methods use the next observation o_{t+1} as the \hat{a}_t label (Du et al., 2023a; Thomas et al., 2023; He et al., 2024). o_{t+1} provides clear information regarding the action that should be taken at o_t . (2) *Observations-as-subgoals*: A subgoal can be thought of as a high-level action. In ‘observations-as-subgoals’ methods (Black et al., 2023b; Park et al., 2024; Bhateja et al., 2023), an observation (or embedding thereof) from k time-steps into the future is used as a sub-goal / action representation. Some simple strategies for defining sub-goals in the video data include: choosing a fixed time-horizon k (Black et al., 2023b; Du et al., 2023a), or randomly sampling observations beyond the current timestep (Bhateja et al., 2023). More complex strategies include using key-frame identification to identify bottleneck states in video (Pertsch et al., 2019; Liu et al., 2023b).

Language-as-action. Natural language can be used as a flexible, high-level action-space (e.g., $\hat{a}_t = \text{“pick up the cube”}$) (Belkhale et al., 2024; Shi et al., 2024; Xiang et al., 2024), and can allow for interfacing with other language models (Du et al., 2023b). Some video datasets come with language-action annotations (Grauman et al., 2021). Otherwise, standard annotations can be further processed (e.g., using LLMs) (Mu et al., 2023). If the video does not come with any language annotations, manual or automated captioning methods can be used (see Section 5.1.2). One downside here is that language is coarse and may omit important lower-level action information.

Visual Motion Information. Other works have used visual motion information in video to define $\hat{\mathcal{A}}$. Wen et al. (2023) use 2D point trajectories, obtained by tracking points on objects throughout the video via an off-the shelf point tracker (Karaev et al., 2023). Yuan et al. (2024) similarly use 3D point trajectories obtained from 3D annotated datasets. Elsewhere, Ko et al. (2023) use an off-the-shelf model (Xu et al., 2022) to predict optical flow, giving a pixel-level dense correspondence map between two frames. Nasiriany et al. (2024b) represent actions via visual arrows in images. Finally, Wang et al. (2023b) use structure-from-motion (Schonberger & Frahm, 2016) to recover action information, Yuan et al. (2021) use the motions of object-centric representations, and Yang et al. (2023c) optionally use camera frame motion information as conditioning information for a video predictor.

(Human)-embodiment Information. Off-the-shelf human-hand detection models (Rong et al., 2020; Shan et al., 2020) can extract hand poses or affordances from videos which can act as an action representation (Bharadhwaj et al., 2023; Bahl et al., 2023; Shaw et al., 2022; Qin et al., 2022, 2021). For example, \hat{a}_t can be defined as the pose that should be reached at time $t + 1$. Bharadhwaj et al. (2023) use object masks in addition to human poses to define $\hat{\mathcal{A}}$. Animal embodiment information could also be used (Peng et al., 2020). More details on methods for detecting human hand poses and affordances from video are provided in Section 4.2.2.

IDM Pseudo-action Labels. Though not technically an *alternative* action representation, these methods train an inverse dynamics model $p^{-1}(a_t|o_t, o_{t+1})$ on action-labelled robot data, and use it to provide pseudo-action labels for action-free video data (Baker et al., 2022; Torabi et al., 2018a; Schmeckpeper et al., 2020). However, these approaches are unlikely to scale to diverse internet video as they require either: (i) minimal domain-shift between the video data and the robot domain (e.g., Baker et al. (2022) assume identical embodiments), or (ii) an explicit mechanism to deal with domain-shift that may not scale well to diverse internet video (Schmeckpeper et al., 2020; Kim et al., 2023) (see Section 4.2.2).

Discussion.

Can $\hat{\mathcal{A}}$ be easily obtained from internet video? Observations-as-action can be obtained from any raw video and can (in theory) leverage the full range of available video data. Single-step latent actions, and (some) multi-step latent actions can also be obtained from raw video, but an additional learning step (that may face optimisation difficulties) is required. Language-as-action, visual motion information, and (human)-embodiment information all

require labelled video. Nevertheless, often off-the-shelf models can provide labels, and curated video datasets often come paired with language annotations (see Section 5.1.3). Visual motion information and (human)-embodiment information approaches may require higher degrees of structure in the video (e.g., a relatively fixed frame); it is unclear how sensible these representations will be when applied to heterogenous internet video data.

Once obtained, how useful is $\hat{\mathcal{A}}$? The information content of a given $\hat{\mathcal{A}}$ will determine how useful it will be. A longer-horizon or more high-level $\hat{\mathcal{A}}$ (e.g., language-as-actions) may ultimately aid downstream performances in long-horizon tasks. However, shorter-horizon $\hat{\mathcal{A}}$'s with more low-level information may be more informative for decoding a_t from \hat{a}_t . Note, video-based actions representations will not usually contain all information required to accurately decode the exact low-level robot action. As such, in practice, any decoder may need to be defined as $\pi(a_t|\hat{a}_t, o_t)$ rather than $\pi(a_t|\hat{a}_t)$.

Future directions. There is no work comprehensively comparing the utility of different action representations for LfV. We advocate for empirical research to help answer the questions we have posed above in the two paragraphs above.

4.2.2 REPRESENTATIONS TO ADDRESS LfV DISTRIBUTION-SHIFT

Distribution shift between internet video and the target robot domain poses a challenge to LfV approaches (see Section 3.4). For example, there exist embodiment differences between humans in internet video and robots. Such distribution shifts can hinder our ability to transfer knowledge from the video data to the robot.

A line of LfV research has attempted to overcome these issues by explicitly designing representations of (human) video that are more transferable to the robot domain. Once the transferable representation is obtained, works have most commonly used it to: (i) define a reward function encouraging the robot to match the behaviour in the video (Zakka et al., 2021), or (ii) to help train a policy via behaviour cloning of the represented video (Bharadhwaj et al., 2023).

In this section, we focus solely on describing methods for obtaining representations that explicitly address LfV distribution-shift. Details regarding how the obtained representation can be used downstream to aid robot learning are found throughout Section 4.3.

Method: (Human)-embodiment-aware Approaches. In LfV, we are most often interested in learning from human behaviour; in particular in replicating the effects of the human hand. There is a line of LfV research that explicitly detects human-embodiment information in video, and subsequently transfers this information to the robot. Note, animal embodiment information can also be used (Peng et al., 2020).

What types of human-embodiment information can be detected?

(1) Poses: Several works explicitly estimate the pose of the human body or hand in videos (Shaw et al., 2022; Sivakumar et al., 2022). This involves estimating the positions and orientations of various joints or key points on the body via off-the-shelf models. Once a human-hand pose is detected, it may need to be retargeted to the robot embodiment. This can be achieved by directly optimising a loss function at inference (Shaw et al., 2022), or

by training a retargeting network to minimise a retargeting loss function (Sivakumar et al., 2022).

(2) Affordances: A common affordance seen in the LfV literature is the combined use of grasp points and grasp trajectories (Bahl et al., 2023; Mendonca et al., 2023) – this abstraction transfers naturally from human to robot embodiment. This affordance information can be extracted from videos using an off-the-shelf model (Shan et al., 2020), and using further tricks to ensure accurate, usable affordance labels (Bahl et al., 2023). Note, 2D affordances can be converted to 3D using depth estimation (Mendonca et al., 2023).

(3) Masks and Bounding boxes: Masks or bounding boxes of human hands and objects can be used (Bharadhwaj et al., 2023). These can be obtained from videos using off-the shelf models (Kirillov et al., 2023; Zhang et al., 2022) or via labelled datasets (Darkhalil et al., 2022).

How to use this human embodiment-centric information? A video dataset labelled with the human-centric information described above can allow for one of the following to be performed: (1) The original process for extracting the human-centric information from the video/image can be distilled into a single model (Mendonca et al., 2023). This can be useful when the original method is convoluted or unlikely to generalize. This process may also be a good auxiliary representation learning objective for robot manipulation (Bahl et al., 2023). (2) The extracted embodiment information can be treated as an ‘alternative action representation’ (Bharadhwaj et al., 2023; Bahl et al., 2023; Shaw et al., 2022; Qin et al., 2022, 2021) (see Section 4.2.1), or as a state-observation when retargeted to the robot embodiment (Radosavovic et al., 2024).

Limitations. There can still be difficulties transferring this human-embodiment information to the robot. For example, a model trained to propose future poses solely on human images is unlikely to generalise zero-shot to robot images. This has led to tricks being used in the LfV literature, such as predicting affordances only when the embodiment is out of frame (Bahl et al., 2023), or in-painting human embodiments over robot embodiments (Bharadhwaj et al., 2023).

Method: Learned Invariant Representations. These are methods that *learn* a representation that is invariant to a specific distribution shift between the video dataset and robot domain.

Approaches. (1) Domain confusion techniques can learn representations that are invariant across viewpoints (Stadie et al., 2017) and embodiments (Schmeckpeper et al., 2020). (2) Contrastive learning and related techniques can encourage invariance across a particular axis; such as viewpoints (Sermanet et al., 2018) and visual changes (Aytar et al., 2018). (3) Temporal cycle-consistency objectives can learn embodiment invariant representations (Zakka et al., 2021). (4) Factorized representations learn one representation that is common across the video and robot distributions, and one that is unique to each distribution (Schmeckpeper et al., 2019; Shang & Ryoo, 2021). Similarly, Chang et al. (2023) use embodiment segmentation and in-painting removal to obtain explicit factorized representations of the agent and environment. (5) Image translation methods can convert an image from

the source distribution (e.g., human embodiment) to the target (e.g., robot embodiment) (Smith et al., 2019; Bahl et al., 2022; Bharadhwaj et al., 2023; Li et al., 2024).

Limitations. (1) Invariant representations can omit useful information, such as important differences between human and robot embodiments. (2) These methods can have overly strict requirements on the video data. For example, Sermanet et al. (2018) assume access to multiple videos of the same scene but from different viewpoints. (3) Many of these methods only provide invariance to a single type of distribution shift (e.g., embodiment differences only). In reality, there may be many distinct shifts between any given video and the robot’s setting.

Method: Transferable Abstractions. Some methods exploit abstractions that naturally transfer well from human to robot. This includes: object-centric graphical representations (Sieb et al., 2020; Kumar et al., 2022); object-centric activity-context priors (Nagarajan & Grauman, 2021); key-points in video (Karnan et al., 2021; Xiong et al., 2021); and embodiment-agnostic affordances (Bahl et al., 2023; Mendonca et al., 2023). These methods all respectively benefit from the use of off-the-shelf object, key-point, and human-hand detectors. Language has also been used as a transferable abstraction (Chen et al., 2021; Mu et al., 2023; Pertsch et al., 2022).

Discussion. These methods highlight the trade-off that must be made between: (i) imposing structure and inductive biases to improve performance in narrow settings, and (ii) opting for end-to-end learning methods that are more scalable, but are less effective in the small data regime and narrow settings. The central focus of this survey is on scaling to diverse internet data in order to tackle unstructured environments with generalist robots. As such, we advocate for methods following the spirit of (ii). Through this lens, we regard some of the methods in this section to be less promising, and have commented on their limitations above.

4.3 Applications to RL and Robot Learning

This section presents our main analysis of the LfV literature. We taxonomize this literature according to which downstream RL knowledge modality (KM) most directly benefits from the use of video data by the LfV method (see Figure 6). The KMs we consider here are: policies (Section 4.3.1), dynamics models (Section 4.3.2), reward functions (Section 4.3.3), and value functions (Section 4.3.4). For brief descriptions of each of these KMs, we refer the reader back to Section 3.1.

4.3.1 POLICIES

Ultimately, the goal of LfV is to use D_{video} to help obtain a policy $\pi(a_t|o_t)$. In this section, we detail literature where π is the RL KM that most directly benefits from the use of video data. We first identify and detail several distinct categories of methods (see Figure 7), before moving to a brief discussion.

Method: Representation Transfer. These methods pretrain visual representations on video data using some learning objective. Subsequently, the representations are transferred (either frozen or to be finetuned) to aid downstream learning of a policy. Figure 7 visualizes

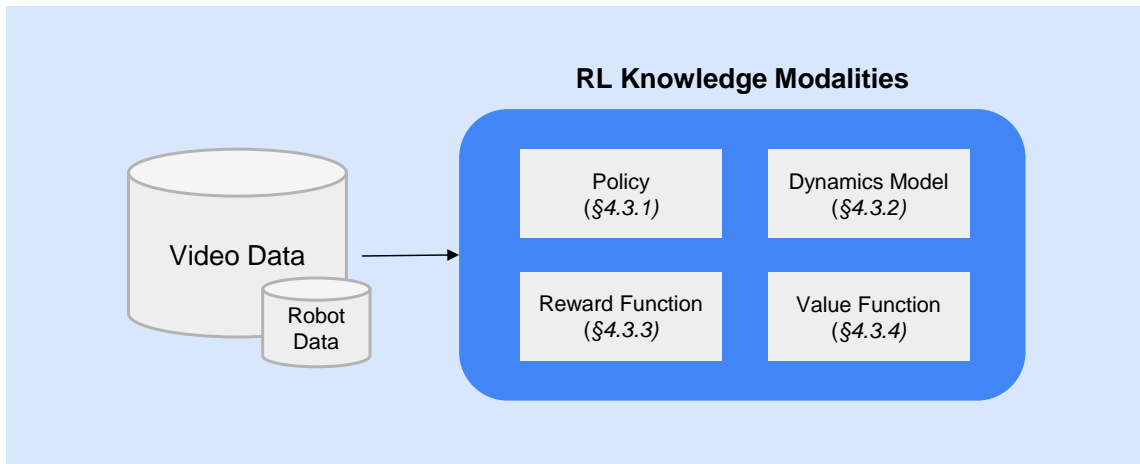


Figure 6: LfV applications to RL and Robot Learning (Section 4.3). We categorise the LfV literature according to which Reinforcement Learning (RL) Knowledge Modality (KM) benefits from the use of video data, resulting in the taxonomy illustrated in the above figure.

this process. There have been several large-scale analyses of representation transfer from video data (Jing et al., 2023; Silwal et al., 2023; Zhao et al., 2022; Burns et al., 2023; Hu et al., 2023b; Majumdar et al., 2023).

A number of learning objectives have been explored in the literature. This includes: frame-level objectives such as masked-autoencoding (MAE) (Radosavovic et al., 2022), contrastive learning (Chen et al., 2021; Jing et al., 2023), and others (Zhao et al., 2022); time-contrastive learning objectives (Ma et al., 2022, 2023; Nair et al., 2022); video prediction objectives (Wu et al., 2023a; He et al., 2024; Jang et al., 2024); temporal-difference learning (Bhateja et al., 2023); predicting affordances from videos (Bahl et al., 2023); predicting latent actions (Schmidt & Jiang, 2023); and objectives that leverage language labels, such as image-language contrastive learning (Ma et al., 2023), video-language alignment (Nair et al., 2022) and video captioning (Karamcheti et al., 2023). Works have often combined multiple objectives (Nair et al., 2022; Ma et al., 2023; Karamcheti et al., 2023).

The use of video data relevant to the robot is important (Jing et al., 2023). Nair et al. (2022), Ma et al. (2023), Karamcheti et al. (2023), Majumdar et al. (2023) leverage ego-centric human and/or navigation video. Radosavovic et al. (2022) leverage third-person video of humans interacting with objects (Shan et al., 2020; Miech et al., 2019). Others have leveraged videos of robots (Dasari et al., 2023), or first-person videos of humans operating robot-like grippers (Shafiullah et al., 2023). Combining datasets to improve data diversity has proven beneficial (Majumdar et al., 2023; Dasari et al., 2023; Radosavovic et al., 2022).

Method: Multi-modal Models. These methods train a monolithic model jointly on video and robot data. Reed et al. (2022) train a sequence model on multi-modal data, including image, text, and robot data, but do not use video data. Radosavovic et al. (2024) train a sequence model for locomotion on both action-labelled robot data and action-free pose trajectories extracted from YouTube videos. Sohn et al. (2024) present an 8 billion parameter any-to-any transformer trained on text, images, videos, and robot perceptions

and actions (but experimental details are not published). These recent methods may obtain positive transfer by learning from different modalities of data, and are promising due to their simplicity and scalability.

Method: Alternative-action Policies $\pi_{\text{alt}}(\hat{a}_t|o_t)$. In Section 4.2.1, we outlined different alternative-action representations $\hat{\mathcal{A}}$. Here, we detail methods that use such representations to train a policy $\pi_{\text{alt}}(\hat{a}_t|o_t)$ from video data. Such a pretrained $\pi_{\text{alt}}(\hat{a}_t|o_t)$ can be useful for representation transfer, or to condition a decoder $\pi(a_t|\hat{a}_t, o_t)$ (see the following paragraph (Schmidt & Jiang, 2023)).

Works have trained a $\pi_{\text{alt}}(\hat{a}_t|o_t)$ using: single-step latent actions (Edwards et al., 2018; Schmidt & Jiang, 2023; Bruce et al., 2024); multi-step latent actions (Wang et al., 2023a; Pertsch et al., 2022); language-actions (Ajay et al., 2023; Yang et al., 2023c; Du et al., 2023b; Mu et al., 2023); observations-as-action, including next-observation-as-action policies (Du et al., 2023a; Thomas et al., 2023; He et al., 2024) and sub-goal policies (Black et al., 2023b; Park et al., 2024); visual motion information (Wen et al., 2023; Yuan et al., 2024); and human-embodiment information (Bahl et al., 2023; Shaw et al., 2022; Qin et al., 2022, 2021; Peng et al., 2018; Bharadhwaj et al., 2023).

A common training process involves assuming the video data contains relatively expert behaviour, labelling the video data with the alternative-action, and training $\pi_{\text{alt}}(\hat{a}|o)$ using a supervised behaviour cloning objective (Schmidt & Jiang, 2023; Bruce et al., 2024; Wang et al., 2023a; Du et al., 2023b; Black et al., 2023b; Wen et al., 2023; Bharadhwaj et al., 2023). When the behaviour in the data is suboptimal, language (Du et al., 2023b; Wen et al., 2023) or goal-conditioning (Wang et al., 2023a) can be beneficial. Offline RL is another option when the data is suboptimal (though this is currently underexplored).

To obtain language-as-action policies, Yang et al. (2023c), Du et al. (2023b), Mu et al. (2023) supervised finetune internet-pretrained VLMs or LLMs. Black et al. (2023b) supervised finetune an image-editing diffusion model to edit the current observation into a subgoal image.

Method: Alternative-action Decoders $\pi(a_t|\hat{a}_t, o_t)$. Several works train a low-level robot policy $\pi(a_t|\hat{a}_t, o_t)$ that decodes \hat{a}_t to a_t . This decoder can be useful when \hat{a}_t is: (1) obtained from a $\pi_{\text{alt}}(\hat{a}_t|o_t)$ – i.e., *hierarchical conditioning via $\pi_{\text{alt}}(\hat{a}_t|o_t)$* (Schmidt & Jiang, 2023; Du et al., 2023a; Wen et al., 2023); or (2) \hat{a}_t is a video instruction, usually a representation of a human demonstration video – i.e., *video-as-instructions* (Chane-Sane et al., 2023; Cai et al., 2023; Lifshitz et al., 2023; Xu et al., 2023). The decoding policy $\pi(a_t|\hat{a}_t, o_t)$ can either be learned with data, or can be manually crafted.

Learning the decoder: The D_{robot} can be labelled with alternative actions to give tuples of the form $(o_t, a_t, \hat{a}_t, o_{t+1})$, and the decoder can be trained via supervised learning on these tuples. This has been done with single-step latent actions (Schmidt & Jiang, 2023; Bruce et al., 2024), multi-step latent actions (Wang et al., 2023a), point-trajectory latent actions (Wen et al., 2023), next-observation-as-actions (Du et al., 2023a) and sub-goals-as-actions (Black et al., 2023b). $\pi(a_t|\hat{a}_t, o_t)$ can also be trained via online RL with the compositional policy, $\pi(a_t|\pi_{\text{alt}}(\hat{a}_t|o_t), o_t)$, being trained end-to-end (as opposed to keeping π_{alt} frozen) (Schmidt & Jiang, 2023). Jain et al. (2024) end-to-end learn a mapping from human demonstrations to robot actions, but require a dataset of human video demonstrations paired with equivalent robot trajectories.

Manually defining the decoder: Ko et al. (2023) infer low-level robot actions from optical flow, Yuan et al. (2024) infer actions from 3D flow predictions, while Nasiriany et al. (2024b) map from robot action to visual arrows and back. Other works have retargeted human-hand pose actions to robot poses (Qin et al., 2021; Sivakumar et al., 2022).

Method: Policy-as-video. These methods are a distinct sub-section of the alternative-action methods mentioned above. They use observations-as-actions in a ‘hierarchical conditioning via $\pi_{\text{alt}}(\hat{a}_t|o_t)$ ’ scheme. A common approach here involves using a language-conditioned video predictor to generate plausible video trajectories that complete a language-specified task, before decoding actions from the generated video via an action-decoding inverse-dynamics model (IDM) $p^{-1}(a_t|o_t, o_{t+1})$ trained on D_{robot} (Du et al., 2023a). To improve upon this scheme: Ajay et al. (2023) enforce compositional consistency between LLM plans, video generations, and the IDM actions; and Du et al. (2023b) improve action decoding model via the use of goal-conditioned behaviour-cloning.

Method: IDM Pseudo-actions. These methods train an IDM $p^{-1}(a_t|o_t, o_{t+1})$ on action-labelled robot data and use it to label video data with pseudo-actions. The pseudo-labelled video data can then be used to help train a policy $\pi(a|o)$ (Baker et al., 2022). However, as mentioned in Section 4.2.1, naive IDM pseudo-action approaches are unlikely to scale to diverse internet videos.

Discussion. *Performance gains:* The methods above have contributed to improvements in task-success rates (Radosavovic et al., 2022; Nair et al., 2022; Parisi et al., 2022), robot data efficiency (Nair et al., 2022; Schmidt & Jiang, 2023; Ye et al., 2023), and generalization beyond D_{robot} (Du et al., 2023a; Wang et al., 2023a; Black et al., 2023b; Thomas et al., 2023; Zhao et al., 2022; Lin et al., 2024). Nevertheless, this has often been in toy (non-generalist) settings or with toy datasets (Schmidt & Jiang, 2023; Wen et al., 2023; Thomas et al., 2023). Gains when using diverse human video datasets have often been more modest (Du et al., 2023a; Shaw et al., 2022; Black et al., 2023b).

Pros and cons: A robot policy is ultimately what we want, and initial results suggest this is a highly promising KM to target. However, there are some disadvantages to note. Policies must output low-level actions and so the missing low-level information in video will present a challenge. Additionally, policies prefer expert data, but the behaviours in internet video may often be diverse and non-expert.

Future directions: Jointly pretraining multi-modal foundation models on both video and robot data is still underexplored. Representation transfer approaches may be further improved by: training encoders that fuse spatio-temporal information (rather than embedding individual images separately); using representations from video foundation models (see Section 4.1); or training on larger internet datasets (see Section 5.1.3). Methods that leverage representations $\hat{\mathcal{A}}$ will be limited by the scalability of their $\hat{\mathcal{A}}$ (as discussed in Section 4.2.1). An open question is whether $\hat{\mathcal{A}}$ ’s are best utilised explicitly in a hierarchical setup, or if they are most useful for representation transfer. In hierarchical setups, where the policy is defined as $\pi(a_t|\pi_{\text{alt}}(\hat{a}_t|o_t), o_t)$, we should explore the extent to which either π_{alt} or π is the performance bottleneck.

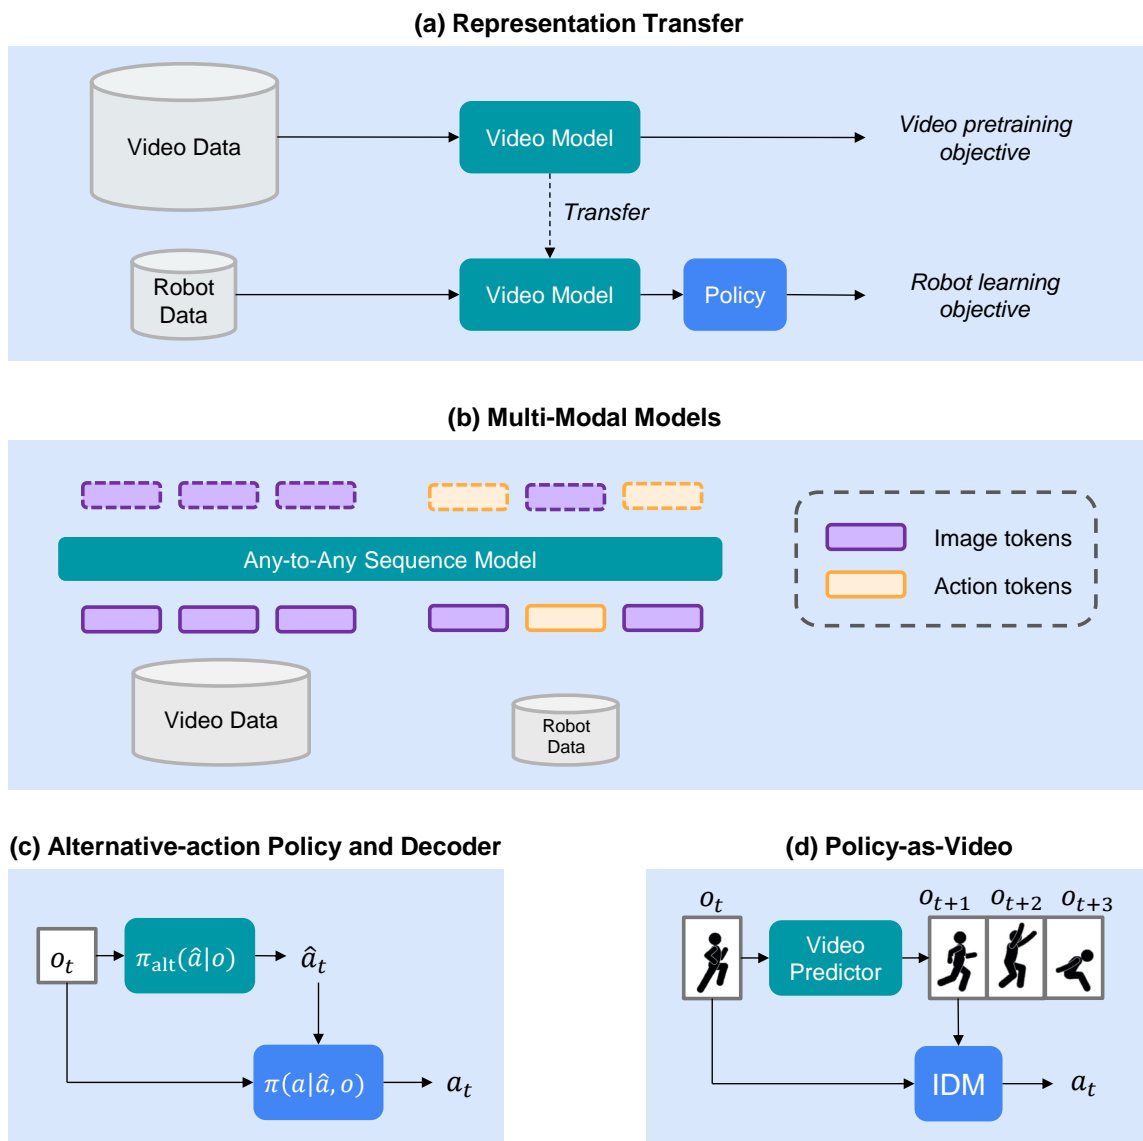


Figure 7: Learning policies from video (Section 4.3.1). (a) Representations can be pretrained from video data and used downstream whilst training a policy on robot data. (b) Models can be trained jointly on video and robot data to predict robot actions. (c) A π_{alt} can be trained on video data to output an action representation (see Section 4.2.1) which conditions an action-decoding π trained on robot data. (d) Policy-as-video is a specific instantiation of this hierarchical setup where the action representation is a video and the decoder is (often) an inverse dynamics model (IDM).

4.3.2 DYNAMICS MODELS

Video prediction models, $p(o_{t+1}|o_t)$, capture temporal dynamics information – information about the dynamics and physics of the world. A line of LfV research has sought to use video

prediction objectives on a D_{video} to aid the learning of a robot dynamics model $p(o_{t+1}|o_t, a_t)$. This can involve pretraining $p(o_{t+1}|o_t)$ on D_{video} and adapting it into $p(o_{t+1}|o_t, a_t)$ using D_{robot} . Alternatively, it could involve jointly pretraining on D_{video} and D_{robot} . In this section, we detail the various video prediction pretraining schemes seen in the LfV literature, before outlining how the pretrained models can be adapted and utilized for downstream robotics.

Pretraining: Architectures and Datasets. Video diffusion architectures have recently been scaled to increasingly large human video datasets for LfV (Yang et al., 2023c; Du et al., 2023a, 2023b). Autoregressive transformer architectures have also been employed (Hu et al., 2023; Wu et al., 2023a), including on large-scale internet (video-game) data (Bruce et al., 2024). Bruce et al. (2024), Hu et al. (2023) find their video prediction models to scale well with increased compute and model size. Other works (Seo et al., 2022a; Mendonca et al., 2023; Wu et al., 2023b) use the recurrent state-space model of Dreamer (Hafner et al., 2023), a state-of-the-art model-based RL architecture.

Pretraining: Action-conditioning. To add action-conditioning information to the video predictor, Yang et al. (2023c), Sohn et al. (2024) pretrain jointly on both video and robot data (the robot data contains action labels used for conditioning). Otherwise, other works have pretrained an alternative-action video predictor $p_{\text{alt}}(o_{t+1}|o_t, \hat{a}_t)$ (Yang et al., 2023c; Bruce et al., 2024). Conditioning on an $\hat{\mathcal{A}}$ allows for more control over video generations, and often a mapping can be obtained from $\hat{\mathcal{A}}$ to the robot action-space (Rybkin et al., 2018; Schmidt & Jiang, 2023). LfV video predictors have been trained to be conditioned on: language-as-actions (Yang et al., 2023c; Du et al., 2023b); single-step latent actions (Rybkin et al., 2018; Bruce et al., 2024); goal images (Du et al., 2023a); future grasp-location and post-grasp waypoint affordance information (Mendonca et al., 2023); or motion information (Yuan et al., 2021; Wang et al., 2023b). Yang et al. (2023c) condition on several different action-spaces, including robot actions, language actions, and camera motions.

Downstream: Adapting the Video Predictor. A video prediction model can be adapted via finetuning on D_{robot} (Du et al., 2023a; Ajay et al., 2023). However, few works directly finetune an action-free video predictor $p(o_{t+1}|o_t)$ into an action-conditioned dynamics model $p(o_{t+1}|o_t, a_t)$. Mendonca et al. (2023) pretrain on video with affordance-based conditioning, and add optional robot action-conditioning during finetuning. Seo et al. (2022a) find naive finetuning on robot data to result in the erasure of pretraining knowledge, and instead ‘stack’ an action-conditioned model on top of the pretrained model. In related work, Yang et al. (2023b) demonstrate that the score function of a large pretrained video diffusion model can guide the generations of a smaller task-specific video model. Adaptation can involve obtaining a mapping from $\hat{\mathcal{A}}$ to the robot action space (Rybkin et al., 2018) (Section 4.3.1 elaborates on methods that map from $\hat{\mathcal{A}}$ to \mathcal{A}).

Downstream: Using the dynamics model. Once the dynamics model has been obtained it has been used in several ways in the LfV literature. (1) *As a simulator:* $p(o_{t+1}|o_t, a_t)$ can be used to generate synthetic data to help train a policy (Yang et al., 2023c; Bruce et al., 2024). (2) *As a differentiable simulator:* similarly, one can backpropagate through model-generated rollouts to help train a policy (Seo et al., 2022a; Wu et al., 2023b; Hafner et al.,

2023). (3) *For planning*: the dynamics model can be used for standard model predictive control (Rybkin et al., 2018; Mendonca et al., 2023) or tree-search (Du et al., 2023b).

These use-cases often require evaluation of the model-generated trajectories. Some works learn reward/value estimates via a downstream finetuning stage, making use of reward-labelled robot data (Seo et al., 2022a). Others use video data to help learn a reward function (Mendonca et al., 2023; Rybkin et al., 2018; Yang et al., 2023c; Du et al., 2023b). See Sections 4.3.3 and 4.3.4 for details regarding methods for learning reward and value functions from video.

Discussion. *Performance gains*: Bruce et al. (2024) show their video-game foundation model to exhibit initial signs of impressive generalization. When pretraining with large human video datasets, several works have demonstrated moderate but significant performance gains (Mendonca et al., 2023; Wu et al., 2023b). Yang et al. (2023c), Du et al. (2023b) demonstrate that large-scale pretrained video diffusion models can be particularly useful in long-horizon tasks.

Pros and cons: These results, combined with the possibility that dynamics models can learn from non-expert and off-policy internet data more easily than policies (Yu et al., 2020b), make LfV dynamics model approaches appear promising. However, we note that, like policies, certain approaches may suffer from missing low-level information in video.

Future directions: (1) An obvious route to improved performances here is to continue to scale our video dataset and model sizes (Bruce et al., 2024; Hu et al., 2023). Experimenting with scalable alternative-action techniques (Bruce et al., 2024) will be useful for conditioning foundational video predictors. (2) A hierarchical world/dynamics model (LeCun, 2022), where the higher levels are learned from video data and the lower-levels are learned from robot data, is another direction to explore. (3) An underexplored direction is to combine standard analytic simulation (Todorov et al., 2012; Makoviychuk et al., 2021) with video prediction simulation (Yang et al., 2023c) to obtain the benefits of both. (4) Following synthetic data trends in other fields (Wang et al., 2024; Li et al., 2024b), future work may seek to use foundational video predictors to generate synthetic video rollouts (Yang et al., 2023c; Bruce et al., 2024), or augmenting existing data via video editing (Yu et al., 2023a).

4.3.3 REWARD FUNCTIONS

The reward function is an essential component of an RL algorithm. However, manual reward design is difficult to scale to complex and unstructured real-world generalist robot settings. LfV research has sought to tackle this issue by extracting visual reward functions from video data. In this section, we detail any method that uses video data to help relabel transition tuples (o_t, a_t, o_{t+1}) to (o_t, a_t, r_t, o_{t+1}) , thus allowing the tuples to be used for online or offline RL.

Extracting reward functions from video. We now describe the main clusters of methods for extracting and constructing reward functions from video data.

- **Video-language Model Rewards.** These methods specify the task via language and use a video-language model (VidLM) (see Section 4.1) to provide a reward signal. We identify two categories of methods here. *Video-text similarity*: A dual encoder

model can be trained to embed videos and language into the same representation-space (Xu et al., 2021; Zhao et al., 2024). From such a model, a reward can be defined as the similarity (in embedding space) between a language task-description and a video of the robot’s behaviour (Fan et al., 2022; Ding et al., 2023b; Sontakke et al., 2023). Baumli et al. (2023) study dual-encoder image-text rewards in detail. *Visual question answering (VQA)*: Reward information can be obtained from a video-to-text model (see Section 4.1.3) by asking it whether a task has been completed in a video. A dense reward could be obtained by asking the model to score the robots progress, or by using the model to provide feedback within an ‘RL-AI-F’ framework (Klissarov et al., 2023). VQA rewards have been used with images as input (Du et al., 2023c; Yang et al., 2023a). Liu et al. (2024) employ video-based VQA rewards, but the limited capabilities of current video-to-text models has hindered progress here.

- **Video-predictors as Reward Functions.** A video prediction model $p(o_{t+1}|o_t)$ can be converted into a reward function (Zhu et al., 2023; Escontrela et al., 2023; Huang et al., 2023b). These methods define a reward based on the likelihood of the robot video under the video predictor. This encourages the robot to match the behaviour distribution of the video data. Language-conditioned video prediction may allow these approaches to scale to diverse, non-expert internet video (Escontrela et al., 2023).
- **Representational Similarity to a reference.** These methods define the reward as the similarity between representations of the robot’s observation(s) and a reference observation (i.e., a goal image or demonstration video). We outline two distinct approaches here. *Standard deep representations*: ‘Standard’ learning objectives on video data can provide representations useful for measuring the similarity between the current observation and a goal image. Ma et al. (2022) use a time-contrastive objective, which gives implicit measurements of the temporal distance between two images. Hu et al. (2023b) find that many standard deep representations can be effective, though masked autoencoding-based representations perform poorly. *Representations that address LfV distribution shift*: Distribution-shifts (such as embodiment differences) can prevent meaningful comparison between human and robot videos. Thus, previous work has used representations designed to explicitly ignore such distributions shifts (see Section 4.2.2) when defining their LfV reward. This has included the use of: embodiment-invariant representations (Zakka et al., 2021); object-centric representations (Kumar et al., 2022; Sieb et al., 2020; Chang et al., 2020); the retargeting of poses from human to robot embodiments (Mandikal & Grauman, 2022; Qin et al., 2021); and viewpoint invariant representations (Sermanet et al., 2018; Aytar et al., 2018).
- **Potential-based shaping with value functions.** A value function, $V(o_t)$, pretrained from video can provide a dense reward via ‘potential-based shaping’: $r_t = V(o_{t+1}) - V(o_t)$. In the LfV literature, such rewards have been defined using value functions pretrained on video data via TD learning (Chang et al., 2022), or time-contrastive learning (Ma et al., 2022).
- **Generative adversarial imitation.** Generative adversarial imitation learning (Ho & Ermon, 2016) has been used to encourage the robot to match the behaviour dis-

tribution of a video dataset during online learning (Torabi et al., 2018b). This has often required the use of representations that explicitly ignore LfV distribution shifts (Stadie et al., 2017; Qin et al., 2021).

- **Other methods.** A task classifier can be trained on task-labelled video data to provide downstream rewards (Chen et al., 2021; Shao et al., 2020). Several methods use the number of steps-to-completion in the video as a proxy label to train a video reward model (Yang et al., 2023c; Edwards & Isbell, 2019). Others encourage similarity to a video-obtained behavioural prior: such as a video-pretrained policy (Ye et al., 2023), or a human affordance distribution (Bahl et al., 2023).

Downstream Usage: Transfer Mechanisms. A video-pretrained reward function can be used zero-shot in the downstream robot domain (Escontrela et al., 2023). Other works further finetune the reward function on in-domain robot data (Sontakke et al., 2023). The LfV reward could be used as the sole reward for the robot, or it could be used as an exploration or shaping bonus, in addition to a sparse task reward (Ye et al., 2023; Chang et al., 2022). Adeniji et al. (2023) pretrain the policy using the LfV reward, before finetuning it on a manually defined task reward.

Discussion. *Pros and cons:* Learning accurate reward functions purely from video data may be more feasible than other RL KMs. Policies or dynamics models may need access to non-visual information (e.g., forces) in the downstream robot domain, whereas reward functions can often operate solely using visual information and thus can be used zero-shot after video pretraining (Escontrela et al., 2023). However, targeting other KMs via LfV (i.e., policies and dynamics models) may better reduce demands on the robot data and better aid generalization beyond D_{robot} .

Future directions: (1) The most promising approaches are likely those that can leverage pretrained video foundation models: i.e., video-language model rewards and video-predictors as reward functions. (2) One avenue is to combine LfV reward functions with other LfV KMs. For example, finetuning an LfV policy via online RL and LfV rewards. (3) An underexplored direction is to use LfV rewards to augment reward labels in offline RL data. (4) LfV reward functions may prove useful for detecting safety-related metrics when deploying robots in the real world (Guan et al., 2024). (5) Many LfV reward functions are differentiable, making them suitable for use in certain model-based RL algorithms (Hafner et al., 2023; JyothirS et al., 2023). (6) Shaped reward functions could be extracted from video-to-text models via RL from AI feedback (RL-AI-F) methods (Klissarov et al., 2023).

4.3.4 VALUE FUNCTIONS

Value functions are an essential component of most deep RL algorithms (Schulman et al., 2017; Haarnoja et al., 2018). A small but distinct line of LfV research pretrains models that closely resemble value functions using video data. We outline methods that do so below.

Pretraining: TD-learning. The temporal-difference (TD) learning objective is commonly used to learn value functions in RL (Sutton & Barto, 2018). However, video data is missing important action, reward, and goal labels that are often required during TD-learning.

Missing action labels: Action labels are required to obtain a state-action value function $V(o_t, a_t)$, which can be more useful than a ‘state’ value function $V(o_t)$ (Sutton & Barto, 2018). Thus, LfV research has sought to train value functions conditioned on ‘alternative-actions’ (see Section 4.2.1): $V(o_t, \hat{a}_t)$. This has been achieved by conditioning on: sub-goals (Bhateja et al., 2023; Ghosh et al., 2023); next observations (Edwards et al., 2020); single-step latent actions (Chang et al., 2022); and IDM-obtained pseudo-actions (Chang et al., 2020).

Missing reward and goal labels: TD-learning requires reward labels. Meanwhile, TD-learning of multi-task/goal value functions requires task/goal labels. To obtain reward labels for TD learning, Bhateja et al. (2023), Ghosh et al. (2023), Park et al. (2024) use hindsight goal relabelling: a sparse reward is defined as $r = (o == g)$ (where o is the current observation and g is the goal observation). Chang et al. (2020) leverage object labels and off-the-shelf object detectors to provide goal and reward labels in navigational video data. Other works assume a single task setting (Edwards et al., 2020), or assume access to reward labels in the video data (Edwards et al., 2020; Chang et al., 2022). These are not scalable assumptions. The LfV reward functions from Section 4.3.3 could be applicable here, while video-to-text models (see Section 4.1.3) could provide goal labels in textual form.

Pretraining: Time-contrastive learning. Time-contrastive objectives induce a temporally smooth representation, and a value function can be defined by measuring the distance between the current observation and a goal image in the representation space (Ma et al., 2022). Importantly, these objectives do not require action labels for video pretraining. Quasimetric functions (Wang et al., 2023a) and temporal cycle-consistency objectives (Zakka et al., 2021) have been used to learn similar representations. Note, the requirement for goal images is a limitation of these approaches.

Pretraining: Others. Edwards and Isbell (2019) regress a value function towards a heuristic value; the number of timesteps remaining in the video. This approach assumes expert behaviour in the video. Du et al. (2023b) take a similar approach, finetuning a VLM to give the heuristic value estimates. Liu et al. (2023b) use critical state identification to aid value predictions, but this assumes access to reward labels in the video data.

Downstream Usage. We now briefly outline how video-pretrained value functions have been used in the downstream robot domain in the literature. (1) *As a value function:* A video-pretrained value function can be directly used downstream in a standard fashion if: it is an action-conditioned $V(o_t, a_t)$ (Chang et al., 2020); or it is an alternative-action-conditioned $V_{\text{alt}}(o_t, \hat{a}_t)$ and a mapping from \hat{a} to a can be obtained; or an action-conditioned dynamics model $p(o_{t+1}|o_t, a_t)$ is available, allowing an unconditioned $V(o)$ to be used for tree-search planning (Du et al., 2023b; Chang et al., 2022). (2) *Representation transfer:* Bhateja et al. (2023) initialise their downstream value function and policy representations from a video-pretrained value function. (3) *Potential-based reward shaping:* A reward function can be defined as: $r = V(o_{t+1}) - V(o_t)$, and be used for downstream online RL (Edwards & Isbell, 2019; Ye et al., 2023; Chang et al., 2022). It may be desirable to do this if: the pretrained value function is not fully reliable but can provide useful auxiliary rewards to guide exploration; or the value function is not action-conditioned, so cannot be used as a $V(o_t, a_t)$ for Q-learning (Sutton & Barto, 2018). (4) *TD bootstrapping:* A $V(o_t)$ can still

be used to accelerate downstream TD-learning of a state-action value function $V(o_t, a_t)$ by using its estimates for the bootstrap term in the bellman backup (Edwards & Isbell, 2019).

Discussion. Research into learning value functions from video has been relatively scarce. This is perhaps due to several associated challenges. First, as noted above, there are issues related to missing action, reward, and goal labels in video. Second, value functions estimate returns under a particular policy, but the behaviour in video data is highly multi-modal. Third, TD learning from video may run into common issues seen in the offline RL literature (Levine et al., 2020), though the offline RL literature does present potential solutions (Kumar et al., 2020; Zhou et al., 2021). We also note that, if the goal is to obtain a policy, it may be easier to attempt this directly from video (see Section 4.3.1). Nevertheless, Bhateja et al. (2023) show that TD-learning of value functions from large-scale human video is a promising direction for real-world robotics.

5. Datasets & Benchmarks

This section first provides details and discussions regarding video datasets in LfV (Section 5.1), before moving to the benchmarking of LfV methods (Section 5.2).

5.1 Datasets

We now turn our attention to the video datasets themselves. In this section (see Figure 8), we will discuss the desired properties of video datasets (Section 5.1.1), summarise methods for curating video data (Section 5.1.2), and review existing datasets and their limitations (Section 5.1.3).

5.1.1 DESIDERATA

We now discuss the key properties and characteristics desired from our LfV video datasets.

Scale and Diversity. The dataset should be large in scale and high in diversity. Scale can be measured in terms of total video duration. Diversity refers to variety in the content of the data. Increased scale and diversity of training data can reliably improve deep learning performances and generalization (Brown et al., 2020). LfV is promising precisely due to the massive scale and diversity of video data available on the internet.

Content Relevance. The content and information in the video data should be relevant to downstream generalist robot settings. For example, the videos should include information regarding the dynamics of the world and how embodied agents can complete physical tasks. Crucially, the video data should have good coverage over the tasks and environments the generalist robot is likely to encounter.

Language Annotations. Language annotations can be useful for training language-conditioned models (Betker et al., 2023; Brooks et al., 2024) and to aid semantic representation learning from video (Zhao et al., 2024). High-level annotations can be useful for learning abstracted representations. Granular annotations—for example, detailed descriptions of actions, spatial information, and object relations—can aid the learning of low-level features that are particularly relevant to robotics.

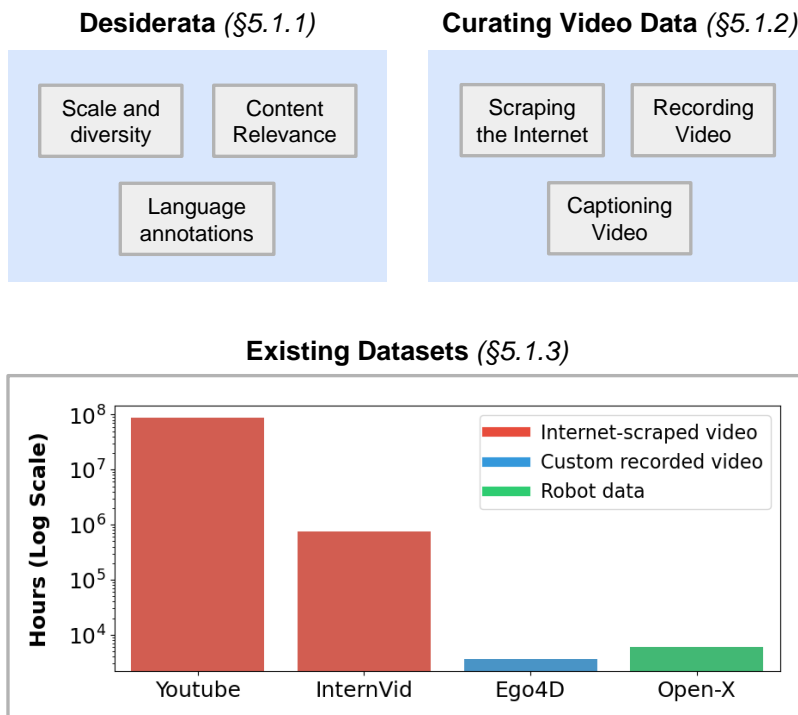


Figure 8: LfV Datasets (Section 5.1). The log-scale plot at the bottom compares the sizes of the largest curated open-source datasets in three different categories. InternVid (Wang et al., 2023b), Ego4D (Grauman et al., 2021), and Open X-Embodiment (Padalkar et al., 2023) are the largest internet-scraped video, custom-recorded video, and robot datasets, respectively (to the best of our knowledge). We estimated the hours in the Open X-Embodiment dataset by assuming the average trajectory length is 10 seconds (at the time of writing, the dataset contained ~ 2 million trajectories). The number of hours of video on YouTube is a rough calculation (Sjöberg, 2023).

Other Desiderata. (1) Many LfV methods assume continuity within a clip (i.e., an absence of sharp scene transitions) (Bruce et al., 2024; Yang et al., 2023c). (2) The use of high-resolution video may benefit finer-grained downstream behaviours. (3) Longer video clips may benefit long-horizon representations useful in multi-step tasks. (4) Video can be paired with other useful information, besides language annotations. Object bounding boxes, segmentations, or human-pose estimates may aid representation learning efforts (Bahl et al., 2023), or inform automated language captioning (Blank et al., 2024). Modalities such as audio or depth information (Grauman et al., 2021) can provide additional information beyond what is contained in RGB pixels.

5.1.2 CURATING VIDEO DATA

Here, we give concrete details on techniques for curating video datasets. We discuss techniques for scraping video from the internet, techniques for recording custom video, and techniques for (manually and automatically) annotating video.

Scraping Video from the Internet. Diverse, large-scale video datasets can be obtained from internet repositories of pre-existing video data. Techniques here focus on ensuring only relevant and high-quality videos are scraped from these repositories. A typical pipeline for scraping internet video involves: (1) *Formulating a pool of query prompts* used to search the repository for candidate videos. Previous works have constructed this pool, for example, via: surveys of human time-use (Grauman et al., 2021; Wang et al., 2023b); crowd-sourcing (Sermanet et al., 2023; Goyal et al., 2017); or by using LLMs to parse action prompts from text corpora (Wang et al., 2023b) (2) *Post-processing the pool of candidate videos*. This has included processing videos into clips which contain no ‘cuts’ between scenes (Blattmann et al., 2023a) and using video meta data (e.g., view counts) to identify and remove low-quality video (Xue et al., 2022; Miech et al., 2019; Nagrani et al., 2022). Automated metrics such as optical flow (Blattmann et al., 2023a), image-language model embeddings (Schuhmann et al., 2022; Blattmann et al., 2023a), and video ‘realism’ estimates (Shan et al., 2020) have also been used to filter video data. (3) *Re-annotating the videos to improve the quality of labels*. We describe video captioning methods in detail in the below paragraphs.

Recording New Video. Manually recording custom videos can be an effective (but expensive) means of collecting video relevant to specific robot tasks (Sermanet et al., 2023; Grauman et al., 2023) or embodiments (Sermanet et al., 2023; Shafiullah et al., 2023). Large-scale recording of custom video datasets has mainly been achieved via crowd-sourcing (Goyal et al., 2017; Grauman et al., 2021). Damen et al. (2018), Grauman et al. (2021) ask participants to record their daily lives, while Goyal et al. (2017), Sermanet et al. (2023), Grauman et al. (2023) provide participants with text instructions regarding the behaviours they should perform. Video can be collected with a diversity of embodiments, including human arms, human-controlled manual grippers, and robot arms (Sermanet et al., 2023; Shafiullah et al., 2023). Recording first-person video (Grauman et al., 2021)—video which may be less common on the internet—could be particularly relevant to a robot with first-person observations.

Manual Captioning. The benefits that language captioning of video can provide are outlined in Section 5.1.1. Previous works have often obtained descriptions of the contents of video data via manual human labelling (Blattmann et al., 2023a; Damen et al., 2018; Grauman et al., 2023, 2021). This can be performed by third-party workers or (where applicable) the person recording the video. Versus to typed annotations, Damen et al. (2018) find spoken annotations to result in higher quantity and quality of captions. Grauman et al. (2023) have the person recording the video explain their thought processes whilst performing actions, and then have third-party annotators provide retrospective expert commentaries. After initial annotation is performed, Maaz et al. (2023) prompt workers to augment the descriptiveness of the video captions.

Automated Captioning. Manual human annotations are expensive (Grauman et al., 2021). For larger-scale datasets, automated annotation pipelines are promising. Various methods have been proposed here.

Automatic speech recognition (ASR), metadata, and others. ASR converts speech in the video’s audio into text (Miech et al., 2019; Xue et al., 2022; Zellers et al., 2021). However,

raw ASR captions can be noisy and unrelated to the contents of the video. Another source of information is corresponding metadata; such as descriptions, tags, and titles (Wang et al., 2023b). Bain et al. (2021) obtain captions from the alt-text HTML attribute associated with web images and videos (Bain et al., 2021) (‘Alt-text’ in Table 1). Nagrani et al. (2022) start with a dataset of high-quality image-caption pairs, then mine video clips with similar frames and transfer the captions to those clips (‘Transfer’ in Table 1).

Off-the-shelf vision models. Video-to-text captioning models are an option (Blattmann et al., 2023a), but poor captioning capabilities have limited previous usage. Alternatively, more reliable image-captioning (Blattmann et al., 2023a; Maaz et al., 2023) or object-detection (Zeng et al., 2022; Maaz et al., 2023; Ranasinghe et al., 2024; Blank et al., 2024) can be employed to gather information regarding the content in a video. The methods in this bullet are referred to as ‘Generated’ in Table 1.

LLM processing. Blattmann et al. (2023a), Maaz et al. (2023), Wang et al. (2023b) use LLMs to summarise keyframe captions and full-clip captions into a single video caption. LLM post-processing can be used to filter out inconsistent captions across sources or frames (Maaz et al., 2023). Combining multiple sources of information via LLM processing may result in more detailed and accurate captions.

5.1.3 EXISTING DATASETS

In this section, we provide an overview of existing video datasets relevant to LfV. We aim to highlight datasets that satisfy key desiderata from Section 5.1.1, and thus are promising for training foundational video and/or robotics models.

Overview of Existing Datasets. Table 1 presents details of a representative set of existing video datasets. We now discuss these datasets in more detail.

Large-scale, internet-scraped datasets. These can span up to several decades worth of video data (Wang et al., 2023b; Xue et al., 2022). They are diverse, capturing human behaviours in tasks and environments sampled from a global population. These datasets have been constructed via: query-based searches of YouTube (Wang et al., 2023b; Miech et al., 2019; Stroud et al., 2020); aggregating video from previous datasets (Zellers et al., 2021); or scraping video from various webpages (Bain et al., 2021). Language captions of these large datasets are usually obtained via automated methods. These datasets have commonly been used in initial attempts at training video foundation models (Zhao et al., 2024; Wang et al., 2023c) (see Section 4.1).

Manually collected datasets. These are generally not as large or diverse as the largest web-obtained video datasets. However, many contain content highly relevant to robotics, and these datasets have often been used in past LfV research (Nair et al., 2022; Yang et al., 2023c; Wu et al., 2023a). For example, Ego4D (Grauman et al., 2021) contains egocentric video of participants going about their daily lives, and RoboVQA (Sermanet et al., 2023) contains video of teleoperated robots and humans performing long-horizon household tasks. Here, it is common for captions to be provided manually by crowd-sourced workers.

Dataset Name	Content	Duration (h)	# Clips	Caption Type	Collection Method
InternVid (Wang et al., 2023b)	YouTube	760,000	230M	Generated	Internet
HD-VILA-100M (Xue et al., 2022)	YouTube	370,000	103M	ASR	Internet
YT-Temporal-180M (Zellers et al., 2021)	YouTube	-	180M	ASR	Internet
WTS-70M (Stroud et al., 2020)	YouTube	190,000	70M	Metadata	Internet
HowTo100M (Miech et al., 2019)	Instruction	134,000	136M	ASR	Internet
WebVid-10M (Bain et al., 2021) ¹	YouTube	52,000	10M	Alt-text	Internet
VideoCC3M (Nagrani et al., 2022) ¹	YouTube	18,000	6M	Transfer	Internet
100 Days of Hands (Shan et al., 2020)	Actions	3,100	27k	Metadata	Internet
Ego-4D (Grauman et al., 2021)	Everyday	3,600	28k	Manual	Manual
Ego-Exo-4D (Grauman et al., 2023)	Skilled	1,400	6k	Manual	Manual
SS-v2 (Goyal et al., 2017)	Actions	245	221k	Manual	Manual
RoboVQA (Sermanet et al., 2023)	Everyday	230	98k	Manual	Manual
Epic-Kitchens-100 (Damen et al., 2022)	Cooking	100	700	Manual	Manual

Table 1: Existing video datasets. Listed are: (top) large-scale, internet-scraped video datasets, and (bottom) robotics-relevant, manually-recorded video datasets. The datasets are ordered by decreasing total video duration. Details regarding ‘Caption Type’ can be found in Section 5.1.2.

Annotations. All of the datasets in Table 1 come with text annotations. Other annotation modalities are sometimes provided. Grauman et al. (2021, 2023) occasionally collect corresponding audio, 3D meshes, eye-gazes, stereo, and synchronized video from different viewpoints. Shan et al. (2020) provide human-hand labels for 100k images in their video dataset. Note, internet-obtained video datasets generally lack these other annotations as they may be costly to add manually, or may require customized video recording setups.

Discussion. The largest internet-curated video datasets are two orders of magnitude larger than the largest manually-recorded video datasets. Yet, these still barely scratch the surface of the full range of video content available online (see Figure 8). As such, we advocate for continued efforts into curating ever-larger internet video datasets for LfV. Crucially, new curation efforts should optimise for the full range of desiderata discussed in Section 5.1.1). Low-quality language annotations are a key limitation of current internet-curated video datasets. This can be addressed via improved automated captioning methods. Finally, we note that efforts to curate smaller-scale, higher-quality video datasets may also be useful. Such high-quality datasets can be used for finetuning models after pretraining on larger, lower-quality data (Blattmann et al., 2023a).

5.2 Benchmarks

Benchmarks can be crucial for catalysing rapid research progress in a given area (Deng et al., 2009). In this section, we first give recommendations for how an LfV benchmark should be designed (Section 5.2.1). We subsequently review relevant benchmarks from the literature, commenting on limitations and proposing improvements (Section 5.2.2).

1. These datasets are not publicly available at the time of writing.

5.2.1 DESIGNING BENCHMARKS FOR LFV

In the paragraphs below, we first give recommendations regarding the metrics an LfV benchmark should measure, before outlining different possible categories of LfV benchmark and their corresponding desiderata.

Metrics. An LfV benchmark should serve to evaluate either the capabilities of a policy obtained via an LfV approach, or the effectiveness of an LfV algorithm at producing a policy, under certain constraints (e.g., when constrained to use a fixed dataset). More specifically, the benchmark can evaluate the extent to which the potential benefits of LfV (Section 3.3) have been obtained. This can be achieved via the following quantitative metrics:

1. *Performance in-distribution of \mathcal{D}_{robot} .* Performance (e.g., task success rate) of the robot in settings in-distribution of \mathcal{D}_{robot} , after training on \mathcal{D}_{video} and a fixed \mathcal{D}_{robot} .
2. *Data-efficiency in-distribution of \mathcal{D}_{robot} .* The quantity of data in \mathcal{D}_{robot} required to reach a certain performance level in settings in-distribution of \mathcal{D}_{robot} , when also training on \mathcal{D}_{video} .
3. *Generalization beyond \mathcal{D}_{robot} .* The performance of the robot in settings out-of-distribution of \mathcal{D}_{robot} , after training on \mathcal{D}_{video} and a fixed \mathcal{D}_{robot} .

These metrics cover the benefits of ‘generalization beyond \mathcal{D}_{robot} ’ and ‘improvements in-distribution of \mathcal{D}_{robot} ’, as outlined in Section 3.3. However, the benefit of ‘emergent capabilities’ likely must be evaluated qualitatively.

Finally, the benchmark should also inform us on how scalable the LfV method is to diverse internet data and the generalist robot setting, and how well it can handle fundamental LfV challenges (Section 3.4). Specific design choices that can be made here are discussed in later paragraphs.

Categories. All LfV benchmarks should include a fixed set of evaluation environments, \mathcal{M}_{eval} , in which the LfV policy, π_{lfv} , is to be evaluated. However, LfV benchmarks can differ based on whether they specify the datasets \mathcal{D}_{video} and \mathcal{D}_{robot} that are to be used to train the policy. Concretely, we identify the following possible categories of LfV benchmark:

- $B_e = \{\mathcal{M}_{eval}\}$. A π_{lfv} trained on any \mathcal{D}_{video} and any \mathcal{D}_{robot} is evaluated on a fixed \mathcal{M}_{eval} .
- $B_{e-r} = \{\mathcal{M}_{eval}, \mathcal{D}_{robot}\}$. A π_{lfv} trained on any \mathcal{D}_{video} and a *fixed* \mathcal{D}_{robot} is evaluated on a fixed \mathcal{M}_{eval} .
- $B_{e-r-v} = \{\mathcal{M}_{eval}, \mathcal{D}_{robot}, \mathcal{D}_{video}\}$. A π_{lfv} trained on a *fixed* \mathcal{D}_{video} and a *fixed* \mathcal{D}_{robot} is evaluated on a fixed \mathcal{M}_{eval} .

Benchmarks that fix the datasets (e.g., B_{e-r-v}) can provide a fair comparison of LfV algorithms. However, they may end up being ‘toyish’ in practice. Benchmarks that do not fix the data (i.e., B_e) are useful for evaluating the performance of an obtained π_{lfv} .

Desiderata. We now give details regarding the desiderata for each potential component of an LfV benchmark.

- $\mathcal{M}_{\text{eval}}$. The evaluation environments should be analogous to the generalist robot settings we are interested in. (1) *Relevance*: The environments and tasks should resemble those in generalist robot settings. (2) *Diversity* in $\mathcal{M}_{\text{eval}}$ allows us to measure how π_{lfv} will handle diverse and unseen real-world scenarios. (3) *Realism*: The benchmark should include challenges that may be faced in real-world environments (such as noisy observations), and its physics should be sufficiently realistic. To ensuring $\mathcal{M}_{\text{eval}}$ bears on the challenge of ‘missing low-level information in video’, the tasks in $\mathcal{M}_{\text{eval}}$ could be setup to require perception of information not contained in video data.
- $\mathcal{D}_{\text{robot}}$. (1) $\mathcal{D}_{\text{robot}}$ should be drawn from a *subset* of the tasks and environments in $\mathcal{M}_{\text{eval}}$, allowing us to measure performance both in and out-of-distribution of $\mathcal{D}_{\text{robot}}$. (2) To ensure LfV generalization (see Figure 2) is indeed possible in the benchmark, the robot dataset should have good coverage over all possible low-level “atomic” actions.
- $\mathcal{D}_{\text{video}}$. Firstly, $\mathcal{D}_{\text{video}}$ should not contain action labels. Other desiderata depend on the extent to which we wish $B_{\text{e-r-v}}$ to be a ‘toy’ setting for testing LfV algorithms.

Toy setups can allow for excellent control over which LfV challenges (Section 3.4) are faced. (1) A toy setup can ensure $\mathcal{D}_{\text{video}}$ has good coverage over the environments and tasks in $\mathcal{M}_{\text{eval}}$. (2) Characteristics of $\mathcal{D}_{\text{video}}$ can be controlled to establish distribution shifts between $\mathcal{D}_{\text{video}}$ and $\mathcal{M}_{\text{eval}}$ (e.g., embodiment gaps, viewpoint differences). (3) The challenge of ‘controlability’ (see Section 3.4) can be toggled by managing the extent to which changes in the video are due to effects beyond a single agent’s actions.

Approximating the scaled-up LfV setting: Here, $\mathcal{D}_{\text{video}}$ should resemble internet video in terms of its scale, diversity, and content. Thus, $\mathcal{D}_{\text{video}}$ should ideally consist of real-world human videos scraped from the internet. Doing so will inherently present several LfV challenges, and allow for evaluation of the scalability of the LfV method.

5.2.2 EXISTING BENCHMARKS

This section briefly details existing LfV benchmarks, before discussing future directions.

$B_{\text{e}} = \{\mathcal{M}_{\text{eval}}\}$. A number of benchmarks provide an $\mathcal{M}_{\text{eval}}$ relevant to LfV research. (1) *Toy settings*: The diversity of certain complex or open-ended video game environments (Fan et al., 2022; Küttler et al., 2020) can provide an excellent setting for testing LfV policy generalization. (2) *Robotics simulators*: Robotics-relevant simulated environments include benchmarks focused on low-level motor control and object interaction (Mees et al., 2022; Yu et al., 2020a; Gu et al., 2023; Liu et al., 2024a; Kumar et al., 2024; Makoviychuk et al., 2021; Pumacay et al., 2024). (3) *Embodied AI simulators*: Some benchmarks focus on household and everyday mobile manipulation tasks while abstracting away low-level control to focus on higher-level planning (Puig et al., 2023; Kolve et al., 2017; Li et al., 2024a). (4) *Real-robot setups*: Real-world robot evaluations are also available (Ahn et al., 2020), but may be more costly and time-consuming than simulated evaluation. To address this, Li et al. (2024) design a simulated benchmark specifically for evaluating real-world policies.

$B_{e-r} = \{\mathcal{M}_{\text{eval}}, \mathcal{D}_{\text{robot}}\}$. Several benchmarks pair a $\mathcal{D}_{\text{robot}}$ with an $\mathcal{M}_{\text{eval}}$. Mees et al. (2022), Lynch et al. (2023), Liu et al. (2024a) provide demonstration or play data for simulated tabletop manipulation tasks. Gu et al. (2023) includes mobile manipulation tasks. Pumacay et al. (2024), Xie et al. (2023), Nasiriany et al. (2024a) provide multiple different tasks and environments (along with corresponding $\mathcal{D}_{\text{robot}}$ generation methods), which may be useful for testing LfV generalization. Lastly, there exist relatively large real-world robot datasets which are not paired with any specific benchmark (Padalkar et al., 2023; Khazatsky et al., 2024).

$B_{e-r-v} = \{\mathcal{M}_{\text{eval}}, \mathcal{D}_{\text{robot}}, \mathcal{D}_{\text{video}}\}$. To the best of our knowledge, there are few benchmarks that specify a fixed $\mathcal{D}_{\text{video}}$ and a fixed $\mathcal{D}_{\text{robot}}$. Fan et al. (2022) provide a $\mathcal{D}_{\text{video}}$ containing 730k YouTube videos in a Minecraft setting. Many previous LfV works have constructed a $\mathcal{D}_{\text{video}}$ by stripping action labels from a $\mathcal{D}_{\text{robot}}$ (Seo et al., 2022a; Schmidt & Jiang, 2023; Wen et al., 2023). This can allow for easy setup of a scenario where $\mathcal{D}_{\text{video}}$ has good coverage over $\mathcal{M}_{\text{eval}}$, but can neglect distribution shifts seen between the video data and the robot domain in realistic LfV settings.

Discussion. We provide recommendations for improvements in LfV benchmarking.

Improving the diversity in $\mathcal{M}_{\text{eval}}$. The diversity in most suitable robotic simulators (Mees et al., 2022; Lynch et al., 2023; Liu et al., 2024a; Gu et al., 2023; Li et al., 2024a) is still limited in terms of the tasks, environments, and objects presented. Improving diversity will allow us to better assess the applicability of the LfV method to generalist robot settings. One possibility here is to use procedural generation (Deitke et al., 2022) or LLM-assisted environment design (Xian et al., 2023). Another is to aggregate multiple $\mathcal{M}_{\text{eval}}$ ’s within a common framework (Kumar et al., 2024).

Establishing popular B_{e-r} and B_{e-r-v} LfV benchmarks. Establishing benchmarks in these categories (currently there are no popular options) would provided an improved ability to compare LfV algorithms; past works have often chosen different $\mathcal{D}_{\text{video}}$ ’s (Nair et al., 2022; Yang et al., 2023c; Schmidt & Jiang, 2023) and thus are difficult to compare. Any new LfV benchmark should be designed following the recommendations outlined in Section 5.2.1.

6. Challenges & Opportunities

We now provide a comprehensive discussion of challenges and opportunities for future LfV research, based on our analysis of the existing literature. First, we give high-level recommendations for future LfV research (Section 6.1). Second, we detail promising directions for utilising video foundation models and techniques for LfV (Section 6.2). Third, we highlight approaches for overcoming previously identified LfV challenges (Section 6.3). We conclude by discussing other challenges in generalist robotics may not be solved via scaling to larger datasets (Section 6.4).

6.1 High-level Recommendations

After our analysis of the LfV literature in Section 4, we now provide some high-level recommendations for future LfV research.

Focus on scalable approaches. We should focus on methods that can scale well to large, diverse internet video. Many previous LfV works limit scalability by making strong assumptions on the nature of the video data or the downstream robot setting (Baker et al., 2022; Stadie et al., 2017). We advocate for methods that can use general learning objectives to extract knowledge from heterogenous video data (see the foundation model approaches in Section 4.1). Methods that can learn from unlabelled and suboptimal video data are most scalable in theory (Bruce et al., 2024), though methods that leverage language labels can still be highly effective (Brooks et al., 2024; Yang et al., 2023c). Finally, we should focus initially on LfV approaches that can learn from offline robot data (or that can perform online RL in simulation), due to the impracticalities of online real-world RL.

Target the key benefits of LfV via policies and dynamics models. Future LfV research should focus more on obtaining the most promising LfV benefits (Section 3.3); namely, improving robot data-efficiency and improving generalization beyond $\mathcal{D}_{\text{robot}}$. Much past LfV research has sought to extract reward functions from video (Section 4.3.3). Whilst these approaches are useful, we believe learning policies (Section 4.3.1) and dynamics models (Section 4.3.2) is most promising for reducing reliance on robot data (as is discussed in their respective sections).

Improve LfV datasets. Improving and scaling our LfV video datasets is a reliable way to improve our LfV models. In Section 5.1.3, we recommend scraping larger-scale video data from the internet, and captioning this data with high-quality language annotations. We advocate for the open-sourcing of such curated video datasets.

Improve evaluation of LfV methods. We should explicitly measure the extent to which a method can handle LfV challenges and can provide the potential benefits of LfV. In Section 5.2.1, we outline concrete metrics for this. It is often difficult to identify these metrics in existing LfV research. In Section 5.2.2, we advocate for the design of improved LfV benchmarks that can offer these metrics off-the-shelf.

Combine LfV with complementary and alternative approaches. Any practical LfV approach should seek to obtain as useful a $\mathcal{D}_{\text{robot}}$ as possible. In some cases, video data could aid the collection of (real and simulated) robot data. For example, video data and video models could help guide automatic generation of diverse and realistic simulated environments (Xian et al., 2023; Faldor et al., 2024). Elsewhere, we note that the utility of video data is not restricted to monolithic foundation model approaches or pure learning approaches. The components of a modular approach—components such as specialist agents (Yang et al., 2020) or vision systems—may benefit from the use of internet video data. Meanwhile, if learning is combined with more classical or structured control methods (Dalal et al., 2023; Huang et al., 2023c; Mishra et al., 2023), video data could benefit the learning aspect.

6.2 Video Foundation Models for LfV

A highly promising LfV direction is to utilise large-scale internet video data to help train large foundation models (FMs) for robotics. Here, we outline some related research avenues and discussion points.

Improving Video FMs. Advancing video FMs and techniques will be a key driver of progress for scalable LfV approaches (Section 4.1). Key issues to tackle here include addressing dataset limitations and prohibitive computational requirements. More details on avenues for improving video FMs are discussed in Section 4.1.4.

Leveraging Pretrained Video FMs. Generic video foundation models can be adapted into a RL knowledge modality to aid robot learning. Strong baselines here will include finetuning the video FM into an action-outputting policy using offline robot data (Brohan et al., 2023; Wu et al., 2023a), or (if the video FM has video generation capabilities) finetuning it into a robot dynamics model. Data-efficient and computationally efficient adaptation mechanisms (Hu et al., 2021; Yang et al., 2023b) may be useful here.

Customising Video FMs for LfV. The most effective LfV approaches will likely use pipelines fully optimized for robotics purposes. We now touch on directions for customising video FMs and techniques for LfV.

Improve the capabilities of generic video FMs in areas relevant to robotics. For example, we could improve the physics realism of generic video prediction models (e.g., via RL finetuning; see Black et al., 2023a), or the fine-grained understandings of generic video-to-text models (e.g., via improved fine-grained language captioning of the video data). The inclusion of domain-specific robot videos in generic video FM pretraining could improve its performance in the downstream robot setting.

Pretrain control-centric video FMs on \mathcal{D}_{video} . There are various options for obtaining models that are more ‘control-centric’ from video data. The use of action representations (see Section 4.2.1) can add explicit action information to the video FM (Bruce et al., 2024; Schmidt & Jiang, 2023). The model could be trained using control-centric objectives, such as TD-learning (Bhateja et al., 2023). Video data could be paired with robotics-relevant low-level information (where available); e.g., 3D depth information can improve crucial 3D understandings (Zhen et al., 2024; Yuan et al., 2024), or frozen video features could be combined with features from different modalities (Lin et al., 2024).

Pretrain control-centric FMs on \mathcal{D}_{video} and \mathcal{D}_{robot} . Any-to-any sequence models can be pretrained jointly on video and robot data, and can subsequently act as policies, dynamics models, and high-level planners (Sohn et al., 2024). Video prediction models can be pretrained on video and robot data, allowing them to be optionally conditioned on robot actions (Yang et al., 2023c). Action labels in robot data could be used in addition to action representations in video data. It is not yet clear whether pretraining on both \mathcal{D}_{video} and \mathcal{D}_{robot} is preferable to pretraining on \mathcal{D}_{video} before finetuning on \mathcal{D}_{robot} . Future research should clarify this.

Monolithic Vs Compositional Models. Any-to-any sequence modelling is an example monolithic LfV approach (Sohn et al., 2024). The use of a video generation model to hierarchically condition an action-prediction model is an example compositional LfV approach (Ajay et al., 2023). Versus monolithic approaches, Du and Kaelbling (2024) argue that compositional approaches are more computationally efficient, more data-efficient, and can obtain improved generalization (Zhou et al., 2024). These advantages are very relevant

to the LfV setting. Nevertheless, monolithic models may benefit from positive transfer between the different data modalities and tasks they handle, and can be optimized end-to-end. Future research should seek to better compare monolithic and compositional LfV approaches.

Open-sourcing Video FMs. We advocate for increased open-sourcing of video foundation models. Open-sourced models will make cutting-edge LfV research more accessible to academic researchers, accelerating progress in LfV (Kim et al., 2024).

6.3 Overcoming LfV Challenges

In Section 3.4, we outlined the key challenges in LfV. Whilst recent LfV research has partially addressed some of these, here we discuss further promising directions.

Bridging the gap to low-level robot information. A key LfV challenge is to minimise the quantity of robot data required, despite the missing low-level information (e.g., forces and tactile information) in the video data (see Figure 2). While it is possible that further scaling the robot and video datasets will implicitly solve this issue, here we discuss more explicit solutions.

Incorporate low-level information into video pretraining. As discussed in Section 6.2, low-level information could be introduced during video pretraining via: the use of video paired with low-level information (e.g., depth info); or the use of robot data during pretraining. Simulated robot data could be cheap source of low-level information.

Bypass the need to incorporate low-level information into video pretraining. A hierarchical approach can mitigate the need for a video-pretrained model to make use of non-visual information. For example, a high-level policy trained on $\mathcal{D}_{\text{video}}$ can propose alternative-actions, and a low-level policy trained on $\mathcal{D}_{\text{robot}}$ can decode these to robot actions (Du et al., 2023a; Schmidt & Jiang, 2023; Wen et al., 2023) (see Section 4.3.1). The use of a coarse-action space (e.g., cartesian control for manipulation; see Brohan et al., 2022) may achieve a similar effect. One possibility to collect robot data with the hierarchical/coarse action-space policy, and subsequently finetune for finer-grained control.

Recovering action information from video. The missing action label problem in LfV can be partially addressed using alternative-action representations (see Section 4.2.1). We recommend future research to: (1) Scale existing methods to realistic and diverse internet video. (2) Explicitly compare the pros and cons of different action representations, and measure the extent to which each can help obtain the benefits of LfV (see Section 3.3). (3) Develop improved, novel action representations. Perhaps by combining the benefits of existing options.

Tackling distribution shift. Previous LfV works have attempted to address LfV distribution shifts using specific inductive biases (see Section 4.2.2). However, these have not scaled to heterogenous internet video data. We advocate for implicitly addressing distribution shifts by scaling flexible methods to large, diverse internet video data, and, when possible, additionally training on (real and simulated) robot data. Compositional approaches are another option for obtaining generalization under distribution shift (Du & Kaelbling, 2024). Nevertheless, addressing LfV distribution shift in is an open problem.

Mitigating computational demands. The high computational demands of training on video data can be mitigated via improved efficient architectures, taking inspiration from relevant LLM research (Wang et al., 2023c; Liu et al., 2023a; Balažević et al., 2024; Jiang et al., 2024). The ever decreasing cost of compute will also help here (Moore, 1998). Improved methods for learning latent spaces in which the video model can operate (versus operating directly in pixel space), can aid computational efficiency in addition to mitigating issues related to noise and redundancy in video (Bardes et al., 2023; Yan et al., 2021).

6.4 Other Generalist Robot Challenges: Is Scaling Enough?

Observing results in other machine learning domains (Achiam et al., 2023; Betker et al., 2023; Yang et al., 2023c; Sutton, 2019), it seems likely that scaling current robot learning approaches to larger datasets will yield improvements in robot capabilities. This survey advocates for the use of internet video data to help us achieve this scaling. However, scaling may be insufficient to take us all the way to generalist robots (Kumar, 2024). In this section, we note challenges that may face LfV approaches that rely on scaling the data under the current paradigm. Instead, solving these challenges may require algorithmic advances.

LfV is also reliant on robot data. LfV approaches augment a robot dataset with (internet) video data. However, any LfV approach will still likely be bottlenecked by the quantity, quality, and coverage of its robot data. The difficulties of collecting robot data may be the main barrier to matching the successes of deep learning in other domains, even for LfV approaches.

Safety and reliability. Safety is paramount when deploying robots in the real world. As such, physical robots may require higher success rates than required in many natural language tasks. Unfortunately, deep learning models are known to generalise poorly to unseen scenarios. Scaling to internet data may provide the model with improved ‘common-sense’, improving its reliability and generalization. However, this may not fundamentally solve the problem.

Long-horizon tasks and memory. Generalist robots may need to operate over long time horizons. This presents two challenges. First, longer-horizon tasks may necessitate improved planning and reasoning abilities. Second, longer-horizon tasks require improved memory capabilities. Current solutions to long-term memory involve scaling up the context-length of the model (Liu et al., 2024b), or storing and retrieving from simple memory databases (Park et al., 2023). It is unclear whether these solutions will be sufficient to fundamentally address the problem.

Latency. Large foundation models currently have long inference times that limit their ability to perform real-time high-frequency robot control (Reed et al., 2022; Brohan et al., 2022). Techniques to reduce inference latency will be beneficial here (Jiang et al., 2024; Song et al., 2024).

Continual learning and adaptation. A generalist robot may regularly encounter novel scenarios. It must be able to adapt to these scenarios appropriately. Scaling can improve

generalization and in-context ‘meta-learning’ abilities (Brown et al., 2020). Nevertheless, obtaining true continual learning (Abel et al., 2024) abilities is still an open problem, and may require further algorithmic advances.

Reasoning. There exists both speculation and empirical evidence regarding the inability of deep learning methods to perform true ‘reasoning’ (Huang et al., 2023a; Anwar et al., 2024). Such reasoning abilities may be crucial for a generalist robot. If deep learning is fundamentally limited in this regard, then scaling to internet video data may be insufficient to achieve general-purpose robots.

7. Conclusion

Developing general-purpose robots is a grand challenge in robotics. However, current learning approaches are bottlenecked by a lack of robot data. Learning from Video (LfV) methods seek to alleviate this issue by augmenting their training dataset with video data. These methods are promising as internet video comes in vast quantities and contains information highly relevant a general-purpose robot.

In this survey, we have outlined fundamental LfV concepts and conducted a comprehensive review of the LfV literature. We emphasised methods with the potential to scale to large, heterogeneous internet video datasets: following the success of scaling deep learning to internet data in other domains (OpenAI, 2023; Betker et al., 2023), we consider these LfV methods to be highly promising for improving the generality of our robots.

The key takeaways of this survey are summarised below.

- *Fundamental LfV concepts.* We explicitly establish the benefits that can be obtained from LfV (Section 3.3), and key LfV challenges that stand in the way of these benefits (Section 3.4). These fundamental concepts should be used to guide future LfV research agendas.
- *Robot foundation models from internet video.* Video foundation model techniques are promising for extracting knowledge from large, heterogeneous internet video datasets (Section 4.1). In Section 6.2, we discussed directions for leveraging video foundation model techniques for robotics. Developing models customized for robotics is a particularly promising direction. Here, recent monolithic any-to-any sequence models offer a clear path forward. It will also be beneficial to pursue compositional approaches in parallel.
- *Scalable approaches for learning policies and dynamics models.* Our main analysis of the LfV-for-robotics literature (Section 4.3) yielded several important takeaways. First, future LfV research should avoid inductive biases that limit scalability (i.e., those seen in Section 4.2.2), and adopt scalable learning techniques similar to those used for video foundation models (Section 4.1). Whilst a reliance on language captions may limit scalability to an extent, this may become less of an issue as automated captioning methods improve (Section 5.1.2). Second, we should focus on methods that can best obtain the key LfV benefits (e.g., generalisation beyond the available robot data). This should involve targeting the learning of policies (Section 4.3.1)

and dynamics models (Section 4.3.2) from video data. Improved benchmarks that quantitatively measure LfV benefits (see Section 5.2.2) will facilitate these efforts.

- *Action representations.* In Section 4.2.1, we outlined methods for extracting action representations from video. These can serve to mitigate missing action labels in video. These methods are promising, but further work is required to scale them to large, realistic internet video data.
- *Improved datasets.* Improving and scaling our video datasets (as per the desiderata outlined in Section 5.1.1) is a reliable way to improve our LfV models. Suitable methods for curating internet video data are outlined in Section 5.1.2.
- *Is scaling enough?* Exploiting internet video will likely drive significant advancements in robotics. However, the generalist robot setting presents challenges that may not be solved via naive scaling of deep learning (Section 6.4). As LfV and other research attempts to address the data bottleneck in robotics, other complementary and alternative research agendas should be explored in parallel.

The analyses, taxonomies, and directions presented in this survey should serve as a valuable reference for future LfV research. We hope this can catalyze further research in the area, and accelerate our progress towards developing general-purpose robots.

Acknowledgments

Daniel C.H. Tan is supported by the Agency for Science, Technology, and Research (A*STAR), Singapore. Fernando Acero and Nathan Herr are supported by the UKRI CDT in Foundational AI [EP/S021566/1] at the UCL Centre for Artificial Intelligence.

References

- Abel, D., Barreto, A., Van Roy, B., Precup, D., van Hasselt, H. P., & Singh, S. (2024). A definition of continual reinforcement learning. *Advances in Neural Information Processing Systems*, 36.
- Achiam, J., Adler, S., Agarwal, S., Ahmad, L., Akkaya, I., Aleman, F. L., Almeida, D., Altenschmidt, J., Altman, S., Anadkat, S., et al. (2023). Gpt-4 technical report..
- Adeniji, A., Xie, A., Sferrazza, C., Seo, Y., James, S., & Abbeel, P. (2023). Language reward modulation for pretraining reinforcement learning. *ArXiv, abs/2308.12270*.
- Ahn, M., Brohan, A., Brown, N., Chebotar, Y., Cortes, O., David, B., Finn, C., Gopalakrishnan, K., Hausman, K., Herzog, A., Ho, D., Hsu, J., Ibarz, J., Ichter, B., Irpan, A., Jang, E., Ruano, R. J., Jeffrey, K., Jesmonth, S., Joshi, N. J., Julian, R. C., Kalashnikov, D., Kuang, Y., Lee, K.-H., Levine, S., Lu, Y., Luu, L., Parada, C., Pastor, P., Quiambao, J., Rao, K., Rettinghouse, J., Reyes, D. M., Sermanet, P., Sievers, N., Tan, C., Toshev, A., Vanhoucke, V., Xia, F., Xiao, T., Xu, P., Xu, S., & Yan, M. (2022). Do as i can, not as i say: Grounding language in robotic affordances. In *Conference on Robot Learning*.

- Ahn, M., Dwibedi, D., Finn, C., Arenas, M. G., Gopalakrishnan, K., Hausman, K., Ichter, B., Irpan, A., Joshi, N., Julian, R., et al. (2024). Autort: Embodied foundation models for large scale orchestration of robotic agents..
- Ahn, M., Zhu, H., Hartikainen, K., Ponte, H., Gupta, A., Levine, S., & Kumar, V. (2020). Robel: Robotics benchmarks for learning with low-cost robots. In *Conference on robot learning*, pp. 1300–1313. PMLR.
- Ajay, A., Han, S.-J., Du, Y., Li, S., Gupta, A., Jaakkola, T., Tenenbaum, J., Kaelbling, L. P., Srivastava, A., & Agrawal, P. (2023). Compositional foundation models for hierarchical planning. *ArXiv, abs/2309.08587*.
- Akkaya, I., Andrychowicz, M., Chociej, M., Litwin, M., McGrew, B., Petron, A., Paino, A., Plappert, M., Powell, G., Ribas, R., et al. (2019). Solving rubik’s cube with a robot hand..
- Alayrac, J.-B., Donahue, J., Luc, P., Miech, A., Barr, I., Hasson, Y., Lenc, K., Mensch, A., Millican, K., Reynolds, M., et al. (2022). Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems*, 35, 23716–23736.
- Anwar, U., Saporov, A., Rando, J., Paleka, D., Turpin, M., Hase, P., Lubana, E. S., Jenner, E., Casper, S., Sourbut, O., et al. (2024). Foundational challenges in assuring alignment and safety of large language models..
- Aytar, Y., Pfaff, T., Budden, D., Paine, T. L., Wang, Z., & de Freitas, N. (2018). Playing hard exploration games by watching youtube. In *Neural Information Processing Systems*.
- Bahl, S., Gupta, A., & Pathak, D. (2022). Human-to-robot imitation in the wild. *ArXiv, abs/2207.09450*.
- Bahl, S., Mendonca, R., Chen, L., Jain, U., & Pathak, D. (2023). Affordances from human videos as a versatile representation for robotics..
- Bai, Y., Kadavath, S., Kundu, S., Askell, A., Kernion, J., Jones, A., Chen, A., Goldie, A., Mirhoseini, A., McKinnon, C., et al. (2022). Constitutional ai: Harmlessness from ai feedback..
- Bain, M., Nagrani, A., Varol, G., & Zisserman, A. (2021). Frozen in time: A joint video and image encoder for end-to-end retrieval. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 1728–1738.
- Baker, B., Akkaya, I., Zhokhov, P., Huizinga, J., Tang, J., Ecoffet, A., Houghton, B., Sampe-dro, R., & Clune, J. (2022). Video pretraining (vpt): Learning to act by watching unlabeled online videos. *ArXiv, abs/2206.11795*.
- Balažević, I., Shi, Y., Papalampidi, P., Chaabouni, R., Koppula, S., & Hénaff, O. J. (2024). Memory consolidation enables long-context video understanding..
- Bar-Tal, O., Chefer, H., Tov, O., Herrmann, C., Paiss, R., Zada, S., Ephrat, A., Hur, J., Li, Y., Michaeli, T., et al. (2024). Lumiere: A space-time diffusion model for video generation..
- Bardes, A., Garrido, Q., Ponce, J., Chen, X., Rabbat, M., LeCun, Y., Assran, M., & Ballas, N. (2023). V-jepa: Latent video prediction for visual representation learning..

- Baumli, K., Baveja, S., Behbahani, F., Chan, H., Comanici, G., Flennerhag, S., Gazeau, M., Holsheimer, K., Horgan, D., Laskin, M., et al. (2023). Vision-language models as a source of rewards..
- Belkhale, S., Ding, T., Xiao, T., Sermanet, P., Vuong, Q., Tompson, J., Chebotar, Y., Dwibedi, D., & Sadigh, D. (2024). Rt-h: Action hierarchies using language..
- Betker, J., Goh, G., Jing, L., Brooks, T., Wang, J., Li, L., Ouyang, L., Zhuang, J., Lee, J., Guo, Y., et al. (2023). Improving image generation with better captions. *Computer Science*. <https://cdn.openai.com/papers/dall-e-3.pdf>, 2(3), 8.
- Bharadhwaj, H., Gupta, A., Kumar, V., & Tulsiani, S. (2023). Towards generalizable zero-shot manipulation via translating human interaction plans. *ArXiv, abs/2312.00775*.
- Bhateja, C., Guo, D., Ghosh, D., Singh, A., Tomar, M., Vuong, Q. H., Chebotar, Y., Levine, S., & Kumar, A. (2023). Robotic offline rl from internet videos via value-function pre-training. *ArXiv, abs/2309.13041*.
- Black, K., Janner, M., Du, Y., Kostrikov, I., & Levine, S. (2023a). Training diffusion models with reinforcement learning..
- Black, K., Nakamoto, M., Atreya, P., Walke, H., Finn, C., Kumar, A., & Levine, S. (2023b). Zero-shot robotic manipulation with pretrained image-editing diffusion models. *ArXiv, abs/2310.10639*.
- Blank, N., Reuss, M., Wenzel, F., Mees, O., & Lioutikov, R. (2024). Scaling robot policy learning via zero-shot labeling with foundation models. In *2nd Workshop on Mobile Manipulation and Embodied Intelligence at ICRA 2024*.
- Blattmann, A., Dockhorn, T., Kulal, S., Mendeleevitch, D., Kilian, M., Lorenz, D., Levi, Y., English, Z., Voleti, V., Letts, A., et al. (2023a). Stable video diffusion: Scaling latent video diffusion models to large datasets..
- Blattmann, A., Rombach, R., Ling, H., Dockhorn, T., Kim, S. W., Fidler, S., & Kreis, K. (2023b). Align your latents: High-resolution video synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 22563–22575.
- Bommasani, R., Hudson, D. A., Adeli, E., Altman, R., Arora, S., von Arx, S., Bernstein, M. S., Bohg, J., Bosselut, A., Brunskill, E., et al. (2021). On the opportunities and risks of foundation models..
- Bousmalis, K., Vezzani, G., Rao, D., Devin, C., Lee, A. X., Bauza, M., Davchev, T., Zhou, Y., Gupta, A., Raju, A., et al. (2023). Robocat: A self-improving foundation agent for robotic manipulation..
- Brohan, A., Brown, N., Carbajal, J., Chebotar, Y., Choromanski, K., Ding, T., Driess, D., Finn, C., Florence, P. R., Fu, C., Arenas, M. G., Gopalakrishnan, K., Han, K., Hausman, K., Herzog, A., Hsu, J., Ichter, B., Irpan, A., Joshi, N. J., Julian, R. C., Kalashnikov, D., Kuang, Y., Leal, I., Levine, S., Michalewski, H., Mordatch, I., Pertsch, K., Rao, K., Reymann, K., Ryoo, M. S., Salazar, G., Sanketi, P. R., Sermanet, P., Singh, J., Singh, A., Soricut, R., Tran, H., Vanhoucke, V., Vuong, Q. H., Wahid, A., Welker, S., Wohlhart, P., Xiao, T., Yu, T., & Zitkovich, B. (2023). Rt-2: Vision-language-action models transfer web knowledge to robotic control. *ArXiv, abs/2307.15818*.

- Brohan, A., Brown, N., Carbajal, J., Chebotar, Y., Dabis, J., Finn, C., Gopalakrishnan, K., Hausman, K., Herzog, A., Hsu, J., Ibarz, J., Ichter, B., Irpan, A., Jackson, T., Jesmonth, S., Joshi, N. J., Julian, R. C., Kalashnikov, D., Kuang, Y., Leal, I., Lee, K.-H., Levine, S., Lu, Y., Malla, U., Manjunath, D., Mordatch, I., Nachum, O., Parada, C., Peralta, J., Perez, E., Pertsch, K., Quiambao, J., Rao, K., Ryoo, M. S., Salazar, G., Sanketi, P. R., Sayed, K., Singh, J., Sontakke, S. A., Stone, A., Tan, C., Tran, H., Vanhoucke, V., Vega, S., Vuong, Q. H., Xia, F., Xiao, T., Xu, P., Xu, S., Yu, T., & Zitkovich, B. (2022). Rt-1: Robotics transformer for real-world control at scale. *ArXiv, abs/2212.06817*.
- Brooks, T., Peebles, B., Holmes, C., DePue, W., Guo, Y., Jing, L., Schnurr, D., Taylor, J., Luhman, T., Luhman, E., Ng, C., Wang, R., & Ramesh, A. (2024). Video generation models as world simulators..
- Brown, T. B., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., Agarwal, S., Herbert-Voss, A., Krueger, G., Henighan, T. J., Child, R., Ramesh, A., Ziegler, D. M., Wu, J., Winter, C., Hesse, C., Chen, M., Sigler, E., Litwin, M., Gray, S., Chess, B., Clark, J., Berner, C., McCandlish, S., Radford, A., Sutskever, I., & Amodei, D. (2020). Language models are few-shot learners. *ArXiv, abs/2005.14165*.
- Bruce, J., Dennis, M., Edwards, A., Parker-Holder, J., Shi, Y., Hughes, E., Lai, M., Mavalankar, A., Steigerwald, R., Apps, C., Aytar, Y., Behtle, S., Behbahani, F. M. P., Chan, S., Heess, N. M. O., Gonzalez, L., Osindero, S., Ozair, S., Reed, S., Zhang, J., Zolna, K., Clune, J., de Freitas, N., Singh, S., & Rocktaschel, T. (2024). Genie: Generative interactive environments..
- Burns, K., Witzel, Z., Hamid, J. I., Yu, T., Finn, C., & Hausman, K. (2023). What makes pre-trained visual representations successful for robust manipulation?. *ArXiv, abs/2312.12444*.
- Cai, S., Zhang, B., Wang, Z., Ma, X., Liu, A., & Liang, Y. (2023). Groot: Learning to follow instructions by watching gameplay videos. *ArXiv, abs/2310.08235*.
- Chane-Sane, E., Schmid, C., & Laptev, I. (2023). Learning video-conditioned policies for unseen manipulation tasks..
- Chang, H., Zhang, H., Jiang, L., Liu, C., & Freeman, W. T. (2022). Maskgit: Masked generative image transformer..
- Chang, M., Gupta, A., & Gupta, S. (2020). Semantic visual navigation by watching youtube videos. *ArXiv, abs/2006.10034*.
- Chang, M., Gupta, A., & Gupta, S. (2022). Learning value functions from undirected state-only experience. *ArXiv, abs/2204.12458*.
- Chang, M., Prakash, A., & Gupta, S. (2023). Look ma, no hands! agent-environment factorization of egocentric videos. *ArXiv, abs/2305.16301*.
- Chebotar, Y., Vuong, Q., Hausman, K., Xia, F., Lu, Y., Irpan, A., Kumar, A., Yu, T., Herzog, A., Pertsch, K., et al. (2023). Q-transformer: Scalable offline reinforcement learning via autoregressive q-functions. In *Conference on Robot Learning*, pp. 3909–3928. PMLR.

- Chen, A. S., Nair, S., & Finn, C. (2021). Learning generalizable robotic reward functions from "in-the-wild" human videos. *ArXiv, abs/2103.16817*.
- Chen, J., Zhu, D., Haydarov, K., Li, X., & Elhoseiny, M. (2023). Video chatcaptioner: Towards the enriched spatiotemporal descriptions..
- Chen, X., Xie, S., & He, K. (2021). An empirical study of training self-supervised vision transformers..
- Cui, Z. J., Wang, Y., Shafiullah, N. M. M., & Pinto, L. (2022). From play to policy: Conditional behavior generation from uncurated robot data. *ArXiv, abs/2210.10047*.
- Dai, X., Hou, J., Ma, C.-Y., Tsai, S., Wang, J., Wang, R., Zhang, P., Vandenhende, S., Wang, X., Dubey, A., et al. (2023). Emu: Enhancing image generation models using photogenic needles in a haystack..
- Dalal, M., Mandlkar, A., Garrett, C., Handa, A., Salakhutdinov, R., & Fox, D. (2023). Imitating task and motion planning with visuomotor transformers..
- Damen, D., Doughty, H., Farinella, G. M., Fidler, S., Furnari, A., Kazakos, E., Moltisanti, D., Munro, J., Perrett, T., Price, W., et al. (2018). Scaling egocentric vision: The epic-kitchens dataset. In *Proceedings of the European conference on computer vision (ECCV)*, pp. 720–736.
- Damen, D., Doughty, H., Farinella, G. M., Furnari, A., Kazakos, E., Ma, J., Moltisanti, D., Munro, J., Perrett, T., Price, W., et al. (2022). Rescaling egocentric vision: Collection, pipeline and challenges for epic-kitchens-100..
- Darkhalil, A., Shan, D., Zhu, B., Ma, J., Kar, A., Higgins, R., Fidler, S., Fouhey, D., & Damen, D. (2022). Epic-kitchens visor benchmark: Video segmentations and object relations. *Advances in Neural Information Processing Systems, 35*, 13745–13758.
- Dasari, S., Srirama, M. K., Jain, U., & Gupta, A. (2023). An unbiased look at datasets for visuo-motor pre-training. *ArXiv, abs/2310.09289*.
- Deitke, M., VanderBilt, E., Herrasti, A., Weihs, L., Ehsani, K., Salvador, J., Han, W., Kolve, E., Kembhavi, A., & Mottaghi, R. (2022). Proctor: Large-scale embodied ai using procedural generation. *Advances in Neural Information Processing Systems, 35*, 5982–5994.
- Deng, J., Dong, W., Socher, R., Li, L.-J., Li, K., & Fei-Fei, L. (2009). Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pp. 248–255. Ieee.
- Ding, H., Liu, C., He, S., Jiang, X., Torr, P. H., & Bai, S. (2023a). Mose: A new dataset for video object segmentation in complex scenes. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 20224–20234.
- Ding, Z., Luo, H., Li, K., Yue, J., Huang, T., & Lu, Z. (2023b). Clip4mc: An rl-friendly vision-language model for minecraft. *ArXiv, abs/2303.10571*.
- Du, Y., & Kaelbling, L. P. (2024). Compositional generative modeling: A single model is not all you need. *ArXiv, abs/2402.01103*.

- Du, Y., Yang, M., Dai, B., Dai, H., Nachum, O., Tenenbaum, J. B., Schuurmans, D., & Abbeel, P. (2023a). Learning universal policies via text-guided video generation. *ArXiv, abs/2302.00111*.
- Du, Y., Yang, M., Florence, P. R., Xia, F., Wahid, A., Ichter, B., Sermanet, P., Yu, T., Abbeel, P., Tenenbaum, J., Kaelbling, L. P., Zeng, A., & Tompson, J. (2023b). Video language planning. *ArXiv, abs/2310.10625*.
- Du, Y., Konyushkova, K., Denil, M., Raju, A., Landon, J., Hill, F., de Freitas, N., & Cabi, S. (2023c). Vision-language models as success detectors..
- Dubey, A., Jauhri, A., Pandey, A., Kadian, A., Al-Dahle, A., Letman, A., Mathur, A., Schelten, A., Yang, A., Fan, A., et al. (2024). The llama 3 herd of models..
- Edwards, A. D., & Isbell, C. L. (2019). Perceptual values from observation..
- Edwards, A. D., Sahni, H., Liu, R., Hung, J., Jain, A., Wang, R., Ecoffet, A., Miconi, T., Isbell, C. L., & Yosinski, J. (2020). Estimating $q(s, s')$ with deep deterministic dynamics gradients. In *International Conference on Machine Learning*.
- Edwards, A. D., Sahni, H., Schroecker, Y., & Isbell, C. L. (2018). Imitating latent policies from observation. *ArXiv, abs/1805.07914*.
- Escontrela, A., Adeniji, A., Yan, W., Jain, A., Peng, X. B., Goldberg, K., Lee, Y., Hafner, D., & Abbeel, P. (2023). Video prediction models as rewards for reinforcement learning. *ArXiv, abs/2305.14343*.
- Eze, C., & Crick, C. (2024). Learning by watching: A review of video-based learning approaches for robot manipulation..
- Faldor, M., Zhang, J., Cully, A., & Clune, J. (2024). Omni-epic: Open-endedness via models of human notions of interestingness with environments programmed in code..
- Fan, L., Wang, G., Jiang, Y., Mandlekar, A., Yang, Y., Zhu, H., Tang, A., Huang, D.-A., Zhu, Y., & Anandkumar, A. (2022). Minedojo: Building open-ended embodied agents with internet-scale knowledge. *Advances in Neural Information Processing Systems*, 35, 18343–18362.
- Gao, Z., Tan, C., Wu, L., & Li, S. Z. (2022). Simvp: Simpler yet better video prediction. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 3170–3180.
- Gavenski, N., Rodrigues, O., & Luck, M. (2024). Imitation learning: A survey of learning methods, environments and metrics..
- Ge, S., Hayes, T., Yang, H., Yin, X., Pang, G., Jacobs, D., Huang, J.-B., & Parikh, D. (2022). Long video generation with time-agnostic vqgan and time-sensitive transformer. In *European Conference on Computer Vision*, pp. 102–118. Springer.
- Ge, S., Nah, S., Liu, G., Poon, T., Tao, A., Catanzaro, B., Jacobs, D., Huang, J.-B., Liu, M.-Y., & Balaji, Y. (2023). Preserve your own correlation: A noise prior for video diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 22930–22941.

- Ghosh, D., Bhateja, C. A., & Levine, S. (2023). Reinforcement learning from passive data via latent intentions. In *International Conference on Machine Learning*, pp. 11321–11339. PMLR.
- Girdhar, R., El-Nouby, A., Singh, M., Alwala, K. V., Joulin, A., & Misra, I. (2022). Omniae: Single model masked pretraining on images and videos..
- Goyal, R., Kahou, S. E., Michalski, V., Materzynska, J., Westphal, S., Kim, H., Haenel, V., Fründ, I., Yianilos, P. N., Mueller-Freitag, M., Hoppe, F., Thureau, C., Bax, I., & Memisevic, R. (2017). The “something something” video database for learning and evaluating visual common sense..
- Grauman, K., Westbury, A., Byrne, E., Chavis, Z. Q., Furnari, A., Girdhar, R., Hamburger, J., Jiang, H., Liu, M., Liu, X., Martin, M., Nagarajan, T., Radosavovic, I., Ramakrishnan, S. K., Ryan, F., & et. al., J. S. (2021). Ego4d: Around the world in 3,000 hours of egocentric video..
- Grauman, K., Westbury, A., Torresani, L., Kitani, K., Malik, J., Afouras, T., Ashutosh, K., Baiyya, V., Bansal, S., Boote, B., et al. (2023). Ego-exo4d: Understanding skilled human activity from first-and third-person perspectives..
- Gu, A., & Dao, T. (2023). Mamba: Linear-time sequence modeling with selective state spaces..
- Gu, J., Xiang, F., Li, X., Ling, Z., Liu, X., Mu, T., Tang, Y., Tao, S., Wei, X., Yao, Y., et al. (2023). Maniskill2: A unified benchmark for generalizable manipulation skills..
- Guan, L., Zhou, Y., Liu, D., Zha, Y., Amor, H. B., & Kambhampati, S. (2024). ” task success” is not enough: Investigating the use of video-language models as behavior critics for catching undesirable agent behaviors..
- Gupta, A., Tian, S., Zhang, Y., Wu, J., Martín-Martín, R., & Fei-Fei, L. (2022). Maskvit: Masked visual pre-training for video prediction..
- Ha, H., Florence, P., & Song, S. (2023). Scaling up and distilling down: Language-guided robot skill acquisition. In *Conference on Robot Learning*, pp. 3766–3777. PMLR.
- Haarnoja, T., Zhou, A., Hartikainen, K., Tucker, G., Ha, S., Tan, J., Kumar, V., Zhu, H., Gupta, A., Abbeel, P., et al. (2018). Soft actor-critic algorithms and applications..
- Hafner, D., Paukonis, J., Ba, J., & Lillicrap, T. P. (2023). Mastering diverse domains through world models. *ArXiv, abs/2301.04104*.
- He, H., Bai, C., Pan, L., Zhang, W., Zhao, B., & Li, X. (2024). Large-scale actionless video pre-training via discrete diffusion for efficient policy learning..
- Ho, J., Chan, W., Saharia, C., Whang, J., Gao, R., Gritsenko, A., Kingma, D. P., Poole, B., Norouzi, M., Fleet, D. J., et al. (2022). Imagen video: High definition video generation with diffusion models..
- Ho, J., & Ermon, S. (2016). Generative adversarial imitation learning. *Advances in neural information processing systems*, 29.
- Ho, J., Jain, A., & Abbeel, P. (2020). Denoising diffusion probabilistic models. *ArXiv, abs/2006.11239*.

- Ho, J., Salimans, T., Gritsenko, A., Chan, W., Norouzi, M., & Fleet, D. J. (2022). Video diffusion models. *Advances in Neural Information Processing Systems*, 35, 8633–8646.
- Höppe, T., Mehrjou, A., Bauer, S., Nielsen, D., & Dittadi, A. (2022). Diffusion models for video prediction and infilling..
- Hu, A., Russell, L., Yeo, H., Murez, Z., Fedoseev, G., Kendall, A., Shotton, J., & Corrado, G. (2023). Gaia-1: A generative world model for autonomous driving. *ArXiv, abs/2309.17080*.
- Hu, E. J., Shen, Y., Wallis, P., Allen-Zhu, Z., Li, Y., Wang, S., Wang, L., & Chen, W. (2021). Lora: Low-rank adaptation of large language models..
- Hu, Y., Xie, Q., Jain, V., Francis, J., Patrikar, J., Keetha, N., Kim, S., Xie, Y., Zhang, T., Zhao, Z., et al. (2023a). Toward general-purpose robots via foundation models: A survey and meta-analysis..
- Hu, Y., Wang, R., Li, L., & Gao, Y. (2023b). For pre-trained vision models in motor control, not all policy learning methods are created equal. In *International Conference on Machine Learning*.
- Huang, J., Chen, X., Mishra, S., Zheng, H. S., Yu, A. W., Song, X., & Zhou, D. (2023a). Large language models cannot self-correct reasoning yet..
- Huang, T., Jiang, G., Ze, Y., & Xu, H. (2023b). Diffusion reward: Learning rewards via conditional video diffusion..
- Huang, W., Wang, C., Zhang, R., Li, Y., Wu, J., & Fei-Fei, L. (2023c). Voxposer: Composable 3d value maps for robotic manipulation with language models..
- Huang, W., Xia, F., Xiao, T., Chan, H., Liang, J., Florence, P. R., Zeng, A., Tompson, J., Mordatch, I., Chebotar, Y., Sermanet, P., Brown, N., Jackson, T., Luu, L., Levine, S., Hausman, K., & Ichter, B. (2022). Inner monologue: Embodied reasoning through planning with language models. In *Conference on Robot Learning*.
- Ibarz, J., Tan, J., Finn, C., Kalakrishnan, M., Pastor, P., & Levine, S. (2021). How to train your robot with deep reinforcement learning: lessons we have learned. *The International Journal of Robotics Research*, 40(4-5), 698–721.
- Jain, V., Attarian, M., Joshi, N. J., Wahid, A., Driess, D., Vuong, Q., Sanketi, P. R., Sermanet, P., Welker, S., Chan, C., et al. (2024). Vid2robot: End-to-end video-conditioned policy learning with cross-attention transformers..
- Jang, E. (2024). All neural networks, all autonomous, all 1x speed. <https://www.1x.tech/discover/all-neural-networks-all-autonomous-all-1x-speed>. Accessed: 2024-04-10.
- Jang, H., Kim, D., Kim, J., Shin, J., Abbeel, P., & Seo, Y. (2024). Visual representation learning with stochastic frame prediction..
- Jiang, A. Q., Sablayrolles, A., Roux, A., Mensch, A., Savary, B., Bamford, C., Chaplot, D. S., Casas, D. d. l., Hanna, E. B., Bressand, F., et al. (2024). Mixtral of experts..
- Jin, Y., Xu, K., Chen, L., Liao, C., Tan, J., Chen, B., Lei, C., Liu, A., Song, C., Lei, X., et al. (2023). Unified language-vision pretraining with dynamic discrete visual tokenization..

- Jing, Y., Zhu, X., Liu, X., Sima, Q., Yang, T., Feng, Y., & Kong, T. (2023). Exploring visual pre-training for robot manipulation: Datasets, models and methods. *ArXiv, abs/2308.03620*.
- JyothirS, V., Jalagam, S., LeCun, Y., & Sobal, V. (2023). Gradient-based planning with world models. *ArXiv, abs/2312.17227*.
- Kaplan, J., McCandlish, S., Henighan, T., Brown, T. B., Chess, B., Child, R., Gray, S., Radford, A., Wu, J., & Amodei, D. (2020). Scaling laws for neural language models..
- Karaev, N., Rocco, I., Graham, B., Neverova, N., Vedaldi, A., & Rupprecht, C. (2023). Cotracker: It is better to track together..
- Karamcheti, S., Nair, S., Chen, A. S., Kollar, T., Finn, C., Sadigh, D., & Liang, P. (2023). Language-driven representation learning for robotics. *ArXiv, abs/2302.12766*.
- Karnan, H., Warnell, G., Xiao, X., & Stone, P. (2021). Voila: Visual-observation-only imitation learning for autonomous navigation..
- Kaufmann, E., Bauersfeld, L., Loquercio, A., Müller, M., Koltun, V., & Scaramuzza, D. (2023a). Champion-level drone racing using deep reinforcement learning. *Nature, 620(7976)*, 982–987.
- Kaufmann, T., Weng, P., Bengs, V., & Hüllermeier, E. (2023b). A survey of reinforcement learning from human feedback..
- Khazatsky, A., Pertsch, K., Nair, S., Balakrishna, A., Dasari, S., Karamcheti, S., Nasiriany, S., Srirama, M. K., Chen, L. Y., Ellis, K., Fagan, P., Hejna, J., Itkina, M., Lepert, M., Ma, Y., Miller, P. T., Wu, J., Belkhale, S., Dass, S., Ha, H., Jain, A., Lee, A., Lee, Y., Memmel, M., Park, S. Y., & et. al., I. R. (2024). Droid: A large-scale in-the-wild robot manipulation dataset. *ArXiv, abs/2403.12945*.
- Kim, M. J., Pertsch, K., Karamcheti, S., Xiao, T., Balakrishna, A., Nair, S., Rafailov, R., Foster, E., Lam, G., Sanketi, P., et al. (2024). Openvla: An open-source vision-language-action model..
- Kim, M. J., Wu, J., & Finn, C. (2023). Giving robots a hand: Learning generalizable manipulation with eye-in-hand human video demonstrations. *ArXiv, abs/2307.05959*.
- Kirillov, A., Mintun, E., Ravi, N., Mao, H., Rolland, C., Gustafson, L., Xiao, T., Whitehead, S., Berg, A. C., Lo, W.-Y., et al. (2023). Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 4015–4026.
- Klissarov, M., D’Oro, P., Sodhani, S., Raileanu, R., Bacon, P.-L., Vincent, P., Zhang, A., & Henaff, M. (2023). Motif: Intrinsic motivation from artificial intelligence feedback..
- Ko, P.-C., Mao, J., Du, Y., Sun, S.-H., & Tenenbaum, J. (2023). Learning to act from actionless videos through dense correspondences. *ArXiv, abs/2310.08576*.
- Kolve, E., Mottaghi, R., Han, W., VanderBilt, E., Weihs, L., Herrasti, A., Deitke, M., Ehsani, K., Gordon, D., Zhu, Y., et al. (2017). Ai2-thor: An interactive 3d environment for visual ai..
- Kondratyuk, D., Yu, L., Gu, X., Lezama, J., Huang, J., Hornung, R., Adam, H., Akbari, H., Alon, Y., Birodkar, V., et al. (2023). Videopoet: A large language model for zero-shot video generation..

- Krotkov, E., Hackett, D., Jackel, L., Perschbacher, M., Pippine, J., Strauss, J., Pratt, G., & Orłowski, C. (2018). The darpa robotics challenge finals: Results and perspectives..
- Kumar, A., Zhou, A., Tucker, G., & Levine, S. (2020). Conservative q-learning for offline reinforcement learning. *Advances in Neural Information Processing Systems*, 33, 1179–1191.
- Kumar, N. (2024). Will scaling solve robotics?.. Accessed: 2024-10-08.
- Kumar, S., Zamora, J., Hansen, N., Jangir, R., & Wang, X. (2022). Graph inverse reinforcement learning from diverse videos. In *Conference on Robot Learning*.
- Kumar, V., Shah, R., Zhou, G., Moens, V., Caggiano, V., Gupta, A., & Rajeswaran, A. (2024). Robohive: A unified framework for robot learning. *Advances in Neural Information Processing Systems*, 36.
- Küttler, H., Nardelli, N., Miller, A., Raileanu, R., Selvatici, M., Grefenstette, E., & Rocktäschel, T. (2020). The nethack learning environment. *Advances in Neural Information Processing Systems*, 33, 7671–7684.
- LeCun, Y. (2022). A path towards autonomous machine intelligence version 0.9. 2, 2022-06-27. *Open Review*, 62(1).
- Levine, S., Kumar, A., Tucker, G., & Fu, J. (2020). Offline reinforcement learning: Tutorial, review, and perspectives on open problems. *ArXiv, abs/2005.01643*.
- Li, C., Zhang, R., Wong, J., Gokmen, C., Srivastava, S., Martín-Martín, R., Wang, C., Levine, G., Ai, W., Martinez, B., et al. (2024a). Behavior-1k: A human-centered, embodied ai benchmark with 1,000 everyday activities and realistic simulation..
- Li, J., Beeching, E., Tunstall, L., Lipkin, B., Soletskyi, R., Huang, S. C., Rasul, K., Yu, L., Jiang, A., Shen, Z., Qin, Z., Dong, B., Zhou, L., Fleureau, Y., Lample, G., & Polu, S. (2024b). NuminaMath tir. <https://huggingface.co/AI-MO/NuminaMath-TIR>.
- Li, K., Wang, Y., Li, Y., Wang, Y., He, Y., Wang, L., & Qiao, Y. (2023). Unmasked teacher: Towards training-efficient video foundation models..
- Li, P., Liu, T., Li, Y., Han, M., Geng, H., Wang, S., Zhu, Y., Zhu, S.-C., & Huang, S. (2024). Ag2manip: Learning novel manipulation skills with agent-agnostic visual and action representations..
- Li, S., Du, Y., Tenenbaum, J. B., Torralba, A., & Mordatch, I. (2022). Composing ensembles of pre-trained models via iterative consensus..
- Li, X., Hsu, K., Gu, J., Pertsch, K., Mees, O., Walke, H. R., Fu, C., Lunawat, I., Sieh, I., Kirmani, S., et al. (2024). Evaluating real-world robot manipulation policies in simulation..
- Liang, J., Huang, W., Xia, F., Xu, P., Hausman, K., Ichter, B., Florence, P., & Zeng, A. (2023). Code as policies: Language model programs for embodied control. In *2023 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 9493–9500. IEEE.
- Lifshitz, S., Paster, K., Chan, H., Ba, J., & McIlraith, S. A. (2023). Steve-1: A generative model for text-to-behavior in minecraft. *ArXiv, abs/2306.00937*.

- Lin, B., Zhu, B., Ye, Y., Ning, M., Jin, P., & Yuan, L. (2023). Video-llava: Learning united visual representation by alignment before projection..
- Lin, X., So, J., Mahalingam, S., Liu, F., & Abbeel, P. (2024). Spawnnet: Learning generalizable visuomotor skills from pre-trained network. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 4781–4787. IEEE.
- Liu, B., Zhu, Y., Gao, C., Feng, Y., Liu, Q., Zhu, Y., & Stone, P. (2024a). Libero: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 36.
- Liu, H., Yan, W., Zaharia, M., & Abbeel, P. (2024b). World model on million-length video and language with blockwise ringattention..
- Liu, H., Zaharia, M., & Abbeel, P. (2023a). Ring attention with blockwise transformers for near-infinite context..
- Liu, H., Zhuge, M., Li, B., Wang, Y., Faccio, F., Ghanem, B., & Schmidhuber, J. (2023b). Learning to identify critical states for reinforcement learning from videos. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 1955–1965.
- Liu, J., Yuan, Y., Hao, J., Ni, F., Fu, L., Chen, Y., & Zheng, Y. (2024). Enhancing robotic manipulation with ai feedback from multimodal large language models..
- Lynch, C., Khansari, M., Xiao, T., Kumar, V., Tompson, J., Levine, S., & Sermanet, P. (2020). Learning latent plans from play. In *Conference on robot learning*, pp. 1113–1132. PMLR.
- Lynch, C., Wahid, A., Tompson, J., Ding, T., Betker, J., Baruch, R., Armstrong, T., & Florence, P. (2023). Interactive language: Talking to robots in real time..
- Ma, Y. J., Liang, W. J., Som, V., Kumar, V., Zhang, A., Bastani, O., & Jayaraman, D. (2023). Liv: Language-image representations and rewards for robotic control. In *International Conference on Machine Learning*.
- Ma, Y. J., Sodhani, S., Jayaraman, D., Bastani, O., Kumar, V., & Zhang, A. (2022). Vip: Towards universal visual reward and representation via value-implicit pre-training. *ArXiv, abs/2210.00030*.
- Maaz, M., Rasheed, H., Khan, S., & Khan, F. S. (2023). Video-chatgpt: Towards detailed video understanding via large vision and language models..
- Madan, N., Moegelmose, A., Modi, R., Rawat, Y. S., & Moeslund, T. B. (2024). Foundation models for video understanding: A survey..
- Majumdar, A., Yadav, K., Arnaud, S., Ma, Y. J., Chen, C., Silwal, S., Jain, A., Berges, V.-P., Abbeel, P., Malik, J., Batra, D., Lin, Y., Maksymets, O., Rajeswaran, A., & Meier, F. (2023). Where are we in the search for an artificial visual cortex for embodied intelligence?. *ArXiv, abs/2303.18240*.
- Makoviychuk, V., Wawrzyniak, L., Guo, Y., Lu, M., Storey, K., Macklin, M., Hoeller, D., Rudin, N., Allshire, A., Handa, A., et al. (2021). Isaac gym: High performance gpu-based physics simulation for robot learning..
- Mandikal, P., & Grauman, K. (2022). Dexvip: Learning dexterous grasping with human hand pose priors from video. *ArXiv, abs/2202.00164*.

- Mees, O., Hermann, L., Rosete-Beas, E., & Burgard, W. (2022). Calvin: A benchmark for language-conditioned policy learning for long-horizon robot manipulation tasks. *IEEE Robotics and Automation Letters*, 7(3), 7327–7334.
- Mendonca, R., Bahl, S., & Pathak, D. (2023). Structured world models from human videos. *ArXiv, abs/2308.10901*.
- Miech, A., Zhukov, D., Alayrac, J.-B., Tapaswi, M., Laptev, I., & Sivic, J. (2019). Howto100m: Learning a text-video embedding by watching hundred million narrated video clips..
- Mishra, U. A., Xue, S., Chen, Y., & Xu, D. (2023). Generative skill chaining: Long-horizon skill planning with diffusion models. In *Conference on Robot Learning*, pp. 2905–2925. PMLR.
- Moore, G. E. (1998). Cramming more components onto integrated circuits. *Proceedings of the IEEE*, 86(1), 82–85.
- Mu, Y., Zhang, Q., Hu, M., Wang, W., Ding, M., Jin, J., Wang, B., Dai, J., Qiao, Y., & Luo, P. (2023). Embodiedgpt: Vision-language pre-training via embodied chain of thought. *ArXiv, abs/2305.15021*.
- Nagarajan, T., & Grauman, K. (2021). Shaping embodied agent behavior with activity-context priors from egocentric video. *ArXiv, abs/2110.07692*.
- Nagrani, A., Seo, P. H., Seybold, B., Hauth, A., Manen, S., Sun, C., & Schmid, C. (2022). Learning audio-video modalities from image captions. In *European Conference on Computer Vision*, pp. 407–426. Springer.
- Nair, S., Rajeswaran, A., Kumar, V., Finn, C., & Gupta, A. (2022). R3m: A universal visual representation for robot manipulation. In *Conference on Robot Learning*.
- Narang, S., & Chowdhery, A. (2022). Pathways language model (palm): Scaling to 540 billion parameters for breakthrough performance..
- Nasiriany, S., Maddukuri, A., Zhang, L., Parikh, A., Lo, A., Joshi, A., Mandlekar, A., & Zhu, Y. (2024a). Robocasa: Large-scale simulation of everyday tasks for generalist robots..
- Nasiriany, S., Xia, F., Yu, W., Xiao, T., Liang, J., Dasgupta, I., Xie, A., Driess, D., Wahid, A., Xu, Z., Vuong, Q. H., Zhang, T., Lee, T.-W. E., Lee, K.-H., Xu, P., Kirmani, S., Zhu, Y., Zeng, A., Hausman, K., Heess, N. M. O., Finn, C., Levine, S., & Ichter, B. (2024b). Pivot: Iterative visual prompting elicits actionable knowledge for vlms. *ArXiv, abs/2402.07872*.
- Oord, A. v. d., Li, Y., & Vinyals, O. (2018). Representation learning with contrastive predictive coding..
- OpenAI (2023). Gpt-4 technical report. *ArXiv, abs/2303.08774*.
- Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., et al. (2022). Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35, 27730–27744.

- Padalkar, A., Pooley, A., Jain, A., Bewley, A., Herzog, A., Irpan, A., Khazatsky, A., Rai, A., Singh, A., Brohan, A., et al. (2023). Open x-embodiment: Robotic learning datasets and rt-x models..
- Papalampidi, P., Koppula, S., Pathak, S., Chiu, J., Heyward, J., Patraucean, V., Shen, J., Miech, A., Zisserman, A., & Nematzdeh, A. (2023). A simple recipe for contrastively pre-training video-first encoders beyond 16 frames. *ArXiv, abs/2312.07395*.
- Parisi, S., Rajeswaran, A., Purushwalkam, S., & Gupta, A. K. (2022). The unsurprising effectiveness of pre-trained vision models for control. In *International Conference on Machine Learning*.
- Park, J. S., O’Brien, J., Cai, C. J., Morris, M. R., Liang, P., & Bernstein, M. S. (2023). Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology*, pp. 1–22.
- Park, S., Ghosh, D., Eysenbach, B., & Levine, S. (2024). Hiql: Offline goal-conditioned rl with latent states as actions. *Advances in Neural Information Processing Systems, 36*.
- Peng, X. B., Coumans, E., Zhang, T., Lee, T.-W., Tan, J., & Levine, S. (2020). Learning agile robotic locomotion skills by imitating animals..
- Peng, X. B., Kanazawa, A., Malik, J., Abbeel, P., & Levine, S. (2018). Sfv: Reinforcement learning of physical skills from videos. *ACM Trans. Graph., 37*, 178.
- Pertsch, K., Desai, R., Kumar, V., Meier, F., Lim, J. J., Batra, D., & Rai, A. (2022). Cross-domain transfer via semantic skill imitation. In *Conference on Robot Learning*.
- Pertsch, K., Rybkin, O., Yang, J., Zhou, S., Derpanis, K. G., Daniilidis, K., Lim, J. J., & Jaegle, A. (2019). Keyframing the future: Keyframe discovery for visual prediction and planning. In *Conference on Learning for Dynamics & Control*.
- Peters, J., Lee, D. D., Kober, J., Nguyen-Tuong, D., Bagnell, J. A., & Schaal, S. (2016). Robot learning..
- Prudencio, R. F., Maximo, M. R., & Colombini, E. L. (2023). A survey on offline reinforcement learning: Taxonomy, review, and open problems..
- Puig, X., Undersander, E., Szot, A., Cote, M. D., Yang, T.-Y., Partsey, R., Desai, R., Clegg, A. W., Hlavac, M., Min, S. Y., et al. (2023). Habitat 3.0: A co-habitat for humans, avatars and robots..
- Pumacay, W., Singh, I., Duan, J., Krishna, R., Thomason, J., & Fox, D. (2024). The colosseum: A benchmark for evaluating generalization for robotic manipulation..
- Qin, Y., Su, H., & Wang, X. (2022). From one hand to multiple hands: Imitation learning for dexterous manipulation from single-camera teleoperation. *IEEE Robotics and Automation Letters, 7*, 10873–10881.
- Qin, Y., Wu, Y.-H., Liu, S., Jiang, H., Yang, R., Fu, Y., & Wang, X. (2021). Dexmv: Imitation learning for dexterous manipulation from human videos. In *European Conference on Computer Vision*.
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al. (2019). Language models are unsupervised multitask learners. *OpenAI blog, 1*(8), 9.

- Radosavovic, I., Xiao, T., James, S., Abbeel, P., Malik, J., & Darrell, T. (2022). Real-world robot learning with masked visual pre-training. In *Conference on Robot Learning*.
- Radosavovic, I., Zhang, B., Shi, B., Rajasegaran, J., Kamat, S., Darrell, T., Sreenath, K., & Malik, J. (2024). Humanoid locomotion as next token prediction..
- Ranasinghe, K., Li, X., Kahatapitiya, K., & Ryoo, M. S. (2024). Understanding long videos in one multimodal language model pass..
- Ravichandar, H., Polydoros, A. S., Chernova, S., & Billard, A. (2020). Recent advances in robot learning from demonstration. *Annu. Rev. Control. Robotics Auton. Syst.*, 3, 297–330.
- Reed, S., Zolna, K., Parisotto, E., Colmenarejo, S. G., Novikov, A., Barth-Maron, G., Gimenez, M., Sulsky, Y., Kay, J., Springenberg, J. T., Eccles, T., Bruce, J., Razavi, A., Edwards, A. D., Heess, N. M. O., Chen, Y., Hadsell, R., Vinyals, O., Bordbar, M., & de Freitas, N. (2022). A generalist agent. *Trans. Mach. Learn. Res.*, 2022.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., & Ommer, B. (2021). High-resolution image synthesis with latent diffusion models..
- Rong, Y., Shiratori, T., & Joo, H. (2020). Frankmocap: Fast monocular 3d hand and body motion capture by regression and integration..
- Rosete-Beas, E., Mees, O., Kalweit, G., Boedecker, J., & Burgard, W. (2022). Latent plans for task-agnostic offline reinforcement learning. In *Conference on Robot Learning*.
- Rybkin, O., Pertsch, K., Derpanis, K. G., Daniilidis, K., & Jaegle, A. (2018). Learning what you can do before doing anything. In *International Conference on Learning Representations*.
- Schiappa, M. C., Rawat, Y. S., & Shah, M. (2023). Self-supervised learning for videos: A survey. *ACM Computing Surveys*, 55(13s), 1–37.
- Schmeckpeper, K., Rybkin, O., Daniilidis, K., Levine, S., & Finn, C. (2020). Reinforcement learning with videos: Combining offline observations with interaction. *ArXiv, abs/2011.06507*.
- Schmeckpeper, K., Xie, A., Rybkin, O., Tian, S., Daniilidis, K., Levine, S., & Finn, C. (2019). Learning predictive models from observation and interaction. In *European Conference on Computer Vision*.
- Schmidt, D., & Jiang, M. (2023). Learning to act without actions. *ArXiv, abs/2312.10812*.
- Schonberger, J. L., & Frahm, J.-M. (2016). Structure-from-motion revisited. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4104–4113.
- Schuhmann, C., Beaumont, R., Vencu, R., Gordon, C., Wightman, R., Cherti, M., Coombes, T., Katta, A., Mullis, C., Wortsman, M., et al. (2022). Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35, 25278–25294.
- Schulman, J., Wolski, F., Dhariwal, P., Radford, A., & Klimov, O. (2017). Proximal policy optimization algorithms..

- Seo, Y., Lee, K., James, S., & Abbeel, P. (2022a). Reinforcement learning with action-free pre-training from videos. *ArXiv, abs/2203.13880*.
- Seo, Y., Lee, K., Liu, F., James, S., & Abbeel, P. (2022b). Harp: Autoregressive latent video prediction with high-fidelity image generator..
- Sermanet, P., Ding, T., Zhao, J., Xia, F., Dwibedi, D., Gopalakrishnan, K., Chan, C., Dulac-Arnold, G., Maddineni, S., Joshi, N. J., et al. (2023). Robovqa: Multimodal long-horizon reasoning for robotics..
- Sermanet, P., Lynch, C., Chebotar, Y., Hsu, J., Jang, E., Schaal, S., Levine, S., & Brain, G. (2018). Time-contrastive networks: Self-supervised learning from video. In *2018 IEEE international conference on robotics and automation (ICRA)*, pp. 1134–1141. IEEE.
- Shafiullah, N. M. M., Rai, A., Etukuru, H., Liu, Y., Misra, I., Chintala, S., & Pinto, L. (2023). On bringing robots home..
- Shah, D., Osiński, B., Levine, S., et al. (2023). Lm-nav: Robotic navigation with large pre-trained models of language, vision, and action. In *Conference on robot learning*, pp. 492–504. PMLR.
- Shan, D., Geng, J., Shu, M., & Fouhey, D. F. (2020). Understanding human hands in contact at internet scale..
- Shang, C., You, A., Subramanian, S., Darrell, T., & Herzig, R. (2024). Traveler: A multi-lmm agent framework for video question-answering..
- Shang, J., & Ryoo, M. S. (2021). Self-supervised disentangled representation learning for third-person imitation learning..
- Shao, L., Migimatsu, T., Zhang, Q., Yang, K., & Bohg, J. (2020). Concept2robot: Learning manipulation concepts from instructions and human demonstrations. *The International Journal of Robotics Research*, 40, 1419 – 1434.
- Shaw, K., Bahl, S., & Pathak, D. (2022). Videodex: Learning dexterity from internet videos. In *Conference on Robot Learning*.
- Shi, L. X., Hu, Z., Zhao, T. Z., Sharma, A., Pertsch, K., Luo, J., Levine, S., & Finn, C. (2024). Yell at your robot: Improving on-the-fly from language corrections..
- Sieb, M., Xian, Z., Huang, A., Kroemer, O., & Fragkiadaki, K. (2020). Graph-structured visual imitation. In *Conference on Robot Learning*, pp. 979–989. PMLR.
- Silwal, S., Yadav, K., Wu, T., Vakil, J., Majumdar, A., Arnaud, S., Chen, C., Berges, V.-P., Batra, D., Rajeswaran, A., Kalakrishnan, M., Meier, F., & Maksymets, O. (2023). What do we learn from a large-scale study of pre-trained visual representations in sim and real environments?. *ArXiv, abs/2310.02219*.
- Singer, U., Polyak, A., Hayes, T., Yin, X., An, J., Zhang, S., Hu, Q., Yang, H., Ashual, O., Gafni, O., et al. (2022). Make-a-video: Text-to-video generation without text-video data..
- Sivakumar, A., Shaw, K., & Pathak, D. (2022). Robotic telekinesis: Learning a robotic hand imitator by watching humans on youtube. *ArXiv, abs/2202.10448*.

- Sjöberg, A. (2023). How many videos are there on youtube?. <https://www.dexerto.com/entertainment/how-many-videos-are-there-on-youtube-2197264/>.
- Smith, L., Dhawan, N., Zhang, M., Abbeel, P., & Levine, S. (2019). Avid: Learning multi-stage tasks via pixel-level translation of human videos. *ArXiv, abs/1912.04443*.
- Sohn, A., Nagabandi, A., Florensa, C., Adelberg, D., Wu, D., Farooq, H., Clavera, I., Welborn, J., Chen, J., Mishra, N., Chen, P., Qian, P., Abbeel, P., Duan, R., Vijay, V., & Liu, Y. (2024). Introducing rfm-1: Giving robots human-like reasoning capabilities. <https://covariant.ai/insights/introducing-rfm-1-giving-robots-human-like-reasoning-capabilities/>. Accessed: 2024-03-29.
- Song, W., Zhao, H., Ding, P., Cui, C., Lyu, S., Fan, Y., & Wang, D. (2024). Germ: A generalist robotic model with mixture-of-experts for quadruped robot..
- Sontakke, S. A., Zhang, J., Arnold, S. M. R., Pertsch, K., Biyik, E., Sadigh, D., Finn, C., & Itti, L. (2023). Roboclip: One demonstration is enough to learn robot policies. *ArXiv, abs/2310.07899*.
- Stadie, B. C., Abbeel, P., & Sutskever, I. (2017). Third-person imitation learning..
- Stroud, J. C., Lu, Z., Sun, C., Deng, J., Sukthankar, R., Schmid, C., & Ross, D. A. (2020). Learning video representations from textual web supervision..
- Sutton, R. (2019). The bitter lesson..
- Sutton, R. S., & Barto, A. G. (2018). *Reinforcement learning: An introduction*. MIT press.
- Tam, A. C., Rabinowitz, N. C., Lampinen, A. K., Roy, N. A., Chan, S. C. Y., Strouse, D., Wang, J. X., Banino, A., & Hill, F. (2022). Semantic exploration from language abstractions and pretrained representations. *ArXiv, abs/2204.05080*.
- Tang, C., Abbatematteo, B., Hu, J., Chandra, R., Martín-Martín, R., & Stone, P. (2024). Deep reinforcement learning for robotics: A survey of real-world successes..
- Tang, Y., Bi, J., Xu, S., Song, L., Liang, S., Wang, T., Zhang, D., An, J., Lin, J., Zhu, R., et al. (2023). Video understanding with large language models: A survey..
- Team, A. A., Bauer, J., Baumli, K., Baveja, S., Behbahani, F., Bhoopchand, A., Bradley-Schmieg, N., Chang, M., Clay, N., Collister, A., et al. (2023a). Human-timescale adaptation in an open-ended task space..
- Team, G., Anil, R., Borgeaud, S., Wu, Y., Alayrac, J.-B., Yu, J., Soricut, R., Schalkwyk, J., Dai, A. M., Hauth, A., et al. (2023b). Gemini: a family of highly capable multimodal models..
- Team, O. M., Ghosh, D., Walke, H., Pertsch, K., Black, K., Mees, O., Dasari, S., Hejna, J., Xu, C., Luo, J., et al. (2023c). Octo: An open-source generalist robot policy..
- Thomas, G., Cheng, C.-A., Loynd, R., Vineet, V., Jalobeanu, M., & Kolobov, A. (2023). Plex: Making the most of the available data for robotic manipulation pretraining. *ArXiv, abs/2303.08789*.
- Tobin, J., Fong, R., Ray, A., Schneider, J., Zaremba, W., & Abbeel, P. (2017). Domain randomization for transferring deep neural networks from simulation to the real world..

- Todorov, E., Erez, T., & Tassa, Y. (2012). Mujoco: A physics engine for model-based control. In *2012 IEEE/RSJ international conference on intelligent robots and systems*, pp. 5026–5033. IEEE.
- Tomar, M., Ghosh, D., Myers, V., Dragan, A., Taylor, M. E., Bachman, P., & Levine, S. (2023). Video-guided skill discovery. In *ICML 2023 Workshop The Many Facets of Preference-Based Learning*.
- Tong, Z., Song, Y., Wang, J., & Wang, L. (2022). Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *ArXiv, abs/2203.12602*.
- Torabi, F., Warnell, G., & Stone, P. (2018a). Behavioral cloning from observation. In *International Joint Conference on Artificial Intelligence*.
- Torabi, F., Warnell, G., & Stone, P. (2018b). Generative adversarial imitation from observation. *ArXiv, abs/1807.06158*.
- Torabi, F., Warnell, G., & Stone, P. (2019). Recent advances in imitation learning from observation. In *International Joint Conference on Artificial Intelligence*.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., Kaiser, Ł., & Polosukhin, I. (2017). Attention is all you need. *Advances in neural information processing systems*, 30.
- Villegas, R., Babaeizadeh, M., Kindermans, P.-J., Moraldo, H., Zhang, H., Saffar, M. T., Castro, S., Kunze, J., & Erhan, D. (2022). Phenaki: Variable length video generation from open domain textual description. *ArXiv, abs/2210.02399*.
- Wang, C., Luo, X., Ross, K. W., & Li, D. (2022). Vrl3: A data-driven framework for visual deep reinforcement learning. *ArXiv, abs/2202.10324*.
- Wang, C., Fan, L. J., Sun, J., Zhang, R., Fei-Fei, L., Xu, D., Zhu, Y., & Anandkumar, A. (2023a). Mimicplay: Long-horizon imitation learning by watching human play. *ArXiv, abs/2302.12422*.
- Wang, J., Dasari, S., Srirama, M. K., Tulsiani, S., & Gupta, A. (2023b). Manipulate by seeing: Creating manipulation controllers from pre-trained representations. *ArXiv, abs/2303.08135*.
- Wang, L., Huang, B., Zhao, Z., Tong, Z., He, Y., Wang, Y., Wang, Y., & Qiao, Y. (2023c). Videomae v2: Scaling video masked autoencoders with dual masking..
- Wang, R., Chen, D., Wu, Z., Chen, Y., Dai, X., Liu, M., Yuan, L., & Jiang, Y.-G. (2022). Masked video distillation: Rethinking masked feature modeling for self-supervised video representation learning..
- Wang, T., Torralba, A., Isola, P., & Zhang, A. (2023a). Optimal goal-reaching reinforcement learning via quasimetric learning. In *International Conference on Machine Learning*, pp. 36411–36430. PMLR.
- Wang, Y., He, Y., Li, Y., Li, K., Yu, J., Ma, X. J., Chen, X., Wang, Y., Luo, P., Liu, Z., Wang, Y., Wang, L., & Qiao, Y. (2023b). Internvid: A large-scale video-text dataset for multimodal understanding and generation. *ArXiv, abs/2307.06942*.

- Wang, Y., Li, K., Li, X., Yu, J., He, Y., Chen, G., Pei, B., Zheng, R., Xu, J., Wang, Z., et al. (2024). Internvideo2: Scaling video foundation models for multimodal video understanding..
- Wang, Y., Xian, Z., Chen, F., Wang, T.-H., Wang, Y., Fragkiadaki, K., Erickson, Z., Held, D., & Gan, C. (2023). Robogen: Towards unleashing infinite data for automated robot learning via generative simulation..
- Wang, Z., Dong, Y., Delalleau, O., Zeng, J., Shen, G., Egert, D., Zhang, J. J., Sreedhar, M. N., & Kuchaiev, O. (2024). Helpsteer2: Open-source dataset for training top-performing reward models..
- Wen, C., Lin, X., So, J., Chen, K., Dou, Q., Gao, Y., & Abbeel, P. (2023). Any-point trajectory modeling for policy learning. *ArXiv, abs/2401.00025*.
- Wu, H., Jing, Y., Cheang, C.-H., Chen, G., Xu, J., Li, X., Liu, M., Li, H., & Kong, T. (2023a). Unleashing large-scale video generative pre-training for visual robot manipulation. *ArXiv, abs/2312.13139*.
- Wu, J., Ma, H., Deng, C., & Long, M. (2023b). Pre-training contextualized world models with in-the-wild videos for reinforcement learning. *ArXiv, abs/2305.18499*.
- Wulfmeier, M., Byravan, A., Bechtle, S., Hausman, K., & Heess, N. (2023). Foundations for transfer in reinforcement learning: A taxonomy of knowledge modalities..
- Xian, Z., Gervet, T., Xu, Z., Qiao, Y.-L., Wang, T.-H., & Wang, Y. (2023). Towards generalist robots: A promising paradigm via generative simulation..
- Xiang, J., Liu, G., Gu, Y., Gao, Q., Ning, Y., Zha, Y., Feng, Z., Tao, T., Hao, S., Shi, Y., et al. (2024). Pandora: Towards general world model with natural language actions and video states..
- Xie, A., Lee, L., Xiao, T., & Finn, C. (2023). Decomposing the generalization gap in imitation learning for visual robotic manipulation..
- Xiong, H., Li, Q., Chen, Y.-C., Bharadhwaj, H., Sinha, S., & Garg, A. (2021). Learning by watching: Physical imitation of manipulation skills from human videos..
- Xu, H., Zhang, J., Cai, J., Rezatofighi, H., & Tao, D. (2022). Gmflow: Learning optical flow via global matching. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 8121–8130.
- Xu, H., Ghosh, G., Huang, P.-Y. B., Okhonko, D., Aghajanyan, A., & Feichtenhofer, F. M. L. Z. C. (2021). Videoclip: Contrastive pre-training for zero-shot video-text understanding. In *Conference on Empirical Methods in Natural Language Processing*.
- Xu, M., Xu, Z., Chi, C., Veloso, M. M., & Song, S. (2023). Xskill: Cross embodiment skill discovery. *ArXiv, abs/2307.09955*.
- Xue, H., Hang, T., Zeng, Y., Sun, Y., Liu, B., Yang, H., Fu, J., & Guo, B. (2022). Advancing high-resolution video-language representation with large-scale video transcriptions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 5036–5045.
- Yan, S., Zhu, T., Wang, Z., Cao, Y., Zhang, M., Ghosh, S., Wu, Y., & Yu, J. (2022). Videococa: Video-text modeling with zero-shot transfer from contrastive captioners..

- Yan, W., Zhang, Y., Abbeel, P., & Srinivas, A. (2021). Videogpt: Video generation using vq-vae and transformers. *ArXiv, abs/2104.10157*.
- Yang, C., Yuan, K., Zhu, Q., Yu, W., & Li, Z. (2020). Multi-expert learning of adaptive legged locomotion. *Science Robotics*, 5(49), eabb2174.
- Yang, J., Mark, M. S., Vu, B., Sharma, A., Bohg, J., & Finn, C. (2023a). Robot fine-tuning made easy: Pre-training rewards and policies for autonomous real-world reinforcement learning..
- Yang, M., Du, Y., Dai, B., Schuurmans, D., Tenenbaum, J. B., & Abbeel, P. (2023b). Probabilistic adaptation of text-to-video models. *ArXiv, abs/2306.01872*.
- Yang, M., Du, Y., Ghasemipour, K., Tompson, J., Schuurmans, D., & Abbeel, P. (2023c). Learning interactive real-world simulators. *ArXiv, abs/2310.06114*.
- Yang, S., Nachum, O., Du, Y., Wei, J., Abbeel, P., & Schuurmans, D. (2023d). Foundation models for decision making: Problems, methods, and opportunities. *ArXiv, abs/2303.04129*.
- Yang, S., Walker, J., Parker-Holder, J., Du, Y., Bruce, J., Barreto, A., Abbeel, P., & Schuurmans, D. (2024). Video as the new language for real-world decision making..
- Ye, W., Zhang, Y., Wang, M., Wang, S., Gu, X., Abbeel, P., & Gao, Y. (2023). Foundation reinforcement learning: towards embodied generalist agents with foundation prior assistance. *ArXiv, abs/2310.02635*.
- Yu, L., Cheng, Y., Sohn, K., Lezama, J., Zhang, H., Chang, H., Hauptmann, A. G., Yang, M.-H., Hao, Y., Essa, I., & Jiang, L. (2022). Magvit: Masked generative video transformer..
- Yu, L., Lezama, J., Gundavarapu, N. B., Versari, L., Sohn, K., Minnen, D. C., Cheng, Y., Gupta, A., Gu, X., Hauptmann, A. G., Gong, B., Yang, M.-H., Essa, I., Ross, D. A., & Jiang, L. (2023). Language model beats diffusion – tokenizer is key to visual generation..
- Yu, T., Quillen, D., He, Z., Julian, R., Hausman, K., Finn, C., & Levine, S. (2020a). Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on robot learning*, pp. 1094–1100. PMLR.
- Yu, T., Thomas, G., Yu, L., Ermon, S., Zou, J. Y., Levine, S., Finn, C., & Ma, T. (2020b). Mopo: Model-based offline policy optimization. *Advances in Neural Information Processing Systems*, 33, 14129–14142.
- Yu, T., Xiao, T., Stone, A., Tompson, J., Brohan, A., Wang, S., Singh, J., Tan, C., Peralta, J., Ichter, B., et al. (2023a). Scaling robot learning with semantically imagined experience..
- Yu, W., Gileadi, N., Fu, C., Kirmani, S., Lee, K.-H., Arenas, M. G., Chiang, H.-T. L., Erez, T., Hasenclever, L., Humplik, J., et al. (2023b). Language to rewards for robotic skill synthesis..
- Yuan, C., Wen, C., Zhang, T., & Gao, Y. (2024). General flow as foundation affordance for scalable robot learning. *ArXiv, abs/2401.11439*.

- Yuan, H., Wu, R., Zhao, A., Zhang, H., Ding, Z., & Dong, H. (2021). Dmotion: Robotic visuomotor control with unsupervised forward model learned from videos..
- Zakka, K., Zeng, A., Florence, P. R., Tompson, J., Bohg, J., & Dwibedi, D. (2021). Xirl: Cross-embodiment inverse reinforcement learning. In *Conference on Robot Learning*.
- Zellers, R., Lu, X., Hessel, J., Yu, Y., Park, J. S., Cao, J., Farhadi, A., & Choi, Y. (2021). Merlot: Multimodal neural script knowledge models. *Advances in Neural Information Processing Systems*, *34*, 23634–23651.
- Zeng, A., Attarian, M., Ichter, B., Choromanski, K., Wong, A., Welker, S., Tombari, F., Purohit, A., Ryoo, M., Sindhwani, V., et al. (2022). Socratic models: Composing zero-shot multimodal reasoning with language..
- Zhang, D., Yu, Y., Li, C., Dong, J., Su, D., Chu, C., & Yu, D. (2024). Mm-llms: Recent advances in multimodal large language models..
- Zhang, H., Li, X., & Bing, L. (2023). Video-llama: An instruction-tuned audio-visual language model for video understanding..
- Zhang, L., Zhou, S., Stent, S., & Shi, J. (2022). Fine-grained egocentric hand-object segmentation: Dataset, model, and applications. In *European Conference on Computer Vision*, pp. 127–145. Springer.
- Zhao, L., Gundavarapu, N. B., Yuan, L., Zhou, H., Yan, S., Sun, J. J., Friedman, L., Qian, R., Weyand, T., Zhao, Y., Hornung, R., Schroff, F., Yang, M., Ross, D. A., Wang, H., Adam, H., Sirotenko, M., Liu, T., & Gong, B. (2024). Videoprism: A foundational visual encoder for video understanding..
- Zhao, T., Karamcheti, S., Kollar, T., Finn, C., & Liang, P. (2022). What makes representation learning from videos hard for control?..
- Zhao, W., Queralta, J. P., & Westerlund, T. (2020). Sim-to-real transfer in deep reinforcement learning for robotics: a survey. In *2020 IEEE symposium series on computational intelligence (SSCI)*, pp. 737–744. IEEE.
- Zhen, H., Qiu, X., Chen, P., Yang, J., Yan, X., Du, Y., Hong, Y., & Gan, C. (2024). 3d-vla: A 3d vision-language-action generative world model..
- Zhou, D., Wang, W., Yan, H., Lv, W., Zhu, Y., & Feng, J. (2022). Magicvideo: Efficient video generation with latent diffusion models..
- Zhou, S., Du, Y., Chen, J., Li, Y., Yeung, D.-Y., & Gan, C. (2024). Robodreamer: Learning compositional world models for robot imagination..
- Zhou, W., Bajracharya, S., & Held, D. (2021). Plas: Latent action space for offline reinforcement learning. In *Conference on Robot Learning*, pp. 1719–1735. PMLR.
- Zhu, D., Wang, Y., Schmidhuber, J., & Elhoseiny, M. (2023). Guiding online reinforcement learning with action-free offline pretraining. *ArXiv, abs/2301.12876*.
- Zhuang, Z., Fu, Z., Wang, J., Atkeson, C., Schwertfeger, S., Finn, C., & Zhao, H. (2023). Robot parkour learning..