
IntraMix: Intra-Class Mixup Generation for Accurate Labels and Neighbors

Shenghe Zheng¹ Hongzhi Wang¹ Xianglong liu¹

Abstract

Graph Neural Networks (GNNs) demonstrate excellent performance on graphs, with their core idea about aggregating neighborhood information and learning from labels. However, the prevailing challenges in most graph datasets are twofold of Insufficient High-Quality Labels and Lack of Neighborhoods, resulting in weak GNNs. Existing data augmentation methods designed to address these two issues often tackle only one. They may either require extensive training of generators, rely on overly simplistic strategies, or demand substantial prior knowledge, leading to suboptimal generalization abilities. To simultaneously address both of these two challenges, we propose an elegant method called IntraMix. IntraMix innovatively employs Mixup among low-quality labeled data of the same class, generating high-quality labeled data at minimal cost. Additionally, it establishes neighborhoods for the generated data by connecting them with data from the same class with high confidence, thereby enriching the neighborhoods of graphs. IntraMix efficiently tackles both challenges faced by graphs and challenges the prior notion of the limited effectiveness of Mixup in node classification. IntraMix serves as a universal framework that can be readily applied to all GNNs. Extensive experiments demonstrate the effectiveness of IntraMix across various GNNs and datasets.

1. Introduction

Graph Neural Networks (GNNs) have shown great ability in various graph tasks (Zhou et al., 2020). The essence of GNN lies in the propagation mechanism, where information is gathered from neighbors, and involves supervised learning with labels (Xu et al., 2019). However, most graphs suffer from the absence of high-quality labeled data and

incomplete node neighbors, which precisely pinpoint the pain points of GNN, i.e., the dual demands for high-quality labels and rich neighborhoods (Ding et al., 2022).

Data augmentation is one way to address these issues. However, graphs are non-Euclidean data, making it challenging to apply augmentation methods developed for regular Euclidean data such as images to graphs due to the semantic and topological structure of graphs (Han et al., 2022). Therefore, unique augmentation methods need to be proposed for graphs. The first step is to clarify the objective of graph augmentation: generating high-quality nodes and enriching neighborhoods. However, most current methods can only solve one aspect. Moreover, some require training generators for the node or edge, incurring extensive costs (Zhao et al., 2021; Liu et al., 2022), while others rely on overly simplistic methods such as random drops that result in marginal improvement (Fang et al., 2023). Additionally, some methods require excessive prior knowledge, leading to weak generalization abilities (Yoo et al., 2022). Therefore, current methods are insufficient to address the two problems. So there is an urgent need for an efficient method that can generate nodes with high-quality labels and construct reasonable neighborhoods for node classification.

We observe that existing methods mostly overlook low-quality labels. The distribution of low-quality data often slightly differs from high-quality data and may contain features not present in current data. Extracting information from low-quality data would contribute to enriching data diversity. In general, noise diverges in all directions, leading the data beyond the expected distribution, and resulting in low-quality data (Frénay & Verleysen, 2013). A natural idea is to blend noisy data, utilizing the directionality of noise to neutralize noise and generate high-quality data within the correct distribution. Therefore, Mixup (Zhang et al., 2018) comes into our view as a data augmentation method that involves mixing data. Mixup is mathematically defined as $\hat{x} = \lambda x_i + (1 - \lambda)x_j$, $\hat{y} = \lambda y_i + (1 - \lambda)y_j$, where (x_i, y_i) , (x_j, y_j) are randomly selected, and y represents the label. However, although Mixup excels in Euclidean data, experiments commonly suggest that Mixup is hard to be effective in node classification (Wu et al., 2023). Therefore, a natural question emerges: **Can Mixup solve the graph augmentation problems for node classification?**

*Equal contribution ¹Harbin Institute of Technology. Correspondence to: Shenghe Zheng <shenghez.zheng@gmail.com>, Hongzhi Wang <wangzh@hit.edu.cn>.

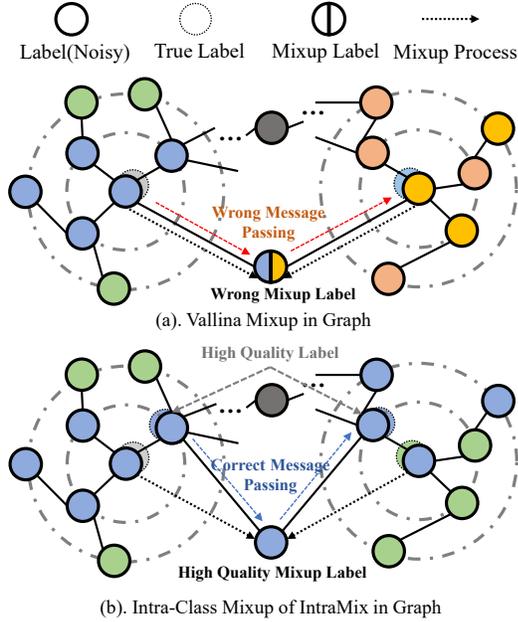


Figure 1. a). Vanilla Mixup may retain noise in labels, and connecting generated nodes to nodes used for their generation leads to incorrect propagation. b). IntraMix generates high-quality labels by Intra-Class Mixup and enriches the neighborhood while preserving correctness by connecting generated nodes to high-quality nodes.

Due to the characteristics of graphs, using Mixup is highly challenging. Typically, Mixup randomly mixes two data in proportion. In node classification, its poor performance can be attributed to two reasons, as illustrated in Figure 1(a): Mixup relies on existing labeled data to generate data, and some graphs have extremely sparse labels, leading to the information bottleneck in generation (Li et al., 2020). Even if there are enough labeled nodes, based on the assumption that nodes of the same class are more likely to appear as neighbors (neighborhood assumption) (Zhu et al., 2020), using Mixup between random classes generating nodes whose distribution lies in the middle of the distributions of two classes (Wu et al., 2023). This makes it hard to confirm the neighbors of the generated nodes, and connecting them to any class of nodes is inappropriate, potentially confusing the GNNs. The second problem highlights the fact that Mixup cannot seamlessly integrate into node classification.

To address the aforementioned issues, we propose IntraMix, a novel graph augmentation method for node classification, as shown in Figure 1(b). The basic idea is to Mixup within nodes of the same class while the generated single labels facilitate neighbor selection, addressing the primary challenge faced by Mixup. After obtaining low-quality labels by pseudo-labeling (Lee et al., 2013), we apply Mixup among data of the same class. The labels of generated data are of much higher quality than the original nodes. Intuitively, if we simplify the labeled noise as $\epsilon \sim N(0, \sigma^2)$, the mean

distribution of two noises $\bar{\epsilon} \sim N(0, \frac{1}{2}\sigma^2)$, with a smaller variance, increases the likelihood that the label of generated data is accurate. Therefore, we address the issue of sparse high-quality labeled data in graphs by Intra-Class Mixup.

For neighbors of the node v generated by Intra-Class Mixup, we connect v to two nodes with high confidence of the same class with v . This has two benefits. Firstly, based on the neighborhood assumption mentioned above, we accurately find neighbors for v , providing it with information gain. Secondly, by connecting v to two nodes that may belong to the same class, we not only bring message interaction to the neighborhoods of these two nodes, but also reduce the noise impact that arises from inaccurate labels. In this way, we construct rich and reasonable node neighborhoods.

Therefore, IntraMix simultaneously addresses two data issues in node classification. It is a data augmentation method decoupled from GNNs and exhibits strong generalization capabilities. Our key contributions are as follows:

- For the first time, we introduce Intra-Class Mixup as the core data augmentation in node classification, highlighting its effectiveness in generating high-quality labeled data.
- The proposed IntraMix tackles sparse labels and incomplete neighborhoods in GNNs through a simple but efficient way of Intra-Class Mixup and neighborhood selection.
- Extensive experiments show that IntraMix improves the performance of GNNs on diverse datasets. Theoretical analysis elucidates the rationale behind IntraMix.

2. Preliminaries

Notations: Given a graph $G = (V, E)$, where $V = \{v_i\}_{i=1}^N$ is the set of nodes, and E represents the set of edges, the adjacency relationship between nodes can be represented by $A \in \{0, 1\}^{N \times N}$, where $A_{ij} = 1$ if and only if $(v_i, v_j) \in E$. We use $X \in R^{N \times D}$ to denote the feature of nodes. The labels of nodes are represented by Y . Based on the presence or absence of labels, the node set can be divided into $D_l = \{(x_{l_1}, y_{l_1}), \dots, (x_{l_N}, y_{l_N})\}$ and $D_u = \{x_{u_1}, \dots, x_{u_N}\}$. We can use pseudo-labeling methods to assign low-quality labels Y_u to nodes in D_u , getting a low-quality set $D_p = \{(x_{u_1}, y_{u_1}), \dots, (x_{u_N}, y_{u_N})\}$. We define $N_i = \{v_j | A_{ij} = 1\}$ as the neighboring nodes of v_i .

Node Classification with GNNs: Given a graph G , the node classification involves determining the category of nodes on G . GNNs achieve this by propagating messages on G , representing each node as a vector h_v . The propagation for the k -th layer of a GNN is represented as follows:

$$h_v^k = COM(h_v^{k-1}, AGG(\{h_u^{k-1} | u \in N_v\})) \quad (1)$$

where COM and AGG are COMBINE and AGGREGATE functions, respectively, and h_v^k denotes the feature of v at

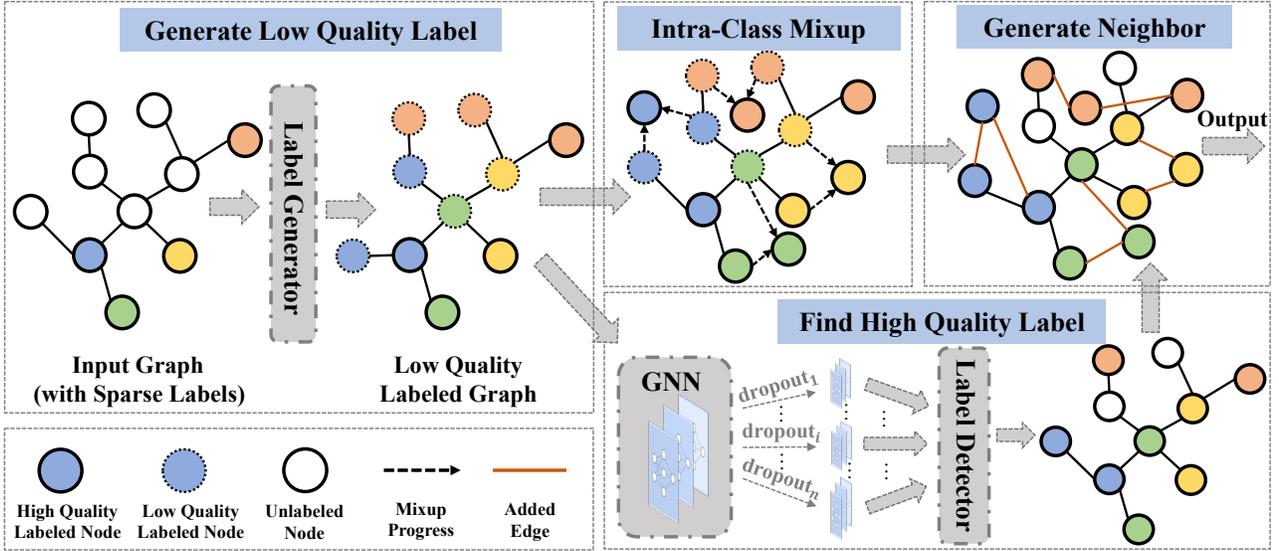


Figure 2. The workflow of IntraMix involves three main steps. First, it utilizes pseudo-labeling to generate low-quality labels for unlabeled nodes. Following that, Intra-Class Mixup is employed to generate high-quality labeled nodes from low-quality ones. Additionally, it identifies nodes with high confidence in the same class and connects them, thus constructing a rich and reasonable neighborhood.

the k -th layer. The output h_v in the last layer of GNN is used for classification as $y_v = \text{softmax}(h_v)$, where y_v is the predicted label for v .

3. Methodology

In this section, we provide a detailed explanation of IntraMix. Firstly, we present the Intra-Class Mixup in 3.1. This method generates high-quality labeled data from low-quality data, addressing the issue of label sparsity. Then, we show the method for finding neighbors for nodes in 3.2. Next, in 3.3, we present the workflow and conduct complexity analysis in 3.4. The framework is illustrated in Figure 2.

3.1. Intra-Class Mixup

Motivation: In supervised learning, labels aid in helping the model to explore classification boundaries, and having more labels typically allows for learning finer boundaries (Van Engelen & Hoos, 2020). However, in node classification, the scarcity of high-quality labels hampers GNNs from effectively learning, resulting in poor performance. Nevertheless, directly utilizing low-quality labels from pseudo-labeling introduces noise detrimental to learning. As we know, low-quality labeled data are often closer to the boundaries that GNNs can learn from the current data, containing distribution information (Lee et al., 2013). There is the possibility of generating high-quality data from them as mentioned in Sec 1. We aim to neutralize data noise in different directions by blending data. Considering that data generated using Vallina Mixup lies between two existing classes, making

it hard to determine neighbors, we innovatively propose Intra-Class Mixup. It not only generates high-quality data but also facilitates the determination of neighbors.

Approach: We use pseudo-labeling to transform the unlabeled nodes D_u into a set of nodes with low-quality labels D_p . Then, we get $D = D_l \cup D_p = \{(x_1, y_1), \dots, (x_N, y_N)\}$, where there are a few high-quality labels and lots of low-quality labels. In contrast to the Vallina Mixup performed between random samples, to overcome noise, we perform Mixup among nodes with the same low-quality labels to obtain high-quality labeled data guaranteed by Theorem 3.1. The generated dataset is represented as:

$$D_m = \{(\hat{x}, \hat{y}) | \hat{x} = M_\lambda(x_i, x_j), \hat{y} = y_i = y_j\} \quad (2)$$

where

$$M_\lambda(x_i, x_j) = \lambda x_i + (1 - \lambda)x_j, (x_i, y_i), (x_j, y_j) \in D \quad (3)$$

The number of generated nodes is manually set. The labels in D_m are of higher quality compared to D , a guarantee provided by Theorem 3.1. The proof can be found in Appendix A.1. In other words, the generated labels exhibit less noise than those of their source nodes. Through Intra-Class Mixup, we obtain a dataset with high-quality labels, leading to improved performance of GNNs.

Theorem 3.1. Assuming different classes of data have varying levels of noise, i.e., $P_{\text{noise}}(y_i|x) = P(y_i|x) + \epsilon_i$, where $P_{\text{noise}}(y_i|x)$ and $P(y_i|x)$ represent the label distribution of class i with and without noise, respectively, and $\epsilon_i \sim N(0, \sigma_i^2)$ is the noise. For Intra-Class Mixup

satisfying Equation 2, the probability that the noise is smaller in the generated data than in the original data is $\frac{2}{\pi} \arctan[\lambda^2 + (1 - \lambda)^2]^{-\frac{1}{2}} > 0.5$. The ratio of the expected noise in the generated data to the expected noise in the original data is $[\lambda^2 + (1 - \lambda)^2]^{\frac{1}{2}} < 1$, indicating that the noise in the generated data is smaller.

3.2. Neighbor Selection

Motivation: The strength of GNN lies in gathering information from the neighborhoods to generate node embeddings, making the neighborhood crucial for GNNs (Hamilton et al., 2017). After generating the node v in Sec 3.1, to leverage the advantages of GNN, it is necessary to find neighbors for v . We aim to construct a neighborhood that satisfies two requirements: a). The neighborhood is accurate for v ; b). The neighbors of v can obtain richer information through v . If v is simply connected to the node that generated it, since the nodes used for Mixup are mostly labeled with low quality, it is prone to unreasonably connecting two nodes, resulting in incorrect propagation. Since nodes of the same class are more likely to appear in the neighborhood in homogeneous graphs, a natural idea is to connect v with nodes of high confidence in the same class. In this way, we can find the correct neighbors for v and, acting as a bridge, connect the neighborhoods of two nodes of the same class through v to obtain more information, as shown in Figure 1(b).

Approach: As mentioned above, neighborhood selection involves two steps. First, finding nodes highly likely to be of the same class as v , and second, determining how to connect v with these nodes. We will now introduce them separately.

In the process of finding high-quality nodes, we ingeniously design an ensemble learning approach without additional training costs. We employ the GNN utilized for pseudo-labeling to predict nodes under n different dropout rates. The nodes consistently predicted in all n trials are considered high-quality. This is essentially an ensemble approach using n GNNs but with only n inference costs, significantly reducing consumption. The selection is expressed as:

$$D_h = \{(x, y) | f_1(x) = \dots = f_n(x), (x, y) \in D\} \quad (4)$$

where f_i represents GNNs with different dropout rates. After obtaining the high-quality set D_h , it is time to establish the neighborhoods between D_h and D_m generated by Mixup. To ensure the correctness of the neighborhoods, we adopt the approach of randomly connecting the generated data to high-quality nodes of the same class. The augmented edge set \hat{E} of the original edge set E can be expressed as:

$$\hat{E} = E \cup \{e(\hat{x}, x_i) | (\hat{x}, y) \in D_m, (x_i, y) \in D_h\} \quad (5)$$

where $e(a, b)$ represents an edge between nodes a and b . In this way, we not only find reasonable neighbors for the generated nodes but also establish an information exchange

Algorithm 1 Workflow of IntraMix

Input: Graph $G = (V, E)$, V can be divided into D_l and D_u as Sec 2, Class category of nodes C , GNN model f

- 1: Pre-train f on G according to Equation.6
- 2: Generate pseudo labels for D_u using f , get \hat{D}_u
- 3: $D = D_l \cup \hat{D}_u$
- 4: Generate Mixup set $D_m = \{V_m, E_m\}$ as Equation.2
- 5: $V = V \cup V_m$
- 6: Generate high-quality set D_h according to Equation.4
- 7: **for** $(\hat{x}, \hat{y}) \in D_m$ **do**
- 8: $E \cup \{e(\hat{x}, x_i), e(\hat{x}, x_j)\}$, where $(x_i/x_j, \hat{y}) \in D_h$
- 9: **end for**

Output: the augmented graph $G = (V, E)$

path between two nodes of the same class. Additionally, by not directly connecting the two nodes, potential noise impacts are avoided. The elimination effect of noise is guaranteed by Theorem 3.2. The detailed proof can be found in Appendix A.2. Through this method, the issue of missing neighborhoods in the graph is alleviated, and a graph with richer structural information is constructed.

Theorem 3.2. *The label noise can be equivalently represented as node noise, i.e., $P_{noise}(x|y_i) = P(x|y_i) + \delta_i$, where $\delta_i \sim N(0, \sigma_{x_i}^2)$. Assuming Equation 1 can be simplified as $h_v^k = MLP^k[(1 + \eta_k)h_v^{k-1} + \frac{1}{|N_v|} \sum_{u \in N_v} h_u^{k-1}]$, where η_k is a learnable variable. Let m and n be nodes from the i -th class, $x_m \sim P(x|y_i)$, $x_n \sim P_{noise}(x|y_i)$. In a two-layer GNN, the ratio of the expected impact of n 's noise on m when nodes connected through Intra-Class Mixup to the expected impact when directly connecting m and n is $\sqrt{(\lambda^2 + (1 - \lambda)^2) + \frac{1}{4(2 + \eta_1 + \eta_2)}}$. This ratio can be controlled to be less than 1 by adjusting learnable η , indicating that our method leads to a smaller noise impact.*

3.3. Workflow

In this section, we will briefly introduce the loss function in training and the overall workflow of IntraMix.

Firstly, we demonstrate the most commonly used cross-entropy loss, and it can be replaced with any function based on the task. Given the node feature X , the node labels Y , and the training set D_T , the loss function is as follows:

$$\mathcal{L} = -\frac{1}{|D_T|} \sum_{(x_i, y_i) \in D_T} \sum_{c=1}^C \mathbb{I}[y_i = c] \log P(c|x_i, \theta) \quad (6)$$

where C is the class number, θ denotes the GNN parameters, and $P(c|x_i, \theta)$ is the probability of x_i belonging to class c .

Next, we introduce the workflow of IntraMix. For detailed steps, refer to Algorithm 1. The process begins by generating low-quality labels for unlabeled nodes through pseudo-labeling (lines 1-3). Following that, high-quality labeled

Table 1. Node Classification accuracy(%) with semi-supervised Graphs. The average result of 30 runs is reported.

Models	Strategy	Cora	CiteSeer	Pubmed	CS	Physics
GCN	Original	81.51 ± 0.42	70.30 ± 0.54	79.06 ± 0.31	91.24 ± 0.43	92.56 ± 1.31
	GraphMix	82.29 ± 3.71	74.55 ± 0.52	<u>82.82 ± 0.53</u>	91.90 ± 0.22	90.43 ± 1.76
	CODA	83.47 ± 0.48	73.48 ± 0.24	78.50 ± 0.35	91.01 ± 0.75	92.57 ± 0.41
	DropMessage	83.33 ± 0.41	71.83 ± 0.35	79.20 ± 0.25	91.50 ± 0.31	92.74 ± 0.72
	MH-Aug	84.21 ± 0.38	73.82 ± 0.82	80.51 ± 0.32	92.52 ± 0.37	92.91 ± 0.46
	LA-GCN	<u>84.61 ± 0.57</u>	<u>74.70 ± 0.51</u>	81.73 ± 0.71	92.60 ± 0.26	93.26 ± 0.43
	NodeMixup	83.47 ± 0.32	74.12 ± 0.35	81.16 ± 0.21	<u>92.69 ± 0.44</u>	<u>93.97 ± 0.45</u>
	IntraMix	85.25 ± 0.42	74.80 ± 0.46	82.98 ± 0.54	92.86 ± 0.04	94.27 ± 0.14
GAT	Original	82.04 ± 0.62	71.82 ± 0.83	78.00 ± 0.71	90.52 ± 0.44	91.97 ± 0.65
	GraphMix	82.76 ± 0.62	73.04 ± 0.51	78.82 ± 0.44	90.57 ± 1.03	92.90 ± 0.42
	CODA	83.36 ± 0.31	72.93 ± 0.42	79.37 ± 1.33	90.41 ± 0.41	92.09 ± 0.62
	DropMessage	82.20 ± 0.24	71.48 ± 0.37	78.14 ± 0.25	91.02 ± 0.51	92.03 ± 0.72
	MH-Aug	84.52 ± 0.91	73.44 ± 0.81	79.82 ± 0.55	91.26 ± 0.35	92.72 ± 0.42
	LA-GAT	<u>84.72 ± 0.45</u>	73.71 ± 0.52	81.04 ± 0.43	91.52 ± 0.31	93.42 ± 0.45
	NodeMixup	83.52 ± 0.31	<u>74.30 ± 0.12</u>	<u>81.26 ± 0.34</u>	92.69 ± 0.21	<u>93.87 ± 0.30</u>
	IntraMix	85.03 ± 0.45	74.50 ± 0.24	81.76 ± 0.32	<u>92.40 ± 0.24</u>	94.12 ± 0.24
SAGE	Original	78.12 ± 0.32	68.09 ± 0.81	77.30 ± 0.74	91.01 ± 0.93	93.09 ± 0.41
	GraphMix	80.09 ± 0.82	70.97 ± 1.21	79.85 ± 0.42	91.55 ± 0.33	93.25 ± 0.33
	CODA	83.55 ± 0.14	73.24 ± 0.24	79.28 ± 0.46	91.64 ± 0.41	93.42 ± 0.36
	MH-Aug	<u>84.50 ± 0.39</u>	75.25 ± 0.44	80.68 ± 0.36	92.27 ± 0.49	93.58 ± 0.53
	LA-SAGE	84.41 ± 0.35	74.16 ± 0.32	<u>80.72 ± 0.42</u>	<u>92.41 ± 0.54</u>	93.41 ± 0.31
	NodeMixup	81.93 ± 0.22	74.12 ± 0.44	79.97 ± 0.53	91.97 ± 0.24	<u>94.76 ± 0.25</u>
	IntraMix	84.72 ± 0.34	<u>74.37 ± 0.45</u>	81.02 ± 0.49	92.80 ± 0.26	94.87 ± 0.04
	APPNP	Original	80.03 ± 0.53	70.30 ± 0.61	78.67 ± 0.24	91.79 ± 0.55
GraphMix		82.98 ± 0.42	70.26 ± 0.43	78.73 ± 0.45	91.53 ± 0.61	94.12 ± 0.14
DropMessage		82.37 ± 0.23	72.65 ± 0.53	80.04 ± 0.42	91.25 ± 0.51	93.54 ± 0.63
MH-Aug		85.04 ± 0.41	74.52 ± 0.32	80.71 ± 0.31	<u>92.95 ± 0.34</u>	94.03 ± 0.25
LA-APPNP		<u>85.42 ± 0.33</u>	74.83 ± 0.29	<u>81.41 ± 0.55</u>	92.71 ± 0.47	<u>94.52 ± 0.27</u>
NodeMixup		83.54 ± 0.45	<u>75.12 ± 0.33</u>	79.93 ± 0.12	92.82 ± 0.24	94.34 ± 0.22
IntraMix		85.99 ± 0.48	75.25 ± 0.42	81.96 ± 0.34	93.24 ± 0.21	94.79 ± 0.14

data is generated by Intra-class Mixup. Subsequently, a reasonable neighborhood is constructed (lines 6-8). The output is a graph better suitable for node classification.

3.4. Complexity Analysis

Assuming the number of generated nodes determined during the Mixup generation process is m , the time cost incurred during the generation and finding neighbors of nodes is $O(m)$. Since our Intra-Class Mixup for node classification does not incur additional computations, its complexity is the same as the original GNNs. Assuming the original time complexity of the GNN is $O(|V| \times F \times F') + O(|E| \times F')$, where F denotes the input feature dimension of nodes, and F' is the hidden layer dimension of GNN. The time complexity after using IntraMix is $O(|V| \times F \times F') + O(|E| \times F') + O(m \times F \times F') + O(2m \times F') + O(m)$. As in most cases, $m \ll |V|$, the time complexity is in the same order of magnitude as the original GNN.

4. Experiment

In this section, we show the excellent performance of IntraMix in both semi-supervised and full-supervised node classification using various GNNs across multiple datasets. Sec 4.3 shows the inductive learning ability of IntraMix. The analysis includes how IntraMix overcomes over-smoothing, and we conduct ablation experiments for in-depth analysis.

4.1. Semi-supervised Learning

Datasets: We evaluate IntraMix on commonly used semi-supervised datasets for node classification, including Cora, CiteSeer, Pubmed (Sen et al., 2017), CS, and Physics (Shchur et al., 2018). We follow the original splits for these datasets. Details can be found in Appendix B.1.

Baselines: We utilize four popular GNNs: GCN (Kipf & Welling, 2017), GAT (Veličković et al., 2018), GraphSAGE (SAGE) (Hamilton et al., 2017), and APPNP (Gasteiger

et al., 2019). Additionally, we compare IntraMix with various mainstream graph augmentation methods (Verma et al., 2021; Duan et al., 2023; Fang et al., 2023; Park et al., 2021; Liu et al., 2022; Lu et al., 2023). Details can be found in Appendix B.2. For each graph augmentation applied to each GNN, we use the same hyperparameters for fairness. When comparing with other methods, we use the settings from their open-source code and report the average results over 30 runs. All experiments are conducted on an RTX-3090.

Result: It is crucial to note that semi-supervised experiments are more important than fully supervised ones. This is primarily due to the sparse labels in most real-world scenarios of graphs. The results of semi-supervised experiments reflect the method’s potential when applied to real-world situations. Observing the results in Table 1, it is evident that IntraMix demonstrates superior performance across almost all GNNs and datasets. This indicates that the IntraMix generation of high-quality labeled nodes and neighborhoods, enriches the knowledge on the graph, making the graph more conducive for GNNs. Additionally, it is noteworthy that IntraMix exhibits greater advantages on SAGE and APPNP. This is attributed to the use of neighbor sampling for message aggregation of SAGE and the customized message-passing of APPNP, both of which prioritize the correct and richness of the neighborhood of nodes in comparison to GCN and GAT. The superiority on these two models further validates the rationality and richness of the neighborhoods constructed by IntraMix and the correctness of the high-quality labeled generated nodes.

4.2. Full-supervised Learning

Datasets: To evaluate IntraMix on fully supervised datasets, we utilized the well-known ogbn-arxiv (Hu et al., 2020) and Flickr (Zeng et al., 2020) datasets, following standard partitioning methods. For detailed information on the datasets, please refer to the Appendix B.1.

Baselines: In this part, we consider three GNNs: GCN, GAT, and GraphSAGE. Additionally, we compare IntraMix with various mainstream methods, and details about the comparative methods can be found in Appendix B.2.

Results: Observing the results in Table 2, it is evident that in fully supervised experiments, IntraMix consistently demonstrates superior performance across almost all GNNs and datasets, aligning with the outcomes in semi-supervised learning. This further affirms the rationale behind IntraMix. Despite the abundance of labeled data in fully supervised learning, which diminishes the improvement of high-quality labeled nodes provided by IntraMix, the rich and accurate neighborhoods constructed by IntraMix still enhance the quality of the graph. IntraMix constructs richer paths for propagation by connecting nodes with label similarity, thereby enhancing node representations. Consequently,

Table 2. Node Classification accuracy(%) with full supervised graphs. The average result of 10 runs is reported.

Models	Strategy	ogbn-arxiv	Flickr
GCN	Original	71.74 ± 0.29	51.88 ± 0.41
	FLAG	72.04 ± 0.20	52.05 ± 0.16
	LAGCN	72.08 ± 0.14	<u>52.63 ± 0.16</u>
	NodeMixup	<u>73.26 ± 0.25</u>	52.54 ± 0.21
	IntraMix	73.51 ± 0.22	53.03 ± 0.25
GAT	Original	73.65 ± 0.11	49.88 ± 0.32
	FLAG	73.71 ± 0.13	51.34 ± 0.27
	LAGAT	<u>73.77 ± 0.12</u>	52.63 ± 0.16
	NodeMixup	73.24 ± 0.32	<u>52.82 ± 0.36</u>
	IntraMix	73.85 ± 0.12	53.49 ± 0.09
SAGE	Original	71.49 ± 0.27	50.47 ± 0.21
	FLAG	72.19 ± 0.21	52.39 ± 0.28
	LASAGE	<u>72.30 ± 0.12</u>	<u>54.24 ± 0.25</u>
	NodeMixup	72.01 ± 0.35	53.49 ± 0.24
	IntraMix	73.61 ± 0.09	54.65 ± 0.26

Table 3. Node Classification with inductive settings.

Models	Strategy	Cora	CiteSeer
GAT	Original	81.3 ± 0.5	70.4 ± 1.2
	LAGAT	82.7 ± 0.8	72.1 ± 0.7
	NodeMixup	83.1 ± 0.5	71.8 ± 0.9
	IntraMix	83.8 ± 0.6	72.9 ± 0.6
SAGE	Original	80.1 ± 1.7	69.1 ± 2.9
	LAGSAGE	81.7 ± 0.8	73.0 ± 1.1
	NodeMixup	81.9 ± 0.5	73.1 ± 1.3
	IntraMix	82.9 ± 0.4	73.9 ± 0.8

even in fully supervised datasets where labeled data is sufficient, IntraMix demonstrates excellent capabilities.

4.3. Inductive Learning

The experiments mentioned above are conducted in a transductive setting. To demonstrate the reliability of IntraMix in inductive learning setups, we conduct inductive experiments on Cora and CiteSeer, combining GraphSAGE and GAT. The results are presented in Table 3. In inductive learning, GNNs can only observe non-test data during training, which aligns more closely with real-world scenarios. From the results, it is evident that IntraMix also exhibits excellent performance in inductive learning. This strongly validates that the nodes with more accurate labels and rich neighborhoods constructed by IntraMix indeed provide the graph with richer information. As a result, GNNs trained with IntraMix can learn more comprehensive patterns and make accurate predictions even for unseen nodes, confirming IntraMix as a generalizable graph augmentation framework applicable to real-world scenarios.

Table 4. Ablation of Intra-Class Mixup on GCN. *w con* connects the generated nodes with nodes used in generation, and *sim con* is the similar connection. \uparrow means an improvement to the original.

Strategy	Cora	CiteSeer	Pubmed
Original	81.5 \pm 0.4	70.3 \pm 0.5	79.0 \pm 0.3
Only PL	82.9 \pm 0.2	72.3 \pm 0.3	79.5 \pm 0.2
Only UPS	83.1 \pm 0.4	72.8 \pm 0.6	79.7 \pm 0.4
Mixup(w/o con)	58.9 \pm 22.3	52.3 \pm 17.6	70.0 \pm 10.8
Mixup(w con)	83.0 \pm 1.2	71.3 \pm 3.5	79.4 \pm 1.1
Mixup(sim con)	83.1 \pm 1.8	71.5 \pm 1.9	79.8 \pm 3.8
Intra-Class Mixup	85.2 (\uparrow3.7)	74.8 (\uparrow4.5)	82.9 (\uparrow3.9)

Table 5. Explore the effect of generating node with Intra-Class Mixup. *Zeros* means replacing the generated nodes with an all-zero vector, and *Ones* means replacing them with an all-one vector.

Strategy	Cora	CiteSeer	Pubmed
Original	81.5 \pm 0.4	70.3 \pm 0.5	79.0 \pm 0.3
Ones	31.9 (\downarrow 49.6)	21.5 (\downarrow 48.8)	38.1 (\downarrow 40.9)
Zeros	83.8 (\uparrow 2.3)	73.6 (\uparrow 3.3)	80.7 (\uparrow 1.7)
IntraMix	85.2 (\uparrow3.7)	74.8 (\uparrow4.5)	82.9 (\uparrow3.9)

4.4. Ablation Experiment

To demonstrate the effects of each IntraMix component, we conduct ablation experiments using GCN on Cora, CiteSeer, and Pubmed. All other parts of IntraMix are kept unchanged except for the mentioned ablated components.

Intra-Class Mixup: We discuss the effectiveness of Intra-Class Mixup. We compare it with methods that do not use Mixup, relying solely on pseudo-labeling(PL), and introduce an advanced PL method called UPS (Rizve et al., 2021). Additionally, we compare Intra-Class Mixup with Vallina Mixup, which employs various connection methods for generated nodes. The results are shown in Table 4. Among these methods, Intra-Class Mixup demonstrates the best performance, demonstrating nearly 3.5% improvement in accuracy compared to the original GCN. This is because, compared to methods using only pseudo-labels, Intra-Class Mixup generates higher-quality labeled nodes and constructs richer neighborhoods, enabling GNNs to get more information. Regarding Mixup, we utilize three connecting methods: treating generated nodes as isolated (w/o con), connecting them with nodes used for generation (w con), and connecting them with nodes with similar embeddings (sim con). However, none of these methods perform well.

As Theorem 3.1 suggests, Intra-Class Mixup ensures the improvement of label quality for each class, a guarantee that Mixup cannot provide. Furthermore, the fact that Intra-Class Mixup data have a single label makes it convenient to select similar neighbors. In contrast, Mixup generates data with mixed labels, introducing the risk of connecting to any class of node and potentially causing errors in propagation. This

Table 6. Effects of Neighbor Selection on GCN. \uparrow means improvement compared to the original, while \downarrow indicates a reduction.

Strategy	Cora	CiteSeer	Pubmed
Original-GCN	81.5 \pm 0.4	70.3 \pm 0.5	79.0 \pm 0.3
Direct Con	83.6 (\uparrow 2.1)	73.4 (\uparrow 3.1)	78.0 (\downarrow 1.0)
Random Con	76.7 (\downarrow 4.8)	67.0 (\downarrow 3.3)	65.1 (\downarrow 13.9)
Without Con	82.9 (\uparrow 1.4)	72.8 (\uparrow 2.5)	79.4 (\uparrow 0.4)
Vallina Con	84.3 (\uparrow 2.8)	73.6 (\uparrow 3.3)	79.8 (\uparrow 0.8)
Similar Con	84.5 (\uparrow 3.0)	74.0 (\uparrow 3.7)	80.3 (\uparrow 1.3)
IntraMix	85.2 (\uparrow 3.7)	74.8 (\uparrow 4.5)	82.9 (\uparrow 3.9)

is a key reason for the poor performance of Mixup in node classification. Simultaneously, in Table 5, when replacing the node generated by IntraMix with an all-zero vector and an all-one vector, both perform worse than IntraMix. This phenomenon indicates that, when excluding the influence of neighbor selection, the nodes generated by IntraMix are also effective for graph augmentation.

Neighbor Selection: This part shows the importance of Neighbor Selection. We compare various selection methods together with the direct connection of high-quality labeled nodes of the same class (*Direct con*) in Table 6. We observe that these methods are less effective than IntraMix. *Direct con* is not effective because, despite high-quality labeling, noise is still present. However, IntraMix avoids this problem. The experimental results validate Theorem 3.2.

Compared to other neighbor selection methods, IntraMix proposes a simple way to select nodes more likely to serve as neighbors, leading to more accurate information passing. Among the methods, *Vallina Con* indicates connecting the generated node to the nodes used for generation. *Similar Con* (SC) denotes connecting the nodes to nodes with similar embeddings. SC performs great, highlighting the importance of selecting similar nodes as neighbors, aligning with our intuition about the same class among neighborhoods. However, SC is not as good as IntraMix, mainly because the initial neighbors for generated nodes are empty, making it hard to provide accurate embeddings for similarity measurement. Even if the similarity could be determined, connecting overly similar nodes resulted in insufficient neighborhood information. In comparison, IntraMix connects nodes with the same label, maintaining neighborhood correctness while connecting nodes that are not extremely similar. IntraMix enriches the knowledge within the neighborhood.

In Table 5, using an all-zero vector to eliminate the influence of Mixup still shows a performance improvement. This reflects the rationality of our proposed Neighbor Selection method, which is effective for graph augmentation.

Utilization of unlabeled data: In this part, we show the importance of using unlabeled nodes to obtain low-quality data, and the results are shown in Figure 3(a). The poor

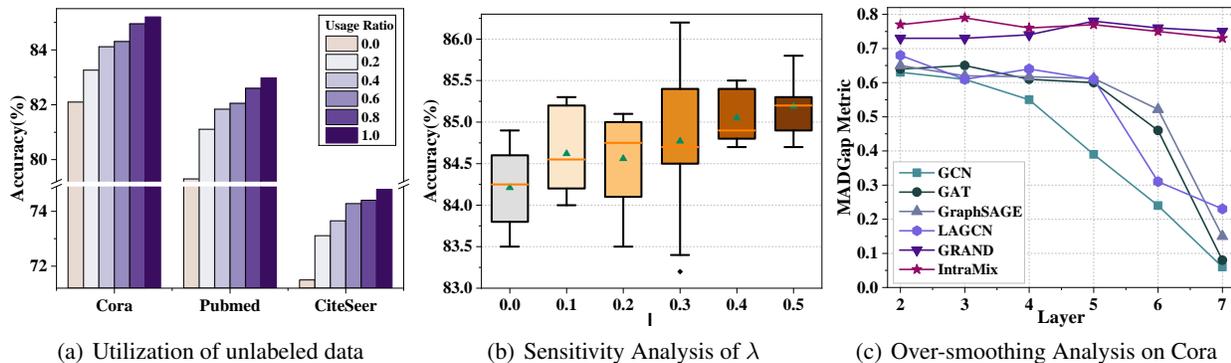


Figure 3. a) Experimental results using different proportions of unlabeled nodes show that performance improves as more unlabeled nodes are utilized. b) Sensitivity analysis of λ indicates that the best performance is achieved when $\lambda = 0.5$. c) Analysis reveals that IntraMix demonstrates effective capabilities in overcoming over-smoothing with deep GNNs.

performance of Mixup only within sparsely labeled nodes is due to the limited nodes. Even though Mixup can augment the label information to some extent, the insufficient nodes used for generation create a bottleneck in information gain, hindering GNNs from learning enough knowledge. Despite the low-quality labels provided by pseudo-labeling for unlabeled data, Intra-Class Mixup enhances the label quality, thus providing GNNs with ample knowledge space.

Sensitivity Analysis of λ : This part discusses the impact of λ in Intra-Class Mixup. The experiment is conducted using GCN on Cora, and detailed results are presented in Figure 3 (b). According to Theorem 3.1, the best noise reduction in each class label is achieved when $\lambda = 0.5$. The results validate our theoretical analysis, showing that the performance of GCN gradually improves as λ varies from 0 to 0.5. This indicates that when λ is closer to 0.5, the quality of the generated data labels is higher. Therefore, we choose $\lambda \sim B(2, 2)$, where B denotes Beta Distribution.

4.5. Over-smoothing Analysis

As is well known, deep GNNs can result in over-smoothing, a phenomenon characterized by the convergence of node embeddings. We show the ability to alleviate over-smoothing of IntraMix in Figure 3(c). We use MADgap (Chen et al., 2020) as the metric, where a larger MADgap indicates a milder over-smoothing. Surprisingly, although IntraMix is not specifically designed to address over-smoothing, it shows a strong ability to counteract over-smoothing, reaching a level similar to GRAND (Feng et al., 2020), a method specialized in addressing over-smoothing. This is attributed to the bridging effect of the generated nodes, connecting nodes of the same class with high confidence in a random manner. This process resembles random propagation, providing effective resistance against over-smoothing. Additionally, the richer neighborhood and node features inherently mitigate over-smoothing issues (Keriven, 2022).

5. Related Work

Graph Augmentation: The primary purpose of graph augmentation is to address two common challenges in graphs encountered by GNN, scarcity of labels and incomplete neighborhoods (Ding et al., 2022). Graph augmentation can be categorized into Node Manipulation (Verma et al., 2021), Edge Manipulation (Rong et al., 2020), Feature Manipulation (Feng et al., 2019), and Subgraph Manipulation (Park et al., 2022). However, existing methods either require complex generators (Liu et al., 2022) or extensive empirical involvement (Wang et al., 2020), failing to effectively address the two issues. The proposed IntraMix offers a simple solution to simultaneously tackle the two challenges faced by GNNs. Details can be found in Appendix C.2.

Mixup: Mixup is a promising data augmentation method (Zhang et al., 2018), enhancing the generalization of various tasks (Verma et al., 2019; Sun et al., 2020). However, there has been limited focus on the application of Mixup in node classification. We address the shortcomings of Mixup in node classification, proposing IntraMix, which involves Intra-Class Mixup. IntraMix provides richer information for the graph, improving the performance of GNNs in node classification. Details can be found in Appendix C.1.

6. Conclusion

This paper presents IntraMix, an elegant graph augmentation method for node classification. We utilize Intra-Class Mixup to generate high-quality labels to address the issue of sparse high-quality labels. To address the problem of limited neighborhoods, we connect the generated nodes with nodes that are highly likely from the same class. IntraMix provides an elegant solution to the dual challenges faced by graphs. Moreover, IntraMix is a flexible method that can be applied to all GNNs. Future work will focus on exploring neighbor selection methods to construct more realistic graphs.

Impact Statements

This paper presents work whose goal is to advance the field of Machine Learning. There are many potential societal consequences of our work, none which we feel must be specifically highlighted here.

References

- Beckham, C., Honari, S., Verma, V., Lamb, A. M., Ghadiri, F., Hjelm, R. D., Bengio, Y., and Pal, C. On adversarial mixup resynthesis. *Advances in neural information processing systems*, 32, 2019.
- Carratino, L., Cissé, M., Jenatton, R., and Vert, J.-P. On mixup regularization. *The Journal of Machine Learning Research*, 23(1):14632–14662, 2022.
- Chen, D., Lin, Y., Li, W., Li, P., Zhou, J., and Sun, X. Measuring and relieving the over-smoothing problem for graph neural networks from the topological view. In *Proceedings of the AAAI conference on artificial intelligence*, volume 34, pp. 3438–3445, 2020.
- Ding, K., Xu, Z., Tong, H., and Liu, H. Data augmentation for deep graph learning: A survey. *ACM SIGKDD Explorations Newsletter*, 24(2):61–77, 2022.
- Duan, R., Yan, C., Wang, J., and Jiang, C. Class-homophilic-based data augmentation for improving graph neural networks. *Knowledge-Based Systems*, 269:110518, 2023.
- Fang, T., Xiao, Z., Wang, C., Xu, J., Yang, X., and Yang, Y. Dropmessage: Unifying random dropping for graph neural networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pp. 4267–4275, 2023.
- Feng, F., He, X., Tang, J., and Chua, T.-S. Graph adversarial training: Dynamically regularizing based on graph structure. *IEEE Transactions on Knowledge and Data Engineering*, 33(6):2493–2504, 2019.
- Feng, W., Zhang, J., Dong, Y., Han, Y., Luan, H., Xu, Q., Yang, Q., Kharlamov, E., and Tang, J. Graph random neural networks for semi-supervised learning on graphs. *Advances in neural information processing systems*, 33: 22092–22103, 2020.
- Fréney, B. and Verleysen, M. Classification in the presence of label noise: a survey. *IEEE transactions on neural networks and learning systems*, 25(5):845–869, 2013.
- Gasteiger, J., Bojchevski, A., and Günnemann, S. Combining neural networks with personalized pagerank for classification on graphs. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=H1gL-2A9Ym>.
- Guo, H. and Mao, Y. ifmixup: Towards intrusion-free graph mixup for graph classification. *arXiv e-prints*, pp. arXiv-2110, 2021.
- Guo, H., Mao, Y., and Zhang, R. Mixup as locally linear out-of-manifold regularization. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pp. 3714–3722, 2019.
- Hamilton, W., Ying, Z., and Leskovec, J. Inductive representation learning on large graphs. *Advances in neural information processing systems*, 30, 2017.
- Han, X., Jiang, Z., Liu, N., and Hu, X. G-mixup: Graph data augmentation for graph classification. In *International Conference on Machine Learning*, pp. 8230–8248. PMLR, 2022.
- Hu, W., Fey, M., Zitnik, M., Dong, Y., Ren, H., Liu, B., Catasta, M., and Leskovec, J. Open graph benchmark: Datasets for machine learning on graphs. *Advances in neural information processing systems*, 33:22118–22133, 2020.
- Keriven, N. Not too little, not too much: a theoretical analysis of graph (over) smoothing. *Advances in Neural Information Processing Systems*, 35:2268–2281, 2022.
- Kim, J.-H., Choo, W., and Song, H. O. Puzzle mix: Exploiting saliency and local statistics for optimal mixup. In *International Conference on Machine Learning*, pp. 5275–5285. PMLR, 2020.
- Kipf, T. N. and Welling, M. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations*, 2017. URL <https://openreview.net/forum?id=SJU4ayYgl>.
- Kong, K., Li, G., Ding, M., Wu, Z., Zhu, C., Ghanem, B., Taylor, G., and Goldstein, T. Robust optimization as data augmentation for large-scale graphs. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 60–69, 2022. doi: 10.1109/CVPR52688.2022.00016.
- Langley, P. Crafting papers on machine learning. In Langley, P. (ed.), *Proceedings of the 17th International Conference on Machine Learning (ICML 2000)*, pp. 1207–1216, Stanford, CA, 2000. Morgan Kaufmann.
- Lee, D.-H. et al. Pseudo-label: The simple and efficient semi-supervised learning method for deep neural networks. In *Workshop on challenges in representation learning, ICML*, volume 3, pp. 896. Atlanta, 2013.
- Leone, F. C., Nelson, L. S., and Nottingham, R. The folded normal distribution. *Technometrics*, 3(4):543–550, 1961.

- Li, J., Socher, R., and Hoi, S. C. Dividemix: Learning with noisy labels as semi-supervised learning. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=HJgExaVtwr>.
- Liu, S., Ying, R., Dong, H., Li, L., Xu, T., Rong, Y., Zhao, P., Huang, J., and Wu, D. Local augmentation for graph neural networks. In *International Conference on Machine Learning*, pp. 14054–14072. PMLR, 2022.
- Lu, W., Guan, Z., Zhao, W., and Jin, L. Nodemixup: Tackling under-reaching for graph neural networks. *arXiv preprint arXiv:2312.13032*, 2023.
- Lukasik, M., Bhojanapalli, S., Menon, A., and Kumar, S. Does label smoothing mitigate label noise? In *International Conference on Machine Learning*, pp. 6448–6458. PMLR, 2020.
- Meng, L., Xu, J., Tan, X., Wang, J., Qin, T., and Xu, B. Mixspeech: Data augmentation for low-resource automatic speech recognition. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 7008–7012. IEEE, 2021.
- Müller, R., Kornblith, S., and Hinton, G. E. When does label smoothing help? *Advances in neural information processing systems*, 32, 2019.
- Park, H., Lee, S., Kim, S., Park, J., Jeong, J., Kim, K.-M., Ha, J.-W., and Kim, H. J. Metropolis-hastings data augmentation for graph neural networks. *Advances in Neural Information Processing Systems*, 34:19010–19020, 2021.
- Park, J., Shim, H., and Yang, E. Graph transplant: Node saliency-guided graph mixup with local structure preservation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pp. 7966–7974, 2022.
- Rizve, M. N., Duarte, K., Rawat, Y. S., and Shah, M. In defense of pseudo-labeling: An uncertainty-aware pseudo-label selection framework for semi-supervised learning. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=-ODN6SbiUU>.
- Rong, Y., Huang, W., Xu, T., and Huang, J. Dropedge: Towards deep graph convolutional networks on node classification. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=Hkx1qkrKPr>.
- Sen, P., Namata, G., Bilgic, M., Getoor, L., Galligher, B., and Eliassi-Rad, T. Collective classification in network data. *AI Magazine*, pp. 93, Jul 2017. doi: 10.1609/aimag.v29i3.2157. URL <http://dx.doi.org/10.1609/aimag.v29i3.2157>.
- Shchur, O., Mumme, M., Bojchevski, A., and Günnemann, S. Pitfalls of graph neural network evaluation. *arXiv preprint arXiv:1811.05868*, 2018.
- Sohn, J.-y., Shang, L., Chen, H., Moon, J., Papailiopoulos, D., and Lee, K. Genlabel: Mixup relabeling using generative models. *arXiv preprint arXiv:2201.02354*, 2022.
- Sun, L., Xia, C., Yin, W., Liang, T., Yu, P., and He, L. Mixup-transformer: Dynamic data augmentation for NLP tasks. In Scott, D., Bel, N., and Zong, C. (eds.), *Proceedings of the 28th International Conference on Computational Linguistics*, pp. 3436–3440, Barcelona, Spain (Online), December 2020. International Committee on Computational Linguistics. doi: 10.18653/v1/2020.coling-main.305. URL <https://aclanthology.org/2020.coling-main.305>.
- Van Engelen, J. E. and Hoos, H. H. A survey on semi-supervised learning. *Machine learning*, 109(2):373–440, 2020.
- Veličković, P., Cucurull, G., Casanova, A., Romero, A., Liò, P., and Bengio, Y. Graph attention networks. In *International Conference on Learning Representations*, 2018. URL <https://openreview.net/forum?id=rJXMpikCZ>.
- Verma, V., Lamb, A., Beckham, C., Najafi, A., Mitliagkas, I., Lopez-Paz, D., and Bengio, Y. Manifold mixup: Better representations by interpolating hidden states. In *International conference on machine learning*, pp. 6438–6447. PMLR, 2019.
- Verma, V., Qu, M., Kawaguchi, K., Lamb, A., Bengio, Y., Kannala, J., and Tang, J. Graphmix: Improved training of gnn for semi-supervised learning. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, pp. 10024–10032, 2021.
- Wang, Y., Wang, W., Liang, Y., Cai, Y., Liu, J., and Hooi, B. Nodeaug: Semi-supervised node classification with data augmentation. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pp. 207–217, 2020.
- Wang, Y., Wang, W., Liang, Y., Cai, Y., and Hooi, B. Mixup for node and graph classification. In *Proceedings of the Web Conference 2021*, pp. 3663–3674, 2021.
- Wu, L., Xia, J., Gao, Z., Lin, H., Tan, C., and Li, S. Z. Graphmixup: Improving class-imbalanced node classification by reinforcement mixup and self-supervised context prediction. In *Machine Learning and Knowledge Discovery in Databases: European Conference, ECML PKDD 2022, Grenoble, France, September 19–23, 2022, Proceedings, Part IV*, pp. 519–535, Berlin, Heidelberg,

2023. Springer-Verlag. ISBN 978-3-031-26411-5. doi: 10.1007/978-3-031-26412-2_32. URL https://doi.org/10.1007/978-3-031-26412-2_32.

Xu, K., Hu, W., Leskovec, J., and Jegelka, S. How powerful are graph neural networks? In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=ryGs6iA5Km>.

Yoo, J., Shim, S., and Kang, U. Model-agnostic augmentation for accurate graph classification. In *Proceedings of the ACM Web Conference 2022*, pp. 1281–1291, 2022.

Zeng, H., Zhou, H., Srivastava, A., Kannan, R., and Prasanna, V. Graphsaint: Graph sampling based inductive learning method. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=BJe8pkHFwS>.

Zhang, H., Cisse, M., Dauphin, Y. N., and Lopez-Paz, D. mixup: Beyond empirical risk minimization. In *International Conference on Learning Representations*, 2018. URL <https://openreview.net/forum?id=r1Ddp1-Rb>.

Zhao, T., Liu, Y., Neves, L., Woodford, O., Jiang, M., and Shah, N. Data augmentation for graph neural networks. In *Proceedings of the aaai conference on artificial intelligence*, volume 35, pp. 11015–11023, 2021.

Zhou, J., Cui, G., Hu, S., Zhang, Z., Yang, C., Liu, Z., Wang, L., Li, C., and Sun, M. Graph neural networks: A review of methods and applications. *AI open*, 1:57–81, 2020.

Zhu, J., Yan, Y., Zhao, L., Heimann, M., Akoglu, L., and Koutra, D. Beyond homophily in graph neural networks: Current limitations and effective designs. *Advances in neural information processing systems*, 33:7793–7804, 2020.

A. Proofs

A.1. Theorem 3.1

In this section, we will prove Theorem 3.1. We will start by introducing the notation used in the proof process.

A.1.1. NOTATION AND PRELIMINARIES

The category-specific noise is represented as:

$$P_{noise}(y_i|x) = P(y_i|x) + \epsilon_i \quad (7)$$

where $\epsilon_i \sim N(0, \sigma_i^2)$.

For simplification of the solution, we use the expression involving the label matrix transfer (Müller et al., 2019), denoted as $(x, y) \sim Q$. And get the noise label matrix transfer as:

$$Q_{noise} = T^t Q \quad (8)$$

where $T_{y,y'} \geq 0$ represents the probability, under the influence of noise, that data with the true label y is mislabeled as y' .

And T can be represented as :

$$T = (1 - f(\epsilon))I + f(\epsilon)J \quad (9)$$

Here, $\epsilon = \epsilon_i \sim N(0, \sigma_i^2)_{i=1}^{|C|}$ represents the noise for each class, I denotes the diagonal matrix, and J represents the matrix of all ones. Therefore, $f(\epsilon)J$ is the noise matrix, and the purpose of f is to control the range of noise. It satisfies three properties: 1). $0 \leq f(x) \leq 1$; 2). $f(x)$ exhibits the same monotonicity as $|x|$; 3). $f(x) + f(y) = f(x + y)$;

Satisfying property 1 is essential because, in Equation 9, f is used to control the range of noise, and probabilities represented by matrix entries should remain within the meaningful range of $[0, 1]$.

Satisfying property 2 is due to the representation in Equation 7, where $|\epsilon_i|$ represents the magnitude of the deviation from the correct distribution, indicating larger noise for greater magnitudes. The positive or negative sign of ϵ_i indicates the direction of the noise, but in Equation 9, this directionality is not explicitly represented. Therefore, using the absolute value captures the magnitude of noise.

Satisfying property 3 is because the noise in Equation 7 has directionality; two noises may cancel each other out due to opposite directions. When represented using Equation 9, considering the directional of noise, operations need to be performed first, which might lead to cancellation due to different directions. Afterward, applying f is necessary to ensure the result falls within the $(0, 1)$ range, adhering to the definition of probabilities. For simplicity, we assume that f directly satisfies property 3.

A.1.2. DETAILS OF PROOF

When we use Intra-Class Mixup, According to Equation 7, the distribution of labels for the generated data by Intra-class Mixup can be expressed as:

$$P_{intra}(y_i|\hat{x}) = \lambda(P(y_i|\hat{x}) + \epsilon_i) + (1 - \lambda)(P(y_i|\hat{x}) + \epsilon'_i) \quad (10)$$

where $\epsilon_i \sim N(0, \sigma_i^2)$, $\epsilon'_i \sim N(0, \sigma_i^2)$, and \hat{x} represents the generated sample.

According to the definition of Intra-class Mixup and equation 9, the label transition matrix for the results of Intra-class Mixup can be expressed as:

$$T_{intra} = (1 - f(\lambda\epsilon_1 + (1 - \lambda)\epsilon_2))I + f(\lambda\epsilon_1 + (1 - \lambda)\epsilon_2)J \quad (11)$$

where $\epsilon_1 = \{\epsilon_i \sim N(0, \sigma_i^2)\}_{i=1}^{|C|}$ and $\epsilon_2 = \{\epsilon_i \sim N(0, \sigma_i^2)\}_{i=1}^{|C|}$.

The measurement of noise in T and T_{intra} is essentially comparing $f(\epsilon)$ with $f(\lambda\epsilon_1 + (1 - \lambda)\epsilon_2)$. According to property 2 satisfied by f , this can be transformed into comparing $|\epsilon|$ with $|\lambda\epsilon_1 + (1 - \lambda)\epsilon_2|$. A larger value in this comparison indicates greater noise. For the i -th class label, it is a calculation of:

$$P(|\lambda\epsilon_{i1} + (1 - \lambda)\epsilon_{i2}| < |\epsilon_i|) \quad (12)$$

where $\epsilon_i \sim N(0, \sigma_i^2)$, $\epsilon_i, \epsilon_{i1}, \epsilon_{i2}$ are independent and identically distributed variables, and $|\epsilon|$ follows the folded normal distribution (Leone et al., 1961), let $c = \lambda^2 + (1 - \lambda)^2$, we have:

$$\begin{aligned}
 P(|\lambda\epsilon_{i1} + (1 - \lambda)\epsilon_{i2}| < |\epsilon_i|) &= \int_0^{+\infty} \frac{\sqrt{2}}{\sqrt{\pi}\sigma_i} e^{-\frac{x^2}{2\sigma_i^2}} \left(\int_0^{+\infty} \frac{\sqrt{2}}{\sqrt{\pi c}\sigma_i} e^{-\frac{y^2}{2c^2\sigma_i^2}} dy \right) dx \\
 &\stackrel{\substack{u=\frac{x}{\sigma_i} \\ v=\frac{y}{\sigma_i}}}{=} \frac{2}{\pi c} \int_0^{+\infty} \int_0^u e^{-\frac{u^2}{2} - \frac{v^2}{2c^2}} dv du \\
 &\stackrel{\substack{u=r\cos\theta \\ v=r\sin\theta}}{=} \frac{2}{\pi c} \int_0^{\frac{\pi}{4}} \int_0^{+\infty} r e^{-\frac{r^2}{2} - \frac{1-c^2}{2c^2} r^2 \sin^2\theta} dr d\theta \\
 &= \frac{2}{\pi c} \int_0^{\frac{\pi}{4}} \frac{c^2}{c^2 + (1 - c^2)\sin^2\theta} d\theta \\
 &\stackrel{t=\tan\theta}{=} \frac{2c}{\pi} \int_0^1 \frac{1}{c^2 + t^2} dt \\
 &= \frac{2}{\pi} \arctan \frac{1}{c} \\
 &= \frac{2}{\pi} \arctan(\lambda^2 + (1 - \lambda)^2)^{-\frac{1}{2}} > 0.5
 \end{aligned} \tag{13}$$

Proof completed. This establishes that the likelihood of improving label quality after Intra-Class Mixup for each class is greater than 0.5, demonstrating its effectiveness in enhancing label quality.

Next, let's consider the expectation of noise, which can be equivalently expressed in terms of the expectation of $|\epsilon|$. Then we have:

$$\begin{aligned}
 E(|\lambda\epsilon_{i1} + (1 - \lambda)\epsilon_{i2}|) &= \int_0^{+\infty} x \frac{\sqrt{2}}{\sqrt{\pi c}\sigma_i} e^{-\frac{x^2}{2c^2\sigma_i^2}} dx \\
 &\stackrel{u=\frac{x}{c\sigma_i}}{=} \frac{\sqrt{2}c\sigma_i}{\sqrt{\pi}} \int_0^{+\infty} u e^{-\frac{u^2}{2}} du \\
 &= \frac{\sqrt{2}\sigma_i}{\sqrt{\pi}}
 \end{aligned} \tag{14}$$

Similarly, we have: $E(|\epsilon_i|) = \frac{\sqrt{2}\sigma_i}{\sqrt{\pi}}$.

Therefore, the ratio of the expected noise after Intra-Class Mixup to the original noise in class i is given by:

$$\frac{E(f(\lambda\epsilon_{i1} + (1 - \lambda)\epsilon_{i2}))}{E(f(\epsilon_i))} \sim \frac{E(|\lambda\epsilon_{i1} + (1 - \lambda)\epsilon_{i2}|)}{E(|\epsilon_i|)} = \sqrt{\lambda^2 + (1 - \lambda)^2} < 1 \tag{15}$$

This implies that the expected noise in each class is reduced after Intra-Class Mixup.

When we use Vallina Mixup, i.e., performing Mixup randomly between samples, it can be expressed according to the derivation in (Carratino et al., 2022) and Equation 9 as follows:

$$T_{mixup} = (1 - f(\lambda\epsilon_1 + (1 - \lambda)\bar{\epsilon}))I + f(\lambda\epsilon_1 + (1 - \lambda)\bar{\epsilon})J \tag{16}$$

where $\bar{\epsilon} = \frac{1}{|C|} \sum_{i=1}^{|C|} \epsilon_i$.

Then, following similar derivations of Equation 13, let $\sigma_{i2} = \sqrt{\lambda^2\sigma_i^2 + (1 - \lambda)^2\bar{\sigma}^2}$, $\bar{\sigma} = \frac{1}{|C|} \sum_{i=1}^{|C|} \sigma_i$, we have:

$$\begin{aligned}
 P(|\lambda\epsilon_1 + (1 - \lambda)\bar{\epsilon}| < |\epsilon|) &= \int_0^{+\infty} \frac{\sqrt{2}}{\sqrt{\pi}\sigma_i} e^{-\frac{x^2}{2\sigma_i^2}} \left(\int_0^{+\infty} \frac{\sqrt{2}}{\sqrt{\pi c}\sigma_i} e^{-\frac{y^2}{2c^2\sigma_i^2}} dy \right) dx \\
 &= \frac{2}{\pi} \arctan \frac{\sigma_i}{\sqrt{\lambda^2\sigma_i^2 + (1 - \lambda)^2\bar{\sigma}^2}}
 \end{aligned} \tag{17}$$

The Equation 17 cannot guarantee that it is greater than 0.5 for all σ_i . This implies that although Vallina Mixup acts as a form of regularization during training, implicitly introducing data denoising (Zhang et al., 2018), it does not ensure label quality improvement for every class. In this regard, it has limitations compared to our proposed Intra-Class Mixup.

A.2. Theorem 3.2

In this section, we will prove Theorem 3.2. We will begin by introducing the notation used in the proof process.

A.2.1. NOTATION AND PRELIMINARIES

In the proof of this section, the labeling noise in Equation 7 is transformed into equivalent node feature noise as follows:

$$P_{noise}(x|y_i) = P(x|y_i) + \delta_i \quad (18)$$

where $\delta_i \sim N(0, \sigma_{x_i}^2)$. The equivalence proof with Equation 7 is as follows:

$$\begin{aligned} P_{noise}(x|y_i) &= P_{noise}(y_i|x) \frac{P(x)}{P(y_i)} \\ P(x|y_i) &= P(y_i|x) \frac{P(x)}{P(y_i)} \end{aligned} \quad (19)$$

Therefore, from Equation 18, we have:

$$\begin{aligned} P_{noise}(x|y_i) &= P_{noise}(y_i|x) \frac{P(x)}{P(y_i)} \\ &= (P(y_i|x) + \epsilon_i) \frac{P(x)}{P(y_i)} \\ &= (P(x|y_i) \frac{P(y_i)}{P(x)} + \epsilon_i) \frac{P(x)}{P(y_i)} \\ &= P(x|y_i) + \frac{P(x)}{P(y_i)} \epsilon_i \end{aligned} \quad (20)$$

$\frac{P(x)}{P(y_i)}$ is a constant related to the dataset. Thus, the equation $P_{noise}(x|y_i) = P(x|y_i) + \delta_i$ holds, where $\delta_i \sim N(0, \sigma_{x_i}^2)$. The equivalence between label noise and feature noise holds.

In this section, for the sake of convenience in derivation, the information propagation formula of the GNN in Equation 1 at the k -th layer is simplified to:

$$h_v^k = MLP^k \left[(1 + \eta_k) h_v^{k-1} + \frac{1}{|N_v|} \sum_{u \in N_v} h_u^{k-1} \right] \quad (21)$$

Where h_v^k is used to represent the feature representation of node v at the k -th layer, η_k represents the learnable variable at the k -th layer, N_v denotes the set of neighboring nodes of node v . W_k can be used to represent the parameter matrix of the MLP in the k -th layer of the GNN, and b_k represents the bias term of the MLP in the k -th layer.

In this part, consider two nodes m and n , both belonging to class y_i under high-confidence labeling. Node m has a node feature x_m following the distribution $P(x|y_i)$, while the node feature x_n of node n follows the distribution $P_{noise}(x|y_i)$. We have:

$$P(x_m|y_i) = P(x|y_i), P(x_n|y_i) = P_{noise}(x|y_i) = P(x|y_i) + \delta_i \quad (22)$$

For convenience in derivation, without loss of generality, we can assume that m and n have no neighbors in their initial states. We will prove that in a two-layer GNN: 1). By the approach proposed through IntraMix, connecting m and n through the node $v = (\hat{x}, y_i)$ generated by Intra-Class Mixup. 2). Connecting nodes m and n directly. The ratio of the expected impact of n 's noise on m in case 1) to the expected noise impact in case 2) can be controlled to be less than 1 by adjusting learnable η . Therefore, the connection approach in IntraMix can to some extent overcome the potential noise disturbance that may exist when connecting high-quality labeled nodes directly.

A.2.2. DETAILS OF PROOF

When connecting nodes m and n directly, we have:

$$\begin{aligned} P(h_m^1|y_i) &= W_1[(1 + \eta_1)P(x_m|y_i) + P(x_n|y_i)] + b_1 \\ &= W_1[(2 + \eta_1)P(x|y_i) + \delta_i] + b_1 \end{aligned} \quad (23)$$

Similarly, we have:

$$P(h_n^1|y_i) = W_1[(2 + \eta_1)P(x|y_i) + (1 + \eta_1)\delta_i] + b_1 \quad (24)$$

Then, after the second-layer message passing, node m can be represented as:

$$\begin{aligned} P(h_m^2|y_i) &= W_1[(1 + \eta_2)P(h_m^1|y_i) + P(h_n^1|y_i)] \\ &= W_2\{(1 + \eta_2)[W_1[(2 + \eta_1)P(x|y_i) + \delta_i] + b_1] + W_1[(2 + \eta_1)P(x|y_i) + (1 + \eta_1)\delta_i] + b_1\} + b_2 \\ &= \underbrace{W_2\{(2 + \eta_1)[(1 + \eta_2)W_2W_1 + W_1]P(x|y_i) + (2 + \eta_2)b_1\}}_{value} + \underbrace{W_2W_1(2 + \eta_1 + \eta_2)\delta_i}_{noise} \end{aligned} \quad (25)$$

When connecting through Intra-Class Mixup with the node v , we have:

According to Equation 18 and Equation 11, the feature distribution of the node v generated by Intra-Class Mixup satisfies $P(\hat{x}|y_i) = P(x|y_i) + \delta'_i$, where $\delta'_i \sim N(0, (\lambda^2 + (1 - \lambda)^2)\sigma_{x_i}^2)$.

Following the same reasoning as above, we have:

$$\begin{aligned} P'(h_m^1|y_i) &= W_1[(1 + \eta_1)P(x_m|y_i) + P(\hat{x}|y_i)] + b_1 \\ &= W_1[(2 + \eta_1)P(x|y_i) + \delta'_i] + b_1 \\ P'(h_n^1|y_i) &= W_1[(2 + \eta_1)P(x|y_i) + \delta'_i + (1 + \eta_1)\delta_i] + b_1 \\ P'(h_v^1|y_i) &= W_1[(1 + \eta_1)P(\hat{x}|y_i) + \frac{1}{2}P(h_m^0|y_i) + \frac{1}{2}P(h_n^0|y_i)] + b_1 \\ &= W_1[(2 + \eta_1)P(x|y_i) + \delta'_i + \frac{1}{2}\delta_i] + b_1 \end{aligned} \quad (26)$$

Then, after the second-layer message passing, m can be represented as:

$$\begin{aligned} P'(h_m^2|y_i) &= W_1[(1 + \eta_2)P'(h_m^1|y_i) + P'(h_v^1|y_i)] \\ &= W_2\{(1 + \eta_2)[W_1[(2 + \eta_1)P(x|y_i) + \delta'_i] + b_1] + W_1[(2 + \eta_1)P(x|y_i) + \delta'_i + \frac{1}{2}\delta_i] + b_1\} + b_2 \\ &= \underbrace{W_2\{(2 + \eta_1)[(1 + \eta_2)W_2W_1 + W_1]P(x|y_i) + (2 + \eta_2)b_1\}}_{value} + \underbrace{W_2W_1[(2 + \eta_1 + \eta_2)\delta'_i + \frac{1}{2}\delta_i]}_{noise} \end{aligned} \quad (27)$$

Assuming the parameters of MLP are the same, the value parts of Equation 25 and Equation 27 are the same. Now, what needs to be compared is the ratio of the expected values of the noise parts in the two equations. Similar to property 3 mentioned in Sec A.1.1, when comparing noise expectations, absolute values should be considered. That is, the farther the noise is from the 0, the larger it is, and the sign indicates the direction. Let $noise_m$ and $noise'_m$ represent the noise terms in Equation 25 and Equation 27, respectively. We have:

$$\frac{E(noise'_m)}{E(noise_m)} = \frac{E\{|(2 + \eta_1 + \eta_2)\delta'_i + \frac{1}{2}\delta_i|\}}{E\{|(2 + \eta_1 + \eta_2)\delta_i|\}} \quad (28)$$

Similar to the derivation in Equation 14, we have:

$$\begin{aligned} E\{|(2 + \eta_1 + \eta_2)\delta_i|\} &= \frac{\sqrt{2}(2 + \eta_1 + \eta_2)\sigma_{x_i}}{\sqrt{\pi}} \\ E\{|(2 + \eta_1 + \eta_2)\delta'_i + \frac{1}{2}\delta_i|\} &= \frac{\sqrt{2}\sigma_{x_i}\sqrt{\frac{1}{4} + (2 + \eta_1 + \eta_2)^2(\lambda^2 + (1 - \lambda)^2)}}{\sqrt{\pi}} \end{aligned} \quad (29)$$

Then, Equation 28 can be represented as:

$$\frac{E(\text{noise}'_m)}{E(\text{noise}_m)} = \sqrt{\frac{1}{4(2 + \eta_1 + \eta_2)} + (\lambda^2 + (1 - \lambda)^2)} \quad (30)$$

As η_1 and η_2 are learnable parameters, by controlling them, the value of Equation 30 can be made less than 1. This indicates that connecting nodes obtained through Intra-Class Mixup leads to smaller noise compared to directly connecting them.

B. Reproducibility

In this section, we present detailed information about the datasets used in the experiments, including the split method. Additionally, we provide a thorough introduction to the comparative methods and the setups of GNNs in the experiments.

B.1. Datasets

In this part, we introduce the datasets used in this paper. Detailed information can be found in Table 7.

Table 7. Data statistics

Category	Name	Graphs	Nodes	Edges	Features	Classes	Split Ratio	Metric
Semi-Supervised	Cora	1	2,708	5,429	1,433	7	8.5/30.5/61	Accuracy
	CiteSeer	1	3,327	4,732	3,703	6	7.4/30.9/61.7	Accuracy
	Pubmed	1	19,717	44,338	500	3	3.8/32.1/64.1	Accuracy
	CS	1	18,333	163,788	6,805	15	1.6/2.4/96	Accuracy
	Physics	1	34,493	495,924	8,415	5	0.28/0.43/99.29	Accuracy
Full-Supervised	ogbn-arxiv	1	169,343	1,166,243	128	40	54/18/28	Accuracy
	Flickr	1	89,250	899,756	500	7	50/25/25	Accuracy

In semi-supervised learning, we utilized five datasets: Cora, CiteSeer, Pubmed (Sen et al., 2017), CS, and Physics (Shchur et al., 2018). All five datasets are related to citation networks. The first three datasets are standard citation datasets, where nodes represent papers, edges between nodes indicate citation relationships between papers, and node features are constructed by extracting key information from the papers, such as a one-hot vector indicating the presence of specific words in the paper. Node classification on these three datasets involves assigning papers to their respective categories. During the dataset split process, we follow the standard partitioning method outlined in the literature (Sen et al., 2017), using a minimal amount of samples for training to adhere to the semi-supervised configuration.

On the other hand, CS and Physics datasets represent datasets related to collaboration among researchers. In these datasets, each node represents a researcher, and edges denote collaborative relationships between researchers in co-authored papers. Node features capture partial characteristics of researchers’ papers. The process of node classification involves assigning researchers to their respective research directions. During the dataset split process, we follow the standard partitioning method (Shchur et al., 2018), randomly selecting 20 samples from each class as training samples and using 1000 samples in total for the training set to meet the semi-supervised configuration.

In the supervised learning, we utilized two datasets: ogbn-arxiv (Hu et al., 2020) and Flickr (Zeng et al., 2020). The ogbn-arxiv is a dataset of the ogb standard dataset, where each node represents an Arxiv paper, and directed edges indicate citations between papers. Each paper is associated with a 128-dimensional feature vector obtained by averaging embeddings of words in the title and abstract. The classification task involves predicting the primary category of Arxiv papers, constituting a 40-class classification problem. The dataset partitioning follows the original paper (Hu et al., 2020), with papers published until 2017 serving as the training set, papers published in 2018 as the validation set, and papers published after 2019 as the test set. Unlike the limited training set in semi-supervised learning, the training set here is relatively larger.

On the other hand, Flickr is constructed by forming links between shared public images on Flickr. Each node in the graph represents an image uploaded to Flickr. If two images share certain attributes (e.g., the same geographic location, the same gallery, comments posted by the same user), there is an edge between the nodes representing these two images. The dataset is collected from various sources, and images are represented using SIFT-extracted features. A 500-dimensional bag-of-visual-words representation from NUS-wide serves as the node feature. For labels, the paper (Zeng et al., 2020)

scans 81 tags for each image and manually merges them into 7 categories. Each image belongs to one of the 7 categories. The dataset partitioning follows the approach proposed in the paper (Zeng et al., 2020), with 50% of the nodes as the training set, 25% as the validation set, and 25% as the test set.

B.2. Baselines

This section introduces the methods compared in the experiments. For the fairness of the experiments, we maintain consistent GNN structures when testing different augmentation methods. The configurations of GNNs are kept consistent with those described in (Liu et al., 2022). We introduce several data augmentation methods compared in this paper:

GraphMix (Verma et al., 2021): This is an effective exploration of using the Mixup method in graphs, attempting to perform Mixup in the hidden layer outputs of GNN to mitigate the impact of the topological structure of graphs on the Mixup. However, it overlooks the core issue we analyzed regarding Mixup on graphs: the inability to determine neighborhood relationships. The method used in this paper connects the generated sample with the samples used for generation, resulting in poor performance and only addressing the issue of missing high-quality nodes.

CODA (Duan et al., 2023): The paper proposes to extract all nodes of the same class to generate a dense graph for each class, using dense graphs of each class as generated graphs. However, this approach simplifies the topological relationships on the graph, as not every node of the same class can appear as neighbors. Connecting each node of the same class makes the neighborhood very rich, but it leads to excessive message transfer that should not occur, resulting in poor performance.

FLAG (Kong et al., 2022): This is a data augmentation method that uses adversarial learnable noise perturbations, quite effective on large graphs. It incorporates learnable noise into node features and optimizes GNN training by finding the most challenging noise in each iteration. However, inevitably, it requires fine-tuning between the magnitude of noise and its effectiveness in training, which can ultimately lead to noise being either too small or too large, both hindering learning. Moreover, it only addresses the issue of missing high-quality nodes.

DropMessage (Fang et al., 2023): In this method, random dropout of information during message passing is considered, representing a unified form for drop node/drop edge-like strategies. However, as analyzed in the paper, this strategy is overly simplistic and fails to adapt well to graph augmentation tasks that require nuanced operations, resulting in poor performance.

MH-Aug (Park et al., 2021): This approach formulates a target distribution based on the existing graph, samples a series of augmented graphs from the distribution using a sampling method proposed in the paper, and trains using a consistency approach. However, this method introduces certain prior knowledge, which may lead to suboptimal generalization.

GRAND (Feng et al., 2020): Strictly speaking, this is not a data augmentation method, but it shares some similarities in terms of ideas. Grand randomly propagates information on the graph, significantly mitigating issues like over-smoothing. While it presents a novel solution, the strategy used is overly simplistic and requires further optimization based on dataset characteristics to achieve better performance. Additionally, it only addresses the problem of neighborhood deficiency.

LA (Liu et al., 2022): This method employs the conditional variational autoencoder (CVAE) as the generator to learn information about neighborhoods and generates features for nodes with sparse neighbors to compensate for the lack of information that cannot be obtained from the neighborhood, thereby obtaining better node representations for classification. This approach incurs a training cost for the generator and only addresses the issue of missing high-quality nodes.

NodeMixup (Lu et al., 2023): This is an exploratory approach to Mixup on graphs. However, it faces the challenge of not proposing an elegant and concise graph Mixup method. It focuses more on accurately determining node similarity to perform Mixup on similar nodes. The issue arises from the fact that the generated samples are excessively similar to each other, resulting in generated samples being relatively similar to their parent samples. Generated samples that are overly similar to the original samples fail to provide sufficient information gain. We will provide a detailed explanation in the following section C.2. Additionally, NodeMixup only addresses the issue of missing high-quality nodes.

In summary, existing methods often address only one aspect of the two challenges faced by graph data, failing to effectively solve the graph data augmentation problem. In contrast, our proposed method, IntraMix, presents a concise yet powerful solution that efficiently tackles both challenges, making it a highly promising approach.

C. Connection to Existing works

In this section, we present an expanded version of the related work section 5.

C.1. Mixup

Mixup is a data augmentation method that has demonstrated excellent performance in classical Euclidean data such as images (Zhang et al., 2018), text (Sun et al., 2020), and audio (Meng et al., 2021). The idea is to randomly sample data from the original dataset and mix the features and labels proportionally, generating new data. Both theoretically and experimentally, Mixup has been proven to enrich the distribution of the current data, allowing deep learning models to learn richer information (Carratino et al., 2022; Beckham et al., 2019; Kim et al., 2020). Mixup can also be approximated as an implicit regularization during the training process, providing constraints for better model performance (Guo et al., 2019).

However, in the case of images, each data exists independently, and there is no assumed relationship between individual samples. The independence and identical distribution (i.i.d.) assumption holds for image data. In contrast, graph data exhibits a neighbor relationship, and GNNs perform well due to this characteristic. This directly implies that when applying Mixup to graph data, the connectivity between generated samples and existing samples needs to be considered (Wu et al., 2023). The full potential of GNNs can be realized only by constructing a reasonable neighborhood. This crucial aspect has been largely overlooked in almost all current Mixup approaches used in graphs.

Due to the necessity to consider connectivity and the assumption that neighboring nodes in the graph are more similar, a challenge arises when applying Vallina Mixup: the generated data distribution often falls between the existing distributions of the two classes (Sohn et al., 2022), making it difficult to resemble any specific class. Determining neighborhood relationships becomes challenging in this scenario. Hence, we innovatively propose conducting Mixup within the same class. Through this approach, the generated sample distribution substantially overlaps with the class used for generation, making it easier to determine neighborhoods. Existing Mixup methods typically discourage intra-class Mixup to preserve the diversity of generated samples. However, we break away from the empirical practice of existing Mixup techniques that only blend random samples from two different classes, presenting an elegant solution for graph data augmentation.

C.2. Graph Augmentation Methods

Graph data augmentation is a method aimed at addressing issues such as missing label data and incomplete neighborhoods in graph data. As mentioned in Sec 5, existing methods often suffer from various problems and are typically capable of addressing only one aspect of the problems, leaving the other unresolved (Ding et al., 2022). This limitation is insufficient for the challenges posed by graph data augmentation. We believe that generating high-quality labeled data from low-quality samples holds potential as mentioned in Section 1. As noise in low-quality samples often causes the data distribution to diverge in various directions (Lukasik et al., 2020), exceeding the intended distribution range, we plan to leverage this directionality of noise. By blending multiple samples through the direction of noise, we aim to neutralize the noise and generate high-quality samples. Thus, we propose IntraMix.

Although there are a few works that have recently focused on Mixup in the context of graph augmentation (Verma et al., 2021; Wu et al., 2023; Lu et al., 2023; Guo & Mao, 2021; Wang et al., 2021), they tend to overlook the unique characteristics of graphs, specifically the topological structure mentioned earlier. Most Mixup methods applied to graphs borrow strategies from image-based approaches, randomly mixing samples from different classes (Wu et al., 2023). These approaches directly lead to the challenge of determining the neighborhood of generated samples. These works often choose to connect generated samples with the samples used for generation. This can result in problems due to the low-quality annotations on graphs, leading to incorrect message propagation. The subpar experimental results of these methods also substantiate this point (Verma et al., 2021).

While some works have attempted to use intra-class Mixup (Lu et al., 2023), they often treat it merely as a regularization component and do not realize its full potential. Similar to the use of inter-class Mixup, these approaches attempt to overcome the connectivity issues of Mixup by connecting nodes that have similar embeddings. However, this results in connected nodes being overly similar, providing limited meaningful information gain and leading to minimal performance improvement. These attempts highlight the inappropriate application of Mixup on graphs. Our proposed connection method ensures correctness in connections, while still providing rich information to a node’s neighborhood since the similarity in labels does not necessarily imply high similarity in node features.

In summary, the proposed IntraMix elegantly addresses both the challenges of scarce high-quality labels and neighborhood incompleteness in graphs through a sophisticated Intra-Class Mixup approach and a high-confidence neighborhood selection method. The theoretical justification provided further supports the rationale behind this method.