

THE 2ND FUTUREDIAL CHALLENGE: DIALOG SYSTEMS WITH RETRIEVAL AUGMENTED GENERATION (FUTUREDIAL-RAG)

Yucheng Cai*
Tsinghua University

Shi Chen
China Mobile Research Institute

Yi Huang
China Mobile Research Institute

Junlan Feng[†]
China Mobile Research Institute
fengjunlan@chinamobile.com

Zhijian Ou*[†]
Tsinghua University
ozj@tsinghua.edu.cn

1 OVERVIEW

Developing intelligent dialog systems has been one of the longest running goals in AI. In recent years, significant progress has been made in building dialog systems with the breakthrough of deep learning methods and the large amount of conversational data being made available for system development (Budzianowski et al., 2018; Ou et al., 2022a; Ouyang et al., 2022; Achiam et al., 2023).

There are still full of challenges toward building future dialog systems. The first FutureDial challenge focused on building semi-supervised and reinforced task-oriented dialog systems (FutureDial-SereTOD) (Ou et al., 2022a;b), which was successfully held at EMNLP 2022 SereTOD workshop¹. ChatGPT (Ouyang et al., 2022), a newly emerged generative dialog system in the end of 2022, has marked another amazing progress in engaging users in open-domain dialogs. However, problems like hallucination and fabrication (Alkaissi & McFarlane, 2023) still hinder the usage of such systems in real-life applications like customer service systems, which requires pin-point accuracy. Retrieval augmented generation (RAG) (Lewis et al., 2020; Guu et al., 2020) has been introduced to enhance dialog systems with retrieved information from external knowledge bases and has attracted increasing interests. RAG has been shown to be able to help the dialog systems to reply with higher accuracy and factuality, providing more informative and grounded responses (Humeau et al., 2020; Izacard & Grave, 2021; Shuster et al., 2022b; Glass et al., 2022; Izacard et al., 2022a;b; Shuster et al., 2022a; Cai et al., 2023). However, there remain challenges for RAG-based dialog systems such as designing retrievers that can retrieve knowledge from multiple knowledge sources, building RAG-based dialog systems that can effectively utilize available tools and API-calls for retrieval (Schick et al., 2023; Yao et al., 2023), and etc.

To further promote the study of how to empower dialog systems with RAG, we release a new dataset, called MobileCS2 (Mobile Customer Service) that aims to benchmark and stimulate related research in this area. The dataset originates from the real-life customer-service logs from China Mobile. Relevant knowledge bases and ground truth retrieved results are annotated so that dialog systems with RAG can be trained over such data. Note that successful fulfilling of customer-service usually needs to call specialized domain knowledge and/or APIs to retrieve relevant information. This dataset is very suited to benchmark dialog systems with RAG. In MobileCS2, there have multiple types of knowledge bases, like user profile, product information and FAQ manual, which bring challenge to the retrieval task in RAG. Moreover, the dataset contains around 3,000 sessions of unlabeled dialogs along with the same amount of sessions of labeled dialogs, which facilitates the study for semi-supervised RAG-based dialog systems (Zhang et al., 2020; Liu et al., 2022a; Cai et al., 2022; Liu et al., 2023; Cai et al., 2023).

*Supported by National Science and Technology Major Project (2023ZD0121401)

[†]Corresponding author

¹<http://seretod.org/>

Following the success of the 1st FutureDial challenge, the 2nd FutureDial challenge², co-located with SLT 2024, aims to benchmark and stimulate research in building dialog systems with RAG, with the newly released dialog dataset, MobileCS2, as overviewed in Figure 1. We aim to create a forum to discuss key challenges in the field and share findings from real-world applications.

2 TOPICS OF INTEREST FOR THE CHALLENGE

Topics of interest that are relevant to the challenge include, but are not limited to, the following:

- Retrieval augmented dialog systems
- Information retrieval
- Grounded dialog systems with unstructured knowledge sources
- Large language model based dialog systems
- Holistic AI technologies and applications
- Semi-supervised dialog systems
- Reinforced dialog systems
- Evaluation of dialog systems
- Dialog-related datasets and language resources
- General topics for dialog systems

3 SHARED TASK

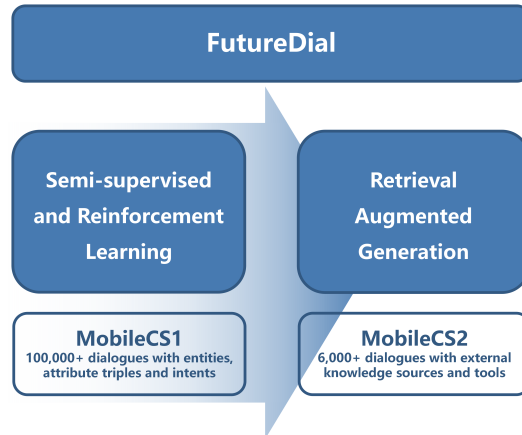


Figure 1: Overview of the FutureDial-RAG Challenge: Dialog Systems with Retrieval Augmented Generation.

The 1st FutureDial challenge at EMNLP 2022 (Ou et al., 2022a;b; Liu et al., 2022b) focused on building semi-supervised and reinforced task-oriented dialog systems (FutureDial-SereTOD), and released a large-scale human-human dialog dataset MobileCS1 (Mobile Customer Service).

The 2nd FutureDial challenge focuses on building dialog systems with RAG, with the following features:

- We release a new dataset from the China Mobile customer-service logs (MobileCS2) that contains both labeled and unlabeled data, which encourages the study of semi-supervised RAG-based dialog systems.

²<http://futuredial.org/>

- The dataset enables the study of building dialog systems with knowledge base queries and API calls.
- The dataset is available in both *Chinese* and *English* versions to the public, so that researchers around the world can experiment with this dataset.

To enable a RAG-based dialog system to provide appropriate answers and services to users, it is essential for the system to utilize knowledge relevant to the conversation context. Therefore the 2nd challenge examines how dialog systems can retrieve the most appropriate knowledge pieces from the knowledge base and generate grounded and faithful response to user requests, with the newly released knowledge-grounded dialog dataset, MobileCS2. The information needed should be retrieved from a given database or API call, which returns specific feedback closely related to real customer service scenarios, such as bill inquiry and package change. Accordingly, the following two tracks are proposed, which are related to the information retrieval of dialog data and the construction of RAG-based dialog systems in the customer service scenario respectively:

- Track 1: Information retrieval based on knowledge bases and dialog context
- Track 2: Dialog systems with retrieval augmented generation

Given the context in a dialog, the most relevant knowledge snippet in the multi-source databases should be retrieved by a retrieval model. So Track 1 aims to build the retrieval model for the dialog system. Based on retrieved knowledge, Track 2 aims to build a retrieval-augmented dialog system in the customer service scenario. The system should generate informative responses leveraging the retrieved results. Offline corpus-based evaluation will be conducted to test the performance of the submitted system.

4 THE MOBILECS2 DATASET

The MobileCS2 dataset is derived from the China Mobile real-world conversational scenarios and comprises around 6,000 processed dialog logs (nearly 3,000 carefully annotated) between customers and customer service staffs. It can serve for research aims such as the development of conversational models, colloquial human-to-human dialog systems, and data-driven systematic dialog analysis.

4.1 ANNOTATION DETAILS

In the customer service scenario, there are some knowledge or information that the customer service agent needs to get from knowledge bases (KBs) in order to correctly respond to the user. Therefore, to annotate the necessary knowledge or information, the annotators should imagine themselves as customer service agents. When presented with a dialog, annotators are required to identify the agent’s intent at each turn. If the intent is to query the KBs to seek external information and the response contains specific details, the annotator should perform a retrospective analysis based on the information provided in the response and annotate the corresponding query result. Specifically, Table 1 contains the set of intents (annotated as *Api_query*) and the explanations of each intent, which are provided to annotators for their reference during the annotation process. For example, given the dialog “Help me check my package”, the annotator needs to identify the intent “Search for user information” and then annotate the package that appears in the customer service’s response into the query result.

We recruited 6 China Mobile customer service staffs for the annotation, which are divided into 2 teams. The annotation is conducted dialog by dialog, and the labeling task for one dialog is assigned to an arbitrary annotator, and the annotation process takes about a week. To ensure the quality of the dataset, cross-validation is conducted between the 2 teams, and 100 annotated dialogs are checked by the other team everyday. The cross-validation agreement rate is 97 percent, which shows the dataset is of high quality. After annotation, the dataset is desensitized to remove sensitive personal information like individual names, ids, and phone numbers.

In the final dataset, each sample in the dataset represents a dialog. At each turn of the dialog, there are two types of information to be annotated: customer service intent and customer service query results. An example of the annotated data dialog data is shown in Figure 2.

Table 1: Detailed description for Api_query annotation. The Chinese version can be seen in Appendix.

Main_class	Api_query	Description
QA	[QA]	Consult the FAQ manual, which includes a collection of commonly asked questions such as recent promotional packages and general business regulations.
NULL	-	Based on the contextual information, customer service personnel can successfully complete the conversation without the need for additional inquiries.
API-Inquiry	Search for products information	Inquire about the current business information of the China Mobile, such as specific packages, data plans, etc.
	Search for user information	Inquire about the services that the user currently possesses, including the current package, current monthly fee, and current data usage.
	Search for other information	Inquire about other key information used to complete the dialog. For example, inquiring about text messages regarding excessive data usage alerts sent by the China Mobile 10086 in the historical trajectory, querying the address of the business hall, etc.
API-Cancel	Cancel business	Revoke a certain service currently possessed by the user.
API-Handle	Handle business	Process a new service for the user.
API-Verification	Verify identity	Send verification codes, passwords, or other related customer service verification operations to the user.

4.2 POST-PROCESSING

Based on the annotation data, it is possible to aggregate the information in the dataset and simulate the information that the agents can access in real-world services. For turns annotated with the inquiry [QA], the information can be aggregated into an FAQ (Frequently Asked Questions) handbook across the entire dataset. Turns labeled as “Search for user information” can be consolidated into a user database (local_kb) within a single dialog. Meanwhile, turns labeled as “search for products information” can be aggregated into a product database (global_kb) across the entire dataset. These three databases largely emulate the channels through which the agents acquire knowledge in real-world settings.

5 THE BASELINE SYSTEM AND METRICS

5.1 THE BASELINE SYSTEM

We use RAG-based (Lewis et al., 2020; Cai et al., 2023) methods to build our baseline system. RAG-based dialog systems aim to retrieve relevant knowledge pieces given the dialog context and generate system response using the retrieved knowledge. For MobileCS2, we take into consideration various important settings, such as adding the unique user profile for each user to the knowledge base and considering multiple relevant knowledge pieces useful given context. RAG over MobileCS2 is for

```

"log": [
{
  "user": "Manual",
  "system": "The seasons are changing, but our deep affection remains the same. Meeting you is the most beautiful moment. If there is anything I can assist you with, please feel free to tell me.",
  "api_query": "",
  "api_result": ""
},
{
  "user": "Is my current package discounted?",
  "system": "Dear customer, you have chosen a customized package, which is composed of an internet data package and a voice call package. You need to choose one of each. Currently, it is a combination package of 4G customized voice call package at \u00a58C and 5G Unlimited Customized Data Package at \u00a5120. Package name: Upgrade to 5G Unlimited Customized Data 120\u00a5 (Direct Discount of 50\u00a5) with an application period of 6 months. Start Time: [Start Time], End Time: [End Time]. You have participated in an offer with a discount of 50\u00a5, dear.",
  "api_query": "search for user information",
  "api_result": "Business Name: Upgrade to 5G and enjoy self-selected data for 120 yuan (direct reduction of 50 yuan) for 6 months. Application time: [Start Time], Start time: [Start Time], End time: [End Time], Promotion discount of 50 yuan."
},
...
{
  "user": "Do I have to cancel by myself when it expires?",
  "system": "Yes, you will receive a text message reminder before the expiration date. You will need to cancel it through the APP or contact customer service to cancel.",
  "api_query": "",
  "api_result": ""
}
],
"local_kb": [
"Business Name: Upgrade to 5G and enjoy self-selected data for 120 yuan (direct reduction of 50 yuan) for 6 months. Application time: [Start Time], Start time: [Start Time], End time: [End Time], Promotion discount of 50 yuan.",
"Business Name: 1. \u00a51.35/month for 15GB dedicated data package (choose one from: 15GB Headlines and TikTok package, \u00a51.35 Kuaishou data package, Tencent Video 15GB on-demand package, Youku Video data package - \u00a51.35 level, Baidu iQIYI data package - \u00a51.35 level);\n2. The duration of the agreement for the event is 6 months, with a monthly package fee discounted to \u00a50.15;\n3. A text message reminder will be sent upon expiration of the event, the dedicated data package will be retained and restore to the standard tariff."
]

```

Figure 2: An example of annotated dialogs. The Chinese version can be seen in Appendix.

real-life scenarios, which is different from prior work in knowledge grounded dialog systems (Lewis et al., 2020; Cai et al., 2023).

To introduce the RAG-based baseline system on MobileCS2, we make the following definitions. Assume we have a dialog X with T turns of user utterances and system responses, denoted by $u_1, r_1, \dots, u_T, r_T$ respectively. For each dialog, we assume that there is a knowledge base that is necessary for the system to respond correctly. In MobileCS2, the knowledge base is made up of the user information, which is unique for each dialog, the product information list, and the FAQ list for commonly asked questions. Therefore, for the dialog X , the knowledge base KB_X can be denoted as: $KB_X \triangleq KB_{user} \cup KB_{FAQ} \cup KB_{product}$.

At turn t of a dialog X , based on dialog context $c_t \triangleq u_1 \oplus r_1 \oplus \dots \oplus u_{t-1} \oplus r_{t-1} \oplus u_t$ (\oplus means sequence concatenation) and the knowledge base KB_X , the system uses a retriever to get the relevant knowledge h_t from the knowledge base and generates appropriate responses with the generator $p_\theta(r_t | c_t, h_t)$.

To train the retrieval model, we consider each knowledge piece z_i ($i = 1, 2, \dots, K$) in KB_X and model the retrieval distribution of $p_\eta(z_i | c_t)$ as in (Lewis et al., 2020):

$$p_\eta(z_i | c_t) \propto \exp(\text{Encoder}_p(z_i)^\top \text{Encoder}_c(c_t)) \quad (1)$$

Encoder_p and Encoder_c are both initialized with a BERT-based pretrained model (Devlin et al., 2019). The probability is optimized with the standard cross entropy loss, with the positive pieces $z \in Z_+$ labeled in the dataset:

$$\mathcal{L}_{ret} = -\frac{1}{|Z_+|} \sum_{z \in Z_+} \log \frac{p_\eta(z | c_t)}{p_\eta(z | c_t) + \sum_{i=1, z_i \neq z}^K p_\eta(z_i | c_t)} \quad (2)$$

The knowledge piece encoder Encoder_p is fixed during the training, and the context encoder Encoder_c is trained with the loss in Eq. 2, following the setting in Karpukhin et al. (2020).

To train the dialog system $p_\theta(r_t | c_t, h_t)$, we use the standard auto-regressive loss to optimize the generation probability initialized :

$$p_\theta(r_t | c_t, h_t) = \prod_{l=1}^{|r_t|} p_\theta(y^l | c_t, h_t, y^1, \dots, y^{l-1}) \quad (3)$$

where $|\cdot|$ denotes the length in tokens, and y^l the l -th token of r_t and p_θ is initialized with a GPT-based pretrained lanugae model (Radford et al., 2019).

5.2 METRICS AND EVALUATION

Given a dialog X and its knowledge base KB_X , the retrieval system needs to rank the relevance score for each knowledge piece in the KB_X . We use the commonly used recall metrics to assess the retrieval system. To get the recall@k metrics, we calculate whether the ground-truth knowledge piece is in the top-k retrieved knowledge pieces. To comprehensively evaluate the retrieval quality of the system, we calculate the sum of the recall for $k = 1, 5, 20$ as the final score: $score_{retriever} = recall@1 + recall@5 + recall@20$.

To generate the suitable system response, relevant knowledge pieces are first retrieved using the retrieval system. Given the retrieved knowledge pieces, the generator can generate response based on the retrieved knowledge. The generated response is evaluated by measuring the similarity score with the ground-truth response (*BLEU* and *BERTScore*) and whether the system correctly provides the requested information by the user (*Inform Rate*). *BLEU* is used to measure the fluency of the generated responses by analyzing the amount of n-gram overlap between the real responses and the generated responses. *BERTScore* (Zhang et al., 2019) is used to measure the semantic similarity of the generated responses with the oracle responses by using a pretrained BERT model. *Inform Rate* refers to how often the system response is able to cover the requested information by the user. The final score of the generator is computed as $score_{generator} = 0.5 * (BLEU + BERTScore) + Inform$.

6 CHALLENGE RULES

- The challenge website is <http://futuredialog.org/>. Teams should submit the registration form to FutureDialogRAG@gmail.com, which will be reviewed by the organizers.
- Teams are required to sign an Agreement for Challenge Participation and Data Usage. Data will be provided to approved teams.
- For teams that participate in Track 1, the scores will be ranked according to the performance for Track 1. The teams can choose to participate only in Track 1.
- For teams that participate in Track 2, they can use the baseline system provided by the organizers or use the system developed by themselves for Track 1. The ranking is based on the performance for Track 2.
- Participants need to strictly follow the Submission Guidelines as described below. Participants are allowed to use any external (publicly available) or internal (proprietary) datasets, resources and pre-trained models,
- The evaluation data will not be released to the teams for their own evaluation. The organizers will run the submitted systems for evaluation. The evaluation data will be shared with the eligible teams after evaluation results are announced. Only teams who strictly follow the Submission Guidelines are viewed as eligible.
- In publishing the results, all teams will be identified as team IDs (e.g. team1, team2, etc). The organizers will verbally indicate the identities of all teams at the Workshop for communicating results. Participants may identify their own team label (e.g. team5) and report their own result, in publications or presentations, if they desire.

7 SUBMISSION GUIDELINES

- Each team needs to submit a package via email to `FutureDialRAG@gmail.com` before the Entry Submission Deadline. The package should contain a clear README documentation for running the system over the evaluation data. The submitted system should be in one of the following two forms. In either form, the system’s processing speed should be no less than 10 tokens per second.
 - The submission package contains the system executable with the model, for example, in a Docker image. All dependencies are contained in the submission package. The organizers run the system over a server with Nvidia A100*4 hardware, evaluate, and calculate the running time over the evaluation data.
 - The system is encapsulated as a callable web service. The organizers will run the script submitted by the team, call the web service to evaluate, and calculate the running time over the evaluation data.
- The submission should provide a System Description Document (SDD), introducing the submitted system. Teams are also encouraged to submit papers to SLT 2024. See important dates and instructions at SLT 2024 website <https://2024.ieeeslt.org/>.
- Before the Entry Submission Deadline, each team can submit for multiple times for each track. The last entry from each team will be used for the evaluation.

8 IMPORTANT DATES

- April 9, 2024: Registration opening for the challenge
- April 29, 2024: Training data release
- June 10, 2024: Entry submission deadline
- June 20, 2024: Evaluation results announced
- June 20, 2024: SLT paper submission deadline
- June 27, 2024: SLT paper update deadline
- August 30, 2024: Notification of paper acceptance
- December 2-5, 2024: SLT 2024 Workshop Date (in-person)

REFERENCES

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Hussam Alkaiissi and Samy I McFarlane. Artificial hallucinations in ChatGPT: Implications in scientific writing, 2023.
- Paweł Budzianowski, Tsung-Hsien Wen, Bo-Hsiang Tseng, Inigo Casanueva, Stefan Ultes, Osman Ramadan, and Milica Gašić. Multiwoz—a large-scale multi-domain wizard-of-oz dataset for task-oriented dialogue modelling. *arXiv preprint arXiv:1810.00278*, 2018.
- Yucheng Cai, Hong Liu, Zhijian Ou, Yi Huang, and Junlan Feng. Advancing semi-supervised task oriented dialog systems by JSA learning of discrete latent variable models. In *Proceedings of the 23rd Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pp. 456–467, 2022.
- Yucheng Cai, Hong Liu, Zhijian Ou, Yi Huang, and Junlan Feng. Knowledge-retrieval task-oriented dialog systems with semi-supervision. In *INTERSPEECH*, 2023.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proc. of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 2019.

- Michael Glass, Gaetano Rossiello, Md Faisal Mahbub Chowdhury, Ankita Naik, Pengshan Cai, and Alfio Gliozzo. Re2g: Retrieve, rerank, generate. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 2701–2715, 2022.
- Kelvin Guu, Kenton Lee, Zora Tung, Panupong Pasupat, and Ming-Wei Chang. Realm: retrieval-augmented language model pre-training. In *Proceedings of the 37th International Conference on Machine Learning*, pp. 3929–3938, 2020.
- Samuel Humeau, Kurt Shuster, Marie-Anne Lachaux, and Jason Weston. Poly-encoders: Architectures and pre-training strategies for fast and accurate multi-sentence scoring. In *International Conference on Learning Representations*, 2020.
- Gautier Izacard and Édouard Grave. Leveraging passage retrieval with generative models for open domain question answering. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pp. 874–880, 2021.
- Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. Unsupervised dense information retrieval with contrastive learning. *Transactions on Machine Learning Research*, 2022a.
- Gautier Izacard, Patrick Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. Few-shot learning with retrieval augmented language models. *arXiv e-prints*, pp. arXiv–2208, 2022b.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 6769–6781, 2020.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33: 9459–9474, 2020.
- Hong Liu, Yucheng Cai, Zhijian Ou, Yi Huang, and Junlan Feng. Building Markovian generative architectures over pretrained LM backbones for efficient task-oriented dialog systems. In *IEEE Spoken Language Technology Workshop*, 2022a.
- Hong Liu, Hao Peng, Zhijian Ou, Juanzi Li, Yi Huang, and Junlan Feng. Information extraction and human-robot dialogue towards real-life tasks: A baseline study with the mobilecs dataset. In *EMNLP 2022 SereTOD Workshop*, 2022b.
- Hong Liu, Yucheng Cai, Zhenru Lin, Zhijian Ou, Yi Huang, and Junlan Feng. Variational latent-state GPT for semi-supervised task-oriented dialog systems. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 2023.
- Zhijian Ou, Junlan Feng, and Juanzi Li. Proceedings of the towards semi-supervised and reinforced task-oriented dialog systems (seretod). In *Proceedings of the Towards Semi-Supervised and Reinforced Task-Oriented Dialog Systems (SereTOD)*, 2022a.
- Zhijian Ou, Junlan Feng, Juanzi Li, Yakun Li, Hong Liu, Hao Peng, Yi Huang, and Jiangjiang Zhao. A challenge on semi-supervised and reinforced task-oriented dialog systems. *arXiv preprint arXiv:2207.02657*, 2022b.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *arXiv preprint arXiv:2203.02155*, 2022.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 1(8):9, 2019.

- Timo Schick, Jane Dwivedi-Yu, Roberto Dessi, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- Kurt Shuster, Mojtaba Komeili, Leonard Adolphs, Stephen Roller, Arthur Szlam, and Jason Weston. Language models that seek for knowledge: Modular search & generation for dialogue and prompt completion. *arXiv preprint arXiv:2203.13224*, 2022a.
- Kurt Shuster, Jing Xu, Mojtaba Komeili, Da Ju, Eric Michael Smith, Stephen Roller, Megan Ung, Moya Chen, Kushal Arora, Joshua Lane, et al. Blenderbot 3: a deployed conversational agent that continually learns to responsibly engage. *arXiv preprint arXiv:2208.03188*, 2022b.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. React: Synergizing reasoning and acting in language models. In *International Conference on Learning Representations (ICLR)*, 2023.
- Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav Artzi. Bertscore: Evaluating text generation with bert. In *International Conference on Learning Representations*, 2019.
- Yichi Zhang, Zhijian Ou, Min Hu, and Junlan Feng. A probabilistic end-to-end task-oriented dialog model with latent belief states towards semi-supervised learning. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2020.

A APPENDIX

Table 2: Chinese description for Api_query annotation.

主类	Api_query	解释
QA类	[QA]	查询FAQ手册，包含一些常见问题，如最近优惠的套餐、普遍的业务规则等。
置空类	-	根据上下文信息，客服人员无需进行额外的查询便能顺利的完成对话。
API-查询类	查询特定业务信息	查询移动当前有的业务信息，如特定的套餐、流量包等。
	查询用户已办理的业务	查询用户当前已经拥有的业务，包括当前套餐、当前月租、当前流量等。
	查询其他信息（例如：查询流量短信）	查询其他用于完成对话的关键信息。比如：查询历史轨迹中移动10086给用户发送的超出流量提醒短信、查询营业厅地址等
API-取消类	取消	取消用户当前拥有的某个业务
API-办理类	办理	为用户办理某个新的业务
API-验证类	验证	向用户发送验证码、密码等相关的客服验证操作

```

"log": [
  {
    "user": "人工",
    "system": "季节在变，深情不变，遇见您是最美好的时光有什么可以帮您的，直接跟我说哦",
    "api_query": "",
    "api_result": ""
  },
  {
    "user": "我现在的套餐是有优惠的吗？",
    "system": "亲，您办理的是自选套餐，自选套餐由上网流量和语音通话套餐构成，语音包和流量包要各选一个的。目前是4G自选套餐语音包8元C&5G畅享自选套餐流量包120元组合套餐。方案名称：升5G畅享自选流量120元（直降50元）6个月申请时间：[开始时间]开始时间：[开始时间]结束时间：[结束时间]。参加了优惠50元的活动，亲",
    "api_query": "查询用户已办理的业务",
    "api_result": "业务名称：升5G畅享自选流量120元（直降50元）6个月，申请时间：[开始时间]，开始时间：[开始时间]，结束时间：[结束时间]，活动优惠50元"
  },
  ...
  {
    "user": "到期要自己退订吗？",
    "system": "嗯，到期前会有短信提醒，需要您APP取消或者联系客服取消的",
    "api_query": "",
    "api_result": ""
  }
],
"local kb": [
  "业务名称：升5G畅享自选流量120元（直降50元）6个月，申请时间：[开始时间]，开始时间：[开始时间]，结束时间：[结束时间]，活动优惠50元",
  "业务名称：9元/月15GB定向流量包（五选一：15GB头条抖音包、9元快手流量包、任我看腾讯视频15GB包、任我看优酷视频流量包-9元档、百度爱奇艺流量包-9元档）；2、活动协议期6个月，每月套餐费优惠减免至1元；3、活动到期后有短信提醒，定向流量包继续保留，恢复标准资费"
]

```

Figure 3: An example of annotated Chinese dialogs.