

SIGGesture: Generalized Co-Speech Gesture Synthesis via Semantic Injection with Large-Scale Pre-Training Diffusion Models

QINGRONG CHENG, Tencent AI Lab, Tencent TiMi L1 Studio, China

XU LI, Tencent AI Lab, China

XINGHUI FU, Tencent AI Lab, China

FEI XIA, Tencent TiMi L1 Studio, China

ZHONGQIAN SUN, Tencent AI Lab, China

The automated synthesis of high-quality 3D gestures from speech holds significant value for virtual humans and gaming. Previous methods primarily focus on synchronizing gestures with speech rhythm, often neglecting semantic gestures. These semantic gestures are sparse and follow a long-tailed distribution across the gesture sequence, making them challenging to learn in an end-to-end manner. Additionally, generating rhythmically aligned gestures that generalize well to in-the-wild speech remains a significant challenge. To address these issues, we introduce SIGGesture, a novel diffusion-based approach for synthesizing realistic gestures that are both high-quality and semantically pertinent. Specifically, we firstly build a robust diffusion-based foundation model for rhythmical gesture synthesis by pre-training it on a collected large-scale dataset with pseudo labels. Secondly, we leverage the powerful generalization capabilities of Large Language Models (LLMs) to generate appropriate semantic gestures for various speech transcripts. Finally, we propose a semantic injection module to infuse semantic information into the synthesized results during the diffusion reverse process. Extensive experiments demonstrate that SIGGesture significantly outperforms existing baselines, exhibiting excellent generalization and controllability.

CCS Concepts: • **Computing methodologies** → **Animation**; *Natural language processing*; *Neural networks*.

Additional Key Words and Phrases: Co-speech gesture synthesis, Semantic gestures, Large Language Models, Diffusion models

ACM Reference Format:

Qingrong Cheng, Xu Li, Xinghui Fu, Fei Xia, and Zhongqian Sun. 2024. SIGGesture: Generalized Co-Speech Gesture Synthesis via Semantic Injection with Large-Scale Pre-Training Diffusion Models. In *SIGGRAPH Asia 2024 Conference Papers (SA Conference Papers '24)*, December 3–6, 2024, Tokyo, Japan. ACM, New York, NY, USA, 13 pages. <https://doi.org/10.1145/3680528.3687677>

1 INTRODUCTION

Body gesture can significantly enhance people’s expressiveness in communication by emphasizing specific intentions or conveying specific semantics [Cassell et al. 1999; Goldin-Meadow and Alibali 2013; Nyatsanga et al. 2023; Yoon et al. 2020]. Additionally, high-quality 3D gesture animation can present vivid virtual characters that help listeners to concentrate and improve the intimacy between

humans and virtual characters. Consequently, there is a growing demand for automatic high-quality co-speech gesture synthesis in various applications, including virtual humans, non-player gaming characters, and robot assistants. Many researchers have proposed lots of approaches including rule-based methods [Huang and Mutlu 2012; Marsella et al. 2013] and data-driven methods [Ao et al. 2023; Zhi et al. 2023; Zhu et al. 2023].

3D co-speech gesture generation aims to produce gestures with natural movements, accurate rhythm, and clear semantics based on the given speech. Rule-based methods [Huang and Mutlu 2012; Marsella et al. 2013] achieve this by using predefined rules, such as associating the keyword "good" with a simple "thumbs up" gesture. However, these approaches, lacking naturalness, smoothness, and diversity, can only handle simple semantic gestures. The main reason is that generating co-speech gestures is challenging due to the inherently complex many-to-many mapping. Recently, deep learning with large-scale datasets has achieved significant breakthroughs, especially in content synthesis. With the aid of deep learning, co-speech gesture synthesis has seen the emergence of many remarkable methods. These methods attempt to solve this problem by training a conditional model with multi-modal inputs (audio, text, speaker identities, etc.).

Co-speech gestures include rhythmic gestures and semantic gestures. Some works attempt to generate high-quality co-speech gesture that contains accurate semantic gestures, such as GestureDiffuCLIP [Ao et al. 2023], LivelySpeaker [Zhi et al. 2023], and Bodyformer [Pang et al. 2023]. Both GestureDiffuCLIP [Ao et al. 2023] and LivelySpeaker [Zhi et al. 2023] use CLIP [Radford et al. 2021] to learn the relationship between semantic transcripts and motion. However, semantic gestures constitute only a minor portion of the entire sequence and follow a long-tailed distribution, complicating the direct learning of their multi-modal relationships. Moreover, synthesizing gestures rhythmically synchronized with speech faces the challenge of generalizing to in-the-wild scenarios.

To address the aforementioned issues, we propose a diffusion-based semantic injection method with large language model for semantic gesture synthesis, which offers excellent controllability, interpretability, and generalization. It begins with the insight that real-world human conversation contains relatively limited semantic gestures. For example, for specific semantic words like "wonderful," different people usually present similar gestures, such as "opening both arms." During the diffusion reverse process, we can utilize semantically matched gestures as prompts to guide the generative model in synthesizing appropriate semantic gestures. Therefore, we collect a large-scale semantic motion database that includes most

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

SA Conference Papers '24, December 3–6, 2024, Tokyo, Japan

© 2024 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 979-8-4007-1131-2/24/12...\$15.00

<https://doi.org/10.1145/3680528.3687677>

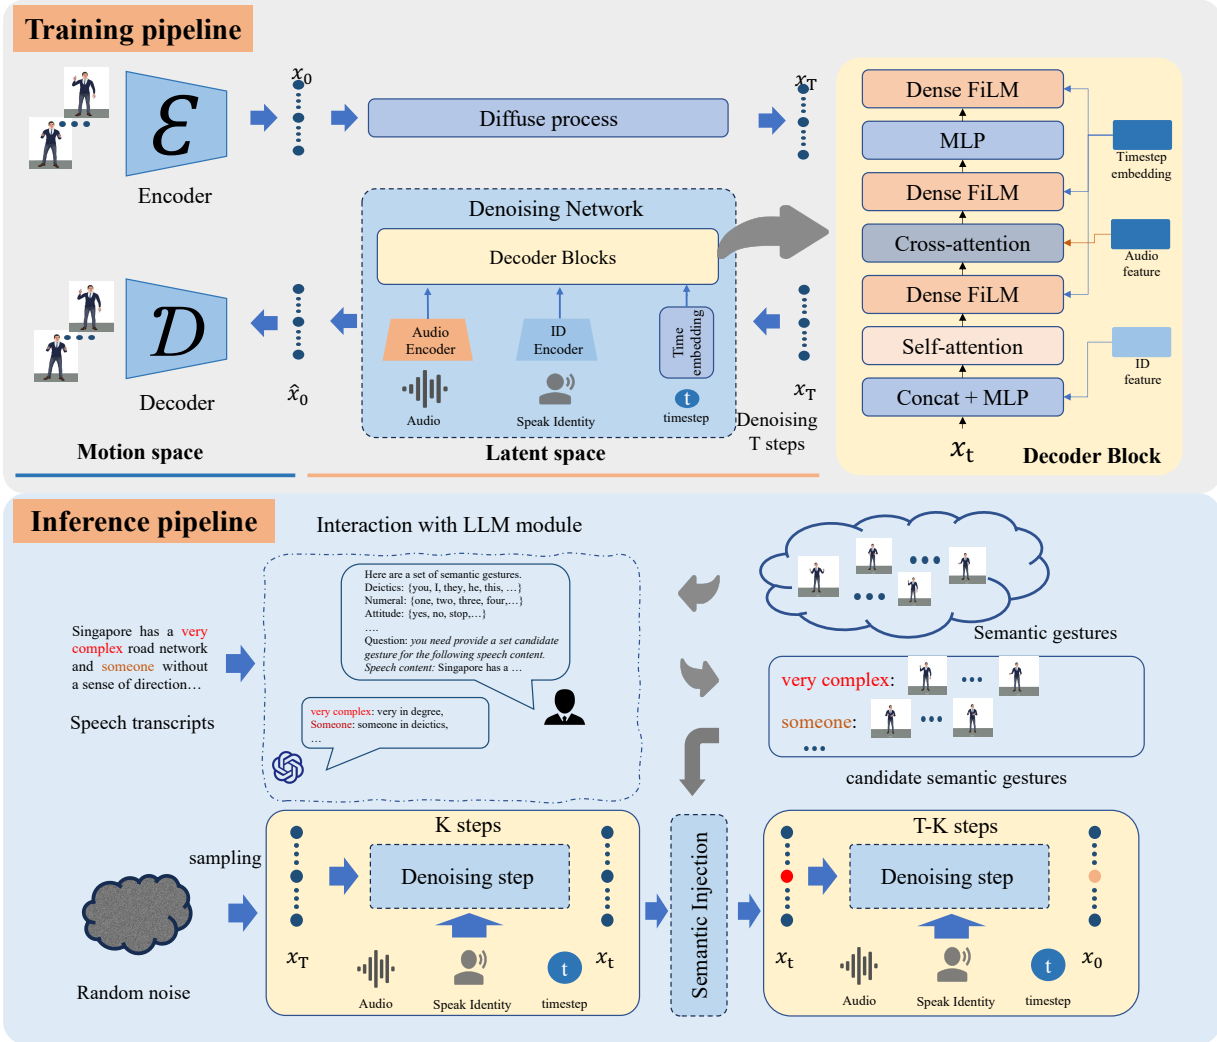


Fig. 1. The framework of the proposed method is illustrated in two parts. The upper section details the training processes of diffusion and denoising. The lower part demonstrates the inference process for synthesizing gestures based on the given conditions. Specifically, the audio features and speaker identity are directly fed into the denoising network. Meanwhile, the speech textual content are used as input in the interaction with the LLM, which generates a set of candidate semantic gestures for the subsequent semantic injection process.

Table 1. Comparison of co-speech gesture datasets. We ignore some datasets with 2D and 3D key-points label. "3D Rot" indicates 3D skeleton with bone rotation. "PGT" means Pseudo Ground Truth.

	Trinity Mocap 2017 [Ferstl and McDonnell 2018]	TWH Mocap 019 [Lee et al. 2019]	Hahibie et al. S2G-3D 2021 [Habibie et al. 2021]	BEAT(X) Mocap 2022 [Liu et al. 2022b]	ZEEG Mocap 2022 [Ghorbani et al. 2023]	Yoon. et al. TED-SMPL 2023 [Lu et al. 2023]	Talkshow S2G-SMPL 2023 [Yi et al. 2023]	Gesture400 Ours 2024
Data type	3D Rot	3D Rot	3D Rot	3D	3D Rot	PGT 3D Rot	PGT 3D Rot	PGT 3D Rot
Duration (hours)	4	20	38	76	4	30	27	393

semantic motions in communication. LLMs, such as GPT3 [Brown et al. 2020] and GPT-4 [Achiam et al. 2023], have demonstrated their ability not only as proficient models for natural language processing (NLP) tasks but also as potent instruments for tackling complex problems. Therefore, we introduce large-language models to assign contextually appropriate gestures to the corresponding

text. Leveraging the strong semantic analysis capabilities of LLMs, the proposed method is adept at handling various languages.

For a specific speech, different people will present notably different rhythmic gestures. For such many-to-many issue, the best solution is to use deep learning with a large-scale dataset to learn their complex relationships. Therefore, it is necessary to build a

robust foundational model that can synthesize natural and smooth rhythmic gestures. Then, the semantic gestures can be naturally injected into the rhythmic gestures. However, the co-speech gesture generation research community lacks 3D skeletal data due to the expensive motion capture system, which is different from other synthesis tasks, such as text-to-image, text-to-speech. Therefore, for improving the basic quality of rhythmic gestures, we collected a large-scale gesture dataset named Gesture400 for pre-training, which contains approximately 400 hours of data. Table 1 shows the statistical data of these co-speech gesture datasets. Some datasets with 2D and 3D key-point labels are ignored because they are difficult to use in real applications. To the best of our knowledge, the proposed dataset is the largest dataset in the field of co-speech gesture synthesis research. By the optimization of pre-training and fine-tuning, the synthesized gesture motion exhibits excellent naturalness and generalization.

The main contributions of our work contain the following aspects:

- (1) We propose an LLMs-based semantic augmentation method for co-speech gesture synthesis, which can greatly improve the generalization ability in semantic gesture synthesis. For controllable semantic gesture synthesis, we build a set of semantic gesture clips and use LLMs to generate appropriate candidate gestures for the specific speech transcripts.
- (2) We build a robust diffusion-based foundational model for rhythmical gesture synthesis by pre-training it on a collected large-scale dataset with pseudo labels. This dataset is the largest dataset for co-speech gesture synthesis, containing approximately 400 hours of motion sequences.
- (3) Extensive experiments show that the proposed method outperforms state-of-the-art methods by a large margin. In particular, the visualization comparisons indicate that our method produces more stable, expressive, and robust results than other approaches.

2 RELATED WORK

2.1 Co-Speech Gesture Generation

The research of co-speech gesture generation can be divided into two branches, rule-based methods [Cassell et al. 1994, 2001; Marsella et al. 2013] and learning-based methods [Ao et al. 2022, 2023; Ginosar et al. 2019; Liu et al. 2022a]. Rule-based works [Cassell et al. 1994, 2001; Marsella et al. 2013] for co-speech gesture synthesis are mainly generated from a pre-defined motion database by keyword matching or other specific rules. These rule-based methods require lots of human effort in defining gesture units and complex mapping rules, which are costly and inefficient. Besides, the results of rule-based methods are usually lack of smoothness and naturalness.

Co-speech gesture synthesis is a complex problem that requires consideration of the audio, the gesture, and their many-to-many relationships. Benefit from recent advanced developments of deep learning, all of recent methods [Ao et al. 2022, 2023; Liu et al. 2022a] adopt deep neural networks as a strong tool to learn the complex relationships from audio to gesture in an end-to-end manner. Earlier works [Ginosar et al. 2019; Qian et al. 2021] explore various network architecture to regress 2D keypoints of the human body movements because of lacking high-quality 3D gesture datasets. These 2D

datasets are constructed by using off-the-shelf pose estimator [Cao et al. 2017] to obtain pseudo 2D gesture annotations from the online videos. However, The 2D results face significant challenges in practical applications. Recently, some high-quality speech-gesture corpus such as BEAT [Liu et al. 2022b] and ZeroEGGS [Ghorbani et al. 2023] are released, which contribute to the development of co-speech gesture synthesis. Some of existing works focus on exploring the effectiveness of different network architectures, including the Multi-Layer Perceptron (MLP) [Kucherenko et al. 2020], Convolutional Neural Networks (CNN) [Habibie et al. 2021; Yi et al. 2023], Recurrent Neural Networks (RNNs) [Bhattacharya et al. 2021a; Hasegawa et al. 2018; Liu et al. 2022a; Yoon et al. 2020] and Transformers [Bhattacharya et al. 2021b; Pang et al. 2023]. Besides the exploration of model architecture, some approaches [Ginosar et al. 2019; Yang et al. 2023b] dive into researching the connections between co-speech gesture and speech audio, text transcript, speaking style, and speaker identity. Furthermore, some approaches involve the adversarial training [Ginosar et al. 2019; Liu et al. 2022a], phase-guided motion matching [Yang et al. 2023a], and reinforcement learning [Sun et al. 2023] to guarantee realistic results. In addition to gestures, some methods [Chen et al. 2024; Liu et al. 2023; Yi et al. 2023] begin to explore the generation of full-body movements, including body gestures and facial expressions.

The rapid development of diffusion models [Ho et al. 2020; Song et al. 2020] has surpassed the traditional synthesis paradigm such as GAN [Goodfellow et al. 2020] and VAE [Kingma and Welling 2013], showcasing a powerful and realistic characteristic in synthesis. Diffusion-based motion generation also become a popular research direction, such as text2motion [Zhang et al. 2024b]. To be specific, text-guided motion can synthesize realistic and expressive results with diffusion model. In co-speech gesture synthesis, recent approaches such as GestureDiffuCLIP [Ao et al. 2023], LivelySpeaker [Zhi et al. 2023], DiffStyleGesture [Yang et al. 2023b], C2G2 [Ji et al. 2023], LDA [Alexanderson et al. 2023], Remodiffuse [Zhang et al. 2023a] are diffusion-based approaches.

2.2 Semantic-aware Co-Speech Gesture Generation

In gesture language, semantic gesture units are crucial for conveying specific intentions, thoughts, emotions, and enhancing gestural expressiveness. For generating more expressive gestures, there are also some attempts such as Gesticulator [Kucherenko et al. 2020], GestureDiffuCLIP [Ao et al. 2023], LivelySpeaker [Zhi et al. 2023], Bodyformer [Pang et al. 2023]. Specifically, GestureDiffuCLIP [Ao et al. 2023] adopts CLIP [Hafner et al. 2021] to align motion and text semantic, then use the textual feature as additional condition to control the generation process. LivelySpeaker [Zhi et al. 2023] is a two-stage framework for semantic and rhythmic gesture generation, which aim at decoupling the semantic gesture generation and rhythmic gesture generation. In semantic gesture generation, they also use a CLIP style module to align the semantic motion and semantic text. Besides, some approaches add semantic text as additional input to fuse semantic into the model, such as Rhythmic Gesticulator [Ao et al. 2022], Gesticulator [Kucherenko et al. 2020], FreeTalker [Yang et al. 2024] and Trimodal [Yoon et al. 2020]. BodyFormer [Pang et al. 2023] takes both low-level and high-level speech

features as input and generates a sequence of realistic 3D body gestures in an auto-regressive manner. The high-level speech features represent the semantic gestures. With the development of LLMs, some approaches also use it to extract motion-related information from textual input, such as GesGPT[Gao et al. 2023], MoConVQ [Yao et al. 2023]. The proposed method uses Large Language Models (LLMs) to generate proper mapping between the text transcripts and semantic gesture units, which shows excellent performance in both generalization and controllability.

In semantic gesture generation, Semantic Gesticulator[Zhang et al. 2024a] is the most similar work to ours in the same period. Semantic Gesticulator[Zhang et al. 2024a] also attempts to synthesize semantically accurate gestures by introducing a LLM-based semantic gesture units retrieval from a predefined dataset. The gesture generator of Semantic Gesticulator[Zhang et al. 2024a] is based on the GPT-2 [Radford et al. 2019], which predicts the future gesture tokens in an auto-regressive manner. Compared with their work, we use a strong diffusion-based method as fundamental gesture generator to fuse semantic gestures and rhythmic gestures.

3 METHOD

3.1 Problem Formulation

Given a specific audio, its corresponding text, and identity information, the proposed method can generate high-quality 3D skeletal co-speech gesture results. To be specific, considering a sample of raw audio A , we adopt Jukebox [Dhariwal et al. 2020] to extract its acoustic feature, which is pre-trained on large-scale music datasets. All of the motion sequences \mathcal{M} are encoded into discrete tokens by VQVAE [Oord et al. 2017]. Details of VQVAE can be found in the appendix. By VQVAE encoding, a motion can be represented by a latent embedding x_0 . Then, we adopt transformer-based diffusion model as the denoising network to recover the latent embedding by removing the noise. The reverse denoising process of the optimized diffusion model G parameterized by θ can recover the motion latent embedding x_0 conditioned on the speech audio sequence and identity information. With integration with LLM, it can provide accurate candidate semantic gestures for the speech transcripts. Then, the candidate semantic gesture embedding are fused into the synthesized motion latent embedding by semantic injection module. Finally, the synthesized motion are decoded to continues 3D skeleton rotation by the pre-trained VQVAE.

3.2 Semantic Gesture Collection

Through extensive observation of numerous instances, it has been discerned that semantic gestures maintain a universality in gestural communication. Specifically, it is evident that different individuals display similar gestural expressions when articulating identical semantic concepts [Lascarides and Stone 2009; Zhang et al. 2024a]. This observation provides a feasible methodology for the collection of an extensive array of semantic gesture actions, aimed at covering a comprehensive range of semantic contexts. We collect a large-scale semantic gesture dataset that contains motion clips $G = \{G_0, G_1, \dots, G_N\}$ and corresponding text $T = \{T_0, T_1, \dots, T_N\}$ by manual selection and modification with the aid of technical artist. Some of these semantic gestures are borrowed from BEAT dataset.

All of the semantic motion clips are shorter than 3 seconds and each motion clip is a whole independent semantic motion. After manual selection and check, we have collected 2,537 semantic motion clips. Some examples of semantic gestures and the distribution statistics are shown in Figure 2. More examples can be found in the supplementary video. These motion clips are sorted into a predefined motion semantic system.

All of semantic gesture clips are encoded into latent embedding $V_{semantic} = \{v_0, v_1, \dots, v_N\}$ by a pre-trained VQVAE model. To improve the diversity of semantic gesture, we add a random noise to the embeddings during semantic injection.

3.3 Diffusion models with semantic injection

SIGGesture employs a diffusion model to synthesize the latent representation of gesture, which consists of a diffusion process and a denoising process, as shown in upper part of Figure 1. Given a specific real motion data distribution $p(x_0)$, our goal is learn a distribution $q_\theta(x_0)$ that is parameterized by θ to approximate the real distribution.

3.3.1 Diffusion process. We follow the previous DDPM [Ho et al. 2020] definition of diffusion as a Markov noising process with latent $x_{0:T}$ that follows a forward noising process $p(x_{0:T}|x_0)$. Here, x_0 is the latent embedding of real motion data. The forward diffusion process is defined as a Markov chain that gradually adds Gaussian noise to the latent representation of real motion, as follows

$$q(x_{0:T}|x_0) = \prod_{t=1}^T q(x_t|x_{t-1}), \quad (1)$$

where

$$q(x_t|x_{t-1}) = \mathcal{N}(x_t; \sqrt{1 - \beta_t}x_{t-1}, \beta_t I). \quad (2)$$

β_t are variance schedule hyperparameters that control the distribution of Gaussian noise. In the reverse denoising process, β_t are pre-defined constant parameters. In the diffusion process, the original latent representation of motion x_0 progressively substituted by random noises. When T approaches infinity, the distribution of x_T follows a pure white noise distribution.

3.3.2 Denoising process. Through diffusion process, the real data are transferred into pure white noise by adding random noise. On the contrary, the denoising process recovers the real data from pure white noise by removing the random noise. The unconditional reverse process of recover a gesture motion embedding can be represented by the following formula

$$p_\theta(x_{0:T}) = p_\theta(x_0) \prod_{t=1}^T p_\theta(x_{t-1}|x_t), \quad (3)$$

where

$$p_\theta(x_{t-1}|x_t) = \mathcal{N}(x_{t-1}; u_\theta(x_t, t), \beta_t I). \quad (4)$$

The intermediate state x_t is sampled from the following defined distribution

$$p(x_t|x_0) = \mathcal{N}(x_t; \sqrt{\bar{\alpha}_t}, (1 - \bar{\alpha}_t)I). \quad (5)$$

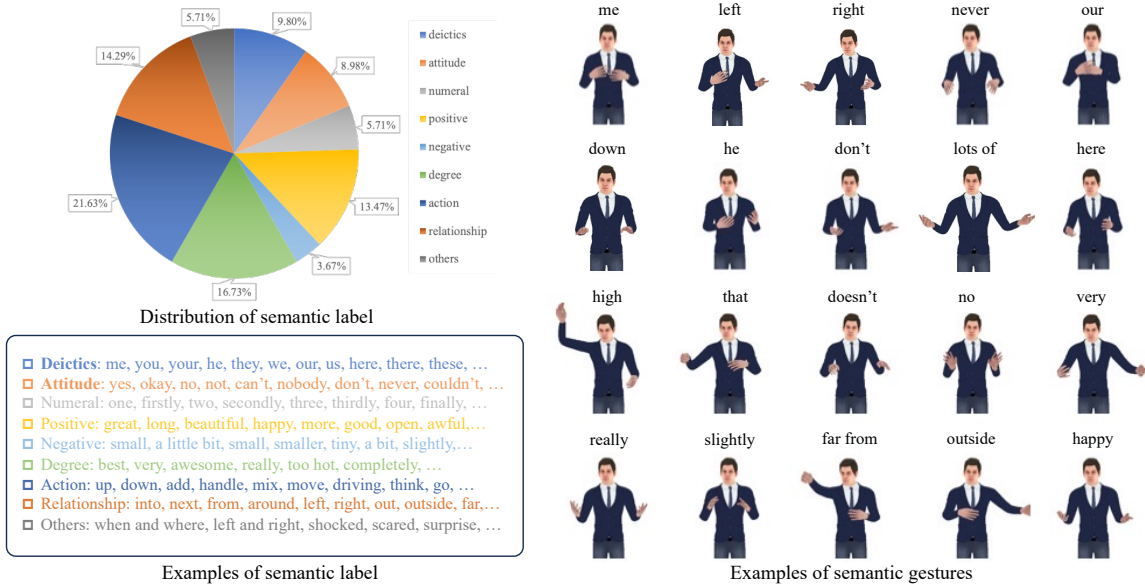


Fig. 2. The statistical data of semantic gesture dataset (upper left part), some examples of semantic label (lower left part), and some semantic gesture examples (right part).

where $\alpha_t = 1 - \beta_t$ and $\bar{\alpha}_t = \prod_{k=0}^t \alpha_k$. The above explanation shows the process of unconditional diffusion generation. For conditional content synthesis, the conditions should be injected into the diffusion generation procedure. The details of the denoising network are shown in the upper right part of Figure 1. In our method, the conditions contains audio c_{audio} and speaker identity c_{id} . For simple notation, we mark the two conditions as $c = [c_{audio}, c_{id}]$. It should be noted that the audio feature is extracted by Jukebox [Dhariwal et al. 2020] instead of WavLM [Chen et al. 2022]. Jukebox [Dhariwal et al. 2020], trained on large-scale music datasets, can focus on the rhythmic features rather than the speech semantic transcripts. By injecting the condition c into generation, the reverse process of each time step t can be updated by the following formula

$$p_{\theta}(x_{t-1}|x_t, c) = N(x_t; u_{\theta}(x_t, t, c), \beta_t I). \quad (6)$$

In a short summary, we firstly start denoising process by sampling x_T from a pure white noise distribution $N(0, I)$. Then, we iteratively denoise the latent variable x_t to obtain the final results x_0 .

3.3.3 Training objective. For a speech condition c , we reverse the forward diffusion process by learning to estimate $p(x_t, t, c)$ approximate x_0 with a parameterized model for all times step t . We use a loss function proposed in [Ho et al. 2020] to optimize the whole model, as following,

$$\mathcal{L} = E_{x,t} [\|x - p(x_t, t, c)\|_2^2]. \quad (7)$$

During training, the model is trained under conditional and unconditional manner with a specific probability. Once the training converges, the diffusion model can predict the noise parameters by considering the unconditional setting and condition c .

3.3.4 Inference with semantic injection. The inference process involves solely the denoising process of diffusion models. The pipeline of inference process is shown in the lower part of Figure 1. To be specific, a speech with its corresponding text will be fed into the generation pipeline. It should be noted that the words in the text are aligned with speech in the timeline. Each word has a duration time. Then, the texts are fed into the LLMs to produce candidate semantic gestures $G_{candidate} = (g_0, \dots, g_N)$ with a pre-defined prompt. N is the number of semantic gestures in this text. The interaction with LLMs process is shown in the left-top corner of inference pipeline in Figure 1. With the ability of LLMs, the proposed method can process various languages, such as Chinese and Japanese.

The candidate semantic gestures have been encoded into latent embedding. We set a control K to determine the degree of semantic injection. From time step T to K , the denoising latent variable is marked as \hat{x}_t that contains the semantic information.

$$p_{\theta}(x_{K:T}) = p_{\theta}(x_T) \prod_{t=K}^T p_{\theta}(x_{t-1}|\hat{x}_t). \quad (8)$$

The semantic gesture $G_{candidate}$ can be injected into the latent variable x_t by the follow formula

$$\hat{x}_t = x_t * m + G_{candidate} * (1 - m), \quad (9)$$

where m denotes the timeline mask of semantic words. From time step K to 1, the denoising latent variable x_t does not contain semantic injection step, which can preserve the structure and smoothness of the generated gesture and improve the diversity of the results.

3.3.5 Generating long sequence. For synthesizing long motion sequence, the common practice uses auto-regressive manner, which generates content sequentially. However, generative models trained

on small pieces may cause unnaturalness and defectiveness. Instead of auto-regressive manner, we adopt DiffCollage [Zhang et al. 2023b] to generate long motion sequence. DiffCollage is a scalable probabilistic model that can synthesize large content in parallel. Specifically, we denote a long sequence as $m = [m^0, m^1, m^2]$, where m^2 is the out-painted sequence generated by the conditional model $m^2|m^1$. Notably, this procedure makes a conditional independence assumption that $q(m^2|m^0, m^1) = q(m^2|m^1)$.

$$q(m) = q(m^0, m^1, m^2) = q(m^0, m^1)q(m^2|m^1). \quad (10)$$

Further, we can obtain the following formula,

$$q(m) = \frac{q(m^2, m^1)q(m^1, m^0)}{q(m^1)}. \quad (11)$$

The score function of $q(m)$ in diffusion model can be represented as a sum over the scores of shorter gesture motions.

$$\nabla q(m) = \nabla q(m^2, m^1) + \nabla q(m^1, m^0) - \nabla q(m^1). \quad (12)$$

From formula 12, it can be found that we can synthesize different gesture clips in parallel since all individual scores can be calculated independently. Then, then we can merge the scores to compute the score of the target long audio condition. For more technical details, please refer to DiffCollage [Zhang et al. 2023b].

3.4 Large-Scale Motion Corpus Collection

In 3D animation, high-quality data collection is remarkably expensive, professional, and time-consuming. High-quality motion capture requires specialized cameras, suits, and markers. Besides, it often requires experienced technicians, actors, and animators to set up, perform, and process the captured data. The process of capturing, cleaning, and integrating motion data is labor-intensive and time-consuming, contributing to the overall expense. In recent years, several high-quality datasets are released to the research community, as shown in Table 1. BEAT [Liu et al. 2022b] is the largest dataset for co-speech gesture synthesis, which contains 76 hours data. However, data-driven approaches with larger models are also short for data. In the inspiration of large-language training paradigm, noise data for pre-training and high-quality data for fine-tuning, we aim at collecting a large-scale gesture corpus for pre-training by video motion capture technique such as HybridIK [Li et al. 2021a], SMPLify [Bogo et al. 2016]. To this end, we collect a large mount of videos about speech or talk from TED¹ and YiXi². Then, we conduct the data post-processing pipeline to obtain the final shots of interests. Table 2 shows the statistical data of the motion corpus collection. Finally, we obtain about 400 hours 3D gesture assets of speech. As shown in Table 1, the proposed dataset is significantly larger than previous datasets by at least 6 times.

4 EXPERIMENTS

4.1 Datasets

In this paper, we use the largest high-quality speech-gesture dataset BEAT to evaluate the proposed method. BEAT is constructed by using commercial motion capture system, including face emotion

¹<https://www.ted.com>

²<https://yixi.tv>

Table 2. Statistical data of the collected motion corpus collection.

Items	Number	Average length	Total length
original videos	6,032	~23min	~2,312h
shots-of-interests	138,209	~20s	~746h
final results	70,784	~20s	~393h

and body motion. It contains about 76 hours motion-audio paired data of 30 speakers talking about different topics. We thoroughly post-process the dataset by removing some defective motion sequences such as speaker drinking, wandering, and incorrect motion. Then, the processed BEAT dataset contains 46 hours motion data and its corresponding text and audio. During training the VQVAE model, the original Euler angles are converted to rotation matrix for better convergence. During training the diffusion-based generation model, all motions are represented by latent embeddings in VQVAE latent space. The datasets collected from Internet by video motion capture are only used for pre-training the diffusion model because of its relatively low quality.

4.2 Evaluation Metrics

For content generation tasks, human objective evaluation is the most important evaluation method because of lacking clear ground and explicit criteria. Therefore, the human objective evaluation is the main evaluation method in our experiment. Each motion slice is re-targeted to Mixamo³ model and rendered as a video. The evaluators are asked to rate the slices from the following four aspects respectively: (1) Naturalness (Nat.), (2) Rhythm (Rhy.), (3) Diversity (Div.), (4) Semantic (Sem.). The scores assigned to each rating are in the range of 1-10, corresponding from worst to best. All scores are normalized to 0-1. Besides, we also calculate some quantitative metrics adopted by previous works. FGD [Yoon et al. 2020] measures the distribution difference between generated data and ground truth. Beat Consistency (BC) [Li et al. 2021b] calculates the average distance between every audio beat and its nearest motion beat. Diversity is a metric of measuring the variations of the synthesized gesture. Semantic-Relevant Gesture Recall (SRGR) [Liu et al. 2022b] measures the semantic correct key point of synthesized data by comparing it with the ground truth.

4.3 Implementation Details

The whole training process consists of two steps. Firstly, we train the VQVAE model by using the Adam optimizer with learning rate 0.001 for 400 epochs. Then, we train the diffusion-based gesture generation model using the Adam optimizer with learning rate 0.0002 for 3000 epochs with batch-size 256. The number of diffusion steps for training and inference is set as 1000. During the training of diffusion model, we firstly use the collected data for pre-training (2000 epochs with batch-size 256), and then use the high-quality dataset for fine-tuning (1000 epochs). In the diffusion model, the variances β_t are predefined to increase linearly from 0.0001 to 0.02, with a total of 1000 noising steps set as $T = 1000$. The length of the

³<https://www.mixamo.com>

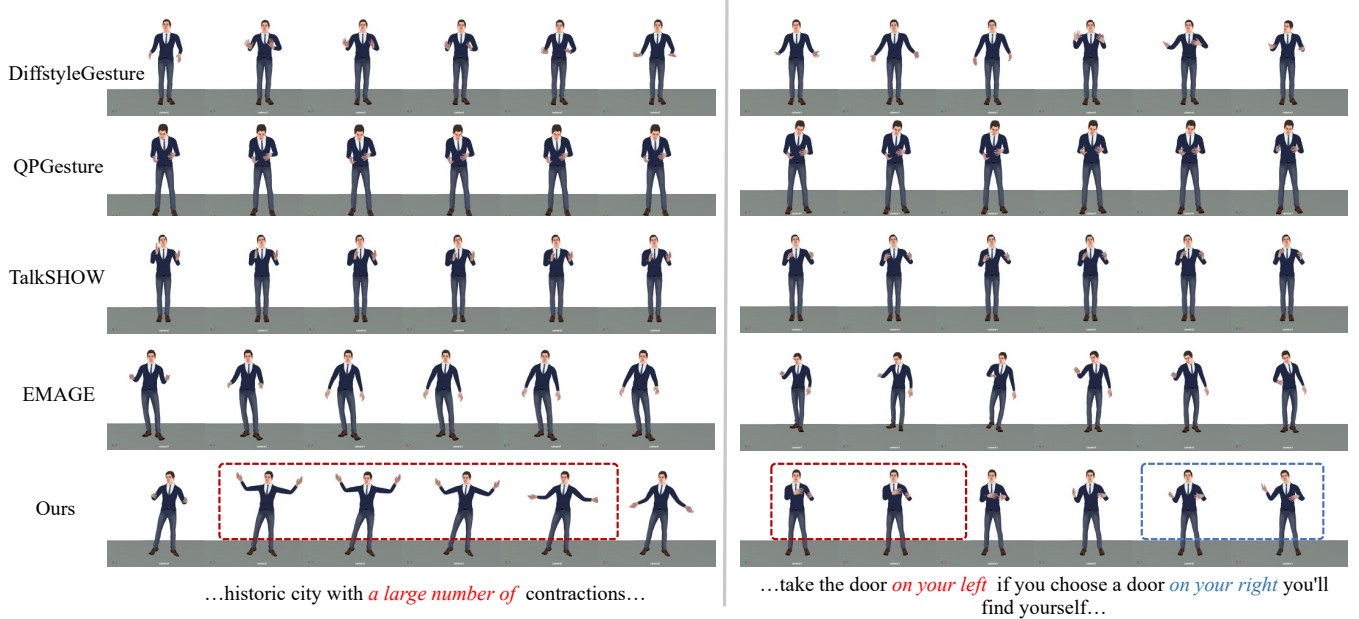


Fig. 3. Visualization results between the proposed method and other state-of-the-art methods.

input audio feature is 12 seconds. We train the diffusion model on 32 V100 GPUs for about one week.

4.4 Comparing Baselines

We compare our method on BEAT dataset with several representative state-of-the-art methods in the last year, including DiffuseStyleGesture [Yang et al. 2023b], TalkSHOW [Yi et al. 2023], QPGesture [Yang et al. 2023a], EMAGE [Liu et al. 2023]. DiffuseStyleGesture [Yang et al. 2023b] is a diffusion model-based co-speech gesture synthesis approach, which takes the motion style into generation process. TalkSHOW [Yi et al. 2023] uses a simple full-body speech-to-motion generation framework with auto-regressive manner, in which the face, body, and hands are modeled separately. QPGesture [Yang et al. 2023a] is a quantization-based and phase-guided motion-matching approach for co-speech gesture synthesis. EMAGE [Liu et al. 2023] leverages a masked gesture reconstruction to enhance audio-conditioned gesture generation.

4.5 Evaluation Results

4.5.1 Qualitative Results. For this task, there is lack of absolutely objective metric to evaluate the performance of various methods. Therefore, we strongly recommend the readers to view our demonstration video to gain an intuitive understanding of the qualitative outcomes. Figure 3 shows some synthesized results of these baselines conditioned on the same speech. From these results, we can observe that the synthesized co-speech gestures of the proposed method are more realistic, agile, and diverse than those of the baselines on BEAT datasets. The baselines suffer different extents of jittering in the results, especially lacking of semantic gesture and naturalness. DiffuseStyleGesture [Yang et al. 2023b] is also a diffusion-based

method, which directly learns the origin motion representations. However, its results lack smoothness and naturalness (e.g. foot sliding). QPGesture [Yang et al. 2023a] exhibits noticeably slower and less varied motion, while ours demonstrates agility comparable to actual movement. For the specific semantic expressions, apart from our approach, other methods cannot effectively synthesize proper semantic gestures. More results are shown in Figure 4. The results indicate that our method can generate proper semantic gestures for the speech semantics. For example, "free will" refers to the first row with open arms; "left" and "right" indicate pointing to the corresponding direction. These results show the surpassing capability of SIGGesture in synthesizing semantic accurate and natural gestures.

4.5.2 User study. As we all known, the evaluation of generative task is very subjective. Although some metrics are introduced to evaluate the performance, there is a huge gap between metric evaluation and human visual perception. We conduct a user study to evaluate the performance of different baselines. Specifically, we randomly select 50 synthesized samples and shuffle results of different methods. Following previous works [Yang et al. 2023b; Zhi et al. 2023], the participants are asked to scoring the gesture based on naturalness, rhythm appropriateness, diversity, and semantic consistence for the shuffled visual results. It's important to note that, for diversity, we enable users to score motion diversity under the condition of smoothness and naturalness. The results of user study are shown in Table 3. The results show that the generated gestures of SIGGesture are dominantly preferred on four metrics over the comparing baselines. Especially, SIGGesture exceeds these baselines by a large margin in semantic relevancy. It can be concluded that large-scale pre-training benefits rhythm and diversity, while semantic injection is advantageous for semantic consistency. Overall,

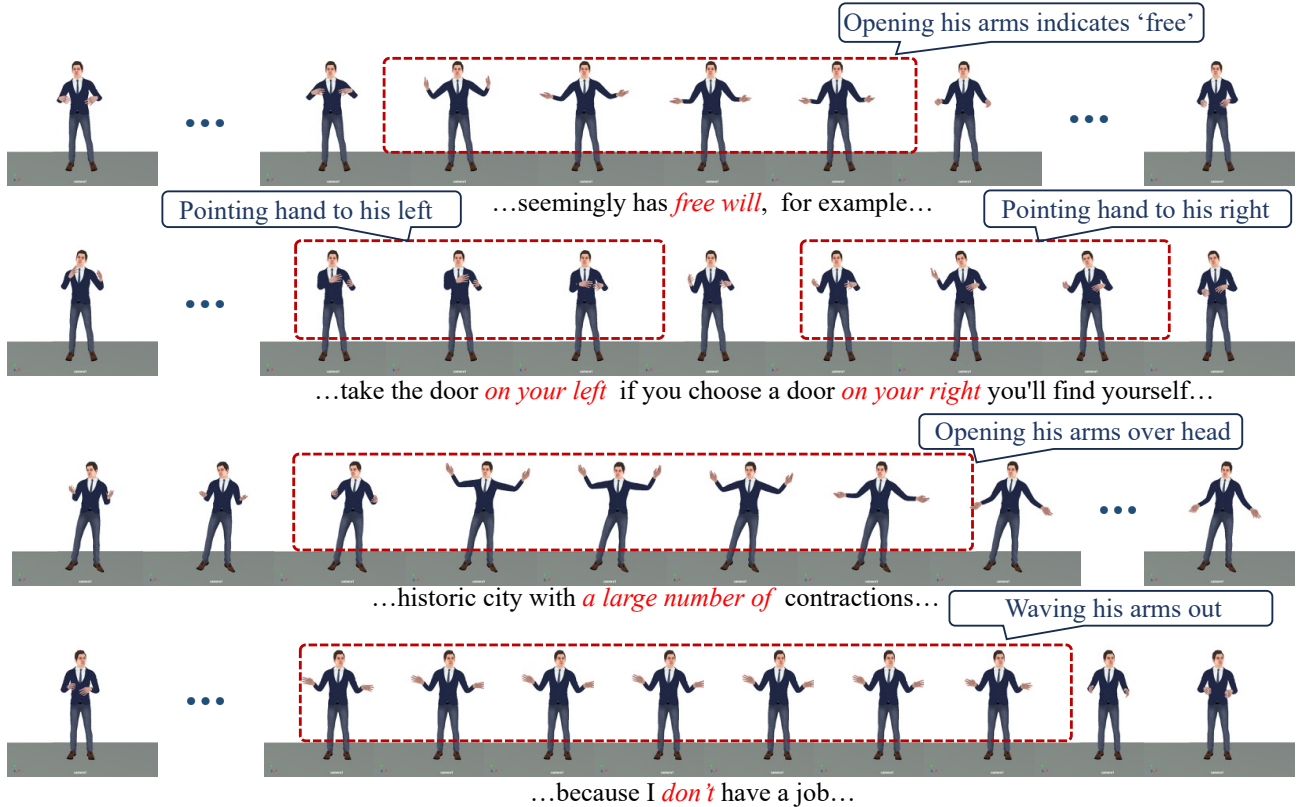


Fig. 4. The visualization results of the proposed method. The gestures in the red box are semantic gesture, which is labeled by the content in green box.

Table 3. The statistical data of user study by comparing the proposed method to baselines. The "↓" means the lower, the better. The "↑" means the higher, the better.

Methods	Nat.↑	Rhy.↑	Div.↑	Sem.↑
DiffuseStyleGesture	0.78	0.82	0.65	0.57
TalkSHOW	0.56	0.63	0.57	0.37
QPGesture	0.62	0.72	0.53	0.56
EMAGE	0.80	0.81	0.79	0.60
SIGGesture	0.82	0.87	0.83	0.92

SIGGesture is capable of generating more realistic, synchronized, diverse, and understandable gestures that humans prefer.

4.5.3 Quantitative Results. We compare our method with the baselines using four metrics on BEAT dataset. The comparison results are shown in Table 4. As discussed in recent works [Ao et al. 2023; Tseng et al. 2023], these metrics have obvious weakness because these values can not keep consistent with the visual results. For example, TalkSHOW [Yi et al. 2023] generates unnatural body movements based on the given audio, as shown in our supplementary video, but the results of these metrics can not show this gap. Besides, the SRGR can not show the difference of various methods, because

Table 4. The statistical data of quantitative results by comparing SIGGesture to the baselines. The "↓" means the lower, the better. The "↑" means the higher, the better.

Methods	FGD↓	SRGR↑	BC↑	Diversity↑
DiffuseStyleGesture	10.14	0.233	0.504	11.975
TalkSHOW	7.313	0.279	0.463	12.859
QPGesture	19.921	0.209	0.453	9.438
EMAGE	5.430	0.272	0.679	13.075
SIGGesture	2.021	0.263	0.707	14.020

SRGR only considers the ground truth semantic motion for a specific speech transcripts. Therefore, the SRGR of our method is lower than TalkSHOW. The reason is that this metric cannot accurately represent semantic performance. Because SRGR calculates the similarity (distance of skeleton) between the generated motion and the GT motion (with semantic labels and duration) in 3D space. For the same sentence, different semantic words can be expressed. All the same, the proposed method can outperform previous works across most metrics. Although we only consider two modalities (audio and speaker identity), the proposed method can excel state-of-the-art model that employs all five modalities, such as DiffStyleGesture.

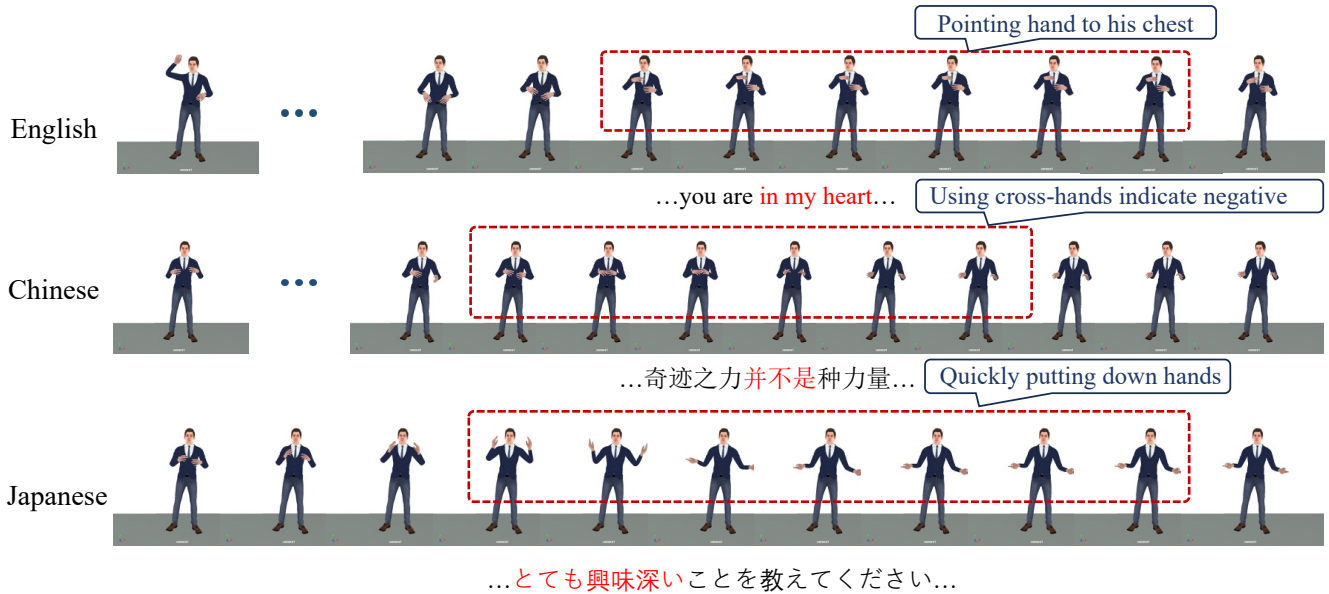


Fig. 5. The visual results of the proposed method on in-the-wild speeches (English, Chinese, and Japanese). The gestures in the red box are semantic gesture, which is labeled by the content in green box.

Table 5. The statistical results of ablation study. "w/o" means "without".

Methods	Nat.↑	Rhy.↑	Div.↑	Sem.↑
baseline	0.56	0.63	0.50	0.38
w/o pre-training	0.64	0.72	0.72	0.87
w/o semantic injection	0.81	0.85	0.76	0.53
SIGGesture (full)	0.82	0.87	0.83	0.92

4.6 Ablation study

In this subsection, we evaluate the contribution of two main parts, large-scale pre-training and semantic injection, by user study. The comparison results are shown in Table 5. The findings reveal that the pre-training with noise data can improve the quality of basic rhythmic gesture. In addition to pre-training, the proposed semantic injection can significantly improve the quality of semantic gesture. The experimental results align with our hypothesis that pre-training with large-scale data can enhance the fundamental capabilities of synthesizing rhythmic gestures, and incorporating semantic injection with LLMs can accurately generate semantic gestures.

4.7 Generalization

To evaluate the generalization ability, we test the proposed method on a broader set of audio samples, including out-of-domain English, Chinese and Japanese. The results are shown in Figure 5. It is also recommended to view the supplementary video for more intuitive understanding. As shown in the visualization, the proposed method can accurately capture the key semantics and present precise gestures cross different language. The enhanced generalization capacity of our methodology is attributable to two principal components.

Firstly, the employment of pseudo-labeled data can significantly improve the generalization ability of rhythmic gestures. Secondly, disentangling the generation of rhythmic and semantic gestures by semantic injection can strengthen the controllability of semantic gesture synthesis. We have established an extensive collection of semantic gestures, encompassing a comprehensive range of gestural expressions. We leverage LLMs as a bridge to link the semantic gesture database with linguistic contexts, which enables robust generalization across diverse languages. This method effectively addresses the challenges posed by the sparsity and long-tail distribution of semantic gestures. As a result, the proposed method has distinguished generalization over different speech inputs.

5 CONCLUSION

In this paper, we introduce a novel method called SIGGesture for high-quality co-speech gesture synthesis. Our approach leverages a semantic injection technique using LLMs to enhance controllability, interpretability, and generalization. Thanks to the capabilities of LLMs, our method can be seamlessly applied to other languages without requiring any complex adjustments. Additionally, we have developed a large-scale 3D gesture dataset sourced from Internet videos to pre-train our diffusion-based synthesis model. By employing a pre-training and fine-tuning paradigm, our generated gestures exhibit greater robustness to variations in audio input. The proposed datasets and accompanying statistical experiments aim to advance the field of co-speech gesture synthesis, including areas such as controllable gesture synthesis and gesture foundation models. Looking ahead, our research will focus on generating full-body animations with enhanced and detailed expressiveness.

6 ACKNOWLEDGEMENTS

We thank Wenhao Ge and Baocheng Zhang for their kindly support.

REFERENCES

- Josh Achiam, Steven Adler, et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774* (2023).
- Simon Alexanderson, Rajmund Nagy, Jonas Beskow, and Gustav Eje Henter. 2023. Listen, denote, action! audio-driven motion synthesis with diffusion models. *ACM Transactions on Graphics (TOG)* 42, 4 (2023), 1–20.
- Tenglong Ao, Qingzhe Gao, Yuke Lou, Baoquan Chen, and Libin Liu. 2022. Rhythmic gesticulator: Rhythm-aware co-speech gesture synthesis with hierarchical neural embeddings. *ACM Transactions on Graphics (TOG)* 41, 6 (2022), 1–19.
- Tenglong Ao, Zeyi Zhang, and Libin Liu. 2023. GestureDiffuCLIP: Gesture diffusion model with CLIP latents. *arXiv preprint arXiv:2303.14613* (2023).
- Alex Bewley, Zongyuan Ge, Lionel Ott, Fabio Ramos, and Ben Upcroft. 2016. Simple on-line and realtime tracking. In *2016 IEEE International Conference on Image Processing (ICIP)*. 3464–3468. <https://doi.org/10.1109/ICIP.2016.7533003>
- Uttaran Bhattacharya, Elizabeth Childs, Nicholas Rewkowski, and Dinesh Manocha. 2021a. Speech2affectivesgestures: Synthesizing co-speech gestures with generative adversarial affective expression learning. In *Proceedings of the 29th ACM International Conference on Multimedia*. 2027–2036.
- Uttaran Bhattacharya, Nicholas Rewkowski, Abhishek Banerjee, Pooja Guhan, Aniket Bera, and Dinesh Manocha. 2021b. Text2gestures: A transformer-based network for generating emotive body gestures for virtual agents. In *2021 IEEE virtual reality and 3D user interfaces (VR)*. IEEE, 1–10.
- Federica Bogo, Angjoo Kanazawa, Christoph Lassner, Peter Gehler, Javier Romero, and Michael J Black. 2016. Keep it SMPL: Automatic estimation of 3D human pose and shape from a single image. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part V 14*. Springer, 561–578.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems* 33 (2020), 1877–1901.
- Zhe Cao, Tomas Simon, Shih-En Wei, and Yaser Sheikh. 2017. Realtime multi-person 2d pose estimation using part affinity fields. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 7291–7299.
- Justine Cassell, David McNeill, and Karl-Erik McCullough. 1999. Speech-gesture mismatches: Evidence for one underlying representation of linguistic and nonlinguistic information. *Pragmatics & Cognition* 7, 1 (1999), 1–34.
- Justine Cassell, Catherine Pelachaud, Norman Badler, Mark Steedman, Brett Achorn, Tripp Becket, Brett Douville, Scott Prevost, and Matthew Stone. 1994. Animated conversation: rule-based generation of facial expression, gesture & spoken intonation for multiple conversational agents. In *Proceedings of the 21st annual conference on Computer graphics and interactive techniques*. 413–420.
- Justine Cassell, Hannes Högni Vilhjálmsón, and Timothy Bickmore. 2001. Beat: the behavior expression animation toolkit. In *Proceedings of the 28th annual conference on Computer graphics and interactive techniques*. 477–486.
- Junming Chen, Yunfei Liu, Jianan Wang, Ailing Zeng, Yu Li, and Qifeng Chen. 2024. DiffSHEG: A Diffusion-Based Approach for Real-Time Speech-driven Holistic 3D Expression and Gesture Generation. *arXiv preprint arXiv:2401.04747* (2024).
- Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Koshioka, Xiong Xiao, et al. 2022. Wavlm: Large-scale self-supervised pre-training for full stack speech processing. *IEEE Journal of Selected Topics in Signal Processing* 16, 6 (2022), 1505–1518.
- Prafulla Dhariwal, Heewoo Jun, Christine Payne, Jong Wook Kim, Alec Radford, and Ilya Sutskever. 2020. Jukebox: A generative model for music. *arXiv preprint arXiv:2005.00341* (2020).
- Ylva Ferstl and Rachel McDonnell. 2018. Investigating the use of recurrent motion modelling for speech gesture generation. In *Proceedings of the 18th International Conference on Intelligent Virtual Agents*. 93–98.
- Nan Gao, Zeyu Zhao, Zhi Zeng, Shuwu Zhang, and Dongdong Weng. 2023. Ges-GPT: Speech Gesture Synthesis With Text Parsing from GPT. *arXiv preprint arXiv:2303.13013* (2023).
- Saeed Ghorbani, Ylva Ferstl, Daniel Holden, Nikolaus F Troje, and Marc-André Carbonneau. 2023. ZeroEGGS: Zero-shot Example-based Gesture Generation from Speech. In *Computer Graphics Forum*, Vol. 42. Wiley Online Library, 206–216.
- Shiry Ginosar, Amir Bar, Gefen Kohavi, Caroline Chan, Andrew Owens, and Jitendra Malik. 2019. Learning individual styles of conversational gesture. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 3497–3506.
- Susan Goldin-Meadow and Martha Wagner Alibali. 2013. Gesture’s role in speaking, learning, and creating language. *Annual review of psychology* 64 (2013), 257–283.
- Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. 2020. Generative adversarial networks. *Commun. ACM* 63, 11 (2020), 139–144.
- Ikhsanul Habibie, Weipeng Xu, Dushyant Mehta, Lingjie Liu, Hans-Peter Seidel, Gerard Pons-Moll, Mohamed Elgharib, and Christian Theobalt. 2021. Learning speech-driven 3d conversational gestures from video. In *Proceedings of the 21st ACM International Conference on Intelligent Virtual Agents*. 101–108.
- Markus Hafner, Maria Katsantoni, Tino Köster, James Marks, Joyita Mukherjee, Dorothee Staiger, Jernej Ule, and Mihaela Zavolan. 2021. CLIP and complementary methods. *Nature Reviews Methods Primers* 1, 1 (2021), 20.
- Dai Hasegawa, Naoshi Kaneko, Shinichi Shirakawa, Hiroshi Sakuta, and Kazuhiko Sumi. 2018. Evaluation of speech-to-gesture generation using bi-directional LSTM network. In *Proceedings of the 18th International Conference on Intelligent Virtual Agents*. 79–86.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. 2020. Denoising diffusion probabilistic models. *Advances in neural information processing systems* 33 (2020), 6840–6851.
- Chien-Ming Huang and Bilge Mutlu. 2012. Robot behavior toolkit: generating effective social behaviors for robots. In *Proceedings of the seventh annual ACM/IEEE international conference on Human-Robot Interaction*. 25–32.
- Longbin Ji, Pengfei Wei, Yi Ren, Jinglin Liu, Chen Zhang, and Xiang Yin. 2023. C2G2: Controllable Co-speech Gesture Generation with Latent Diffusion Model. *arXiv preprint arXiv:2308.15016* (2023).
- Glenn Jocher, Ayush Chaurasia, and Jing Qiu. 2023. *Ultralytics YOLOv8*. <https://github.com/ultralytics/ultralytics>
- Diederik P Kingma and Max Welling. 2013. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114* (2013).
- Taras Kucherenko, Patrik Jonell, Sanne Van Waveren, Gustav Eje Henter, Simon Alexanderson, Iolanda Leite, and Hedvig Kjellström. 2020. Gesticulator: A framework for semantically-aware speech-driven gesture generation. In *Proceedings of the 2020 international conference on multimodal interaction*. 242–250.
- Alex Lascarides and Matthew Stone. 2009. A formal semantic analysis of gesture. *Journal of Semantics* 26, 4 (2009), 393–449.
- Gilwoo Lee, Zhiwei Deng, Shugao Ma, Takaaki Shiratori, Siddhartha S Srinivasa, and Yaser Sheikh. 2019. Talking with hands 16.2 m: A large-scale dataset of synchronized body-finger motion and audio for conversational motion analysis and synthesis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 763–772.
- Jiefeng Li, Chao Xu, Zhicun Chen, Siyuan Bian, Lixin Yang, and Cewu Lu. 2021a. Hybrik: A hybrid analytical-neural inverse kinematics solution for 3d human pose and shape estimation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*. 3383–3393.
- Ruilong Li, Shan Yang, David A Ross, and Angjoo Kanazawa. 2021b. Ai choreographer: Music conditioned 3d dance generation with aist++. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 13401–13412.
- Haiyang Liu, Zihao Zhu, Giorgio Becherini, Yichen Peng, Mingyang Su, You Zhou, Naoya Iwamoto, Bo Zheng, and Michael J Black. 2023. EMAGE: Towards Unified Holistic Co-Speech Gesture Generation via Masked Audio Gesture Modeling. *arXiv preprint arXiv:2401.00374* (2023).
- Haiyang Liu, Zihao Zhu, Naoya Iwamoto, Yichen Peng, Zhengqing Li, You Zhou, Elif Bozkurt, and Bo Zheng. 2022b. Beat: A large-scale semantic and emotional multimodal dataset for conversational gestures synthesis. In *European Conference on Computer Vision*. Springer, 612–630.
- Xian Liu, Qianyi Wu, Hang Zhou, Yinghao Xu, Rui Qian, Xinyi Lin, Xiaowei Zhou, Wayne Wu, Bo Dai, and Bolei Zhou. 2022a. Learning hierarchical cross-modal association for co-speech gesture generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 10462–10472.
- Shuhong Lu, Youngwoo Yoon, and Andrew Feng. 2023. Co-Speech Gesture Synthesis using Discrete Gesture Token Learning. *arXiv preprint arXiv:2303.12822* (2023).
- Stacy Marsella, Yuyu Xu, Margaux Lhomme, Andrew Feng, Stefan Scherer, and Ari Shapiro. 2013. Virtual character performance from speech. In *Proceedings of the 12th ACM SIGGRAPH/Eurographics symposium on computer animation*. 25–35.
- Simbarashe Nyatsanga, Taras Kucherenko, Chaitanya Ahuja, Gustav Eje Henter, and Michael Neff. 2023. A Comprehensive Review of Data-Driven Co-Speech Gesture Generation. In *Computer Graphics Forum*, Vol. 42. Wiley Online Library, 569–596.
- Aaron Van Den Oord, Oriol Vinyals, and Koray Kavukcuoglu. 2017. Neural Discrete Representation Learning. (2017).
- Kunkun Pang, Dafei Qin, Yingruo Fan, Julian Habekost, Takaaki Shiratori, Junichi Yamagishi, and Taku Komura. 2023. Bodyformer: Semantics-guided 3d body gesture synthesis with transformer. *ACM Transactions on Graphics (TOG)* 42, 4 (2023), 1–12.
- Georgios Pavlakos, Vasileios Choutas, Nima Ghorbani, Timo Bolkart, Ahmed A. A. Osman, Dimitrios Tzionas, and Michael J. Black. 2019. Expressive Body Capture: 3D Hands, Face, and Body from a Single Image. In *Proceedings IEEE Conf. on Computer Vision and Pattern Recognition (CVPR)*.
- Shenhan Qian, Zhi Tu, Yihao Zhi, Wen Liu, and Shenghua Gao. 2021. Speech drives templates: Co-speech gesture synthesis with learned templates. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 11077–11086.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural language supervision. In *International conference on machine learning*. PMLR, 8748–8763.

- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog* 1, 8 (2019), 9.
- Jiaming Song, Chenlin Meng, and Stefano Ermon. 2020. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502* (2020).
- Mingyang Sun, Mengchen Zhao, Yaqing Hou, Minglei Li, Huang Xu, Songcen Xu, and Jianye Hao. 2023. Co-Speech Gesture Synthesis by Reinforcement Learning With Contrastive Pre-Trained Rewards. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2331–2340.
- Jonathan Tseng, Rodrigo Castellon, and Karen Liu. 2023. Edge: Editable dance generation from music. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 448–458.
- Yufei Xu, Jing Zhang, Qiming Zhang, and Dacheng Tao. 2022. ViTPose: Simple Vision Transformer Baselines for Human Pose Estimation. In *Advances in Neural Information Processing Systems*.
- Sicheng Yang, Zhiyong Wu, Minglei Li, Zhensong Zhang, Lei Hao, Weihong Bao, Ming Cheng, and Long Xiao. 2023b. DiffuseStyleGesture: Stylized Audio-Driven Co-Speech Gesture Generation with Diffusion Models. In *Proceedings of the Thirty-Second International Joint Conference on Artificial Intelligence, IJCAI-23*. International Joint Conferences on Artificial Intelligence Organization, 5860–5868. <https://doi.org/10.24963/ijcai.2023/650>
- Sicheng Yang, Zhiyong Wu, Minglei Li, Zhensong Zhang, Lei Hao, Weihong Bao, and Haolin Zhuang. 2023a. QPGesture: Quantization-Based and Phase-Guided Motion Matching for Natural Speech-Driven Gesture Generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2321–2330.
- Sicheng Yang, Zunnan Xu, Haiwei Xue, Yongkang Cheng, Shaoli Huang, Mingming Gong, and Zhiyong Wu. 2024. Freetalker: Controllable Speech and Text-Driven Gesture Generation Based on Diffusion Models for Enhanced Speaker Naturalness. *arXiv preprint arXiv:2401.03476* (2024).
- Heyuan Yao, Zhenhua Song, Yuyang Zhou, Tenglong Ao, Baoquan Chen, and Libin Liu. 2023. MoConVQ: Unified Physics-Based Motion Control via Scalable Discrete Representations. *arXiv preprint arXiv:2310.10198* (2023).
- Hongwei Yi, Hualin Liang, Yifei Liu, Qiong Cao, Yandong Wen, Timo Bolkart, Dacheng Tao, and Michael J Black. 2023. Generating holistic 3d human motion from speech. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 469–480.
- Youngwoo Yoon, Bok Cha, Joo-Haeng Lee, Minsu Jang, Jaeyeon Lee, Jaehong Kim, and Geehyuk Lee. 2020. Speech gesture generation from the trimodal context of text, audio, and speaker identity. *ACM Transactions on Graphics (TOG)* 39, 6 (2020), 1–16.
- Youngwoo Yoon, Woo-Ri Ko, Minsu Jang, Jaeyeon Lee, Jaehong Kim, and Geehyuk Lee. 2019. Robots Learn Social Skills: End-to-End Learning of Co-Speech Gesture Generation for Humanoid Robots. In *Proc. of The International Conference in Robotics and Automation (ICRA)*.
- Mingyuan Zhang, Zhongang Cai, Liang Pan, Fangzhou Hong, Xinying Guo, Lei Yang, and Ziwei Liu. 2024b. Motiondiffuse: Text-driven human motion generation with diffusion model. *IEEE Transactions on Pattern Analysis and Machine Intelligence* (2024).
- Mingyuan Zhang, Xinying Guo, Liang Pan, Zhongang Cai, Fangzhou Hong, Huirong Li, Lei Yang, and Ziwei Liu. 2023a. Remodiffuse: Retrieval-augmented motion diffusion model. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 364–373.
- Qinsheng Zhang, Jiaming Song, Xun Huang, Yongxin Chen, and Ming-Yu Liu. 2023b. DiffCollage: Parallel Generation of Large Content With Diffusion Models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 10188–10198.
- Zeyi Zhang, Tenglong Ao, Yuyao Zhang, Qingzhe Gao, Chuan Lin, Baoquan Chen, and Libin Liu. 2024a. Semantic Gesticulator: Semantics-Aware Co-Speech Gesture Synthesis. *ACM Transactions on Graphics (TOG)* 43, 4 (2024), 1–17.
- Yihao Zhi, Xiaodong Cun, Xuelin Chen, Xi Shen, Wen Guo, Shaoli Huang, and Shenghua Gao. 2023. Livelyspeaker: Towards semantic-aware co-speech gesture generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 20807–20817.
- Lingting Zhu, Xian Liu, Xuanyu Liu, Rui Qian, Ziwei Liu, and Lequan Yu. 2023. Taming Diffusion Models for Audio-Driven Co-Speech Gesture Generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 10544–10553.

A MOTION REPRESENTATION

The diffusion model synthesizes the latent feature, and then the decoder of the Vector Quantized Variational Autoencoder (VQVAE) recovers the skeletal rotation from the latent space. VQVAE [Oord et al. 2017] has shown excellent performance in reconstructing complex content, including image, animation, video, etc. This section will present the details of the VQVAE model. We use high-quality skeletal rotations as motion representations and parameterize these rotations using rotation matrices relative to a reference T-pose. The original motion is denoted as $\mathcal{M} = \{m_0, m_1, \dots, m_L\}$, $m_i \in R^{J \times 9}$, where J is the number of skeletal bones and 9 is the dimension of rotation matrix. The initial FPS of different datasets is converted to 30 FPS for a unified standard. For a specific motion sequence \mathcal{M} , we use VQVAE to encode and quantize it into a finite codebook $\mathcal{Z} = \{z_i\}_0^N$, where N is the size of codebook and z_i is a specific lexeme. By using VQVAE, we can quantize the continuous motion into discrete tokens marked as $\mathcal{M}_{token} = \{\mathcal{T}_0, \dots, \mathcal{T}_{L/4}\}$ with $4 \times$ down-sampling. The framework of VQVAE is shown in Figure 6. A piece of original motion \mathcal{M} firstly is converted to a latent embedding $\hat{e} = \{e_0, e_1, \dots, e_{L/4}\}$. Then, $\hat{e} = \{e_0, e_1, \dots, e_{L/4}\}$ is substituted by its nearest vector z_j in the codebook, which can be denoted as $\arg \min_j \|e_i - z_j\|$.

The encoding process can be represented by the following formula

$$\hat{e}_i = VQ_{encoder}(\mathcal{M}). \quad (13)$$

The decoder will reconstruct the motion $\hat{\mathcal{M}}$ from the quantized latent feature as the following formula

$$\hat{\mathcal{M}} = VQ_{decoder}(\hat{e}_i). \quad (14)$$

$VQ_{encoder}$ and $VQ_{decoder}$ are modelled by Convolutional Neural Networks. In the training process, the encoder, the decoder, and the codebook are optimized by the following loss function

$$\mathcal{L}_{VQ} = \mathcal{L}_{recon} + \|\hat{e} - sg(e)\| + \|sg(\hat{e}) - e\|, \quad (15)$$

where \mathcal{L}_{recon} is the reconstruction error and $sg[*]$ denotes the stop gradient operator. The reconstruction error is calculated by the following formula

$$\mathcal{L}_{recon} = \|\hat{\mathcal{M}} - \mathcal{M}\| + \alpha_0 \|\hat{\mathcal{M}} - \mathcal{M}\| + \alpha_1 \|\hat{\mathcal{M}}' - \mathcal{M}'\|, \quad (16)$$

where \mathcal{M}' and \mathcal{M}'' are the velocity and acceleration of the original motion sequence \mathcal{M} respectively. All motions are encoded into latent space for training the diffusion model. In our pipeline, VQVAE serves as a fundamental model used to encode motions into latent space and to recover motions from latent space.

B USER STUDY

We place significant importance on the effectiveness and fairness of our user study evaluations. To this end, we have recruited 30 volunteers (15 men and 15 women), including 5 researchers with expertise in gesture or animation synthesis. Each participant evaluates 250 co-speech gesture videos, which are generated from 50 audio clips using 5 different methods. To ensure that participants understand each metric and can accurately differentiate between them, we provide detailed instructions and training. This training covers the standard evaluation process and explains the differences

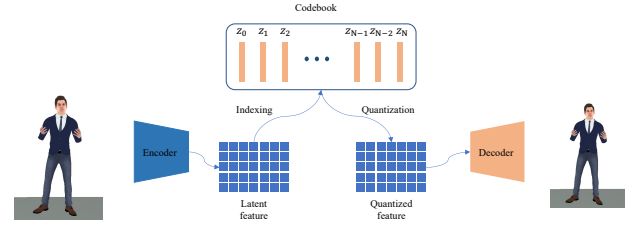


Fig. 6. The architecture of VQVAE. It contains an encoder, a decoder and a codebook.

between the various metrics. The detailed difference of these metric are as following.

The user study focus on the following aspects, Naturalness, Rhythm, Diversity, Semantic. Naturalness refers to how realistically and convincingly the generated motion movements mimic real-world behavior and physics. This includes evaluating whether the movements are fluid, smooth, and consistent with real movements and real-world physical laws. Rhythm metric typically evaluates how well the visual animation aligns with the rhythm or timing of the accompanying audio. This involves examining whether the gesture movements (mainly are hand movements) synchronize effectively with the beats or tempo of the audio. Diversity metric measures how much variety is present in the generated gesture animations produced in response to a specific audio. A higher score of diversity ensures that the synthesized co-speech gestures are not only synchronized with the audio but also rich and varied in a range of different movements and styles rather than repeating similar patterns or showing minimal variation. Semantic metric evaluates how well the animations convey the intended meaning, specific semantic or emotional content of the audio. A high Semantic score indicates that the generated gesture accurately interprets and represents the content of the audio.

Participants first browse the videos to familiarize themselves with the content. They then formally score the videos, with 5 animations from different methods displayed simultaneously on the screen. The differences in scores will reflect the performance variations among the different algorithms.

C VIDEO-BASED COLLECTED DATASET

To ensure safety, raw data is collected from official TED and YiXi sources. Each video on TED and YiXi varies in terms of speaker's gender, age, speech topics, and talking styles. This diversity enriches the dataset with a variety of gesture types. Finally, the dataset contains about 50% English and 50% Chinese. Following previous work [Yoon et al. 2019], the selection criteria for shots of interest include: containing speech content, having a stable background, displaying the entire upper body, facing the camera, and ensuring the body occupies at least 50% of the screen. These video clips are then processed through a gesture motion capture pipeline, depicted in Figure 7, which comprises five key components. Person detection utilizes Yolo-v8 [Jocher et al. 2023], while tracking employs the Sort algorithm [Bewley et al. 2016]. [Bewley et al. 2016]. Person key points are detected by using ViTPose [Xu et al. 2022], which

When people giving a speech, they usually do some gestures to enhance the effectiveness of the speech content. These gestures are named semantic gestures, which can help listeners to better understand the speakers' intention or establish a connection between speaker and listener. The following content defines some specific semantic gesture.

Semantic gesture set:

```
{
Deictics: [me, you, your, he, they, we, my, our, us, here, there, these],
Attitude: [yes, okay, no, not, can't, nobody, don't, couldn't],
Numeral: [one, firstly, two, secondly, three, thirdly, four, finally],
Relationship: [into, next, from, around, left, right, out, outside],
Positive: [great, long, beautiful, happy, more, good, open, awful],
}
```

In this task, you need help me to determine the semantic gestures for a specific speech content. You should provide some semantic words or phrases that people want to emphasize in his speech. The semantic keywords should be in the semantic gesture set or have similar meaning words or phrase in semantic gesture set. This is very important. The output format is: A -> B, A is the word or phrase in the input, B is the word in the Semantic gesture definition set. A must have the same or similar meaning with B.

The following are some positive examples.

Example 1
Input: But more importantly, I understand the meaning of my mother in my life.
Output: ["I" -> "me" in Deictics, "my mother" -> "my" in Deictics, "my life" -> "my" in Deictics]

Example 2
Input: We shouldn't leave the house without the permission of my mother.
Output: ["we" -> "we" in Deictics, "shouldn't" -> "can't" in Attitude, "my mother" -> "my" in Deictics]

Example 3
Input: Dreams are like the stars we never reach in the sky, but like most mariners.
Output: ["we" -> "we" in Deictics, "never" -> "no" in Attitude]

The following are some negative examples.

Input: I firmly believe that nothing can stand in my way.
Output: ["I" -> "me" in Deictics, "my" -> "my" in Deictics, "nothing" -> "nobody" in Attitude, "can" -> "can't" in Attitude]

Reason: "can" shouldn't be contained in the output, because "can" and "can't" have opposite and different meanings.

Now, you need to process the following speech content, and then return the results in list type.
Input: If you think the god haven't blessed you and there is no truth here, you can become the god and create the truth.

Input: If you think the god haven't blessed you and there is no truth here, you can become the god and create the truth.
Output: Output: ["you" -> "you" in Deictics, "haven't" -> "not" in Attitude, "you" -> "you" in Deictics, "no" -> "no" in Attitude, "here" -> "here" in Deictics, "you" -> "you" in Deictics]



Fig. 8. An example of the LLM prompt for generating proper candidate semantic gesture.

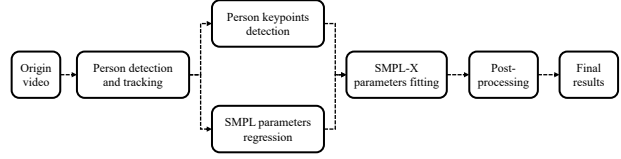


Fig. 7. The process pipeline of video-based gesture motion capture.

are trained on a large-scale dataset. SMPL parameters fitting is like SMPLify [Bogo et al. 2016], which can boost the pose accuracy of SMPLX [Pavlakos et al. 2019]. Post-processing part mainly contains motion smoothing and quality checking.

Finally, the data is represented using the NEUTRAL SMPL-X skeleton. It took about 2 months and utilized 64 V100 GPUs for collecting the video-based gesture data.

D LLM PROMPT

The prompt is divided into three components: the task definition, a series of examples for few-shot learning, and the final task. During inference, the LLM is employed solely to generate accurate semantic gesture mappings from a predefined set. Our experiments utilize GPT-4 [Achiam et al. 2023] to perform this task and also involve a comparison of various prompting strategies, such as zero-shot and few-shot learning. In our findings, zero-shot learning prompts generally fail to produce appropriate semantic gestures. Conversely, few-shot learning prompts demonstrate effectiveness in performing the annotation task and yield meaningful results. It should be noted that these examples for few-shot learning contain both positive and negative examples. Below, we provide an example of the prompt, noting that some terms have been simplified due to page constraints.