# Unraveling overoptimism and publication bias in ML-driven science

Pouria Saidi<sup>a</sup>, Gautam Dasarathy<sup>a</sup>, Visar Berisha<sup>a,b</sup>
<sup>a</sup>School of Electrical, Computer and Energy Engineering,
Arizona State University Tempe, USA, 85281
<sup>b</sup>College of Health Solutions, Arizona State University, Tempe, USA, 85281

#### Abstract

Machine Learning (ML) is increasingly used across many disciplines with impressive reported results across many domain areas. However, recent studies suggest that the published performance of ML models are often overoptimistic. Validity concerns are underscored by findings of an inverse relationship between sample size and reported accuracy in published ML models, contrasting with the theory of learning curves where accuracy should improve or remain stable with increasing sample size. This paper investigates factors contributing to overoptimistic accuracy reports in ML-driven science, focusing on data leakage and publication bias. We introduce a novel stochastic model for observed accuracy, integrating parametric learning curves and the aforementioned biases. We then construct an estimator that corrects for these biases in observed data. Theoretical and empirical results show that our framework can estimate the underlying learning curve, providing realistic performance assessments from published results. Applying the model to meta-analyses in ML-driven science, including neuroimaging-based and speech-based classifications of neurological conditions, we find prevalent overoptimism and estimate the inherent limits of ML-based prediction in each domain.

#### 1 Introduction

Recent advancements in machine learning (ML) have opened new avenues for research across many disciplines, giving rise to the field of ML-based science (e.g. sociology [1], medicine [2], education [3] and digital health [4]). The rapid adoption of ML in these fields is driven in large part by high reported accuracies in academic publications.

Despite impressive reported results, several recent studies have raised questions about their validity [5–7]. For instance, a collection of results from a survey of prediction of brain disorders [6] reveal an unexpected negative association between sample size and reported accuracy in these studies. In Fig. 1a and 1b we illustrate this negative relationship for ML-based studies focused on prediction of Alzheimer's Disease (AD) and Schizophrenia. A similar trend has been reported in [8], where the authors analyzed published accuracies of speech-based ML models to predict AD and other forms of cognitive impairment (CI) [9–11], and in [12], where the authors analyze the performance of ML models for detection of Autism spectrum disorder (ASD). This is in contrast with our theoretical understanding of machine learning, where increasing sample sizes should not decrease the accuracy of a properly trained model [8, 13]. Fig. 1c illustrates a well-behaved learning curve that follows this intuition, and is obtained by solving a binary classification problem using properly-trained and evaluated ML models with randomly sampled datasets of different sample size.

The authors in [8] postulate that overfitting and publication bias give rise to the negative association between reported accuracy and sample size. Overfitting occurs when a model captures not only the underlying patterns in the training data but also its noise and idiosyncrasies, leading to poor generalization on new, unseen data. This issue is especially pronounced in situations with limited data. It can become challenging to identify overfitting in the presence of data leakage, an unintended connection between training and test datasets that arise due to mistakes in data collection and pre-processing [7,14]. Data leakage has gained considerable attention recently in ML-based science [7], with the recognition that it likely results in overestimation of the model's performance and unrealistic reported accuracy, particularly at small sample sizes.

<sup>\*</sup>e-mail:psaidi@asu.edu

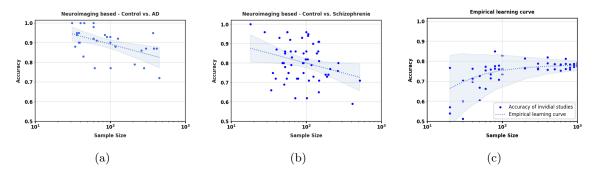


Figure 1: The reported accuracy vs. sample size from a collection of results in a meta-analysis study [6]. This analysis considers neuroimaging-based classification models between a control group and a patient cohort with (a) Alzheimer's disease (AD), and (b) Schizophrenia. (c) An empirical learning curve that is obtained by solving a binary classification problem using different ML models and sample sizes. The y-axis is in linear scale and the x-axis is in log scale.

A less-studied cause of overoptimism in ML-based papers is publication bias. It is known that training an ML model with limited data typically results in high variance accuracy estimates [15]. This increased variability can lead to instances where the accuracy of the model is both underestimated and overestimated. However, models with higher estimated accuracy are more likely to be published [16], a phenomenon known as publication bias or the file drawer effect in the social and medical sciences [17]. As a result, models with inflated estimates of the performance are more likely to be published. Meanwhile, models trained with larger sample sizes produce results that are more accurate and exhibit less variability, making them a more reliable measure of accuracy. Therefore, both data leakage and publication bias have a greater impact on models when the sample size is small, and this effect diminishes as the sample size increases. Hence, we posit that the negative association observed in Fig. 1 is attributable to data leakage and publication bias. Both causes of overoptimism are likely compounded by the incentives created by the academic community's outsized emphasis on high accuracy as a primary reason for publication of new methodologies in ML-based science and the increased analytical flexibility of ML methods [18].

Overoptimistic reported accuracy results create challenges for true scientific progress and responsible deployment of ML models. They create a skewed perception of the state of knowledge in the field and inflate expectations for the practical application of research. These inflated expectations can lead to sensationalized stories in the press and premature deployment [19,20]. When these models fail after deployment, these expectations are not met and can negatively impact the public's trust in this technology [21]. We posit that this problem may be amplified for some fields with the new federal public access policy mandates access to the results of federally funded research [22,23]. Ioannidis [18] discussed that rapidly evolving scientific fields with more scientific teams involved and with greater flexibility in design and analytical methods, have higher chances to report false and overoptimistic research findings. Availability of new data in ML-based science will likely attract more scientific teams and consequently, this may lead to an increase in the number of publications. This has the potential to set the stage for a perfect storm where deciding whether the new results are trustworthy or not becomes more difficult, even for the experts in the field.

In this paper, we present a novel observation model for the *published* classification accuracy of ML models based on the notion of parametric learning curves, taking into account both overfitting and publication bias. We leverage this model and further propose a solution to alleviate the overoptimism and determine realistic estimates of model performance by correcting the bias due to both causes.

#### 1.1 Proposed model

We introduce the main idea of our modeling approach here. A more detailed explanation appears in the Materials and Methods section. The relationship between training dataset size n and a machine learning model's performance y(n) (say classification accuracy) is known to be effectively modeled using equations of the form  $y(n) = A + \alpha n^{\beta}$  [24–28]. Such models, known as *power laws*, have found application in a variety of areas such as network science [29], social science [30] and infection disease surveillance [31].

Consider a scenario where a research team has access to a dataset of sample size n for the development of a binary classification model. During ML model development, the team iterates

over the dataset multiple times, adjusting parameters and algorithms based on insights gained from previous runs, resulting in the final estimate of model accuracy. We propose an observation model for such estimates of the accuracy as

$$\mathbf{y}_n^{\star} = A + \alpha n^{\beta} + \mathbf{w}_n \,, \tag{1}$$

where  $\mathbf{y}_n^{\star}$  is the classification accuracy of an ML model given the sample size - n,

- A is the limiting performance
- $\beta < 0$  is the learning rate
- $\alpha < 0$  is the power law index
- $\mathbf{w}_n \sim \mathcal{N}\left(\mu_n, \sigma_n^2\right)$  is a random variable with a Gaussian distribution. The idea behind adding  $\mathbf{w}_n$  is twofold. The random variable  $\mathbf{w}_n$  accounts for the inherent variations in the estimates of the model accuracy and the effects of data leakage on estimated accuracy. Variations in model accuracy arise due to differences in data selection and data splitting for model training and testing, and they scale with  $1/\sqrt{n}$  [32,33]. We incorporate this information and use  $\sigma_n = c_1/\sqrt{n}$ , where  $c_1$  is a constant, to quantitatively model the variations in model accuracy. Similarly, previous studies have shown that data leakage inflates estimated model accuracies with  $n^{-0.5}$ . As a result, we adjust the mean of the Gaussian distribution to  $\mu_n = \zeta n^{-0.5}$  [32,34] to model this. Here,  $\zeta$  denotes the overfitting index, or the bias in the average accuracy estimate due to data leakage.

The model proposed in Eq. (1) posits that the average performance of the model can be represented as  $A + \alpha n^{\beta}$  in the absence of overfitting. By applying this model across a range of sample sizes, the parametric model uncovers the true estimate of the learning trajectory, or learning curve, of the ML model.

A research team may elect to publish the observed results or not, depending on whether they deem the resulting accuracy sufficiently high for publication. Such self-selection has been shown to cause a bias in the published literature [35]. We model publication bias in the reported classification accuracies using a selection mechanism [36]. Under this model, a research team decides to publish their result if the classification accuracy  $\mathbf{y}_n^{\star} > \gamma_n$ , where  $\gamma_n$  is a threshold that depends on the sample size. This operation models, for instance, self-selection by the authors and peer review. We posit that this process is carried out independently by multiple research teams at various levels of data availability. The selection model, therefore, implies that consumers of this literature only observe a biased sample of accuracies that are greater than some threshold.

In this work, we aim to estimate the parameters of the parametric learning curve in Eq. (1) from the observed classification accuracies. Due to the censoring of observations from publication bias, conventional methods such as ordinary least squares lead to the unrealistic negative association observed in Fig. 1. Therefore, we propose a new solution based on truncated regression to estimate the parameter values and provide theoretical and empirical results that demonstrate we can reliably estimate the true learning curve from a series of overoptimistic observations.

#### 1.2 Contributions

The following summarizes the main contributions of this paper:

- We propose a novel observation model for the published classification accuracy of ML models.
  This model is based on the notion of parametric learning curves that can be represented using
  power law models, and it accounts for overfitting and publication bias as two influencing factors
  for overoptimism in the ML literature.
- We propose a solution based on truncated regression and show theoretically that it is possible
  to identify the learning trajectory of ML models even without prior information about the
  selection model. Furthermore, we use the observation model to devise a cost function for
  estimating the true learning curve from overoptimistic accuracy results.
- We apply the model to different meta-analyses in the digital health literature. Particularly, we consider meta-studies of brain disorders, including Alzheimer's disease (AD) and other forms of cognitive impairment (CI), Schizophrenia, attention deficit hyperactivity disorder (ADHD), and Autism spectrum disorder (ASD); the reported ML model results are based on multiple modalities such as neuroimaging and speech data. Our analysis highlights the prevalence of overoptimism in these fields and provides realistic estimates of ML model performance in each field.

#### 2 Results

We evaluate the observation model and the accuracy of the solution in estimating ML model performance under overoptimism. The evaluation comprises three interconnected experiments, each highlighting a key component of the model's performance and relevance.

Experiment 1 serves as a foundational test, where we generate data directly from the observation model and estimate the known underlying learning curve. This experiment establishes the basic efficacy of our model, demonstrating its capability to accurately recover learning curve parameters in a controlled environment. This sets the stage for more complex scenarios in subsequent experiments.

Experiment 2 is a realistic simulation of the real-world process of ML model development, integrating elements of overfitting and selective reporting based on a minimal accuracy threshold. We consider binary classification problems and first empirically derive the true learning curve by progressively increasing sample sizes in ML model training. Next we model data leakage by performing feature selection on all data, then split into a training and test set for model training and evaluation. Finally, we only "report" accuracies greater than a pre-established threshold (unknown to the recovery algorithm). Our model uses the reported accuracies to estimate the learning curve. This experiment is pivotal as it showcases the model's robustness and validity in replicating real-world ML development scenarios, where overfitting and publication bias are prevalent.

Finally, Experiment 3 uses reported accuracies from published meta-analysis across different digital health applications to estimate the underlying learning curve. Then, for some of the fields where data is available, we identify studies published after the meta-analysis publication date (to ensure they are not included in our algorithm) with relatively large sample-sizes to compare our estimates of accuracy with those published from large data. This experiment allows us to evaluate the model on real data and to estimate the amount of overoptimism across different fields of study. It is important to note that in this experiment, we extend the concept of learning curves beyond a single model and architecture [37] to encompass a specific field. Our underlying assumption is that the average performance of all ML models within this field can, in expectation, be expressed using the proposed model outlined in Eq. (1).

#### Experiment 1 (Sampling from the observation model)

In this experiment, we directly sample from the observation model in Eq. (1). We simulate K = 100 researcher teams independently developing ML models for a binary classification problem, given a dataset with sample size of n. The attained classification accuracies are governed by the parametric model in Eq. (1). We consider the case where there is a pre-defined threshold  $\gamma_n$  (unknown to the recovery algorithm) that governs the decision of each of the teams to publish.

Herein, we highlight the results from two sets of model parameters, with additional cases detailed in the supplementary information.


- Problem 1: A = 0.78,  $\alpha = -1.24$ ,  $\beta = -0.76$ ,  $\zeta = 0.45$  and  $c_1 = 0.50$ .
- Problem 2:  $A = 0.75, \, \alpha = -0.75, \, \beta = -0.57, \, \zeta = 0.85$  and  $c_1 = 0.40.$

We simulate our models using these two sets of parameters to generate 100 sample classification accuracies for various sample sizes n, ranging from 20 to 1000, accepting only those above the set threshold  $\gamma_n$ . We aim to recover the true learning curve, only from the reported accuracies.

Fig 2a and 2b show the results, for Problem 1 and Problem 2, respectively. The blue points represent reported accuracies that are inflated due to data leakage and publication bias. The plots further show that the estimated learning curves (red-dashdot lines) and the true learning curves (green-dashed lines) are in close agreement.

### Experiment 2 (Simulating data leakage and publication bias in binary classification)

We consider two binary classification problems with high dimensional features  $\mathbf{x}$ , and corresponding labels  $\mathbf{z}$ . The detailed description of the feature vectors and their corresponding labels are provided in the SI. We consider the scenario where K=20 research teams train ML models, with each team performing feature selection on the complete dataset (prior to train-test split) to simulate a common form of data leakage and overfitting [12]. Then, each team randomly selected a training set (70% of the data) and trained a different ML model. Finally, each team produced an estimate of the accuracy of their classifier on the remaining (30%) of the data. To account for publication bias, only those






Figure 2: Evaluation of the proposed method per Experiment 1 where we sample from the observation model for (a) Problem 1: A=0.78,  $\alpha=-1.24$ ,  $\beta=-0.76$ ,  $\zeta=0.45$  and  $c_1=0.50$ . (b) Problem 2: A=0.75,  $\alpha=-0.75$ ,  $\beta=-0.57$ ,  $\zeta=0.85$  and  $c_1=0.40$ . The results show the overoptimistic accuracies (blue circles), fit to the overoptimistic results (blue line), the new estimates of the learning curve (red line) along the true learning curve (green line). The y-axis is in linear and x-axis is in log scale.


accuracies that are greater than a pre-specified threshold  $\gamma_n$  are reported. To establish a baseline for comparing the learning curve estimated from only the overoptimistic samples, we attain estimates of the true learning curve by iteratively increasing the sample size and training the model without data leakage and without publication bias. We repeat this process 100 times and average over these values.

Fig. 3 shows the overoptimistic classification accuracies (blue circles) and the fit to these published results (solid blue line). The estimated learning curves (red-dashdot lines) is in close agreement with the estimated true learning curves (green-dashed lines). These result provide further backing to our theoretical results in the supplement that the true learning curve is estimable from the overoptimistic estimates using the proposed framework.

#### Experiment 3 (Estimating the limits of prediction from meta-analyses)

Next, we turn our attention to data from published studies that use ML in a binary classification context. Our aim is to estimate the limits of using ML in a particular field from published results. We focus on published accuracies from meta-analyses of binary classification tasks for prediction of brain disorders [6,9–12]. Several studies have reported on the overoptimism in this literature, as evidenced by the negative association in Fig. 1. We consider several cases of interest:

- Case 1: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with Alzheimer's disease (AD) and healthy controls.
- Case 2: Classification accuracy of ML models developed using speech data [9–11] for classifying between patients with AD and healthy controls.
- Case 3: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with Autism spectrum disorder (ASD) and healthy controls.
- Case 4: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with attention-deficit hyperactivity (ADHD) and healthy controls.
- Case 5: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with Schizophrenia and healthy controls.
- Case 6: Classification accuracy of ML models developed using speech data [9–11] for classifying between patients with forms of cognitive impairment that is not Alzheimer's disease (CI) and healthy controls.
- Case 7: Classification accuracy of ML models developed using multi-modality data [12] for classifying between patients with ASD and healthy controls.






Figure 3: Evaluation of the proposed method per Experiment 2 where we simulate data leakage and publication bias in binary classification, (a) Problem 1, (b) Problem 2. The results show the overoptimistic accuracies (blue circles), fit to the overoptimistic results (blue line), the new estimates of the learning curve (red line) along the true learning curve (green line). The y-axis is in linear and the x-axis is in log scale.

Table 1: The estimated limiting performance derived from meta-analyses of the prediction of brain disorders, alongside the published classification accuracy and sample size from individual studies. Abbreviations: HC—Healthy control group, NI—Neuroimaging, AD—Alzheimer's disease, SZ—Schizophrenia, ASD—Autism spectrum disorder

Problem	Limiting Performance	Reference	Sample size	Reported accuracy
NI-based HC vs. AD	0.88, [0.84 - 0.96]	[38]-(2022)	85721	0.91
NI-based HC vs. SZ	0.73, [0.70 - 0.81]	[39]- $(2019)$	1100	0.80
NI-based HC vs. ASD	0.87, [0.80 - 0.93]	[40]- $(2022)$	1026	0.75

Here, we present the first two cases and provide the remainder in the SI. Fig. 4a and 4b illustrates the published classification accuracies (blue circles), and the fit to the overoptimistic results (blue) along with the estimated, de-biased learning curves (red) for the neuroimaging-based and speech based classification of AD, respectively. As depicted in Fig. 4, many of the individual studies from the meta-analyses (blue circles) fall outside the upper confidence band of the corrected learning curves (red-dashdot lines); these are identified as overoptimistic published results by the model.

We compare the estimated limiting performance of the parametric model (i.e., parameter  $\tilde{A}$ ) with large-scale studies published after the publication of the meta-analyses above in Table 1. In some cases, large-scale studies are not available, as collecting large datasets in these fields can be challenging. Nevertheless, we postulate that the reported performance of ML models trained with larger sample sizes should be more realistic, as the impacts of publication bias and overfitting diminish with increasing sample size. Table 1 lists the estimated limiting performance across different fields in digital health, including 95% confidence intervals, alongside the reported accuracy of recent large-scale individual studies with their corresponding sample sizes. The results indicate that reported classification accuracies from larger studies [38,39] fall within the confidence intervals of limiting performance and the estimated learning trajectories for the prediction of AD and Schizophrenia. On the other hand, the reported accuracy for prediction of ASD from [40] is below the anticipated value, estimated by the new, recovered learning curve. This suggests the possibility of further improvement in model development for the large sample-size study published in [40].

#### 3 Materials and Methods

In this section, we first discuss the causes behind overoptimism in the ML-based science literature, and the reasoning behind the proposed model. Then, we provide the details of the proposed solution toward alleviating the overoptimism in published results.

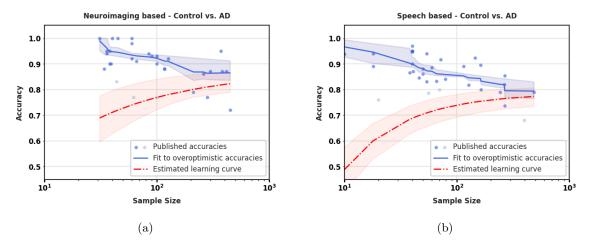


Figure 4: Estimates of the learning trajectories of ML models from (a) meta-analyses of neuroimaging-based prediction of AD [6] and (b) speech-based prediction of AD [9–11] per Experiment 3. The results show the new estimates of the empirical learning curve (red), with the published results (blue circles) and fit to the observations (blue). Faded blue circles shown are considered as outliers and were removed from analysis. y-axis is in linear and x-axis is in log scale.

#### 3.1 Observation model for reported classification accuracy

Learning curves are powerful tools that provide insight into the capabilities of ML models in a specific domain. In the context of supervised learning, the learning curves [41] describe the predictive performance of an ML model by illustrating an estimate of its performance for different sample sizes. One can construct an empirical learning curve by analyzing the classification accuracy of an ML model across a range of sample sizes. A true learning curve accurately represents an ML model's performance for a specific problem, offering insights into how the model's effectiveness changes with the addition of more data samples. Predicting an ML model's capabilities accurately is crucial for guiding future investments and conserving resources by avoiding inefficiencies. However, as demonstrated in Fig. 1, the pervasive overoptimism in ML-based science research can obscure the identification of genuine learning curves. This issue of overoptimism, as suggested by the authors in [8], is likely driven by overfitting and publication bias within the ML scientific community. Overfitting: The literature on machine learning (ML) in scientific research highlights instances of data leakage, a critical issue that leads to models overfitting the test data and producing overly optimistic estimates of classification accuracy. Data leakage often stems from improper separation between training and test datasets. A detailed classification of data leakage within ML research is presented in [7]. Furthermore, smaller datasets exacerbate the problem, as models are more likely to learn from noise and unique dataset characteristics, thus increasing the risk of overfitting. Evidence suggests that reusing a test set multiple times during model development introduces significant overfitting

Publication bias: Inspired by the work on selection bias in econometrics, we model publication bias in similar fashion [36]. We assume that K research groups are independently working on a dataset of sample size n, with each group building an ML model using this data without influence from other groups, and estimating its accuracy. Let  $\mathbf{y}_{n_k}^{\star}$  denote the classification accuracy obtained by the k-th research team, where  $k = 1, 2, \ldots, K$ , for datasets of size n. Then, we can write:

errors, quantifiable as  $\Omega(tn^{-0.5})$ , with t representing the test set's number of reuses [32, 34]. Our proposed model, outlined in Eq. (1), integrates this understanding by incorporating Gaussian noise

with an elevated mean of  $\zeta n^{-0.5}$  to account for overfitting effects.

$$\begin{cases} \mathbf{y}_{n_k} = \mathbf{y}_{n_k}^{\star} \text{ for } k = 1, \dots, K & \text{if } \mathbf{y}_{n_k}^{\star} \ge \gamma_n, \\ \mathbf{y}_{n_k}^{\star} \text{ not observed} & \text{if } \mathbf{y}_{n_k}^{\star} < \gamma_n \end{cases}$$
(2)

where  $\mathbf{y}_{n_k}$  denotes the published classification accuracy for team k using sample size n to build and test their model. Eq. (2) indicates that accuracy  $\mathbf{y}_{n_k}^{\star}$  is observed (published) only if it surpasses a threshold  $\gamma_n$ ; otherwise it remains unobserved (unpublished). Consequently, the count of published accuracies, M, is less than the total number of conducted studies and their corresponding accuracies, implying  $M \leq K$ . Acknowledging that publication bias more significantly affects studies with smaller sample sizes and diminishes as sample size increases, we model  $\gamma_n$  as a decreasing function of sample size. In addition, models trained with larger sample sizes generally exhibit higher reliability, and

consequently, researchers are more inclined to publish studies with large sample sizes. This further supports the rationale that the threshold  $\gamma_n$  should be modeled as a decreasing function of n.

The proposed selection model (Eq. (2)) highlights publication bias, indicating that some studies' results may remain unpublished. To mitigate this bias and accurately estimate the true learning trajectory of ML models, we employ regression with truncated samples. This approach aims to estimate the statistics of Gaussian distributions from the observed data. We outline a solution for estimating these statistics and the parameters of the learning curve. Additionally, a theoretical analysis on the identifiability of this learning trajectory, through the lens of identifying the mean and variance of truncated Gaussian distributions, is presented in the Supplementary Information (SI).

#### 3.2 Proposed solution

Assume  $x \sim \mathcal{N}(\mu, \sigma^2)$ , then from [42] we can write

$$\mathbb{E}\left[x|x>\gamma\right] = \mu + \sigma \frac{\phi\left(\frac{\gamma-\mu}{\sigma}\right)}{1-\Phi\left(\frac{\gamma-\mu}{\sigma}\right)},\tag{3}$$

and

$$\mathbf{Var}\left[x|x>\gamma\right] = \sigma^{2} \left[1 + \frac{\gamma - \mu}{\sigma} \left[\frac{\phi\left(\frac{\gamma - \mu}{\sigma}\right)}{1 - \Phi\left(\frac{\gamma - \mu}{\sigma}\right)}\right] - \left[\frac{\phi\left(\frac{\gamma - \mu}{\sigma}\right)}{1 - \Phi\left(\frac{\gamma - \mu}{\sigma}\right)}\right]^{2}\right],\tag{4}$$

where  $\phi$  (.) denotes the probability density function (PDF) of a standard normal distribution,  $\Phi$  (.) is the cumulative density function (CDF) of a standard normal distribution, and  $\mathbf{Var}[x]$  denotes the variance of x. The ratio in Eq. (3) is known as the inverse of the Mills ratio [43]. Given the parametric model in Eq. (1) with  $\mathbf{y}_n^* \sim \mathcal{N}\left(A + \alpha n^\beta + \zeta n^{-0.5}, \sigma_n^2\right)$ , from Eq. (3) we can write:

$$\mathbb{E}[\mathbf{y}_n|\mathbf{y}_n > \gamma_n] = A + \alpha n^{\beta} + \zeta n^{-0.5} + \sigma_n \psi(n; A, \gamma_n, \alpha, \beta, \zeta, c_1)$$
(5)

where  $\sigma_n = c_1/\sqrt{n}$  and

$$\psi(n; A, \gamma_n, \alpha, \beta, \zeta, c_1) = \frac{\phi\left(\frac{\gamma_n - A - \alpha n^{\beta} - \zeta n^{-0.5}}{\sigma_n}\right)}{1 - \Phi\left(\frac{\gamma_n - A - \alpha n^{\beta} - \zeta n^{-0.5}}{\sigma_n}\right)}.$$
 (6)

For brevity, we use the notation  $\psi(n)$  for  $\psi(n; A, \gamma_n, \alpha, \beta, \zeta, c_1)$ . The average *published* classification accuracy can be expressed as in Eq. (5) where the summation of the first two terms models the true learning curve, i.e.,  $A + \alpha^{\beta}$ , the term  $\zeta n^{-0.5}$  models overfitting, and  $\psi(n)$  in Eq. (6) models the impact of publication bias. From Eq. (4), the variance of this estimate is

$$\mathbf{Var}[\mathbf{y}_{n}|\mathbf{y}_{n} > \gamma_{n}] = \sigma_{n}^{2} \left( 1 + \frac{\gamma_{n} - A - \alpha n^{\beta} - \zeta n^{-0.5}}{\sigma_{n}} \psi(n) - \psi^{2}(n) \right). \tag{7}$$

Cohen (1991) demonstrated that the method of moments can be used to estimate the parameters of a truncated Gaussian distribution by matching the empirical mean and variance of observed samples to those expected from the truncated distribution [42]. Building on this concept, we propose the following multi-objective optimization problem that aims to find the best match between the observed data's statistical properties and those of a theoretical truncated Normal distribution:

$$\min_{A,\alpha,\beta,\zeta,c_1} f_m\left(A,\alpha,\beta,\zeta,c_1\right) 
\text{Subject to} 
f_1\left(A,\alpha,\beta,\zeta,c_1\right) = \sum_{n\in\mathbb{N}} \left(\bar{\mathbf{y}}_n - A - \alpha n^{\beta} - \zeta n^{-0.5} - \sigma_n \psi\left(n\right)\right)^2 
f_2\left(A,\alpha,\beta,\zeta,c_1\right) = ,$$

$$\sum_{n\in\mathbb{N}} \left(\bar{\sigma}_n^2 - \sigma_n^2 \left(1 + \frac{\gamma_n - A - \alpha n^{\beta} - \zeta n^{-0.5}}{\sigma_n} \psi\left(n\right) - \psi^2\left(n\right)\right)\right)^2 
0.5 \le A \le 1, -2 \le \alpha \le -0.5, -1 \le \beta \le 0, 0 \le \zeta \le 1, 0 < c_1 \le 0.5$$

where  $\bar{\mathbf{y}}_n$  and  $\bar{\sigma}_n^2$  are sample mean and sample variance of the reported accuracies given a sample size n, and set N contains all sample sizes used in published studies within a specific field. We use

the non-dominated sorting genetic algorithm (NSGAII) [44] to solve the non-convex optimization program in Eq. (8). To find the optimal solution, we first construct the pareto front of non-dominated solutions to this problem. Among this set, we select the optimal solution by using  $f_1(A, \alpha, \beta, \zeta, c_1)$  as the augmented scalarization function (ASF) [45].

We denote the new estimated learning curve as  $\tilde{A} + \tilde{\alpha}n^{\tilde{\beta}}$  where  $\tilde{A}$ ,  $\tilde{\alpha}$  and  $\tilde{\beta}$  are the estimates of the parameters A,  $\alpha$  and  $\beta$  respectively; we denote the fit to the overoptimistic accuracies using Eq. (5). We build the confidence intervals around these estimates using bootstrapping [46,47] where we sampled from the reported accuracies randomly and with replacement to construct a bootstrap sample and repeat this process 10000 times.

In contrast to traditional regression analyses with truncated samples, which often presuppose knowledge of a threshold  $\gamma_n$  [36,42], our approach does not assume this threshold is known beforehand. We use the maximum likelihood estimate of the threshold, which is the smallest observed value among the data, known as the minimum order statistic [48]. To smooth this statistic, We apply a sliding window technique, with a window length of 2 and a stride of 1, across reported sample sizes,  $\gamma_n$ , taking the lowest reported accuracy within each window as our threshold.

#### 3.3 Limitations

As demonstrated in the SI, there is no fundamental identifiability issue in estimating the trajectory of machine learning models from overoptimistic observations when many observation are available. However, the theoretical results provide limited insight into the sample size of observations required to recover the parameters. Furthermore, when applying the model to results from meta-analyses, evaluating the resulting estimates is difficult due to the absence of ground truth. Although we recommend comparison with individual, large-scale studies, such studies are often unavailable. Additionally, even when such studies are available, the complete model development process may remain opaque, and it is uncertain whether these models have achieved their maximum performance potential.

#### 4 Conclusion

There is evidence of a prevalence of overly optimistic results in ML-based science, including in the digital health literature. We posit that this overoptimism stems from publication bias and overfitting, phenomena that distort our understanding of a model's true performance. In this paper, we proposed a novel model based on parametric learning curves to express the reported classification accuracy of ML models, taking into account both overfitting and publication bias. We further proposed a solution based on regression with truncated samples to alleviate the overoptimism in the literature. This novel technique paves the way for a more accurate understanding of the capabilities of ML models in specific fields using existing, yet overoptimistic, published results. Our results on synthetic data, based on the observation model, demonstrate the success of the proposed solution. Meanwhile, results on real data from meta-analyses in digital health reveal a divergence between the reported accuracies and the newly estimated learning curves. The estimated performance limits and convergence rates of these curves can help reveal the true capabilities of ML models across these fields. Furthermore, they can substantiate trust in published results, especially those obtained with limited samples, should they fall within the confidence intervals of these newly estimated learning curve.

#### Acknowledgments

This work was supported in part by ONR grant N00014-21-1-2615, the John and Tami Marick Foundation, and the National Science Foundation under awards CCF-2007688 and CCF-2048223.

#### References

- [1] Hannes Rosenbusch, Felix Soldner, Anthony M Evans, and Marcel Zeelenberg, "Supervised machine learning methods in Psychology: A practical introduction with annotated R code," Social and Personality Psychology Compass, vol. 15, no. 2, pp. e12579, 2021.
- [2] Gilles Vandewiele, Isabelle Dehaene, György Kovács, Lucas Sterckx, Olivier Janssens, Femke Ongenae, Femke De Backere, Filip De Turck, Kristien Roelens, Johan Decruyenaere, et al.,

- "Overly optimistic prediction results on imbalanced data: a case study of flaws and benefits when applying over-sampling," Artificial Intelligence in Medicine, vol. 111, pp. 101987, 2021.
- [3] Hadeel S Alenezi and Maha H Faisal, "Utilizing crowdsourcing and machine learning in education: Literature review," *Education and Information Technologies*, vol. 25, no. 4, pp. 2971–2986, 2020.
- [4] Simon C Mathews, Michael J McShea, Casey L Hanley, Alan Ravitz, Alain B Labrique, and Adam B Cohen, "Digital health: a path to validation," *NPJ digital medicine*, vol. 2, no. 1, pp. 38, 2019.
- [5] Visar Berisha, Chelsea Krantsevich, Gabriela Stegmann, Shira Hahn, and Julie Liss, "Are reported accuracies in the clinical speech machine learning literature overoptimistic?," in *Proceedings of Interspeech*, 2022.
- [6] Mohammad R Arbabshirani, Sergey Plis, Jing Sui, and Vince D Calhoun, "Single subject prediction of brain disorders in neuroimaging: Promises and pitfalls," *Neuroimage*, vol. 145, pp. 137–165, 2017.
- [7] Sayash Kapoor and Arvind Narayanan, "Leakage and the reproducibility crisis in machine-learning-based science," *Patterns*, vol. 4, no. 9, 2023.
- [8] Visar Berisha, Chelsea Krantsevich, P Richard Hahn, Shira Hahn, Gautam Dasarathy, Pavan Turaga, and Julie Liss, "Digital medicine and the curse of dimensionality," *NPJ digital medicine*, vol. 4, no. 1, pp. 1–8, 2021.
- [9] Sofia de la Fuente Garcia, Craig W Ritchie, and Saturnino Luz, "Artificial intelligence, speech, and language processing approaches to monitoring Alzheimer's disease: a systematic review," *Journal of Alzheimer's Disease*, vol. 78, no. 4, pp. 1547–1574, 2020.
- [10] Ulla Petti, Simon Baker, and Anna Korhonen, "A systematic literature review of automatic Alzheimer's disease detection from speech and language," *Journal of the American Medical Informatics Association*, vol. 27, no. 11, pp. 1784–1797, 2020.
- [11] Israel Martínez-Nicolás, Thide E Llorente, Francisco Martínez-Sánchez, and Juan José G Meilán, "Ten years of research on automatic voice and speech analysis of people with Alzheimer's disease and mild cognitive impairment: a systematic review article," Frontiers in Psychology, vol. 12, pp. 620251, 2021.
- [12] Andrius Vabalas, Emma Gowen, Ellen Poliakoff, and Alexander J Casson, "Machine learning algorithm validation with a limited sample size," *PloS one*, vol. 14, no. 11, pp. e0224365, 2019.
- [13] Tom Viering and Marco Loog, "The shape of learning curves: A review," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 45, no. 6, pp. 7799–7819, 2023.
- [14] Shachar Kaufman, Saharon Rosset, Claudia Perlich, and Ori Stitelman, "Leakage in data mining: Formulation, detection, and avoidance," *ACM Transactions on Knowledge Discovery from Data (TKDD)*, vol. 6, no. 4, pp. 1–21, 2012.
- [15] Gareth James, Daniela Witten, Trevor Hastie, and Robert Tibshirani, An introduction to statistical learning, vol. 112, Springer, 2013.
- [16] Marta Serra-Garcia and Uri Gneezy, "Nonreplicable publications are cited more than replicable ones," *Science advances*, vol. 7, no. 21, pp. eabd1705, 2021.
- [17] Robert Rosenthal, "The file drawer problem and tolerance for null results.," *Psychological bulletin*, vol. 86, no. 3, pp. 638, 1979.
- [18] John PA Ioannidis, "Why most published research findings are false," *PLoS medicine*, vol. 2, no. 8, pp. e124, 2005.
- [19] Inioluwa Deborah Raji, I Elizabeth Kumar, Aaron Horowitz, and Andrew Selbst, "The fallacy of ai functionality," in 2022 ACM Conference on Fairness, Accountability, and Transparency, 2022, pp. 959–972.
- [20] Batul A Yawer, Julie Liss, and Visar Berisha, "Reliability and validity of a widely-available AI tool for assessment of stress based on speech," *Scientific reports*, vol. 13, no. 1, pp. 20224, 2023.

- [21] Anna Jobin, Marcello Ienca, and Effy Vayena, "The global landscape of AI ethics guidelines," *Nature Machine Intelligence*, vol. 1, no. 9, pp. 389–399, 2019.
- [22] "Memorandum on increasing access to the results of federally funded scientific research," 2013, https://obamawhitehouse.archives.gov/sites/default/files/microsites/ostp/ostp\_public\_access\_memo\_2013.pdf.
- [23] "Memorandum on ensuring free, immediate, and equitable access to federally funded research," 2022, https://www.whitehouse.gov/wp-content/uploads/2022/08/08-2022-OSTP-Public-Access-Memo.pdf.
- [24] Derek Hoiem, Tanmay Gupta, Zhizhong Li, and Michal Shlapentokh-Rothman, "Learning curves for analysis of deep networks," in *International conference on machine learning*. PMLR, 2021, pp. 4287–4296.
- [25] Corinna Cortes, Lawrence D Jackel, Sara Solla, Vladimir Vapnik, and John Denker, "Learning curves: Asymptotic values and rate of convergence," Advances in neural information processing systems, vol. 6, 1993.
- [26] George H John and Pat Langley, "Static versus dynamic sampling for data mining.," in Kdd, 1996, vol. 96, pp. 367–370.
- [27] Joel Hestness, Sharan Narang, Newsha Ardalani, Gregory Diamos, Heewoo Jun, Hassan Kianinejad, Md Mostofa Ali Patwary, Yang Yang, and Yanqi Zhou, "Deep learning scaling is predictable, empirically," arXiv preprint, vol. arXiv:1712.00409, 2017.
- [28] Prasanth Kolachina, Nicola Cancedda, Marc Dymetman, and Sriram Venkatapathy, "Prediction of learning curves in machine translation," in *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2012, pp. 22–30.
- [29] Igor Artico, I Smolyarenko, Veronica Vinciotti, and Ernst C Wit, "How rare are power-law networks really?," *Proceedings of the Royal Society A*, vol. 476, no. 2241, pp. 20190742, 2020.
- [30] Shin-Ichiro Kumamoto and Takashi Kamihigashi, "Power laws in stochastic processes for social phenomena: An introductory review," Frontiers in Physics, vol. 6, 2018.
- [31] Sebastian Meyer and Leonhard Held, "Power-law models for infectious disease spread," *The Annals of Applied Statistics*, vol. 8, no. 3, pp. 1612 1639, 2014.
- [32] Sanjeev Arora and Yi Zhang, "Rip van winkle's razor: A simple estimate of overfit to test data," arXiv preprint arXiv:2102.13189, 2021.
- [33] Vladimir Vapnik, Estimation of dependences based on empirical data, Springer Science & Business Media, 2006.
- [34] Cynthia Dwork, Vitaly Feldman, Moritz Hardt, Toni Pitassi, Omer Reingold, and Aaron Roth, "Generalization in adaptive data analysis and holdout reuse," Advances in Neural Information Processing Systems, vol. 28, 2015.
- [35] Phillipa J Easterbrook, Ramana Gopalan, JA Berlin, and David R Matthews, "Publication bias in clinical research," *The Lancet*, vol. 337, no. 8746, pp. 867–872, 1991.
- [36] Takeshi Amemiya, "Tobit models: A survey," *Journal of econometrics*, vol. 24, no. 1-2, pp. 3–61, 1984.
- [37] Yangjun Ruan, Chris J Maddison, and Tatsunori Hashimoto, "Observational scaling laws and the predictability of language model performance," arXiv preprint arXiv:2405.10938, 2024.
- [38] Bin Lu, Hui-Xian Li, Zhi-Kai Chang, Le Li, Ning-Xuan Chen, Zhi-Chen Zhu, Hui-Xia Zhou, Xue-Ying Li, Yu-Wei Wang, Shi-Xian Cui, et al., "A practical alzheimer's disease classifier via brain imaging-based deep learning on 85,721 samples," *Journal of Big Data*, vol. 9, no. 1, pp. 1–22, 2022.
- [39] Weizheng Yan, Vince Calhoun, Ming Song, Yue Cui, Hao Yan, Shengfeng Liu, Lingzhong Fan, Nianming Zuo, Zhengyi Yang, Kaibin Xu, et al., "Discriminating Schizophrenia using recurrent neural network applied on time courses of multi-site fMRI data," *EBioMedicine*, vol. 47, pp. 543–552, 2019.

- [40] Pindi Krishna Chandra Prasad, Yash Khare, Kamalaker Dadi, PK Vinod, and Bapi Raju Surampudi, "Deep learning approach for classification and interpretation of autism spectrum disorder," in 2022 International Joint Conference on Neural Networks (IJCNN). IEEE, 2022, pp. 1–8.
- [41] Felix Mohr and Jan N van Rijn, "Learning curves for decision making in supervised machine learning—a survey," arXiv preprint arXiv:2201.12150, 2022.
- [42] A Clifford Cohen, Truncated and censored samples: theory and applications, CRC press, 1991.
- [43] Amemiya Takeshi and TAKESHI AUTOR AMEMIYA, Advanced econometrics, Harvard university press, 1985.
- [44] Kalyanmoy Deb, Amrit Pratap, Sameer Agarwal, and TAMT Meyarivan, "A fast and elitist multiobjective genetic algorithm: NSGA II," *IEEE transactions on evolutionary computation*, vol. 6, no. 2, pp. 182–197, 2002.
- [45] Andrzej P Wierzbicki, "The use of reference objectives in multiobjective optimization," in Multiple Criteria Decision Making Theory and Application: Proceedings of the Third Conference Hagen/Königswinter, West Germany, August 20–24, 1979. Springer, 1980, pp. 468–486.
- [46] Bradley Efron and Robert Tibshirani, "Bootstrap methods for standard errors, confidence intervals, and other measures of statistical accuracy," *Statistical science*, pp. 54–75, 1986.
- [47] Bradley Efron and Robert J Tibshirani, An introduction to the bootstrap, CRC press, 1994.
- [48] Thomas W Zuehlke, "Estimation of a tobit model with unknown censoring threshold," *Applied Economics*, vol. 35, no. 10, pp. 1163–1169, 2003.
- [49] Ronald Aylmer Fisher, "Properties and applications of  $H_h$  functions," *Mathematical tables*, vol. 1, pp. 2, 1931.
- [50] Harold Hotelling, "Fitting generalized truncated normal distributions," *Annals of Mathematical Statistics*, vol. 19, no. 4, pp. 596–596, 1948.
- [51] John W Tukey, "Sufficiency, truncation and selection," *The Annals of Mathematical Statistics*, vol. 20, no. 2, pp. 309–311, 1949.
- [52] Constantinos Daskalakis, Themis Gouleakis, Chistos Tzamos, and Manolis Zampetakis, "Efficient statistics, in high dimensions, from truncated samples," in 2018 IEEE 59th Annual Symposium on Foundations of Computer Science (FOCS). IEEE, 2018, pp. 639–649.
- [53] Vasilis Kontonis, Christos Tzamos, and Manolis Zampetakis, "Efficient truncated statistics with unknown truncation," in 2019 ieee 60th annual symposium on foundations of computer science (focs). IEEE, 2019, pp. 1578–1595.
- [54] Abram S Besicovitch, "On the linear independence of fractional powers of integers," *Journal of the London Mathematical Society*, vol. 1, no. 1, pp. 3–6, 1940.
- [55] Jerome H Friedman, "Multivariate adaptive regression splines," *The annals of statistics*, vol. 19, no. 1, pp. 1–67, 1991.
- [56] Robert J May, Holger R Maier, Graeme C Dandy, and TMK Gayani Fernando, "Non-linear variable selection for artificial neural networks using partial mutual information," *Environmental Modelling & Software*, vol. 23, no. 10-11, pp. 1312–1326, 2008.
- [57] M Graña, M Termenon, A Savio, A Gonzalez-Pinto, J Echeveste, JM Pérez, and A Besga, "Computer aided diagnosis system for alzheimer disease using brain diffusion tensor imaging features selected by pearson's correlation," *Neuroscience letters*, vol. 502, no. 3, pp. 225–229, 2011.
- [58] Xia Wu, Juan Li, Napatkamon Ayutyanont, Hillary Protas, William Jagust, Adam Fleisher, Eric Reiman, Li Yao, and Kewei Chen, "The receiver operational characteristic for binary classification with multiple indices and its application to the neuroimaging study of alzheimer's disease," IEEE/ACM transactions on computational biology and bioinformatics, vol. 10, no. 1, pp. 173–180, 2012.

- [59] Ali Khazaee, Ata Ebrahimzadeh, and Abbas Babajani-Feremi, "Identifying patients with alzheimer's disease using resting-state fmri and graph theory," *Clinical Neurophysiology*, vol. 126, no. 11, pp. 2132–2141, 2015.
- [60] Tianhao Zhang and Christos Davatzikos, "Optimally-discriminative voxel-based analysis," in Medical Image Computing and Computer-Assisted Intervention-MICCAI 2010: 13th International Conference, Beijing, China, September 20-24, 2010, Proceedings, Part II 13. Springer Berlin Heidelberg, 2010, pp. 257-265.
- [61] Yudong Zhang, Zhengchao Dong, Preetha Phillips, Shuihua Wang, Genlin Ji, Jiquan Yang, and Ti-Fei Yuan, "Detection of subjects and brain regions related to alzheimer's disease using 3d mri scans based on eigenbrain and machine learning," Frontiers in computational neuroscience, vol. 9, pp. 66, 2015.
- [62] Lei Wang, Faisal Beg, Tilak Ratnanather, Can Ceritoglu, Laurent Younes, John C Morris, John G Csernansky, and Michael I Miller, "Large deformation diffeomorphism and momentum based hippocampal shape discrimination in dementia of the alzheimer type," *IEEE transactions* on medical imaging, vol. 26, no. 4, pp. 462–470, 2007.
- [63] Prashanthi Vemuri, Jeffrey L Gunter, Matthew L Senjem, Jennifer L Whitwell, Kejal Kantarci, David S Knopman, Bradley F Boeve, Ronald C Petersen, and Clifford R Jack Jr, "Alzheimer's disease diagnosis in individual subjects using structural mr images: validation studies," Neuroimage, vol. 39, no. 3, pp. 1186–1197, 2008.
- [64] Fatma Polat, Selcuk Orhan Demirel, Omer Kitis, Fatma Simsek, Damla Isman Haznedaroglu, Kerry Coburn, Emre Kumral, and Ali Saffet Gonul, "Computer based classification of mr scans in first time applicant alzheimer patients," *Current Alzheimer Research*, vol. 9, no. 7, pp. 789–794, 2012.
- [65] Pedro Paulo de Magalhães Oliveira Jr, Ricardo Nitrini, Geraldo Busatto, Carlos Buchpiguel, João Ricardo Sato, and Edson Amaro Jr, "Use of svm methods with surface-based cortical and volumetric subcortical measurements to detect alzheimer's disease," *Journal of Alzheimer's Disease*, vol. 19, no. 4, pp. 1263–1272, 2010.
- [66] Michael I Miller, Carey E Priebe, Anqi Qiu, Bruce Fischl, Anthony Kolasny, Timothy Brown, Youngser Park, J Tilak Ratnanather, Evelina Busa, Jorge Jovicich, et al., "Collaborative computational anatomy: an mri morphometry study of the human brain via diffeomorphic metric mapping," Human brain mapping, vol. 30, no. 7, pp. 2132–2141, 2009.
- [67] Belathur Suresh Mahanand, Sundaram Suresh, Narasimhan Sundararajan, and M Aswatha Kumar, "Identification of brain regions responsible for alzheimer's disease using a self-adaptive resource allocation network," *Neural Networks*, vol. 32, pp. 313–322, 2012.
- [68] Benoît Magnin, Lilia Mesrob, Serge Kinkingnéhun, Mélanie Pélégrini-Issac, Olivier Colliot, Marie Sarazin, Bruno Dubois, Stéphane Lehéricy, and Habib Benali, "Support vector machine-based classification of alzheimer's disease from whole-brain anatomical mri," Neuroradiology, vol. 51, pp. 73–83, 2009.
- [69] S Li, F Shi, F Pu, Xiaobo Li, Tianzi Jiang, S Xie, and Y Wang, "Hippocampal shape analysis of alzheimer disease based on machine learning methods," *American Journal of Neuroradiology*, vol. 28, no. 7, pp. 1339–1345, 2007.
- [70] Jason P Lerch, Jens Pruessner, Alex P Zijdenbos, D Louis Collins, Stefan J Teipel, Harald Hampel, and Alan C Evans, "Automated cortical thickness measurements from mri can accurately separate alzheimer's patients from normal elderly controls," *Neurobiology of aging*, vol. 29, no. 1, pp. 23–30, 2008.
- [71] Ga-Young Lee, Jeonghun Kim, Ju Han Kim, Kiwoong Kim, and Joon-Kyung Seong, "Online learning for classification of alzheimer disease based on cortical thickness and hippocampal shape analysis," *Healthcare Informatics Research*, vol. 20, no. 1, pp. 61–68, 2014.
- [72] Peter A Freeborough and Nick C Fox, "Mr image texture analysis applied to the diagnosis and tracking of alzheimer's disease," *IEEE transactions on medical imaging*, vol. 17, no. 3, pp. 475–478, 1998.

- [73] Saima Farhan, Muhammad Abuzar Fahiem, and Huma Tauseef, "An ensemble-of-classifiers based approach for early diagnosis of alzheimer's disease: classification using structural features of brain images," *Computational and mathematical methods in medicine*, vol. 2014, 2014.
- [74] Ali Farzan, Syansiah Mashohor, Rozi Mahmud, et al., "Boosting diagnosis accuracy of alzheimer's disease using high dimensional recognition of longitudinal brain atrophy patterns," *Behavioural brain research*, vol. 290, pp. 124–130, 2015.
- [75] Antonio R Hidalgo-Muñoz, Javier Ramírez, Juan M Górriz, and Pablo Padilla, "Regions of interest computed by svm wrapped method for alzheimer's disease examination from segmented mri," *Frontiers in aging neuroscience*, vol. 6, pp. 20, 2014.
- [76] Charles DeCarli, Declan GM Murphy, A Randy McIntosh, Diane Teichberg, Mark B Schapiro, and Barry Horwitz, "Discriminant analysis of mri measures as a method to determine the presence of dementia of the alzheimer type," *Psychiatry research*, vol. 57, no. 2, pp. 119–130, 1995.
- [77] Pierrick Coupé, Simon F Eskildsen, José V Manjón, Vladimir S Fonov, D Louis Collins, Alzheimer's Disease Neuroimaging Initiative, et al., "Simultaneous segmentation and grading of anatomical structures for patient's classification: application to alzheimer's disease," NeuroImage, vol. 59, no. 4, pp. 3736–3747, 2012.
- [78] Rémi Cuingnet, Joan Alexis Glaunès, Marie Chupin, Habib Benali, and Olivier Colliot, "Spatial and anatomical regularization of svm: a general framework for neuroimaging data," *IEEE transactions on pattern analysis and machine intelligence*, vol. 35, no. 3, pp. 682–696, 2012.
- [79] Ye Chen, Judd Storrs, Lirong Tan, Lawrence J Mazlack, Jing-Huei Lee, and Long J Lu, "Detecting brain structural changes as biomarker from magnetic resonance images using a local feature based sym approach," *Journal of neuroscience methods*, vol. 221, pp. 22–31, 2014.
- [80] Iman Beheshti, Hasan Demirel, Alzheimer's Disease Neuroimaging Initiative, et al., "Probability distribution function-based classification of structural mri for the detection of alzheimer's disease," Computers in biology and medicine, vol. 64, pp. 208–216, 2015.
- [81] Nematollah K Batmanghelich, Ben Taskar, and Christos Davatzikos, "Generative-discriminative basis learning for medical imaging," *IEEE transactions on medical imaging*, vol. 31, no. 1, pp. 51–69, 2011.
- [82] Stanisław Adaszewski, Juergen Dukart, Ferath Kherif, Richard Frackowiak, Bogdan Draganski, Alzheimer's Disease Neuroimaging Initiative, et al., "How early can we predict alzheimer's disease using computational anatomy?," *Neurobiology of aging*, vol. 34, no. 12, pp. 2815–2826, 2013.
- [83] Ahmed Abdulkadir, Bénédicte Mortamet, Prashanthi Vemuri, Clifford R Jack Jr, Gunnar Krueger, Stefan Klöppel, Alzheimer's Disease Neuroimaging Initiative, et al., "Effects of hardware heterogeneity on the performance of svm alzheimer's disease classifier," *Neuroimage*, vol. 58, no. 3, pp. 785–792, 2011.
- [84] Muwei Li, Yuanyuan Qin, Fei Gao, Wenzhen Zhu, and Xiaohai He, "Discriminative analysis of multivariate features from structural mri and diffusion tensor images," *Magnetic resonance imaging*, vol. 32, no. 8, pp. 1043–1051, 2014.
- [85] Martin Dyrba, Michael Ewers, Martin Wegrzyn, Ingo Kilimann, Claudia Plant, Annahita Oswald, Thomas Meindl, Michela Pievani, Arun LW Bokde, Andreas Fellgiebel, et al., "Robust automated detection of microstructural white matter degeneration in alzheimer's disease using machine learning classification of multicenter dti data," PloS one, vol. 8, no. 5, pp. e64925, 2013.
- [86] Juergen Dukart, Karsten Mueller, Henryk Barthel, Arno Villringer, Osama Sabri, Matthias Leopold Schroeter, Alzheimer's Disease Neuroimaging Initiative, et al., "Meta-analysis based svm classification enables accurate detection of alzheimer's disease across different clinical centers using fdg-pet and mri," Psychiatry Research: Neuroimaging, vol. 212, no. 3, pp. 230–236, 2013.

- [87] Zhengjia Dai, Chaogan Yan, Zhiqun Wang, Jinhui Wang, Mingrui Xia, Kuncheng Li, and Yong He, "Discriminative analysis of early alzheimer's disease using multi-modal imaging and multi-level characterization with multi-classifier (m3)," *Neuroimage*, vol. 59, no. 3, pp. 2187–2195, 2012.
- [88] Arvind Caprihan, Godfrey D Pearlson, and Vincent D Calhoun, "Application of principal component analysis to distinguish patients with schizophrenia from healthy controls based on fractional anisotropy measurements," *Neuroimage*, vol. 42, no. 2, pp. 675–682, 2008.
- [89] Matthan WA Caan, Koen A Vermeer, Lucas J van Vliet, Charles BLM Majoie, BD Peters, GJ Den Heeten, and Frans M Vos, "Shaving diffusion tensor images in discriminant analysis: A study into schizophrenia," Medical image analysis, vol. 10, no. 6, pp. 841–849, 2006.
- [90] Babak A Ardekani, Ali Tabesh, Serge Sevy, Delbert G Robinson, Robert M Bilder, and Philip R Szeszko, "Diffusion tensor imaging reliably differentiates patients with schizophrenia from healthy volunteers," *Human brain mapping*, vol. 32, no. 1, pp. 1–9, 2011.
- [91] Jean Honorio, Dardo Tomasi, Rita Z Goldstein, Hoi-Chung Leung, and Dimitris Samaras, "Can a single brain region predict a disorder?," *IEEE Transactions on Medical Imaging*, vol. 31, no. 11, pp. 2062–2072, 2012.
- [92] Oguz Demirci, Vincent P Clark, and Vince D Calhoun, "A projection pursuit algorithm to classify individuals using fmri data: Application to schizophrenia," *NeuroImage*, vol. 39, no. 4, pp. 1774–1782, 2008.
- [93] Jong H Yoon, Diana Tamir, Michael J Minzenberg, J Daniel Ragland, Stefan Ursu, and Cameron S Carter, "Multivariate pattern analysis of functional magnetic resonance imaging data reveals deficits in distributed representations in schizophrenia," *Biological Psychiatry*, vol. 64, no. 12, pp. 1035–1041, 2008.
- [94] Jong H Yoon, Danh V Nguyen, Lindsey M McVay, Paul Deramo, Michael J Minzenberg, J Daniel Ragland, Tara Niendham, Marjorie Solomon, and Cameron S Carter, "Automated classification of fmri during cognitive control identifies more severely disorganized subjects with schizophrenia," Schizophrenia research, vol. 135, no. 1-3, pp. 28–33, 2012.
- [95] Stefan P Koch, Claudia Hägele, John-Dylan Haynes, Andreas Heinz, Florian Schlagenhauf, and Philipp Sterzer, "Diagnostic classification of schizophrenia patients on the basis of regional reward-related fmri signal patterns," *PloS one*, vol. 10, no. 3, pp. e0119089, 2015.
- [96] Hongbao Cao, Junbo Duan, Dongdong Lin, Vince Calhoun, and Yu-Ping Wang, "Integrating fmri and snp data for biomarker identification for schizophrenia with a sparse representation based variable selection method," *BMC medical genomics*, vol. 6, no. 3, pp. 1–8, 2013.
- [97] Eduardo Castro, Manel Martínez-Ramón, Godfrey Pearlson, Jing Sui, and Vince D Calhoun, "Characterization of groups using composite kernels and multi-source fmri analysis data: application to schizophrenia," *Neuroimage*, vol. 58, no. 2, pp. 526–536, 2011.
- [98] Eduardo Castro, Vanessa Gómez-Verdejo, Manel Martínez-Ramón, Kent A Kiehl, and Vince D Calhoun, "A multiple kernel learning approach to perform classification of groups from complex-valued fmri data analysis: application to schizophrenia," *NeuroImage*, vol. 87, pp. 1–17, 2014.
- [99] Yang Yu, Hui Shen, Huiran Zhang, Ling-Li Zeng, Zhimin Xue, and Dewen Hu, "Functional connectivity-based signatures of schizophrenia revealed by multiclass pattern analysis of resting-state fmri from schizophrenic patients and their healthy siblings," *Biomedical engineering online*, vol. 12, no. 1, pp. 1–13, 2013.
- [100] Takanori Watanabe, Daniel Kessler, Clayton Scott, Michael Angstadt, and Chandra Sripada, "Disease prediction based on functional connectomes using a scalable and spatially-informed support vector machine," *Neuroimage*, vol. 96, pp. 183–202, 2014.
- [101] Wenbin Guo, Qinji Su, Dapeng Yao, Jiajing Jiang, Jian Zhang, Zhikun Zhang, Liuyu Yu, Jinguo Zhai, and Changqing Xiao, "Decreased regional activity of default-mode network in unaffected siblings of schizophrenia patients at rest," European Neuropsychopharmacology, vol. 24, no. 4, pp. 545–552, 2014.

- [102] Archana Venkataraman, Thomas J Whitford, Carl-Fredrik Westin, Polina Golland, and Marek Kubicki, "Whole brain resting state functional connectivity abnormalities in schizophrenia," Schizophrenia research, vol. 139, no. 1-3, pp. 7–12, 2012.
- [103] Yan Tang, Lifeng Wang, Fang Cao, and Liwen Tan, "Identify schizophrenia using resting-state functional connectivity: an exploratory research and analysis," *Biomedical engineering online*, vol. 11, pp. 1–16, 2012.
- [104] Longfei Su, Lubin Wang, Hui Shen, Guiyu Feng, and Dewen Hu, "Discriminative analysis of non-linear brain connectivity in schizophrenia: an fmri study," Frontiers in human neuroscience, vol. 7, pp. 702, 2013.
- [105] Hui Shen, Lubin Wang, Yadong Liu, and Dewen Hu, "Discriminative analysis of resting-state functional connectivity patterns of schizophrenia using low dimensional embedding of fmri," *Neuroimage*, vol. 49, no. 4, pp. 3110–3121, 2010.
- [106] Junghoe Kim, Vince D Calhoun, Eunsoo Shim, and Jong-Hwan Lee, "Deep neural network with weight sparsity control and pre-training extracts hierarchical features and enhances classification performance: Evidence from whole-brain resting-state functional connectivity patterns of schizophrenia," Neuroimage, vol. 124, pp. 127–146, 2016.
- [107] Tobias Kaufmann, Kristina C Skåtun, Dag Alnæs, Nhat Trung Doan, Eugene P Duff, Siren Tønnesen, Evangelos Roussos, Torill Ueland, Sofie R Aminoff, Trine V Lagerberg, et al., "Disintegration of sensorimotor brain networks in schizophrenia," Schizophrenia bulletin, vol. 41, no. 6, pp. 1326–1335, 2015.
- [108] Hu Cheng, Sharlene Newman, Joaquín Goñi, Jerillyn S Kent, Josselyn Howell, Amanda Bolbecker, Aina Puce, Brian F O'Donnell, and William P Hetrick, "Nodal centrality of functional network in the differentiation of schizophrenia," *Schizophrenia research*, vol. 168, no. 1-2, pp. 345–352, 2015.
- [109] Tomer Fekete, Meytal Wilf, Denis Rubin, Shimon Edelman, Rafael Malach, and Lilianne R Mujica-Parodi, "Combining classification with fmri-derived complex network measures for potential neurodiagnostics," *PloS one*, vol. 8, no. 5, pp. e62867, 2013.
- [110] Yong Fan, Yong Liu, Hong Wu, Yihui Hao, Haihong Liu, Zhening Liu, and Tianzi Jiang, "Discriminant analysis of functional connectivity patterns on grassmann manifold," *Neuroimage*, vol. 56, no. 4, pp. 2058–2067, 2011.
- [111] Darya Chyzhyk, Alexandre Savio, and Manuel Graña, "Computer aided diagnosis of schizophrenia on resting state fmri data by ensembles of elm," Neural Networks, vol. 68, pp. 23–33, 2015.
- [112] Danielle S Bassett, Brent G Nelson, Bryon A Mueller, Jazmin Camchong, and Kelvin O Lim, "Altered resting state complexity in schizophrenia," *Neuroimage*, vol. 59, no. 3, pp. 2196–2207, 2012.
- [113] Mohammad R Arbabshirani, Kent A Kiehl, Godfrey D Pearlson, and Vince D Calhoun, "Classification of schizophrenia patients based on resting-state functional network connectivity," Frontiers in neuroscience, vol. 7, pp. 133, 2013.
- [114] Alan Anticevic, Michael W Cole, Grega Repovs, John D Murray, Margaret S Brumbaugh, Anderson M Winkler, Aleksandar Savic, John H Krystal, Godfrey D Pearlson, and David C Glahn, "Characterizing thalamo-cortical disturbances in schizophrenia and bipolar illness," Cerebral cortex, vol. 24, no. 12, pp. 3116–3130, 2014.
- [115] Ariana Anderson and Mark S Cohen, "Decreased small-world functional network connectivity and clustering across resting state networks in schizophrenia: an fmri classification tutorial," *Frontiers in human neuroscience*, vol. 7, pp. 520, 2013.
- [116] Tianhao Zhang and Christos Davatzikos, "Optimally-discriminative voxel-based morphometry significantly increases the ability to detect group differences in schizophrenia, mild cognitive impairment, and alzheimer's disease," *Neuroimage*, vol. 79, pp. 94–110, 2013.

- [117] Marcus V Zanetti, Maristela S Schaufelberger, Jimit Doshi, Yangming Ou, Luiz K Ferreira, Paulo R Menezes, Marcia Scazufca, Christos Davatzikos, and Geraldo F Busatto, "Neuroanatomical pattern classification in a population-based sample of first-episode schizophrenia," *Progress in Neuro-Psychopharmacology and Biological Psychiatry*, vol. 43, pp. 116–125, 2013.
- [118] Yoichiro Takayanagi, Tsutomu Takahashi, Lina Orikabe, Yuriko Mozue, Yasuhiro Kawasaki, Kazue Nakamura, Yoko Sato, Masanari Itokawa, Hidenori Yamasue, Kiyoto Kasai, et al., "Classification of first-episode schizophrenia patients and healthy subjects by automated mri measures of regional brain volume and cortical thickness," PloS one, vol. 6, no. 6, pp. e21047, 2011.
- [119] Daqiang Sun, Theo GM van Erp, Paul M Thompson, Carrie E Bearden, Melita Daley, Leila Kushan, Molly E Hardt, Keith H Nuechterlein, Arthur W Toga, and Tyrone D Cannon, "Elucidating a magnetic resonance imaging-based neuroanatomic biomarker for psychosis: classification analysis using probabilistic brain atlas and machine learning algorithms," Biological psychiatry, vol. 66, no. 11, pp. 1055–1060, 2009.
- [120] Eugenia Radulescu, Balaji Ganeshan, Sukhwinder S Shergill, Nick Medford, Chris Chatwin, Rupert CD Young, and Hugo D Critchley, "Grey-matter texture abnormalities and reduced hippocampal volume are distinguishing features of schizophrenia," Psychiatry Research: Neuroimaging, vol. 223, no. 3, pp. 179–186, 2014.
- [121] Laura Pina-Camacho, Juan Garcia-Prieto, Mara Parellada, Josefina Castro-Fornieles, Ana M Gonzalez-Pinto, Igor Bombin, Montserrat Graell, Beatriz Paya, Marta Rapado-Castro, Joost Janssen, et al., "Predictors of schizophrenia spectrum disorders in early-onset first episodes of psychosis: a support vector machine model," European child & adolescent psychiatry, vol. 24, pp. 427–440, 2015.
- [122] Miho Ota, Noriko Sato, Masanori Ishikawa, Hiroaki Hori, Daimei Sasayama, Kotaro Hattori, Toshiya Teraishi, Satoko Obu, Yasuhiro Nakata, Kiyotaka Nemoto, et al., "Discrimination of female schizophrenia patients from healthy women using multiple structural brain measures obtained with voxel-based morphometry," Psychiatry and clinical neurosciences, vol. 66, no. 7, pp. 611–617, 2012.
- [123] Mireille Nieuwenhuis, Neeltje EM van Haren, Hilleke E Hulshoff Pol, Wiepke Cahn, René S Kahn, and Hugo G Schnack, "Classification of schizophrenia patients and healthy controls from structural mri scans in two large independent samples," *Neuroimage*, vol. 61, no. 3, pp. 606–612, 2012.
- [124] Kazue Nakamura, Yasuhiro Kawasaki, Michio Suzuki, Hirofumi Hagino, Kenzo Kurokawa, Tsutomu Takahashi, Lisha Niu, Mie Matsui, Hikaru Seto, and Masayoshi Kurachi, "Multiple structural brain measures obtained by three-dimensional magnetic resonance imaging to distinguish between schizophrenia patients and normal subjects," Schizophrenia bulletin, vol. 30, no. 2, pp. 393–404, 2004.
- [125] Nikolaos Koutsouleris, Eva M Meisenzahl, Stefan Borgwardt, Anita Riecher-Rössler, Thomas Frodl, Joseph Kambeitz, Yanis Köhler, Peter Falkai, Hans-Jürgen Möller, Maximilian Reiser, et al., "Individualized differential diagnosis of schizophrenia and mood disorders using neuroanatomical biomarkers," Brain, vol. 138, no. 7, pp. 2059–2073, 2015.
- [126] Yasuhiro Kawasaki, Michio Suzuki, Ferath Kherif, Tsutomu Takahashi, Shi-Yu Zhou, Kazue Nakamura, Mie Matsui, Tomiki Sumiyoshi, Hikaru Seto, and Masayoshi Kurachi, "Multivariate voxel-based morphometry successfully differentiates schizophrenia patients from healthy controls," Neuroimage, vol. 34, no. 1, pp. 235–242, 2007.
- [127] Tomas Kasparek, Carlos Eduardo Thomaz, Joao Ricardo Sato, Daniel Schwarz, Eva Janousova, Radek Marecek, Radovan Prikryl, Jiri Vanicek, Andre Fujita, and Eva Ceskova, "Maximumuncertainty linear discrimination analysis of first-episode schizophrenia subjects," *Psychiatry Research: Neuroimaging*, vol. 191, no. 3, pp. 174–181, 2011.
- [128] Elissaios Karageorgiou, S Charles Schulz, Randy L Gollub, Nancy C Andreasen, Beng-Choon Ho, John Lauriello, Vince D Calhoun, H Jeremy Bockholt, Scott R Sponheim, and Apostolos P Georgopoulos, "Neuropsychological testing and structural magnetic resonance imaging as diagnostic biomarkers early in the course of schizophrenia and related psychoses," Neuroinformatics, vol. 9, pp. 321–333, 2011.

- [129] Eva Janousova, Daniel Schwarz, and Tomas Kasparek, "Combining various types of classifiers and features extracted from magnetic resonance imaging data in schizophrenia recognition," *Psychiatry Research: Neuroimaging*, vol. 232, no. 3, pp. 237–249, 2015.
- [130] Sarina J Iwabuchi, Peter F Liddle, and Lena Palaniyappan, "Clinical utility of machine-learning approaches in schizophrenia: improving diagnostic confidence for translational neuroimaging," Frontiers in psychiatry, vol. 4, pp. 95, 2013.
- [131] Madhura Ingalhalikar, Alex R Smith, Luke Bloy, Ruben Gur, Timothy PL Roberts, and Ragini Verma, "Identifying sub-populations via unsupervised cluster analysis on multi-edge similarity graphs," in *Medical Image Computing and Computer-Assisted Intervention-MICCAI 2012: 15th International Conference, Nice, France, October 1-5, 2012, Proceedings, Part II 15.* Springer, 2012, pp. 254–261.
- [132] Deanna Greenstein, James D Malley, Brian Weisinger, Liv Clasen, and Nitin Gogtay, "Using multivariate machine learning methods and structural mri to classify childhood onset schizophrenia and healthy controls," *Frontiers in psychiatry*, vol. 3, pp. 53, 2012.
- [133] Ian C Gould, Alana M Shepherd, Kristin R Laurens, Murray J Cairns, Vaughan J Carr, and Melissa J Green, "Multivariate neuroanatomical classification of cognitive subtypes in schizophrenia: a support vector machine learning approach," *NeuroImage: Clinical*, vol. 6, pp. 229–236, 2014.
- [134] Yong Fan, Dinggang Shen, Ruben C Gur, Raquel E Gur, and Christos Davatzikos, "Compare: classification of morphological patterns using adaptive regional elements," *IEEE transactions on medical imaging*, vol. 26, no. 1, pp. 93–105, 2006.
- [135] Yong Fan, Dinggang Shen, and Christos Davatzikos, "Classification of structural images via high-dimensional image warping, robust feature extraction, and svm," in Medical Image Computing and Computer-Assisted Intervention-MICCAI 2005: 8th International Conference, Palm Springs, CA, USA, October 26-29, 2005, Proceedings, Part I 8. Springer, 2005, pp. 1-8.
- [136] Christos Davatzikos, Dinggang Shen, Ruben C Gur, Xiaoying Wu, Dengfeng Liu, Yong Fan, Paul Hughett, Bruce I Turetsky, and Raquel E Gur, "Whole-brain morphometric study of schizophrenia revealing a spatially complex set of focal abnormalities," Archives of general psychiatry, vol. 62, no. 11, pp. 1218–1227, 2005.
- [137] John G Csernansky, Mathew K Schindler, N Reagan Splinter, Lei Wang, Mohktar Gado, Lynn D Selemon, Devna Rastogi-Cruz, Joel A Posener, Paul A Thompson, and Michael I Miller, "Abnormalities of thalamic volume and shape in schizophrenia," *American Journal of Psychiatry*, vol. 161, no. 5, pp. 896–902, 2004.
- [138] U Castellani, E Rossato, V Murino, M Bellani, G Rambaldelli, C Perlini, L Tomelleri, M Tansella, and P Brambilla, "Classification of schizophrenia using feature-based morphometry," *Journal of Neural Transmission*, vol. 119, pp. 395–404, 2012.
- [139] Ravi Bansal, Lawrence H Staib, Andrew F Laine, Xuejun Hao, Dongrong Xu, Jun Liu, Myrna Weissman, and Bradley S Peterson, "Anatomical brain images alone can accurately diagnose chronic neuropsychiatric illnesses," *PloS one*, vol. 7, no. 12, pp. e50698, 2012.
- [140] Miho Ota, Masanori Ishikawa, Noriko Sato, Hiroaki Hori, Daimei Sasayama, Kotaro Hattori, Toshiya Teraishi, Takamasa Noda, Satoko Obu, Yasuhiro Nakata, et al., "Discrimination between schizophrenia and major depressive disorder by magnetic resonance imaging of the female brain," *Journal of psychiatric research*, vol. 47, no. 10, pp. 1383–1388, 2013.
- [141] Wei Du, Vince D Calhoun, Hualiang Li, Sai Ma, Tom Eichele, Kent A Kiehl, Godfrey D Pearlson, and Tülay Adali, "High classification accuracy for schizophrenia with rest and task fmri data," *Frontiers in human neuroscience*, vol. 6, pp. 145, 2012.
- [142] Mustafa S Çetin, Siddharth Khullar, Eswar Damaraju, Andrew M Michael, Stefi A Baum, and Vince D Calhoun, "Enhanced disease characterization through multi network functional normalization in fmri," Frontiers in Neuroscience, vol. 9, pp. 95, 2015.
- [143] Honghui Yang, Jingyu Liu, Jing Sui, Godfrey Pearlson, and Vince D Calhoun, "A hybrid machine learning method for fusing fmri and genetic data: combining both improves classification of schizophrenia," Frontiers in human neuroscience, vol. 4, pp. 192, 2010.

- [144] Jing Sui, Hao He, Qingbao Yu, Jiayu Chen, Jack Rogers, Godfrey D Pearlson, Andrew Mayer, Juan Bustillo, Jose Canive, and Vince D Calhoun, "Combination of resting state fmri, dti, and smri data to discriminate schizophrenia by n-way mcca+ jica," Frontiers in human neuroscience, vol. 7, pp. 235, 2013.
- [145] Madhura Ingalhalikar, Drew Parker, Luke Bloy, Timothy PL Roberts, and Ragini Verma, "Diffusion based abnormality markers of pathology: toward learned diagnostic prediction of ASD," *Neuroimage*, vol. 57, no. 3, pp. 918–927, 2011.
- [146] Marcel Adam Just, Vladimir L Cherkassky, Augusto Buchweitz, Timothy A Keller, and Tom M Mitchell, "Identifying autism from neural representations of social interactions: neurocognitive markers of Autism," *PloS one*, vol. 9, no. 12, pp. e113879, 2014.
- [147] Donna L Murdaugh, Svetlana V Shinkareva, Hrishikesh R Deshpande, Jing Wang, Mark R Pennick, and Rajesh K Kana, "Differential deactivation during mentalizing and classification of Autism based on default mode network connectivity," *PloS one*, vol. 7, no. 11, pp. e50064, 2012.
- [148] Lucina Q Uddin, Kaustubh Supekar, Charles J Lynch, Amirah Khouzam, Jennifer Phillips, Carl Feinstein, Srikanth Ryali, and Vinod Menon, "Salience network-based classification and prediction of symptom severity in children with Autism," *JAMA psychiatry*, vol. 70, no. 8, pp. 869–879, 2013.
- [149] Mark Plitt, Kelly Anne Barnes, and Alex Martin, "Functional connectivity classification of Autism identifies highly predictive brain features but falls short of biomarker standards," *NeuroImage: Clinical*, vol. 7, pp. 359–366, 2015.
- [150] Tetsuya Iidaka, "Resting state functional magnetic resonance imaging and neural network classified Autism and control," *Cortex*, vol. 63, pp. 55–67, 2015.
- [151] Colleen P Chen, Christopher L Keown, Afrooz Jahedi, Aarti Nair, Mark E Pflieger, Barbara A Bailey, and Ralph-Axel Müller, "Diagnostic classification of intrinsic functional connectivity highlights somatosensory, default mode, and visual regions in Autism," NeuroImage: Clinical, vol. 8, pp. 238–245, 2015.
- [152] Jeffrey S Anderson, Jared A Nielsen, Alyson L Froehlich, Molly B DuBray, T Jason Druzgal, Annahir N Cariello, Jason R Cooperrider, Brandon A Zielinski, Caitlin Ravichandran, P Thomas Fletcher, et al., "Functional connectivity magnetic resonance imaging classification of Autism," Brain, vol. 134, no. 12, pp. 3742–3754, 2011.
- [153] Chong-Yaw Wee, Li Wang, Feng Shi, Pew-Thian Yap, and Dinggang Shen, "Diagnosis of Autism spectrum disorders using regional and interregional morphological features," *Human brain mapping*, vol. 35, no. 7, pp. 3414–3430, 2014.
- [154] Lucina Q Uddin, Vinod Menon, Christina B Young, Srikanth Ryali, Tianwen Chen, Amirah Khouzam, Nancy J Minshew, and Antonio Y Hardan, "Multivariate searchlight classification of structural magnetic resonance imaging in children and adolescents with Autism," *Biological psychiatry*, vol. 70, no. 9, pp. 833–841, 2011.
- [155] Yun Jiao, Rong Chen, Xiaoyan Ke, Kangkang Chu, Zuhong Lu, and Edward H Herskovits, "Predictive models of Autism spectrum disorder based on brain regional cortical thickness," Neuroimage, vol. 50, no. 2, pp. 589–599, 2010.
- [156] Christine Ecker, Vanessa Rocha-Rego, Patrick Johnston, Janaina Mourao-Miranda, Andre Marquand, Eileen M Daly, Michael J Brammer, Clodagh Murphy, Declan G Murphy, MRC AIMS Consortium, et al., "Investigating the predictive value of whole-brain structural MR scans in Autism: a pattern classification approach," *Neuroimage*, vol. 49, no. 1, pp. 44–56, 2010.
- [157] Christine Ecker, Andre Marquand, Janaina Mourão-Miranda, Patrick Johnston, Eileen M Daly, Michael J Brammer, Stefanos Maltezos, Clodagh M Murphy, Dene Robertson, Steven C Williams, et al., "Describing the brain in Autism in five dimensions—magnetic resonance imaging-assisted diagnosis of Autism spectrum disorder using a multiparameter classification approach," Journal of Neuroscience, vol. 30, no. 32, pp. 10612–10623, 2010.

- [158] Natacha Akshoomoff, Catherine Lord, Alan J Lincoln, Rachel Y Courchesne, Ruth A Carper, Jeanne Townsend, and Eric Courchesne, "Outcome classification of preschool children with Autism spectrum disorders using MRI brain measures," *Journal of the American Academy of Child & Adolescent Psychiatry*, vol. 43, no. 3, pp. 349–357, 2004.
- [159] Gopikrishna Deshpande, Lauren E Libero, Karthik R Sreenivasan, Hrishikesh D Deshpande, and Rajesh K Kana, "Identification of neural connectivity signatures of Autism using machine learning," Frontiers in human neuroscience, vol. 7, pp. 670, 2013.
- [160] Lauren E Libero, Thomas P DeRamus, Adrienne C Lahti, Gopikrishna Deshpande, and Rajesh K Kana, "Multimodal neuroimaging based classification of Autism spectrum disorder using anatomical, neurochemical, and white matter correlates," *Cortex*, vol. 66, pp. 46–59, 2015.
- [161] Yongxia Zhou, Fang Yu, and Timothy Duong, "Multiparametric MRI characterization and prediction in Autism spectrum disorder using graph theory and machine learning," *PloS one*, vol. 9, no. 6, pp. e90405, 2014.
- [162] Heledd Hart, Kaylita Chantiluke, Ana I Cubillo, Anna B Smith, Andrew Simmons, Michael J Brammer, Andre F Marquand, and Katya Rubia, "Pattern classification of response inhibition in ADHD: toward the development of neurobiological markers for ADHD," Human Brain Mapping, vol. 35, no. 7, pp. 3083–3094, 2014.
- [163] Bo-yong Park, Mansu Kim, Jongbum Seo, Jong-min Lee, and Hyunjin Park, "Connectivity analysis and feature classification in attention deficit hyperactivity disorder sub-types: a task functional magnetic resonance imaging study," *Brain topography*, vol. 29, pp. 429–439, 2016.
- [164] Heledd Hart, Andre F Marquand, Anna Smith, Ana Cubillo, Andrew Simmons, Michael Brammer, and Katya Rubia, "Predictive neurofunctional markers of attention-deficit/hyperactivity disorder based on pattern classification of temporal processing," *Journal of the American Academy of Child & Adolescent Psychiatry*, vol. 53, no. 5, pp. 569–578, 2014.
- [165] Chao-Zhe Zhu, Yu-Feng Zang, Qing-Jiu Cao, Chao-Gan Yan, Yong He, Tian-Zi Jiang, Man-Qiu Sui, and Yu-Feng Wang, "Fisher discriminative analysis of resting-state brain function for attention-deficit/hyperactivity disorder," *Neuroimage*, vol. 40, no. 1, pp. 110–120, 2008.
- [166] Xunheng Wang, Yun Jiao, Tianyu Tang, Hui Wang, and Zuhong Lu, "Altered regional homogeneity patterns in adults with attention-deficit hyperactivity disorder," *European journal* of radiology, vol. 82, no. 9, pp. 1552–1557, 2013.
- [167] Gagan S Sidhu, Nasimeh Asgarian, Russell Greiner, and Matthew RG Brown, "Kernel principal component analysis for dimensionality reduction in fMRI-based diagnosis of ADHD," Frontiers in systems neuroscience, vol. 6, pp. 74, 2012.
- [168] João Ricardo Sato, Marcelo Queiroz Hoexter, André Fujita, and Luis Augusto Rohde, "Evaluation of pattern recognition and feature extraction methods in ADHD prediction," Frontiers in systems neuroscience, vol. 6, pp. 68, 2012.
- [169] Damien A Fair, Joel T Nigg, Swathi Iyer, Deepti Bathula, Kathryn L Mills, Nico UF Dosenbach, Bradley L Schlaggar, Maarten Mennes, David Gutman, Saroja Bangaru, et al., "Distinct neural signatures detected for ADHD subtypes after controlling for micro-movements in resting state functional connectivity MRI data," Frontiers in systems neuroscience, vol. 6, pp. 80, 2013.
- [170] Soumyabrata Dey, A Ravishankar Rao, and Mubarak Shah, "Exploiting the brain's network structure in identifying ADHD subjects," Frontiers in systems neuroscience, vol. 6, pp. 75, 2012.
- [171] Gopikrishna Deshpande, Peng Wang, D Rangaprakash, and Bogdan Wilamowski, "Fully connected cascade artificial neural network architecture for attention deficit hyperactivity disorder classification from functional magnetic resonance imaging data," *IEEE transactions on cybernetics*, vol. 45, no. 12, pp. 2668–2679, 2015.
- [172] Xiaolong Peng, Pan Lin, Tongsheng Zhang, and Jue Wang, "Extreme learning machine-based classification of ADHD using brain structural MRI data," *PloS one*, vol. 8, no. 11, pp. e79476, 2013.

- [173] Lena Lim, Andre Marquand, Ana A Cubillo, Anna B Smith, Kaylita Chantiluke, Andrew Simmons, Mitul Mehta, and Katya Rubia, "Disorder-specific predictive classification of adolescents with attention deficit hyperactivity disorder (ADHD) relative to Autism using structural magnetic resonance imaging," *PloS one*, vol. 8, no. 5, pp. e63660, 2013.
- [174] Blair A Johnston, Benson Mwangi, Keith Matthews, David Coghill, Kerstin Konrad, and J Douglas Steele, "Brainstem abnormalities in attention deficit hyperactivity disorder support high accuracy individual diagnostic classification," *Human brain mapping*, vol. 35, no. 10, pp. 5179–5189, 2014.
- [175] Laura Igual, Joan Carles Soliva, Sergio Escalera, Roger Gimeno, Oscar Vilarroya, and Petia Radeva, "Automatic brain caudate nuclei segmentation and classification in diagnostic of attention-deficit/hyperactivity disorder," Computerized Medical Imaging and Graphics, vol. 36, no. 8, pp. 591–600, 2012.
- [176] Che-Wei Chang, Chien-Chang Ho, and Jyh-Horng Chen, "ADHD classification by a texture analysis of anatomical brain MRI data," Frontiers in systems neuroscience, vol. 6, pp. 66, 2012.
- [177] Ariana Anderson, Pamela K Douglas, Wesley T Kerr, Virginia S Haynes, Alan L Yuille, Jianwen Xie, Ying Nian Wu, Jesse A Brown, and Mark S Cohen, "Non-negative matrix factorization of multimodal MRI, fMRI and phenotypic data reveals differential changes in default mode subnetworks in ADHD," NeuroImage, vol. 102, pp. 207–219, 2014.
- [178] Reto Iannaccone, Tobias U Hauser, Juliane Ball, Daniel Brandeis, Susanne Walitza, and Silvia Brem, "Classifying adolescent attention-deficit/hyperactivity disorder (ADHD) based on functional and structural imaging," European child & adolescent psychiatry, vol. 24, pp. 1279–1289, 2015.
- [179] Dai Dai, Jieqiong Wang, Jing Hua, and Huiguang He, "Classification of ADHD children through multimodal magnetic resonance imaging," Frontiers in systems neuroscience, vol. 6, pp. 63, 2012.
- [180] John B Colby, Jeffrey D Rudie, Jesse A Brown, Pamela K Douglas, Mark S Cohen, and Zarrar Shehzad, "Insights into multimodal imaging classification of ADHD," Frontiers in systems neuroscience, vol. 6, pp. 59, 2012.

In this supplementary information (SI), we begin by presenting a theoretical result concerning the identifiability of the mean and the variance of a truncated Gaussian distribution in the absence of prior knowledge about the truncation set, and we explore the identifiability of the learning trajectory of machine learning (ML) models' performance in the presence of publication bias. Following that, we provide a detailed description of the data used in Experiment 2. Additionally, we present further results on synthetic data generated under the model proposed in Experiment 1. This supplementary results support the effectiveness of our proposed solution in recovering the parameters of the learning curve, assuming that the samples are partially observed due to truncation. Moreover, we include a set of extended results on real published data from various domains in digital health. Table 2 lists the estimated limiting performance in these fields, including 95% confidence intervals. We list the studies included in this analysis in Tables 3, 4, 5, and 6. For details on the studies related to speech-based AD and CI, see [5]<sup>1</sup>. Further information on the studies related to multimodal ASD prediction can be found in the supplementary document cited in [12]. It should be noted that from the meta-analyses, we included only the published results that address binary classification problems between a healthy control group and a patients group. Studies with multiple groups of patients are excluded from this analysis.

## A On identifiability of the parameters of a truncated Gaussian distribution

In this paper, we proposed a parametric model that characterizes the learning trajectory of machine learning (ML) models within a specific domain, reflecting the average performance of ML models across varying sample sizes. We defined this learning trajectory, or learning curve, as  $= A + \alpha n^{\beta}$ . There is substantial evidence suggesting that many published results reflect an overestimation of model performance, and we postulated that this phenomenon was primarily due to overfitting and publication bias. Therefore, the published results predominately reveal only the upper end of the performance estimates for these models, thereby failing to represent the true learning trajectory. Therefore, we directed our focus towards regression analysis using truncated samples to accurately identify the true learning trajectory. To that end, we ask: is it possible to accurately estimate this learning curve from the observed samples alone, especially when the truncation thresholds remain unknown? To answer this question, we first properly formulate the problem.

Let N denote a set that includes all sample sizes used to train machine learning models within a particular field, with  $N = |\mathbf{N}|$  representing the set cardinality. For every  $n \in \mathbf{N}$ , research groups train and evaluate many machine learning models. The accuracies of these models are assumed to be independently drawn from a Gaussian distribution,  $\mathcal{N}(\mu_n, \sigma_n^2)$ , and are subject to a selection mechanism governed by a threshold  $\gamma_n$ . Consequently, we only observe those samples that exceed the threshold  $\gamma_n$ . The question we address is whether, for all  $n \in \mathbf{N}$ , the means,  $\mu_n$ , and variances,  $\sigma_n^2$ , of these Gaussian distributions can be identified from the observed samples when these thresholds  $\gamma_n$  are unknown.

Regression with truncated samples is a classical problem in statistics [42,49] and econometrics [36]. The identifiability of the mean and variance in Gaussian distributions has been extensively explored. Notably, the identifiability of the mean vector and covariance matrix in multivariate Gaussian distributions has been established in asymptotic regimes, provided that the truncation set S, which governs the selection mechanism, is known [50,51]. Specifically, only those samples that fall within set S are observed. Conversely, authors in [52] demonstrated that, in the absence of prior knowledge about the set S, two univariate Normal distributions with distinct means and variances become indistinguishable based solely on the observed samples. However, in our work, we specifically consider cases where the truncation set S is a half-line space. As we show next, this restriction enables the identifiability of the mean and variance of the Gaussian distribution within finite sample regimes.

**Theorem 1.** Let N denote the set of all sample sizes used to train ML models in a field. For every  $n \in \mathbb{N}$ , assume access to M samples (reported accuracies) that are independently drawn from a univariate Gaussian distribution with mean  $\mu_n$  and variance  $\sigma_n^2$ , and have survived a truncation mechanism such that the observations exceed a fixed, yet unknown threshold  $\gamma_n$ . Provided M satisfies Eq. (9) for all  $n \in \mathbb{N}$ , then, with high probability, it is possible to identify  $(\tilde{\mu}_n, \tilde{\sigma}_n^2)$  for each  $n \in \mathbb{N}$ , and consequently, the learning trajectory of the ML models, such that  $\left|\frac{1}{\sigma_n}(\mu_n - \tilde{\mu}_n)\right| \leq \epsilon$  and  $\left|1 - \frac{\tilde{\sigma}_n^2}{\sigma_n^2}\right| \leq \epsilon$ , for any  $\epsilon > 0$ .

 $<sup>^{1} \</sup>rm http://vees.ar/IS22SpeechMLTable.pdf$ 

To prove this theorem we first need the following results.

**Lemma 2** (Special case of Theorem 1 in [53]). Let S be a family of sets of half-line spaces, that are lower bounded at a fixed but unknown point  $\gamma$  and let  $\mathcal{N}(\mu, \sigma^2, S)$  be a truncated Gaussian distribution such that  $\mathcal{N}(\mu, \sigma^2; S) \geq \rho$ , where  $\mathcal{N}(\mu, \sigma^2; S)$  denote the total mass that is contained in the set S by the original distribution  $\mathcal{N}(\mu, \sigma^2)$ . Given M samples with

$$M = poly(1/\rho)\,\tilde{O}\left(\frac{1}{\epsilon^2}\right) \tag{9}$$

Then, with probability at least 99%, it is possible to identify  $(\tilde{\mu}, \tilde{\sigma}^2)$  that satisfy  $\left|\frac{1}{\sigma}(\mu - \tilde{\mu})\right| \leq \epsilon$  and  $\left|1 - \frac{\tilde{\sigma}^2}{\sigma^2}\right| \leq \epsilon$ .

**Proof of Lemma 2:** The above result is a special case of Theorem 1 in [53], which demonstrates that in a multivariate setting and for an unknown truncation set with a finite Vapnik–Chervonenkis (VC) dimension, the mean vector and covariance matrix of the original d-dimensional multivariate Gaussian distribution can be identified with high probability. Specifically, the authors of [53] established that the total variation distance  $d_{TV}$  between the original Gaussian distribution  $\mathcal{N}\left(\mu, \Sigma\right)$  and the estimated distribution  $\mathcal{N}\left(\tilde{\mu}, \tilde{\Sigma}\right)$  is less than any arbitrary small positive number  $\epsilon$ , when the number of observed samples M obeys:

$$M = \text{poly}(1/\rho) \,\tilde{O}\left(\frac{d^2}{\epsilon^2} + \frac{\text{VC}(S)}{\epsilon}\right). \tag{10}$$

Let S be a family of half-line spaces, that are lower bounded at a fixed point  $\gamma$ . Then, this set can be characterized as  $S = \{y | y \ge \gamma\}$ , that has VC(S) = 1. Then, given a univariate Gaussian distribution with d = 1, it directly follows that if M obeys Eq. (9), the mean and variance of a univariate Gaussian distribution are still identifiable with high probability, when only observing the truncated samples and in settings when the truncation point  $\gamma$  is unknown.

**Proof of Theorem 1** The proof follows directly from Lemma 2. Let  $\epsilon > 0$ . For every  $n \in \mathbb{N}$ , consider M observations independently drawn from a truncated Gaussian distribution  $\mathcal{N}\left(\mu_n, \sigma_n^2, S_n\right)$ . Assume that the set S denotes a half-line space characterized by the truncation point  $\gamma_n$ . According to Lemma 2 if the number of observations M satisfies Eq. (9) from Lemma 2, it is possible to identify both the estimated mean  $(\tilde{\mu}_n)$  and variance  $(\tilde{\sigma}_n^2)$  with high probability such that  $\left|\frac{1}{\sigma_n}\left(\mu_n - \tilde{\mu}_n\right)\right| \leq \epsilon$ 

and  $\left|1-\frac{\tilde{\sigma}_n^2}{\sigma_n^2}\right| \leq \epsilon$ . This result extends to affirm the identifiability of the means and variances of all the Gaussian distributions for every  $n \in \mathbb{N}$  with high probability, and consequently, the identifiability of the learning trajectory of ML models.

It is important to note that the primary objective of this work is to identify the learning trajectory of ML models form the overoptimistic observed samples. The result discussed above demonstrates that publication bias does not represent an identifiability issue in this context. Furthermore, we estimate this learning curve by identifying the parameters of the proposed model. As discussed in the main paper, we proposed that estimates of model accuracy can be expressed, in expectation, as  $A + \alpha n^{\beta} + \zeta n^{-0.5}$  in the presence of overfitting. In addition, we incorporated a random variable to account for inherent variability in the ML model development phase, which scales with  $c_1 n^{-0.5}$ . Thus, the goal is to identify the parameters A,  $\alpha$ ,  $\beta$ ,  $\zeta$  and  $c_1$ . It has been established that if  $q_1$  and  $q_2$  are two distinct positive proper fractions, then the numbers  $a^{q_1}$  and  $a^{q_2}$  are linearly independent [54]. From this result, it is straightforward to show that the two exponential terms,  $\alpha n^{\beta}$  (with  $\beta < 0$ ) and  $\zeta n^{-0.5}$  are linearly independent, provided that  $\beta$  is bounded away from 0.5. With this mild assumption, in this work we have formulated an optimization problem based on the method of moments to recover the parameters of the model. Due to the non-convex nature of the objective functions, we used genetic algorithms to solve the optimization problem.

#### B Data generating process for Experiment 2

In Experiment 2, we consider two binary classification problems with 10-dimensional feature vectors  $\mathbf{x}$ , and corresponding labels z. For both problems we train and evaluate a linear classifier. In Problem 1, the feature vectors are randomly and independently drawn from a multivariate Gaussian distribution. For each feature vector  $\mathbf{x}_i = [x_1, x_2, \dots, x_{10}]$  we first compute an output variable  $y_i$  as

$$y_i = \frac{1}{1 + \exp\left(-\left(0.8x_1 - 0.3x_2 + 0.7\epsilon\right)\right)},\tag{11}$$

where  $\epsilon \sim \mathcal{N}(0,1)$  and  $i=1,2,\ldots,n$ . Then, the corresponding label is as follows:

$$z_i = \begin{cases} 1 & y_i > 0.5\\ 0 & \text{Otherwise.} \end{cases}$$
 (12)

Similarly in Problem 2, the feature vectors are randomly and independently drawn from a multivariate Gaussian distribution. However, this time for each  $\mathbf{x}_i$  we first compute an output variable  $y_i$  as [55,56]

$$y_i = 5\left(2\sin(\pi x_1 x_2) + 4(x_3 - 0.5)^2 + 2x_4 + x_5\right) + \epsilon.$$
 (13)

Then, the corresponding label is as follows:

$$z_i = \begin{cases} 1 & \frac{1}{1 + \exp(y_i - \bar{y})} > 0.5\\ 0 & \text{Otherwise} \end{cases}$$
 (14)

where  $\bar{y}$  represents the average of all  $y_i$ 's for  $i = 1, 2, \dots n$ .

#### C Extended results

We extend our results to additional cases based on Experiment 1, which was introduced in the paper. In this experiment, data is generated based on the proposed model, expressed as

$$\mathbf{y}_n^* = A + \alpha n^\beta + \mathbf{w}_n \,, \tag{15}$$

where  $\mathbf{w}_n \sim \mathcal{N}\left(\zeta n^{-0.5}, \sigma_n^2\right)$ , and  $\sigma_n = c_1 n^{-0.5}$ , and subsequently subjected to truncation due to the selection mechanism. We categorize each ML problem as 'easy' if the performance limit A > 0.75, indicating greater separability, and as 'difficult' if  $A \leq 0.75$ . Additionally, the parameter  $\beta$  controls the convergence rate, with larger values in absolute value indicating faster convergence. Furthermore, higher values of the overfitting parameter  $\zeta$  result in greater data leakage and overfitting to the test set. To cover a broad range of scenarios, we consider the following 7 cases:

- Problem 1 (high separability fast convergence):  $A=0.78, \, \alpha=-1.24, \, \beta=-0.76, \, \zeta=0.45$  and  $c_1=0.50.$
- Problem 2 (low separability slow convergence): A = 0.75,  $\alpha = -0.75$ ,  $\beta = -0.57$ ,  $\zeta = 0.85$  and  $c_1 = 0.40$ .
- Problem 3 (high separability slow convergence): A = 0.90,  $\alpha = -0.80$ ,  $\beta = -0.60$ ,  $\zeta = 0.40$  and  $c_1 = 0.30$ .
- Problem 4 (low separability fast convergence): A = 0.60,  $\alpha = -0.60$ ,  $\beta = -0.70$ ,  $\zeta = 0.70$  and  $c_1 = 0.50$ .
- Problem 5 (low separability slow convergence): A = 0.65,  $\alpha = -0.55$ ,  $\beta = -0.60$ ,  $\zeta = 0.40$  and  $c_1 = 0.40$ .
- Problem 6 (high separability fast convergence): A = 0.78,  $\alpha = -1.90$ ,  $\beta = -0.95$ ,  $\zeta = 0.25$  and  $c_1 = 0.50$ .
- Problem 7 (high separability slow convergence): A = 0.85,  $\alpha = -0.70$ ,  $\beta = -0.60$ ,  $\zeta = 0.70$  and  $c_1 = 0.20$ .

Results corresponding to Cases 1 and 2 are presented in the main paper. Here, we present the results for the additional cases. Fig. 5 illustrate the result and show observed and truncated samples (blue and light red circles, respectively), fit to the overoptimistic accuracies (blue line), the new estimated learning curves (red-dashdot lines) and the true learning curves (green-dashed lines). As with the results shown in the main paper, there is good agreement between the true and estimated learning curves.

We also provide extended results for Experiment 3. We extend our results to 5 other fields in digital health in addition to neuroimaging and speech based classification of Alzheimer's disease (AD). We consider the following cases:

• Case 1: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with Autism spectrum disorder (ASD) and healthy controls.

Table 2: The estimated limiting performance derived from meta-analyses of the prediction of brain disorders [6,9–12]. Abbreviations: HC — Healthy control group, AD — Alzheimer's disease, ASD—Autism spectrum disorder, ADHD—Attention deficit - hyperactivity disorder, CI—forms of cognitive impairment that is not Alzheimer's disease

Problem	Limiting Performance
Neuroimaging-based HC vs. AD	0.88, [0.84 - 0.96]
Neuroimaging-based HC vs. Schizophrenia	0.73, [0.70 - 0.81]
Neuroimaging-based HC vs. ADHD	0.59, [0.50 - 0.68]
Neuroimaging-based HC vs. ASD	0.87, [0.80 - 0.93]
Speech-based HC vs. AD	0.79, [0.75 - 0.83]
Speech-based HC vs. CI	0.76, [0.71 - 0.86]
Multi-modal HC vs. ASD	0.72, [0.65 - 0.77]

- Case 2: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with attention-deficit hyperactivity (ADHD) and healthy controls.
- Case 3: Classification accuracy of ML models developed using neuroimaging data [6] for classifying between patients with Schizophrenia and healthy controls.
- Case 4: Classification accuracy of ML models developed using speech data [9–11] for classifying between patients with forms of cognitive impairment that is not Alzheimer's disease (CI) and healthy controls.
- Case 5: Classification accuracy of ML models developed using multi-modality data [12] for classifying between patients with ASD and healthy controls.

Fig. 6 shows the published classification accuracies (blue circles), and the fit to the overoptimistic results (blue) along with the estimated, debiased learning curves (red-dashdot lines) across these five fields. The dimmed blue circles in these figures are considered as outliers which have been excluded from our analysis. To identify and remove these outliers, we utilized a quantile regression approach, and discard samples below the 0.1 quantiles. Fig. 7 shows the published results and the 0.1 quantile. The faded blue circles indicates samples that are below this line and are considered as outliers.

Lastly, to employ the NSGA II algorithm we used the population size of 40, off springs of 10, the cross-over parameter  $\eta_c = 15$  and the mutation parameter  $\eta_m = 20$ . The total number of generations was varied between 200 to 500 across different fields.

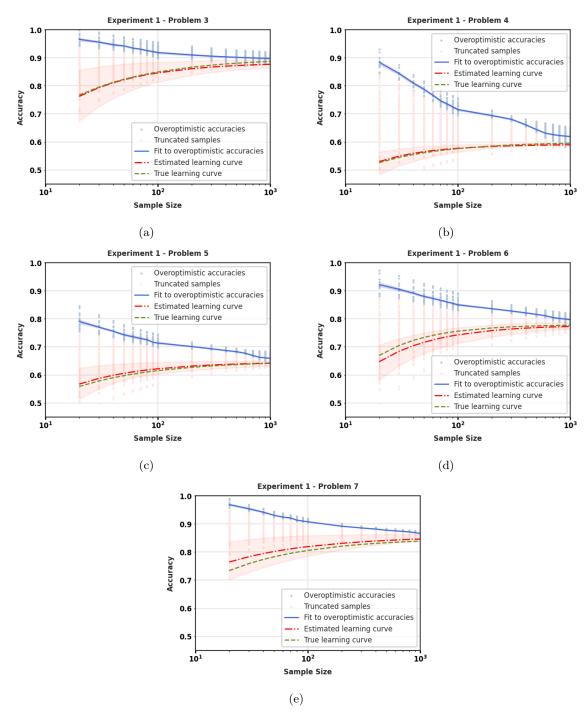


Figure 5: Extended results based on Experiment 1 and for 5 additional cases introduced in Section C.

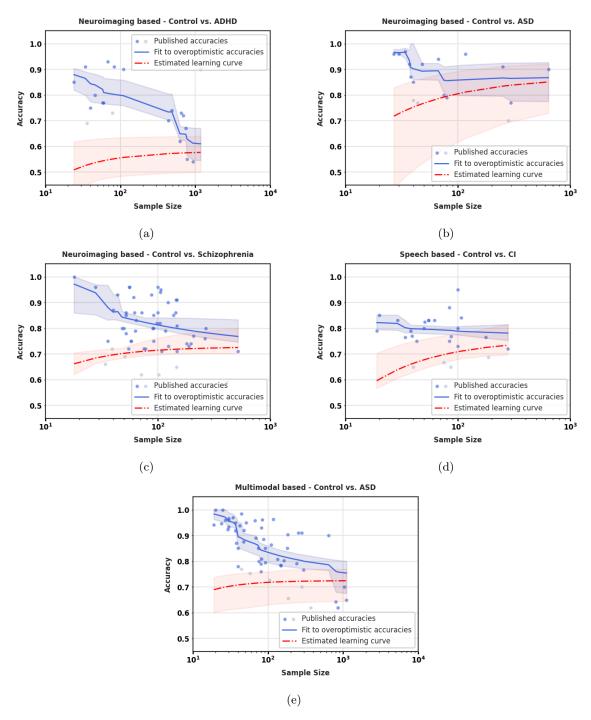


Figure 6: Evaluation of the proposed method on collection of results from meta-analysis of neuroimaging-based prediction of brain disorders [6] that includes (a) control vs. ADHD and (b) control vs. ASD, and (c) control vs. Schizophrenia, (d) speech based prediction of CI [9–11], and (e) multi-modal based prediction of ASD [12]. Faded blue are considered as outliers and are removed from analysis. y-axis is in linear and x-axis is in log scale.

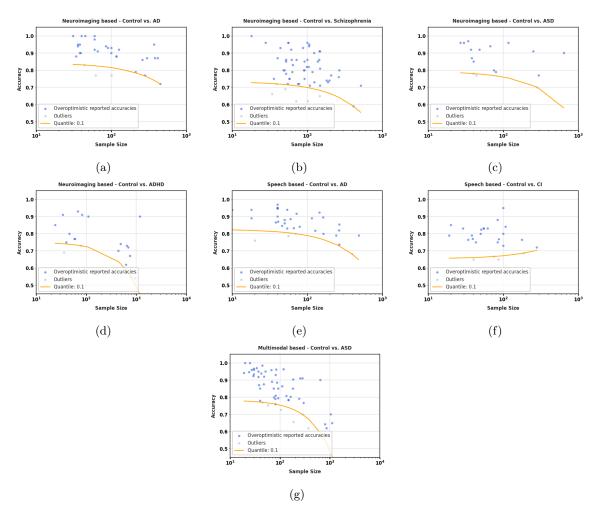


Figure 7: The published results from the meta-analyses [6,9–12] shown with blue circles and address (a) the neuroimaging based control vs. AD, (b) the neuroimaging based control vs. Schizophrenia, (c) the neuroimaging based control vs. ASD, (d) the neuroimaging based control vs. ADHD (e) speech based control vs. AD, (f) speech based control vs. CI and (g) multimodal based control vs. ASD. The orange lines are the 0.1 quantiles that govern the outlier detection thresholds.

Table 3: List of studies used in Experiment 3 and the analysis for neuroimaging based classification of Alzheimer's Disease [6]

Sample size	Reported accuracy	Reference
45	1.00	[57]
31	1.00	[58]
40	1.00	[59]
100	0.90	[60]
126	0.92	[61]
44	0.83	[62]
380	0.87	[63]
62	0.77	[64]
34	0.88	[65]
101	0.77	[66]
60	0.98	[67]
38	0.95	[68]
39	0.90	[69]
36	0.95	[70]
117	0.88	[71]
66	0.91	[72]
85	0.94	[73]
60	0.92	[74]
370	0.95	[75]
60	1.00	[76]
100	0.93	[77]
299	0.87	[78]
212	0.79	[79]
260	0.86	[80]
117	0.88	[81]
448	0.72	[82]
417	0.87	[83]
36	0.94	[84]
280	0.77	[85]
90	0.93	[86]
38	0.90	[87]

Table 4: List of studies used in Experiment 3 for neuroimaging based classification of Schizophrenia [6]

90	Sample size	Reported accuracy	Reference
100         0.96         90]           28         0.96         191]           138         0.85         192]           34         0.66         193]           102         0.62         194]           88         0.93         195]           208         0.777         196]           106         0.95         197]           52         0.85         198           71         0.62         199           145         0.91         100]           92         0.75         101]           36         0.75         102]           44         0.93         103           64         0.83         104           52         0.86         105           100         0.86         106           267         0.80         107           48         0.80         108           18         1.00         109           62         0.86         110           144         0.86         111           58         0.75         112           56         0.96         113           180         0.74	90	0.80	[88]
28         0.96         [91]           138         0.85         [92]           34         0.66         [93]           102         0.62         [94]           88         0.93         [95]           88         0.93         [95]           106         0.95         [97]           52         0.85         [98]           71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           144	58	0.75	[89]
138         0.85         92           34         0.66         93           102         0.62         94           88         0.93         95           208         0.77         96           106         0.95         97           52         0.85         98           71         0.62         199           145         0.91         100           92         0.75         101           36         0.75         102           44         0.93         103           64         0.83         104           52         0.86         105           100         0.86         106           267         0.80         107           48         0.80         108           18         1.00         109           62         0.86         110           144         0.86         111           58         0.75         112           56         0.96         113           180         0.74         114           146         0.65         115           148         0.71         116	100	0.96	[90]
34         0.66         [93]           102         0.62         [94]           88         0.93         [95]           208         0.77         [96]           106         0.95         [97]           52         0.85         [98]           71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148<	28	0.96	[91]
102         0.62         [94]           88         0.93         [95]           208         0.77         [96]           106         0.95         [97]           52         0.85         [98]           71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148         0.71         [116]           12	138	0.85	[92]
88       0.93       [95]         208       0.77       [96]         106       0.95       [97]         52       0.85       [98]         71       0.62       [99]         145       0.91       [100]         92       0.75       [101]         36       0.75       [102]         44       0.93       [103]         64       0.83       [104]         52       0.86       [105]         100       0.86       [106]         267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.86       [119]         51       0.69       [120]         123       0.90       [121]	34	0.66	[93]
208         0.77         [96]           106         0.95         [97]           52         0.85         [98]           71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           144         0.86         [111]           148         0.71         [116]           124         0.73         [117]           92         0.86         [119]           51         0.69         [120]           1	102	0.62	[94]
106         0.95         [97]           52         0.85         [98]           71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148         0.71         [116]           124         0.73         [117]           92         0.86         [119]           51         0.69         [120]			
52         0.85         [98]           71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148         0.71         [116]           124         0.73         [117]           92         0.86         [119]           51         0.69         [120]           123         0.90         [121] <td< td=""><td></td><td></td><td></td></td<>			
71         0.62         [99]           145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148         0.71         [116]           124         0.73         [117]           92         0.86         [119]           51         0.69         [120]           123         0.90         [121]           189         0.73         [122]           516         0.71         [123]           <			
145         0.91         [100]           92         0.75         [101]           36         0.75         [102]           44         0.93         [103]           64         0.83         [104]           52         0.86         [105]           100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148         0.71         [116]           124         0.73         [117]           92         0.86         [119]           51         0.69         [120]           123         0.90         [121]           189         0.73         [122]           516         0.71         [123]           104         0.82         [124]			
92       0.75       [101]         36       0.75       [102]         44       0.93       [103]         64       0.83       [104]         52       0.86       [105]         100       0.86       [106]         267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]			
36       0.75       [102]         44       0.93       [103]         64       0.83       [104]         52       0.86       [105]         100       0.86       [106]         267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [128]			
44       0.93       [103]         64       0.83       [104]         52       0.86       [105]         100       0.86       [106]         267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]			
64       0.83       [104]         52       0.86       [105]         100       0.86       [106]         267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]			
52       0.86       [105]         100       0.86       [106]         267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]			
100         0.86         [106]           267         0.80         [107]           48         0.80         [108]           18         1.00         [109]           62         0.86         [110]           144         0.86         [111]           58         0.75         [112]           56         0.96         [113]           180         0.74         [114]           146         0.65         [115]           148         0.71         [116]           124         0.73         [117]           92         0.80         [118]           72         0.86         [119]           51         0.69         [120]           123         0.90         [121]           189         0.73         [122]           516         0.71         [123]           104         0.82         [124]           262         0.76         [125]           92         0.85         [126]           78         0.72         [128]           98         0.82         [129]           39         0.72         [130]			
267       0.80       [107]         48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]			
48       0.80       [108]         18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]			
18       1.00       [109]         62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]			
62       0.86       [110]         144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]			
144       0.86       [111]         58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]			. ,
58       0.75       [112]         56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]			
56       0.96       [113]         180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]			
180       0.74       [114]         146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]			
146       0.65       [115]         148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]			
148       0.71       [116]         124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]			
124       0.73       [117]         92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]			
92       0.80       [118]         72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
72       0.86       [119]         51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
51       0.69       [120]         123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
123       0.90       [121]         189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
189       0.73       [122]         516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
516       0.71       [123]         104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
104       0.82       [124]         262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
262       0.76       [125]         92       0.85       [126]         78       0.72       [127]         75       0.72       [128]         98       0.82       [129]         39       0.72       [130]         52       0.78       [131]         197       0.74       [132]         412       0.59       [133]         148       0.91       [134]         61       0.92       [135]         148       0.81       [136]         117       0.79       [137]         108       0.71       [138]         105       0.94       [139]         50       0.80       [140]         56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
92     0.85     [126]       78     0.72     [127]       75     0.72     [128]       98     0.82     [129]       39     0.72     [130]       52     0.78     [131]       197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
78     0.72     [127]       75     0.72     [128]       98     0.82     [129]       39     0.72     [130]       52     0.78     [131]       197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
75     0.72     [128]       98     0.82     [129]       39     0.72     [130]       52     0.78     [131]       197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
98     0.82     [129]       39     0.72     [130]       52     0.78     [131]       197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
39     0.72     [130]       52     0.78     [131]       197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
52     0.78     [131]       197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
197     0.74     [132]       412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
412     0.59     [133]       148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
148     0.91     [134]       61     0.92     [135]       148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]	412	0.59	
148     0.81     [136]       117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]	148	0.91	
117     0.79     [137]       108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]	61	0.92	[135]
108     0.71     [138]       105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]	148	0.81	[136]
105     0.94     [139]       50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]	117	0.79	[137]
50     0.80     [140]       56     0.96     [141]       55     0.72     [142]       40     0.87     [143]			
56       0.96       [141]         55       0.72       [142]         40       0.87       [143]			
55 0.72 [142] 40 0.87 [143]			
40 0.87 [143]			
L J			
63   0.79   [144]			
	63	0.79	[144]

Table 5: List of studies used in Experiment 3 and the analysis for neuroimaging based classification of ASD [6]

Sample size	Reported accuracy	Reference
75	0.80	[145]
34	0.97	[146]
27	0.96	[147]
40	0.78	[148]
296	0.77	[149]
640	0.90	[150]
252	0.91	[151]
80	0.79	[152]
117	0.96	[153]
48	0.92	[154]
38	0.87	[155]
44	0.77	[156]
40	0.85	[157]
67	0.94	[158]
30	0.96	[159]
37	0.92	[160]
280	0.70	[161]

Table 6: List of studies used in Experiment 3 and the analysis for neuroimaging based classification of ADHD [6]

Sample size	Reported accuracy	Reference
60	0.77	[162]
34	0.91	[163]
40	0.75	[164]
24	0.85	[165]
46	0.80	[166]
688	0.72	[167]
929	0.54	[168]
647	0.73	[169]
487	0.74	[170]
1177	0.90	[171]
110	0.90	[172]
58	0.77	[173]
68	0.93	[174]
78	0.73	[175]
436	0.70	[176]
83	0.91	[139]
748	0.67	[177]
36	0.69	[178]
624	0.62	[179]
776	0.55	[180]