

VAAD: Visual Attention Analysis Dashboard applied to e-Learning

Miriam Navarro, Álvaro Becerra, Roberto Daza, Ruth Cobos, Aythami Morales, Julian Fierrez
School of Engineering, Universidad Autonoma de Madrid, Spain
{miriam.navarroclemente, alvaro.becerra, roberto.daza, ruth.cobos, aythami.morales, julian.fierrez}@uam.es

Abstract—In this paper, we present an approach in the Multimodal Learning Analytics field. Within this approach, we have developed a tool to visualize and analyze eye movement data collected during learning sessions in online courses. The tool is named VAAD—an acronym for Visual Attention Analysis Dashboard—. These eye movement data have been gathered using an eye-tracker and subsequently processed and visualized for interpretation. The purpose of the tool is to conduct a descriptive analysis of the data by facilitating its visualization, enabling the identification of differences and learning patterns among various learner populations. Additionally, it integrates a predictive module capable of anticipating learner activities during a learning session. Consequently, VAAD holds the potential to offer valuable insights into online learning behaviors from both descriptive and predictive perspectives.

Index Terms—biometrics, dashboard, eye-tracker, learning analytics, machine learning, multimodal learning, online learning

I. INTRODUCTION

The progression of technology has played a crucial role in fostering innovative education within online settings, alongside various other noteworthy advancements. A notable instance of this is the growing prominence of Massive Open Online Courses (MOOCs). Known for their diversity, MOOCs prioritize inclusivity and accessibility, as they do not necessitate specific prerequisites for enrollment. This wide array of subject matter makes them a valuable source of knowledge, as they are recognized by official educational institutions [1], [2].

Educators can now upload learning materials, such as videos and other educational resources, through these online courses, making it easy for learners to access this information. This enables learners from all over the world to access numerous courses uploaded by different universities globally.

While the popularity of MOOCs continues to grow, so do dropout rates. Despite being an appealing learning tool, few learners successfully complete these courses [3]. This is why educators are worried about this trend, emphasizing the need to understand the underlying causes.

This concern has led to the creation of Learning Analytics (LA) tools, which provide valuable insights into online educational environments [4]. It is the case of Universidad Autónoma de Madrid (UAM), with the development of such systems, like edX-LIMS [5]–[8] or M2LADS [9], [10].

The first one, edX-LIMS, gives learners feedback on their interaction with the MOOC, assisting them throughout their learning journey and addressing their problems, thereby keeping them engaged. They also provide instructors with a web-based Dashboard to monitor their learners, giving them a better understanding of their progress and helping them identify those in need of additional support. Consequently, instructors can intervene and offer targeted assistance to learners who may benefit from it.

The second one, M2LADS, facilitates the integration and visualization of multimodal data captured during monitoring using biometric sensors, presented through Web-based Dashboards.

With the main aim to complement and provide analysis of data managed by e-learning platforms, we have developed a tool designed to visualize eye movement data collected. The name of this tool is VAAD, which stands for Visual Attention Analysis Dashboard. This tool presents visualizations through different graphs such as boxplots and heatmaps to help understand the monitored individuals' behavior. In this article, we use data gathered during a learning session (LS) in online learning to better understand learners' behavior. However, VAAD could also be applied in other contexts involving web platforms and services, such as marketing studies or system analysis [11], to gain insights into users' preferences, or in gaming to improve players' performance.

The capture of data throughout learning sessions is carried out via the edBB platform, tailored for remote education, which captures both biometric and behavioral data [12], [13].

In this article we present the tool VAAD applied to e-learning. The structure of this article is as follows: In the following section we present related works and the motivation for the approach proposed. Then, in Section III we provide a description of the context and dataset. In Section IV, a detailed explanation of the proposed approach is presented. Finally, in Section V the article concludes with conclusions and future work.

II. RELATED WORKS AND MOTIVATION FOR THE APPROACH PROPOSED

Capturing and analyzing biometric multimodal data can be an effective method for gaining insight into a course's dynamics and learner engagement [14]. For instance, audio data can be used to create a network of learner interactions;

arXiv:2405.20091v4 [cs.CV] 2 Sep 2024

visual and eye-tracking data can offer insights into visual attention; sensors can measure psychological responses. If properly interpreted, these data can help understand interactions that contribute to educational success [15].

Biometric multimodal data can be collected from various devices [16], including webcams, electroencephalogram bands (EEG) for brain waves and attention levels, smartwatches for heart rate and EDA, or eye-trackers for pupil diameter and visual attention, including fixation gaze and saccades.

Regarding visual attention, earlier studies have shown that eye-tracking techniques can give a deeper understanding of learners' performance, regardless of their backgrounds [17]. Employing this approach could enhance attention and the quality of learning in MOOCs, due to the established correlation between learner performance and visual attention [18].

In [17], learners' visual attention was examined, and feedback on their visual performance led to a consistent improvement of their performance by 1% every minute. Additionally, research in [19] revealed that listeners who focused more on visual references made by an interlocutor had higher comprehension levels, while research in [20] found a strong correlation between fixation eye movements and learning outcomes.

To better understand visual data, visualization is crucial. In the LA field, the frequent use of dashboards [21], [22] aids learners and instructors in decision-making by providing a clear insight into the ongoing learning process [23].

Research cited in [24] highlights the effectiveness of dashboards in the aftermath of processing and synthesizing visual attention data, providing analysts with precise and succinct information. The study presents a dashboard designed to organize eye-tracking data from a range of learners, including information on eye fixations, saccades, and pupil diameter. Moreover, it successfully predicted with a 76.4% accuracy whether a learner was fatigued or not employing predictive algorithms.

The eye-tracking technology is an integral part of all the research cited. This is why in the case of the tool VAAD the focus remains on eye movement data. This tool focuses on fixation and saccade events, as prior research has revealed that eye movements can indicate patterns and visual behaviors associated with different areas of interest (AOI) for learners, highlighting areas where they focus the most [25]. Moreover, this research has shown that studying saccade movements can successfully help identify AOIs.

VAAD's goal is to extract essential information about fixation and saccade events. This tool then presents visual data in two views: a global one, offering insight into the session and MOOC activities, and an individual view displaying learners' AOIs through a heat map. Consequently, VAAD is equipped with a descriptive analysis module that includes the option for an ANOVA test, enabling it to identify correlations among different learner populations as seen in prior studies [26].

However, VAAD is not limited to a descriptive module; it also features a predictive analysis module that can identify what a learner is doing at a specific moment during the

LS. This allows VAAD to provide insights using both descriptive and predictive approaches, enabling analysts to draw conclusions and gain a better understanding of the cognitive processes related to eye movement.

III. CONTEXT AND DATASET

In order to test the approach proposed, we have conducted a study in the School of Engineering at our institution, where 120 learners from the school were monitored in our laboratory while they attended and interacted with a MOOC subunit during a 30-minute LS. The chosen MOOC was titled "Introduction to Development of Web Application" (WebApp), which is available on the edX MOOC platform¹ and offered by our university.

In this study, the monitored learners engaged in various activities such as watching videos, reading documents, and then completing assignments on the LS content, which was about HTML language. Prior to the gathering of multimodal data from the LS, learners underwent a pretest to determine their initial level of knowledge on HTML. At the end of the LS, the assignments that had been completed by the learners in the MOOC served as the posttest items.

Learners were monitored throughout the LS via the edBB platform. All multimodal biometric data captured by their sensors are synchronised by M2LADS [9], [10]. The sensors used to obtain the different multimodal data are as follows:

- Video data: Acquired from overhead, front and side cameras, consisting of 2 webcams and 1 Intel RealSense. Additionally, video from the screen monitors was also recorded.
- Electroencephalogram (EEG) data: Acquired from a NeuroSky EGG band [27], [28].
- Heart rate data: Acquired from a Huawei Watch 2 pulsemeter feature [29].
- Visual attention data: Acquired from a Tobii Pro Fusion that contains 2 eye-tracking cameras.

As previously mentioned, VAAD centers on managing all multimodal data linked to visual attention, which is why the Tobii Pro Fusion eye-tracking device remains the focal point. The data for VAAD arises from the processing module, which handles the eye-tracking data produced by the eye-tracker, as well as additional data generated by M2LADS. This study has received approval from the university's ethics committee, and all biometric multimodal data are anonymized.

A. Eye-tracking Data

The eye-tracker estimates a wide variety of multimodal data. However, for the development of VAAD, the processing module only works with specific metrics, which are listed in Table I.

B. M2LADS Data

Additional data regarding learner population and the LS are obtained from the M2LADS database. The processing module

¹<https://www.edx.org/>

TABLE I
MULTIMODAL DATA EXTRACTED FROM THE TOBII PRO FUSION
EYE-TRACKING DEVICE

Variable	Description	Units
Participant ID	Anonymized ID	-
Recording date	-	YYYY-MM-DD
Recording start time	-	HH:MM:SS:mmm
Recording timestamp	Timestamp counted from the start of the recording ($t_0 = 0$)	Milliseconds
Gaze point X	Horizontal coordinate of the averaged left and right eye gaze point	Pixels
Gaze point Y	Vertical coordinate of the averaged left and right eye gaze point	Pixels
Eye movement type	Type of eye movement	Fixation, Saccade, Unclassified, Eyes Not Found
Gaze Event duration	The duration of the currently active eye movement	Milliseconds
Eye movement type index	Count is an auto-increment number starting with 1 for each eye movement type	Number

exclusively operates with specific data, which are listed in Table II.

Prior to the monitorization, learners were categorized into three different groups (40 learners per group), which determined the frequency of interruptions they encountered during the LS.

TABLE II
DATA EXTRACTED FROM M2LADS

Variable	Description
Participant ID	Anonymized ID of the participant
Activity identifier	Activity of the MOOC in which the learner is involved
Initial time	Initial timestamp of the activity
Final time	Final timestamp of the activity
Sex	Participant sex
Group	Participant group
HTML level	Initial knowledge level on HTML
Academic background	University degree
Learning score	Difference between the posttest and pretest grade

IV. APPROACH PROPOSED

The VAAD tool is composed of three different modules: a processing data module, a visualization module, and a prediction module. As seen in Fig. 1, the processing module manages the data from the eye-tracker and M2LADS, and is interconnected with both the visualization and prediction modules, which use the processed data for their respective tasks. Finally, all preprocessed data and results are stored in M2LADS database.

A. Processing Data Module

Throughout the LS, VAAD has specifically focused on capturing saccade and fixation event information provided by

the eye-tracker, in addition to timestamps and event durations, to gather insights into these eye movements.

Before the processing stage, the eye-tracking data of learners were thoroughly inspected to identify errors or anomalies. Learners displaying a notable frequency of "Eyes Not Found" values for the Eye movement type variable were excluded to ensure the integrity of the final data utilized by VAAD.

The objective of the processing module was to synchronize the eye-tracking data with the M2LADS data, ensuring that each learner's eye-tracking data were accurately tagged with the corresponding activities within the MOOC for every frame captured. This approach enabled us to determine precisely when each eye event occurred during the LS, utilizing the available timestamps and activities. By incorporating this tagging process, we were able to generate the necessary data for the visualization module and the prediction module.

From a general visualization perspective, data were compiled to include all learners, incorporating their sex and group, thus enabling differentiation of populations based on these factors. Subsequently, four key parameters were determined for each learner: average saccades, average fixations, average saccade time, and average fixation time. These parameters were not only assessed for the overall session but also for each activity individually. The culmination of this data processing is a final database that profiles each learner, including their respective group and sex, and provides details on the four aforementioned parameters for every activity within the MOOC, as well as for the entire session.

Regarding the individual visual overview, data were generated for each available learner, which included information about their saccade and fixation events, along with their gaze point parameters for the X and Y coordinates and the activity within the MOOC.

Concerning the predictive analysis, data were utilized to collect various metrics subsequently employed for prediction. Detailed information on these metrics is gathered in Table III.

B. Visualization Module

The visualization charts crafted by VAAD provide a thorough examination of the session, providing a deep understanding of both global trends and individual learners' engagement. These charts are available in both English and Spanish.

The general session overview is presented through interactive box plot charts, providing a visual representation of the four parameters mentioned earlier, namely average saccades, average saccade time, average fixations, and average fixation time. These charts can be filtered by different demographic categories, such as groups or sex, allowing for a detailed exploration of the data. Fig. 2 (a) illustrates an example of average saccade movements during reading, filtered by sex, revealing a greater distribution among females. The same pattern is observed for video watching in Fig. 2 (b). Analysts have the option to visualize specific activities within the MOOC or view the entire session at once, with each task differentiated by a different color for enhanced clarity. Moreover, an ANOVA test is conducted for each of the four

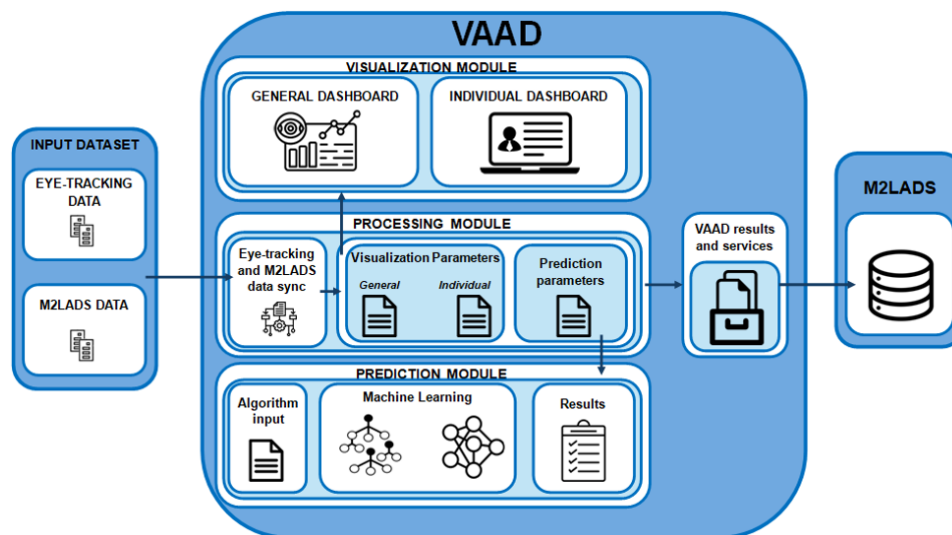


Fig. 1. VAAD Architecture/Modules

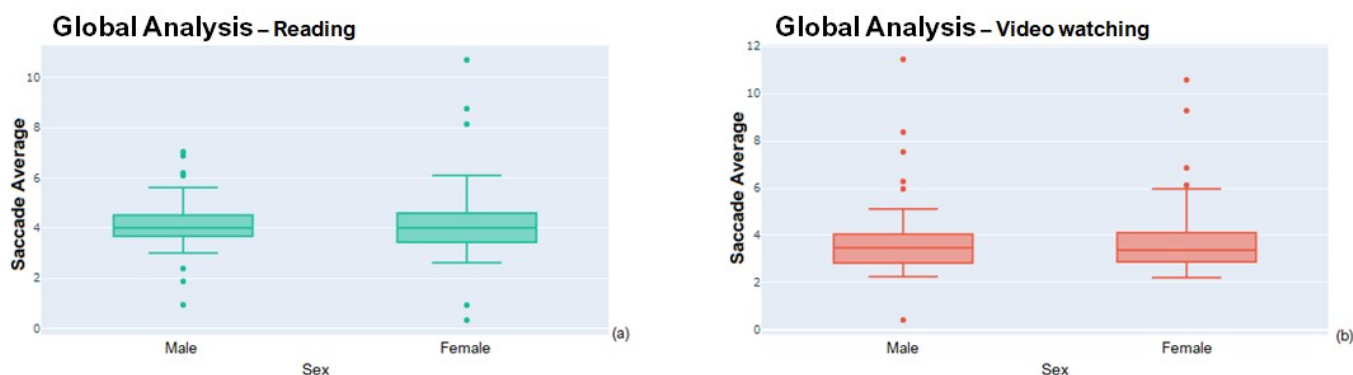


Fig. 2. Screenshot from an example overview of global analysis for reading activity (a) and video watching (b)

parameters, identifying significant variations among learners from different populations.

Another interactive chart presents individual learners' data through a heat map, providing a visual representation of their on-screen attention. As depicted in the example shown in Fig. 3 (a), it is possible to identify precisely where the learner was looking during the video task, with a higher concentration of fixations observed within the region of the screen where the video was displayed (Fig. 3 (b)). Analysts can select a specific learner and customize their visual screen heat map by choosing from various options, such as different activities within the MOOC session. This approach offers valuable insights into each learner's focus during different activities, assisting in the identification of engaging materials and assessing the impact of diverse learning sources on learners' performance.

C. Prediction Module

The goal of the prediction module is to determine the activity which the learner is doing. The identifier metric may indicate either video watching or course content reading. The

prediction module utilizes the metrics outlined in Table III to make a binary prediction between reading and video watching.

For the prediction task, we worked with learners belonging to groups 2 and 3 (80 learners), excluding those from group 1 due to the high frequency of interruptions experienced by learners in this group during the LS. Additionally, we excluded some data from the reading category to balance our training dataset, ensuring an equal number of data points for each category (524 samples for each category).

We used the Random Forest algorithm and a neural network to test against the testing data. The neural network tested is a perceptron with one hidden layer (32 neurons and ReLU activation) and one output layer (sigmoid activation). The loss function chosen was Mean Squared Error (MSE) with Adam optimizer (default learning rate of 0.001).

We adopted two distinct approaches. Initially, we divided the learners from groups 2 and 3 into 75% for training data and 25% for testing data. Subsequently, we used both Random Forest and the neural network for analysis. (See Table IV)

The second approach consisted of evaluating both methods using the Leave-One-Out Cross-Validation (LOOCV) tech-

Individual Analysis Video task heatmap – Student 202303231

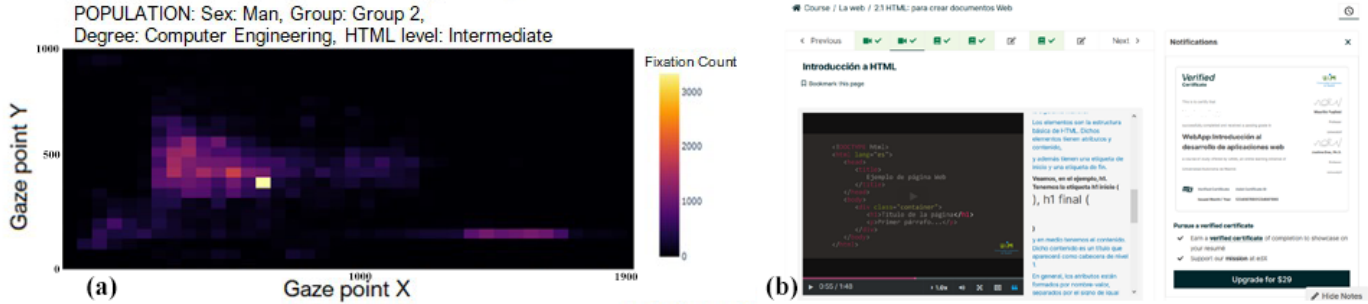


Fig. 3. Screenshot from an example overview of individual analysis (a) and screenshot from the video that the learner is watching (b)

TABLE III
METRICS USED IN THE PREDICTION MODULE

Feature	Description
Sex	Participant sex
Label	The activity to be predicted within the MOOC
Saccade number	Average number of saccade movements
Velocity	Average saccade velocity
Velocity X	Average horizontal saccade velocity
Velocity Y	Average vertical saccade velocity
Max velocity	Maximum saccade velocity
Min velocity	Minimum saccade velocity
Deviation	Saccade velocity typical deviation
Deviation X	Saccade horizontal velocity standard deviation
Deviation Y	Saccade vertical velocity typical deviation
Kurtosis	Saccade velocity kurtosis
Kurtosis X	Saccade horizontal velocity kurtosis
Kurtosis Y	Saccade vertical velocity kurtosis
Skew	Saccade velocity skew
Skew X	Saccade horizontal velocity skew
Skew Y	Saccade vertical velocity skew

TABLE IV
RESULTS OF TESTING TWO ALGORITHMS ON THE TESTING DATA WITH 75% TRAINING AND 25% TEST

		Random Forest	Neural Network
Accuracy test		0.72	0.73
Video watching	Precision	0.62	0.67
	Recall	0.88	0.75
	F1-Score	0.73	0.70
Reading	Precision	0.88	0.80
	Recall	0.61	0.74
	F1-Score	0.72	0.77

nique.

Following the testing of both approaches for both predictive methods, the results obtained after applying the LOOCV technique were more promising as we don't have a lot of data. The results obtained from the LOOCV technique are presented in Table V.

For LOOCV, in terms of accuracy, both methods show close similarity, with Random Forest slightly edging ahead. This trend persists across the other metrics, with Random Forest consistently showing a slight advantage.

TABLE V
RESULTS OF TESTING TWO ALGORITHMS ON THE TESTING DATA WITH LOOCV

		Random Forest	Neural Network
Accuracy test		0.76	0.74
Video watching	Precision	0.76	0.74
	Recall	0.79	0.76
	F1-Score	0.77	0.75
Reading	Precision	0.78	0.75
	Recall	0.75	0.73
	F1-Score	0.76	0.74

Overall, while both models share similarities, Random Forest shows a slight superiority.

V. CONCLUSIONS AND FUTURE WORK

In this paper, we introduce VAAD (Visual Attention Analysis Dashboard), an innovative tool designed to visualize biometric data related to visual attention gathered from monitored sessions. In this article, we use eye movement data from a learning session and this tool enables analysts to gain a deeper understanding of learner behavior by filtering and visualizing different components of the session.

It offers valuable insights into learners' focus and engagement through the analysis of eye movements. Moreover, it provides the flexibility to filter data by various learner demographics, enabling a more detailed exploration of the data. Additionally, the tool facilitates ANOVA tests, allowing for the identification of significant differences among learners during the learning process. The data managed by VAAD also offer the opportunity to detect the tasks performed by online learners during the learning session, which can be valuable information for instructors.

This tool has the potential to significantly enhance the analysis of online learning behaviors and provide valuable insights for educational practitioners, and is currently being used by the MOOC instructors' team to gather information on learner visual behaviour while learning.

Finally, future work will further explore current and emerging predictive methods to ascertain the most suitable model for task prediction and investigate other indicators that have proven to be useful in predicting activities such as eyeblink

[30], [31], eye pupil size [32], keystroking [33], among others. Additionally, we will tested the use of this tool in others contexts where the behavior of users looking at the screen is to be analyzed.

ACKNOWLEDGMENT

Support by projects: HumanCAIC (TED2021-131787B-I00 MICINN), SNOLA (RED2022-134284-T), e-Madrid-CM (S2018/TCS-4307, a project which is co-funded by the European Structural Funds, FSE and FEDER), IndiGo! (PID2019-105951RB-I00), TEA360 (PID2023-150488OB-I00, SPID202300X150488IV0), BIO-PROCTORING (GNOSS Program, Agreement Ministerio de Defensa-UAM-FUAM dated 29-03-2022), and Cátedra ENIA UAM-VERIDAS en IA Responsable (NextGenerationEU PRTR TSI-100927-2023-2). Roberto Daza is supported by a FPI fellowship from MINECO/FEDER.

REFERENCES

- [1] F. J. García-Peñalvo, Á. Fidalgo-Blanco, and M. L. Sein-Echaluce, "Los mooc: Un análisis desde una perspectiva de la innovación institucional universitaria," *Tech. Rep.*, 2017.
- [2] L. Ma and C. S. Lee, "Investigating the adoption of moocs: A technology–user–environment perspective," *Journal of Computer Assisted Learning*, vol. 35, no. 1, pp. 89–98, 2019.
- [3] R. Cobos, A. Wilde, and E. Zaluska, "Predicting attrition from massive open online courses in futurelearn and edx," in *Proceedings of the 7th International Learning Analytics and Knowledge Conference, Simon Fraser University, Vancouver, BC, Canada*, 2017, pp. 13–17.
- [4] C. Lang, G. Siemens, A. Wise, and D. Gasevic, *Handbook of learning analytics*. SOLAR, Society for Learning Analytics and Research New York, 2017.
- [5] R. Cobos, "Self-regulated learning and active feedback of mooc learners supported by the intervention strategy of a learning analytics system," *Electronics*, vol. 12, no. 15, p. 3368, 2023.
- [6] R. Cobos and J. C. Ruiz-Garcia, "Improving learner engagement in moocs using a learning intervention system: A research study in engineering education," *Computer Applications in Engineering Education*, vol. 29, no. 4, pp. 733–749, 2021.
- [7] R. Cobos and J. Soberón, "A proposal for monitoring the intervention strategy on the learning of mooc learners," in *CEUR Conference Proceedings. LASI-Spain*, 2020.
- [8] I. Pascual and R. Cobos, "A proposal for predicting and intervening on mooc learners' performance in real time," 2022.
- [9] Á. Becerra, R. Daza, R. Cobos, A. Morales, and J. Fierrez, "User experience study using a system for generating multimodal learning analytics dashboards," in *Proceedings of the XXIII International Conference on Human Computer Interaction*, 2023, pp. 1–2.
- [10] Á. Becerra, R. Daza, R. Cobos, A. Morales, M. Cukurova, and J. Fierrez, "M2lads: A system for generating multimodal learning analytics dashboards," in *2023 IEEE 47th Annual Computers, Software, and Applications Conference (COMPSAC)*. IEEE, jun 2023, pp. 1564–1569.
- [11] S. Białowąs and A. Szyszka, "Eye-tracking in marketing research," *Managing Economic Innovations-Methods and Instruments*, vol. 1, no. 69, pp. 91–104, 2019.
- [12] J. Hernandez-Ortega, R. Daza, A. Morales, J. Fierrez, and J. Ortega-Garcia, "edbb: Biometrics and behavior for assessing remote education," *arXiv preprint arXiv:1912.04786*, 2019.
- [13] R. Daza, A. Morales, R. Tolosana, L. F. Gomez, J. Fierrez, and J. Ortega-Garcia, "edbb-demo: biometrics and behavior analysis for online educational platforms," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 37, no. 13, 2023, pp. 16422–16424.
- [14] M. Saqr, O. Viberg, J. Nouri, and S. Oyelere, "Multimodal temporal network analysis to improve learner support and teaching," in *2020 CrossMMLA in Practice: Collecting, Annotating and Analyzing Multimodal Data Across Spaces, CrossMMLA 2020, 24 March 2020*. CEUR-WS, 2020, pp. 30–33.
- [15] D. Spikol, E. Ruffaldi, G. Dabisias, and M. Cukurova, "Supervised machine learning in multimodal learning analytics for estimating success in project-based learning," *Journal of Computer Assisted Learning*, vol. 34, no. 4, pp. 366–377, 2018.
- [16] M. Giannakos, D. Spikol, D. Di Mitri, K. Sharma, X. Ochoa, and R. Hammad, *The multimodal learning analytics handbook*. Springer Nature, 2022.
- [17] K. Sharma, H. S. Alavi, P. Jermann, and P. Dillenbourg, "A gaze-based learning analytics model: in-video visual feedback to improve learner's attention in moocs," in *Proceedings of the sixth international conference on learning analytics & knowledge*, 2016, pp. 417–421.
- [18] K. Sharma, S. D'Angelo, D. Gergle, and P. Dillenbourg, "Visual augmentation of deictic gestures in mooc videos." Singapore: International Society of the Learning Sciences, 2016.
- [19] D. C. Richardson, R. Dale, and N. Z. Kirkham, "The art of conversation is coordination," *Psychological science*, vol. 18, no. 5, pp. 407–413, 2007.
- [20] R. E. Mayer, "Unique contributions of eye-tracking research to the study of learning with graphics," *Learning and instruction*, vol. 20, no. 2, pp. 167–171, 2010.
- [21] K. Verbert, E. Duval, J. Klerkx, S. Govaerts, and J. L. Santos, "Learning analytics dashboard applications," *American Behavioral Scientist*, vol. 57, no. 10, pp. 1500–1509, 2013.
- [22] K. Verbert, S. Govaerts, E. Duval, J. L. Santos, F. Van Assche, G. Parra, and J. Klerkx, "Learning dashboards: an overview and future research opportunities," *Personal and Ubiquitous Computing*, vol. 18, pp. 1499–1514, 2014.
- [23] R. Martinez Maldonado, J. Kay, K. Yacef, and B. Schwendimann, "An interactive teacher's dashboard for monitoring groups in a multi-tabletop learning environment," in *Intelligent Tutoring Systems: 11th International Conference, ITS 2012, Chania, Crete, Greece, June 14-18, 2012. Proceedings 11*. Springer, 2012, pp. 482–492.
- [24] J. Andreu-Perez, C. Solnais, and K. Sriskandarajah, "Ealab (eye activity lab): a matlab toolbox for variable extraction, multivariate analysis and classification of eye-movement data," *Neuroinformatics*, vol. 14, pp. 51–67, 2016.
- [25] S. Goodwin, A. Prouzeau, R. Whitelock-Jones, C. Hurter, L. Lawrence, U. Afzal, and T. Dwyer, "Veta: Visual eye-tracking analytics for the exploration of gaze patterns and behaviours," *Visual Informatics*, vol. 6, no. 2, pp. 1–13, 2022.
- [26] K. Sharma, V. Chavez-Demoulin, and P. Dillenbourg, "An application of extreme value theory to learning analytics: predicting collaboration outcome from eye-tracking data," *Available at SSRN 2831445*, 2016.
- [27] R. Daza, D. DeAlcala, A. Morales, R. Tolosana, R. Cobos, and J. Fierrez, "ALEBk: Feasibility Study of Attention Level Estimation Via Blink Detection Applied to e-learning," in *Proc. AAAI Workshop on Artificial Intelligence for Education*, 2022.
- [28] R. Daza, L. F. Gomez, A. Morales, J. Fierrez, R. Tolosana, R. Cobos, and J. Ortega-Garcia, "MATT: Multimodal Attention Level Estimation for e-learning Platforms," in *Proc. AAAI Workshop on Artificial Intelligence for Education*, 2023.
- [29] J. Hernandez-Ortega, R. Daza, A. Morales, J. Fierrez, and R. Tolosana, "Heart Rate Estimation from Face Videos for Student Assessment: Experiments on edBB," in *Proc. Annual Computers, Software, and Applications Conference (COMPSAC)*, 2020, pp. 172–177.
- [30] R. Daza, A. Morales, J. Fierrez, and R. Tolosana, "mEBAL: A Multimodal Database for Eye Blink Detection and Attention Level Estimation," in *Proc. Intl. Conf. on Multimodal Interaction*, 2020, pp. 32–36.
- [31] R. Daza, A. Morales, J. Fierrez, R. Tolosana, and R. Vera-Rodriguez, "mebal2 database and benchmark: Image-based multispectral eyeblink detection," *Pattern Recognition Letters*, vol. 182, pp. 83–89, 2024.
- [32] S. Rafiqi, C. Wangwattana, J. Kim, E. Fernandez, S. Nair, and E. C. Larson, "PupilWare: Towards Pervasive Cognitive Load Measurement using Commodity Devices," in *Proc. of the 8th ACM International Conference on Pervasive Technologies Related to Assistive Environments*, 2015, pp. 1–8.
- [33] A. Morales, J. Fierrez, M. Gomez-Barrero, J. Ortega-Garcia, R. Daza, J. V. Monaco, J. Montalvão, J. Canuto, and A. George, "KBOC: Keystroke Biometrics Ongoing Competition," in *Proc. Intl. Conf. on Biometrics Theory, Applications and Systems*, 2016, pp. 1–6.