

STRUCTEXTV3: AN EFFICIENT VISION-LANGUAGE MODEL FOR TEXT-RICH IMAGE PERCEPTION, COMPREHENSION, AND BEYOND

Pengyuan Lyu[†], Yulin Li[†], Hao Zhou, Weihong Ma, Xingyu Wan, Qunyi Xie,
Liang Wu, Chengquan Zhang^{*}, Kun Yao, Errui Ding, Jingdong Wang
Department of Computer Vision Technology (VIS), Baidu Inc.

ABSTRACT

Text-rich images have significant and extensive value, deeply integrated into various aspects of human life. Notably, both visual cues and linguistic symbols in text-rich images play crucial roles in information transmission but are accompanied by diverse challenges. Therefore, the efficient and effective understanding of text-rich images is a crucial litmus test for the capability of Vision-Language Models. We have crafted an efficient vision-language model, **StrucTexTv3**, tailored to tackle various intelligent tasks for text-rich images. The significant design of StrucTexTv3 is presented in the following aspects: *Firstly*, we adopt a combination of an effective multi-scale reduced visual transformer and a multi-granularity token sampler (**MG-Sampler**) as a visual token generator, successfully solving the challenges of high-resolution input, like 1600x1600 pixels, and complex representation learning for text-rich images. *Secondly*, we enhance the perception and comprehension abilities of StrucTexTv3 through instruction learning, seamlessly integrating various text-oriented tasks into a unified framework. *Thirdly*, we have curated a comprehensive collection of high-quality text-rich images, abbreviated as **TIM-30M**, encompassing diverse scenarios like incidental scenes, office documents, web pages, and screenshots, thereby improving the robustness of our model. Our method achieved SOTA results in text-rich image perception tasks, and significantly improved performance in comprehension tasks. Among multi-modal models with LLM decoder of approximately **1.8B** parameters, it stands out as a leader, which also makes the deployment of edge devices feasible. In summary, the StrucTexTv3 model, featuring efficient structural design, outstanding performance, and broad adaptability, offers robust support for diverse intelligent application tasks involving text-rich images, thus exhibiting immense potential for widespread application. *Demo or API is coming soon.*

1 INTRODUCTION

Text-rich images serve as an important medium for conveying information. The extraction and comprehension of the embedded textual and visual data within them carry significant practical implications (Huang et al., 2022; Yu et al., 2023b; Liu et al., 2024c; Dong et al., 2024). This intricate process can be delineated into two primary capability dimensions: perception and comprehension. At the perceptual level, it primarily involves tasks related to visual perception, encompassing text spotting (Wu et al., 2022; Liu et al., 2023e), document parsing (Blecher et al., 2023; Lv et al., 2023), table recognition (Lyu et al., 2023), chart parsing (Liu et al., 2023a), among others. Conversely, the comprehension level pertains to abilities dependent on deeper semantic comprehension, including key information extraction, document-oriented VQA tasks (docvqa (Mathew et al., 2021b), infovqa (Mathew et al., 2022), chartvqa (Masry et al., 2022), table image understanding (Svetlichnaya, 2020; Zhao et al., 2023)), text image translation, and so on.

[†]Equal contribution, ^{*}Corresponding Author.



Figure 1: General text-rich image perception and comprehension capabilities of StrucTexTv3. The first row displays perceptual-level capabilities such as text spotting, document parsing, and chart parsing. The second row presents cognitive-level abilities, including document-oriented VQA, key information extraction, table summarization, and text image translation.

In the early stages, the processing of perception and comprehension tasks often involved the utilization of multiple expert models and carried out in a multi-stage manner. However, in recent years, with the rapid advancement of multimodal large language models (Lv et al., 2023; Wei et al., 2023; Liu et al., 2024c; Dong et al., 2024), the development of an end-to-end universal model for handling perception and comprehension tasks has become a focal point of research. These approaches typically leverage pre-trained visual backbones to extract robust visual representations and combine them with the powerful comprehension capabilities of large-scale language models for semantic reasoning. Remarkably, these methods have demonstrated significant efficacy across multiple tasks.

Text-rich images, with their inherent diversity, complexity, and distinct perception-comprehension requirements, present a range of obstacles for multimodal large language models. A significant hurdle is the prevalence of small and dense text within these images, demanding high-resolution inputs for precise text extraction (Li et al., 2023b). Methods like LLaVA (Liu et al., 2024b) and Qwen-VL (Bai et al., 2023), which commonly work with 224x224 or 336x336 image sizes, struggle to adequately capture this fine detail. To address this issue, some methods (Chen et al., 2023a;b) have attempted to use higher-resolution images directly. However, this approach is constrained by memory and computational resources, as the resolution that ViT-based visual encoders can handle is severely limited. Additionally, some methods (Li et al., 2023b; Ye et al., 2023b) explore the use of sliding window techniques to partition input images into smaller patches. While this approach partially mitigates the scale issue, it may introduce semantic incoherence, thereby affecting the perception and comprehension capabilities of the model.

In this paper, we introduce **StrucTexTv3**, an efficient vision-language model designed for the perception and comprehension of text-rich images. Diverging from previous approaches that employ ViT as the image encoder, StrucTexTv3 adopts a hierarchical vision transformer (such as Swin Transformer). This design ensures high-resolution inputs, such as 1600x1600, while mitigating semantic inconsistencies and minimizing memory usage. Additionally, to acquire robust visual representations capable of addressing diverse perception or comprehension tasks, we introduce a multi-granularity token sampler (abbreviated as **MG-Sampler**). This sampler extracts rich visual representations from multi-scale feature spaces, ensuring high-quality and comprehensive visual representations. Building upon this efficient model, we have integrated a variety of tasks tailored for text-rich images using instruction learning. These tasks include perception tasks such as text spotting and document parsing, as well as comprehension tasks like documented-oriented vqa, key information extraction, table image understanding, and text image translation. In addition, to ensure the robustness of our model, we have established a data pipeline for generating high-quality perception and comprehension data, collecting nearly 30 million of **Text-rich Image based Multimodal data** (abbreviated as **TIM-30M**).

We validated our model across multiple benchmarks, and the experimental results reveal remarkable performance despite its modest **1.8B LLM**, outperforming models with **7B LLM** across various tasks and datasets.

Our contributions can be summarized as follows:

- We introduce an efficient vision-language model (StrucTexTv3) tailored for the perception and comprehension of text-rich images, adeptly tackling challenges associated with high-resolution input and intricate representation learning.
- By employing multiple data collection methods, we have curated a comprehensive collection of high-quality text-rich images named TIM-30M, which includes rich perceptual and comprehension instruction learning data.
- Employing instruction learning, StrucTexT v3 demonstrates extensive perception and comprehension capabilities, culminating in state-of-the-art performance across numerous tasks and benchmark datasets.

2 MODEL ARCHITECTURE

StrucTexT v3 comprises three components: (1) an efficient **Visual Encoder** for effective extraction of visual features, (2) a **Multi-Granularity token Sampler** for deriving rich fine-grained visual representations from multi-scale visual features, (3) a **Large Language Model** for understanding and reasoning about visual cues and linguistic symbols in text-rich images.

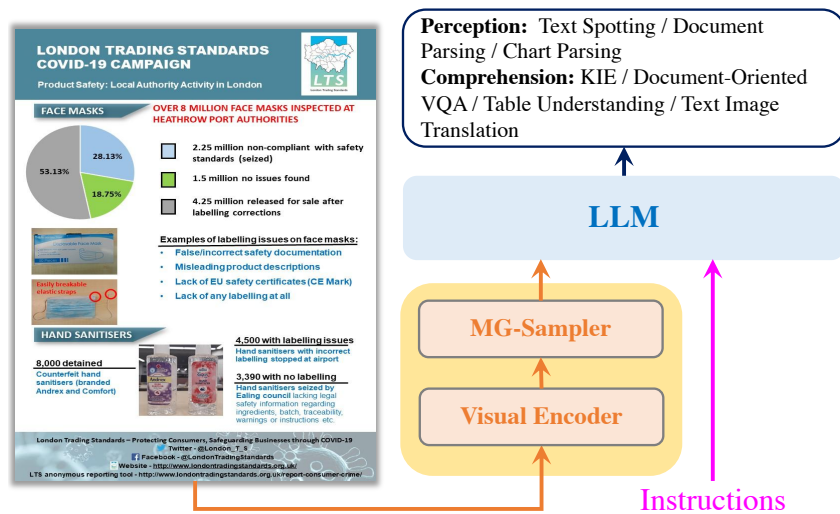


Figure 2: The overview of StrucTexTv3. It comprises three core parts: Visual Encoder, MG-Sampler, and LLM.

Visual Encoder. We employed a Swin-Large model (Liu et al., 2021) that has been pretrained on ImageNet (Deng et al., 2009) as our visual encoder to extract hierarchical visual representations. The intrinsic shifted windowing scheme of the Swin Transformer ensures efficiency even when handling higher resolution inputs. Leveraging this characteristic, we configure the resolution of the input images to 1600x1600 pixels, thereby facilitating the accurate detection and recognition of even small-scale text.

MG-Sampler. We employed a resampler with a structure akin to Q-Former (Li et al., 2023a) to extract refined visual representations from lengthy, redundant visual representations. Additionally, given that the Swin Transformer has a hierarchical architecture, we can extract features at various levels of granularity from the outputs of different stages using the resampler. Specifically, we extracted feature representations with a sequence length of 256 from the outputs of Stage 3 and Stage 4 of the Swin Transformer. These two feature sequences were then concatenated into a single feature sequence of length 512, which served as the input for the language model.

LLM. We adopted the standard transformer decoder structure (Vaswani et al., 2017) as our language model and have been effectively trained on a large amount of Chinese and English web-page text, codes, book contents, and other data. To ensure edge device compatibility, our optimized LLM boasts a parameter count of 1.8B, featuring 24 layers, 16 attention heads, and 2048 hiddens. To simplify the encoding length of two-dimensional coordinate sequences, we have added two sets of tokens with an accuracy value of one thousandth for relative x/y coordinates, and the overall vocabulary size is approximately 160,000.

3 DATA CONSTRUCTION AND PROMPT DESIGN

Rich and diverse data are crucial for ensuring that large multimodal models acquire perception and comprehension capabilities. Based on this premise, we have constructed a large-scale text-rich image based multimodal training data, namely **TIM-30M**, which mainly includes perception tasks and comprehension tasks. Excluding some business-owned data, we will provide a detailed introduction to the composition of these two data types of capability (as listed in Table 1), especially the public training data included and the corresponding prompt design formats.

3.1 PERCEPTION DATA

We have curated a comprehensive, large-scale training dataset that focused on enhancing perception abilities in areas like text spotting, document parsing (including normal text, formula, and table),

and chart parsing. The accumulated training data boasts a total of approximately 25 million text-rich images.

Spotting. We construct a large-scale spotting training dataset involving publicly available benchmarks, synthetic data, and pseudo-labeled in-house data to endow the model with robust spotting capabilities. The composition of the benchmarks is presented in Table 1, which contains ICDAR2013 (Karatzas et al., 2013), ICDAR2015 (Karatzas et al., 2015), MLT2017 (Nayef et al., 2017), TextOCR (Singh et al., 2021), CTW1500 (Liu et al., 2017), TotalText (Chng & Chan, 2017), HierText (Long et al., 2022), CORD (Park et al., 2019), FUNSD (Jaume et al., 2019), SROIE (Huang et al., 2019), RECTs (Zhang et al., 2019), LSVT (Sun et al., 2019) and HWDB (Liu et al., 2011). For all spotting data, we used “Detect and recognize text in image” as the prompt. We represent each text instance as a sequence of characters formatted as `<pos_x1><pos_y1><pos_x2><pos_y2><ref>transcription</ref>`. Here, `<pos_x1><pos_y1><pos_x2><pos_y2>` are specialized tokens denoting the coordinates of the top-left and bottom-right vertices of the text. The string enclosed between `<ref>` and `</ref>` represents the content of the text. In our experiments, we found that there was no significant difference in results between representing each coordinate as a sequence of characters using multiple tokens and directly using a special token for each coordinate. However, the special token representation significantly reduces the length of the generated sequence, particularly for samples with a large number of text instances, thereby greatly reducing the inference overhead. Subsequently, we sorted all text instances based on their positions from top to bottom and from left to right and generated labels accordingly. We found that organizing the text in this manner reduces label ambiguity and consequently enhances the performance of our model.

Document Parsing. We also build a large-scale training dataset for document parsing. Our data sources are primarily composed of three parts: publicly available benchmarks, arXiv data, and a weakly labeled in-house dataset. We collect FinTabNet (Zheng et al., 2021) and PubTabNet (Zhong et al., 2020) for table structure recognition to enable our model to parse table structures. Each table image is represented as an HTML sequence. We follow the data production process outlined by Blecher et al. (2023), downloading LaTeX source code from arXiv, rendering it into PDF format, and converting it into corresponding Markdown sequences. We have also amassed a substantial collection of books and academic paper images, and have utilized our commercial API¹ to acquire pseudo-labels to enhance the generalization capabilities of our model. We use the prompt “Convert the textual content of the image into markdown.” to instruct the model to parse the input into Markdown format.

Chart Parsing. Due to the limited amount of data available in public benchmarks for chart parsing, in addition to collecting data from public benchmarks including ChartQA (Masry et al., 2022), PlotQA (Methani et al., 2020), Chart-to-Text (Kantharaj et al., 2022), UniChart (Masry et al., 2023) and MMC (Liu et al., 2023c), we also developed a synthetic data generation pipeline to generate Chart images with several visualization packages (*e.g.*, ECharts², Matplotlib³, plotly⁴, etc). The pipeline supports the creation of common chart types such as histograms, bar charts, pie charts, mind map and so on. To enrich the instruction data, Ernie-Bot-4.0⁵ is adopted for generating statistical data, QA pairs, and summaries. To guide the model in transforming chart images into sequences in a target format, we use the format “Convert the chart of the image into {target format}”. Here, {target format} refers to the sequence format, which can be CSV, Markdown, or JSON. This approach enhances the model’s capability to process various chart types and improves its accuracy in converting visual data into structured data.

3.2 COMPREHENSION DATA

The comprehension capabilities of our model are inherently linked to various tasks, encompassing key information extraction, document-oriented VQA, table image understanding, and text image translation. The total number of associated text-rich images is 5 million.

¹https://ai.baidu.com/tech/ocr/doc_analysis_office

²<https://echarts.apache.org/en/index.html>

³<https://matplotlib.org>

⁴<https://github.com/plotly/plotly.py>

⁵<https://qianfan.cloud.baidu.com>

Key Information Extraction. We collect open-source datasets including CORD (Park et al., 2019), EPHOIE (Wang et al., 2021), SROIE (Huang et al., 2019), XFUND (Xu et al., 2022), SIBR (Yang et al., 2023), WildReceipt (Sun et al., 2021), Form-NLU (Ding et al., 2023a), Kleister-NDA (Stanislawek et al., 2021) and Chinese in-house data to enrich the model’s power for both Chinese and English KIE tasks. A brief prompt template: “What is the value of the {key}?” is applied for semantic entity extraction. Note that for several manual labels or abbreviated phrases, such as *void_menu.nm* in CORD, *address_street_line* in Kleister-NDA, we imitate the practices of InstructDoc (Tanaka et al., 2024) that construct prompts holding all category options and constrain the model to select one of them.

Document-Oriented VQA. In this work, we utilize a diverse set of OCR-related VQA datasets to develop better visual document comprehension in scene text scenarios. The extensive datasets consists of 13 pieces: DocVQA (Mathew et al., 2021b), InfoVQA (Mathew et al., 2022), DUDE (Langdeghem et al., 2023), TextOCR (Singh et al., 2021), SlideVQA (Tanaka et al., 2023), WebSRC (Chen et al., 2021), TextbookQA (Kembhavi et al., 2017), VisualMRC (Tanaka et al., 2021), TabFact (Chen et al., 2020b), BenthamQA (Mathew et al., 2021a), ST-VQA (Biten et al., 2019), OCR-VQA (Mishra et al., 2019), PDF-VQA (Ding et al., 2023b). Additionally, we use the self-instruction method (Li et al., 2023a) to expand the diversity of data and supplement the LLaVA-150k (Liu et al., 2024b) instruction data to enrich the general conversational capabilities of our model.

Table Image Understanding. We enhance our model’s capability to comprehend tables by utilizing two tasks: Table VQA and Table Summarization. The training data of table image understanding involves publicly available benchmarks, and pseudo-labeled in-house data. The composition of the benchmarks is presented in Table 1, which contains QTSUMM (Zhao et al., 2023), ToTTo (Parikh et al., 2020), LogicNLG (Chen et al., 2020a), Deepform (Svetlichnaya, 2020), and WTQ (Pasupat & Liang, 2015). Each sample’s question is directly used as a prompt. To enhance the diversity of our training data and to mitigate the overfitting issue due to the insufficient volume of training samples in the public table image understanding benchmarks, we also employed Ernie-Bot-4.0 to generate QA pairs for data augmentation.

Text Image Translation. We also explore the translation capabilities of our model by constructing an image-to-text translation dataset. Our data sources include publicly available benchmark OCRMT30K Lan et al. (2023) and synthetic data. The data encompasses both entire images and text line images. For text-line images, we use “Translate the text in the image into English/Chinese.” as the prompt. For entire images, we employ prompts such as “Detect and translate the text in the image into English/Chinese.” and “Detect, recognize, and translate the text in the image into English/Chinese.”. The text instances are still organized from top-left to right-bottom.

4 TRAINING PIPELINES

Our training process includes three stages: pre-training, multi-task pre-training, and supervised fine-tuning. Following (Bai et al., 2023; Lu et al., 2024), we mixed image-text pair data with pure-text data during training to maintain the capabilities of the language model.

Pre-training. During the pre-training phase, our objective is to endow our model with the capability to perceive text. To reduce training difficulty, we focus solely on training the spotting task. All parameters are trained unfrozen with a sequence length of 4096. To expedite the training process, the input image size was initially 960 and later increased to 1600.

Multi-task Pre-training. In this stage, we utilize all training data from multiple perceptual and cognitive tasks to support our model with both perceptual and cognitive capabilities. The size of the input images remains at 1600x1600, and the maximum sequence length remains at 4096. Additionally, all parameters are trainable.

Supervised Fine-tuning. Due to the large amount of synthetic or pseudo-labeled data in our training set, we further fine-tuned our model using the relatively high-quality benchmark data listed in Table 1 during the third phase. We retained the same image size, sequence length, and trainable parameters as in the second phase, additionally training for 2000 steps on higher-quality benchmarks.

Table 1: Summary of **TIM-30M** data.

Capability	Task	Dataset
Perception	Spotting	Public data: MLT2017, ICDAR2013, ICDAR2015, TextOCR, CTW1500, Total-Text, HierText, CORD, FUNSD, SROIE, RECTs, LSVT, HWDB. Synthetic data. In-house data.
	Document parsing	Public data: FinTabNet, PubTabNet arXiv data. In-house data
	Chart parsing	Public data: ChartQA, PlotQA, UniChart, Chart-to-Text. Synthetic data.
Comprehension	Key information extraction	Public data: CORD, EPHOIE, SROIE, SIBR, XFUND, WildReceipt, Form-NLU, Kleister-NDA. In-house data.
	Document-Oriented VQA	Public data: DocVQA, WebSRC, DUDE, InfoVQA, TextOCR, TabFact, OCR-VQA, VisualMRC, ST-VQA, SlideVQA, BenthamQA, TextbookQA, PDF-VQA, LLaVA-150k. In-house data.
	Table image understanding	Public data: QTSUMM, Totto, LogicNLG, DeepForm, WTQ. In-house data.
	Text image translation	Public data: OCRMT30K Synthetic data.

5 EVALUATION

In this section, we assess the perception and comprehension abilities of StrucTexTv3. The perception assessment focuses on text spotting, document parsing, and chart parsing. Meanwhile, the comprehension evaluation includes benchmarks for key information extraction, document-oriented VQA, table image understanding, and text image translation.

5.1 PERCEPTION ABILITY

5.1.1 TEXT SPOTTING

The text spotting task is evaluated on two benchmark datasets, the document image dataset SROIE (Huang et al., 2019) and the scene image dataset ICDAR15 (Karatzas et al., 2015), respectively. To facilitate comparison with previous methods, we employed the official evaluation protocol for SROIE, assessing word-level precision, recall, and F1 score. For ICDAR2015, we utilized the evaluation scripts provided by SPTS (Liu et al., 2023e), using both point-based and transcription-based metrics to evaluate the results. Given methods without publicly available results or a unified evaluation protocol on the corresponding benchmark datasets, we conducted fair evaluations based on the officially released implementations.

As shown in Tab. 2, our method achieves the best performance on both the SROIE and ICDAR2015 datasets. On the SROIE dataset, we obtain 94.1% f1 score, as for the ICDAR2015, the metrics for Trans and pos are 62.4% and 69.5% correspondingly.

Table 2: Experimental results on Text Spotting benchmarks. “*” denotes the results obtained through the open-source checkpoint model.

Methods	LLM Size	SROIE		ICDAR2015	
		P	R / F1	Trans	Pos
Vary (Wei et al., 2023)*	7B	21.7	48.5 / 30.0	-	-
TextMonkey (Liu et al., 2024c)*	7B	67.0	47.8 / 55.8	59.6	55.9
KOSMOS-2.5 (Lv et al., 2023)	0.85B	91.7	92.6 / 92.1	-	-
Ours	1.8B	94.2	94.1 / 94.1	62.4	69.5

5.1.2 DOCUMENT PARSING

For document parsing, the model outputs the Markdown conversion results when provided with the document image, including the main text, table HTML information, and formula recognition results. Following (Wei et al., 2023), we evaluate the performance of our model using three test sets on this task, comprising 200 document images for main text parsing, 100 document images with mathematical formulas, and 100 document images with span-cell tables. In each dataset, both Chinese and English images make up half of the data. Following (Lv et al., 2023), we compare the 1-Normalized Edit Distance with other methods that have demonstrated decent performance in this task. When evaluating document images with formulas, some existing methods may treat main text, such as numbers, as formulas. Therefore, the main text is taken into account when evaluating formula performance. On the other hand, when evaluating document images with tables, we exclusively evaluate the content within the tables to emphasize the effectiveness of table recognition.

As shown in Tab. 3, when considering the output consisting solely of pure main text content, our method outperforms other competing methods in both Chinese and English documents. Furthermore, when considering the document image with formula and table recognition result, our method also achieves the best performance, significantly surpassing other comparative methods, showing impressive capabilities in perceiving and comprehending textual information.

Table 3: Experimental results on Doc Parsing benchmarks. “*” denotes the results obtained through the open-source checkpoint model. In formula set, formula sequence lengths accounts for 65% of the total sequence in Chinese set, while 45% in English set.

Methods	LLM Size	Pure Document OCR		Formula		Table	
		Chn(%)	Eng(%)	Chn(%)	Eng(%)	Chn(%)	Eng(%)
Vary (Wei et al., 2023)*	7B	37.6	50.8	31.3	61.9	57.8	2.4
Nougat (Blecher et al., 2023)*	0.27B	3.6	78.8	5.4	86.2	0.0	71.7
Kosmos2.5 (Lv et al., 2023)*	0.85B	31.8	67.9	21.3	63.9	40.4	50.3
Vary-toy (Wei et al., 2024)*	1.8B	33.1	65.5	31.3	60.9	74.4	41.3
Ours	1.8B	95.1	96.9	92.7	95.7	82.5	92.2

5.1.3 CHART PARSING

We evaluate the model performance of Chart Parsing on the chart-to-table set of ChartQA (Masry et al., 2022). For chart-to-table translation, we use RMS-F1 from DePlot (Liu et al., 2023a). Few multimodal models master the ability of chart parsing. Hence, as shown in Tab 4, we reported the performance of several methods specifically designed for chart-related tasks. Thanks to the optimization on diverse text-rich data, our method achieved the best results in the chart parsing task, surpassing several models with 13B LLM.

Table 4: Experimental results on Chart Parsing benchmarks. “*” denotes the results obtained through the open-source checkpoint model.

Methods	LLM Size	Chart-to-Table
		RMS-F1
ChartLlama (Han et al., 2023)	13B	90.0
ChartAst (Meng et al., 2024)	13B	91.6
OneChart (Chen et al., 2024)	0.2B	88.8*
Matcha (Liu et al., 2023b)	1.3B	89.6
Ours	1.8B	91.8

5.2 COMPREHENSION ABILITY

5.2.1 KEY INFORMATION EXTRACTION

We evaluate the model performance of Key Information Extraction on three public benchmarks: FUNSD (Jaume et al., 2019), POIE (Kuang et al., 2023), and SVRD (Yu et al., 2023a). For a fair comparison, we employ a zero-shot setup and remove the English documents of XFUND and the training examples of SVRD during training, to eliminate the risk of benchmark leakage. We follow the instruction templates released by InstructDoc and adopt the entity F1-score for the FUNSD labeling task. The accuracy metric (Liu et al., 2024c) is utilized for measuring POIE and the FUNSD linking task. We mainly assess the models’ ability on task 3 of SVRD (E2E Zero-shot Structured Text Extraction) by the ICDAR official leaderboards. As shown in Table 5, our model shows comparable scores of FUNSD to that of 7B-size models and achieves state-of-the-art performance on POIE and SVRD. The results demonstrate that our model proves great comprehension ability with only 1.8B size of LLM, indicating its effectiveness in the KIE tasks.

Table 5: Experimental results on key information extraction. The superscript “*” refers to the results obtained through the open-source checkpoint model.

Methods	LLM Size	FUNSD		POIE	SVRD
		labeling (F1)	linking (Acc.)	Acc.	F1-score
Monkey (Li et al., 2023b)	7B	-	24.1	19.9	37.2*
DocPedia (Feng et al., 2023)	7B	-	29.9	39.9	-
TextMonkey (Liu et al., 2024c)	7B	-	42.9	32.0	51.4*
InstructDoc (Tanaka et al., 2024)	3.4B	38.2	-	-	-
Ours	1.8B	55.7	42.9	55.9	55.6

5.2.2 DOCUMENT-ORIENTED VQA

In this study, our primary focus lies on Document-Oriented VQA, and we assess our model’s performance across three benchmarks: DocVQA, InfoVQA, and ChartQA. DocVQA and InfoVQA employ ANLS (Average Normalized Levenshtein Similarity), an edit distance-based metric, for evaluation. For ChartQA, we adopt the methodology outlined in prior works (Masry et al., 2022; Liu et al., 2023a), allowing for relaxed correctness (an exact match with a tolerance for a 5% numerical error). As illustrated in Table 6, our model achieves 72.8% ANLS on DocVQA, 28.9% ANLS on InfoVQA, and 70.8% average accuracy on ChartQA, surpassing Vary-toy (Wei et al., 2024) which has a similar LLM size to ours, by a substantial margin. It underscores its adeptness in document understanding. However, our model demonstrates relatively poor performance on the challenging InfoVQA task, likely attributable to the limitations posed by its 1.8B LLM size on generalization ability.

Table 6: Experimental results on Document-Oriented VQA benchmarks.

Methods	LLM Size	DocVQA	InfoVQA	ChartQA
		ANLS	ANLS	Average
ChartLlama (Han et al., 2023)	13B	-	-	69.6
ChartAst (Meng et al., 2024)	13B	-	-	75.1
DocPedia (Feng et al., 2023)	7B	47.1	15.2	46.9
DocOwl (Ye et al., 2023a)	7B	62.2	38.2	57.4
Qwen-VL (Bai et al., 2023)	7B	65.1	35.4	65.7
TextMonkey (Liu et al., 2024c)	7B	73.0	38.7*	66.9
HRVDA (Liu et al., 2024a)	7B	72.1	43.5	67.6
DocOwl-1.5 (Hu et al., 2024)	7B	81.6	50.4	70.5
IXC2-4KHD (Dong et al., 2024)	7B	90.0	68.6	81.0
InstructDoc (Tanaka et al., 2024)	3.4B	-	50.9	29.4
Vary-toy (Wei et al., 2024)	1.8B	65.0	6.3*	59.1
Matcha (Liu et al., 2023b)	1.3B	74.2	37.2	64.2
Ours	1.8B	72.8	28.9	70.8

5.2.3 TABLE IMAGE UNDERSTANDING

Table image understanding aims to precise extraction and interpretation of tabular data to address user-defined queries effectively. To further assess the performance of table image understanding, we conduct experiments on two tabular data-oriented datasets, specifically tailored for table VQA and table summarization tasks. For the benchmark evaluation of the table VQA task on Deepform (Svetlichnaya, 2020) dataset, we employed the normalized accuracy score metric. For the table summarization task, we utilized the METEOR (Banerjee & Lavie, 2005) and AutoACU (Liu et al., 2023d) metrics on QTSUMM (Zhao et al., 2023). We rendered tabular data into table images and filtered out the ones including multiple images (due to the single image input limitation). As shown in Tab. 7, our method obtained the best performance on QTSUMM and the second best performance on Deepform. Compared to the previous SOTA method Qwen-VL (Bai et al., 2023), the METEOR/AutoACU metrics on QTSUMM raised from 22.04%/23.71% to 31.81%/36.04% respectively. Our method also achieves comparable performance to SOTA method DocOwl-1.5 (Hu et al., 2024) on the DeepForm dataset, while the LLM size is only 1.8B.

Table 7: Experimental results on table image understanding benchmarks. “*” denotes the results obtained through the open-source checkpoint model.

Methods	LLM Size	Deepform	QTSUMM	
		Acc.	METEOR	AutoACU
Qwen-VL (Bai et al., 2023)	7B	3.1	22.0*	23.7*
Monkey (Li et al., 2023b)	7B	40.5	2.6*	10.4*
TextMonkey (Liu et al., 2024c)	7B	61.6	2.4*	10.8*
DocOwl-1.5 (Hu et al., 2024)	7B	68.8	12.1*	20.6*
Ours	1.8B	65.8	31.8	36.0

5.2.4 TEXT IMAGE TRANSLATION

We found that many existing multimodal large language models already possess the ability to accurately recognize text content in images. However, for the task of image translation, which requires both perception and understanding abilities, their performance is suboptimal. Therefore, we aimed to verify whether incorporating relevant training data during the training phase could enable the model to acquire image translation capabilities. We synthesized 1M training and 1000 testing data for image translation based on the WMT18 Chinese to English corpus and evaluated the model’s performance. As shown in Table 8, compared to models that were not supervised-trained on the

relevant task, our model demonstrated a significant improvement in image translation performance, demonstrating the potential of multimodal large language models in this task.

Table 8: Experimental results on image translation task. The superscript “*” refers to the results obtained through the open-source checkpoint model or API.

Methods	LLM Size	sacre-BLEU
Qwen-VL (Bai et al., 2023)*	7B	0.72
IXC2-4KHD (Dong et al., 2024)*	7B	1.86
GPT 4o ^{6*}	-	20.36
Ours	1.8B	12.0

6 CONCLUSION AND FUTURE WORK

This technical report has introduced an efficient Vision-Language model, namely StrucTexTv3, which effectively tackles the problems of text-rich image perception and comprehension. The proposed combination of a multi-scale reduced visual transformer and MG-Sampler successfully solves the challenges of high-resolution input and rich representation learning for text-rich images. Subsequently, a systematic organization of tasks related to both perception and comprehension abilities of text-rich images, as well as high-quality data collection, was carried out to train a highly competitive unified large multimodal model. StrucTexTv3 stands out among numerous multimodal models equipped with LLM decoder of approximately 1.8B parameters, and it also makes the deployment of edge devices feasible.

Our method offers promising avenues for future research. (1) To enrich the comprehension of text-rich videos and multi-page scanned PDFs, we need to broaden the image-level context, enabling the extraction of visual tokens from multiple images. (2) To advance toward Artificial General Intelligence (AGI), we must augment our learning data with a wider range of images, corpora, and real user instructions. This will empower our model with more universal capabilities, such as GUI understanding and mathematical problem analysis. (3) To study the scaling laws of large vision-language models on text-rich images, we must validate the effectiveness of larger datasets and model parameter sizes. These efforts will pave the way for more comprehensive and intelligent text-rich image understanding in the future.

REFERENCES

- Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- Satanjeev Banerjee and Alon Lavie. Meteor: An automatic metric for mt evaluation with improved correlation with human judgments. In *ACL Workshop IEEMMTS*, pp. 65–72, 2005.
- Ali Furkan Biten, Rubèn Tito, Andrés Mafla, Lluís Gómez i Bigorda, Marçal Rusiñol, C. V. Jawahar, Ernest Valveny, and Dimosthenis Karatzas. Scene text visual question answering. In *ICCV*, pp. 4290–4300, 2019.
- Lukas Blecher, Guillem Cucurull, Thomas Scialom, and Robert Stojnic. Nougat: Neural optical understanding for academic documents. *arXiv preprint arXiv:2308.13418*, 2023.
- Jinyue Chen, Lingyu Kong, Haoran Wei, Chenglong Liu, Zheng Ge, Liang Zhao, Jianjian Sun, Chunrui Han, and Xiangyu Zhang. Onechart: Purify the chart structural extraction via one auxiliary token. *arXiv preprint arXiv:2404.09987*, 2024.
- Wenhu Chen, Jianshu Chen, Yu Su, Zhiyu Chen, and William Yang Wang. Logical natural language generation from open-domain tables. In *ACL*, pp. 7929–7942, 2020a.

⁶<https://openai.com/index/hello-gpt-4o/>

- Wenhu Chen, Hongmin Wang, Jianshu Chen, Yunkai Zhang, Hong Wang, Shiyang Li, Xiyu Zhou, and William Yang Wang. Tabfact: A large-scale dataset for table-based fact verification. In *ICLR*, 2020b.
- Xi Chen, Josip Djolonga, Piotr Padlewski, Basil Mustafa, Soravit Changpinyo, Jialin Wu, Carlos Riquelme Ruiz, Sebastian Goodman, Xiao Wang, Yi Tay, Siamak Shakeri, Mostafa Dehghani, Daniel Salz, Mario Lucic, Michael Tschannen, Arsha Nagrani, Hexiang Hu, Mandar Joshi, Bo Pang, Ceslee Montgomery, Paulina Pietrzyk, Marvin Ritter, A. J. Piergiovanni, Matthias Minderer, Filip Pavetic, Austin Waters, Gang Li, Ibrahim Alabdulmohsin, Lucas Beyer, Julien Amelot, Kenton Lee, Andreas Peter Steiner, Yang Li, Daniel Keysers, Anurag Arnab, Yuanzhong Xu, Keran Rong, Alexander Kolesnikov, Mojtaba Seyedhosseini, Anelia Angelova, Xiaohua Zhai, Neil Houlsby, and Radu Soricut. Pali-x: On scaling up a multilingual vision and language model. *CoRR*, abs/2305.18565, 2023a.
- Xi Chen, Xiao Wang, Lucas Beyer, Alexander Kolesnikov, Jialin Wu, Paul Voigtlaender, Basil Mustafa, Sebastian Goodman, Ibrahim Alabdulmohsin, Piotr Padlewski, Daniel Salz, Xi Xiong, Daniel Vlasic, Filip Pavetic, Keran Rong, Tianli Yu, Daniel Keysers, Xiaohua Zhai, and Radu Soricut. Pali-3 vision language models: Smaller, faster, stronger. *CoRR*, abs/2310.09199, 2023b.
- Xingyu Chen, Zihan Zhao, Lu Chen, Jiabao Ji, Danyang Zhang, Ao Luo, Yuxuan Xiong, and Kai Yu. Websrc: A dataset for web-based structural reading comprehension. In *EMNLP*, pp. 4173–4185. *ACL*, 2021.
- Chee Kheng Chng and Chee Seng Chan. Total-text: A comprehensive dataset for scene text detection and recognition. In *ICDAR*, pp. 935–942, 2017.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *CVPR*, pp. 248–255, 2009.
- Yihao Ding, Siqu Long, Jabin Huang, Kaixuan Ren, Xingxiang Luo, Hyunsuk Chung, and Soyeon Caren Han. Form-nlu: Dataset for the form natural language understanding. In *SIGIR*, pp. 2807–2816, 2023a.
- Yihao Ding, Siwen Luo, Hyunsuk Chung, and Soyeon Caren Han. PDF-VQA: A new dataset for real-world VQA on PDF documents. In *ECML-PKDD*, pp. 585–601, 2023b.
- Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Songyang Zhang, Haodong Duan, Wenwei Zhang, Yining Li, et al. Internlm-xcomposer2-4khd: A pioneering large vision-language model handling resolutions from 336 pixels to 4k hd. *arXiv preprint arXiv:2404.06512*, 2024.
- Hao Feng, Qi Liu, Hao Liu, Wen gang Zhou, Houqiang Li, and Can Huang. Docpedia: Unleashing the power of large multimodal model in the frequency domain for versatile document understanding. *ArXiv*, abs/2311.11810, 2023.
- Yucheng Han, Chi Zhang, Xin Chen, Xu Yang, Zhibin Wang, Gang Yu, Bin Fu, and Hanwang Zhang. Chartllama: A multimodal LLM for chart understanding and generation. *arXiv preprint arXiv:2311.16483*, 2023.
- Anwen Hu, Haiyang Xu, Jiabo Ye, Ming Yan, Liang Zhang, Bo Zhang, Chen Li, Ji Zhang, Qin Jin, Fei Huang, and Jingren Zhou. mplug-docowl 1.5: Unified structure learning for ocr-free document understanding, 2024.
- Yupan Huang, Tengchao Lv, Lei Cui, Yutong Lu, and Furu Wei. Layoutlmv3: Pre-training for document AI with unified text and image masking. In *ACM Multimedia*, 2022.
- Zheng Huang, Kai Chen, Jianhua He, Xiang Bai, Dimosthenis Karatzas, Shijian Lu, and CV Jawahar. Icdar2019 competition on scanned receipt ocr and information extraction. In *ICDAR*, pp. 1516–1520, 2019.
- Guillaume Jaume, Hazim Kemal Ekenel, and Jean-Philippe Thiran. FUNSD: A dataset for form understanding in noisy scanned documents. In *ICDAR*, pp. 1–6, 2019.

- Shankar Kantharaj, Rixie Tiffany Ko Leong, Xiang Lin, Ahmed Masry, Megh Thakkar, Enamul Hoque, and Shafiq R. Joty. Chart-to-text: A large-scale benchmark for chart summarization. In *ACL*, pp. 4005–4023, 2022.
- Dimosthenis Karatzas, Faisal Shafait, Seiichi Uchida, Masakazu Iwamura, Lluís Gomez i Bigorda, Sergi Robles Mestre, Joan Mas, David Fernández Mota, Jon Almazán, and Lluís-Pere de las Heras. ICDAR 2013 robust reading competition. In *ICDAR*, pp. 1484–1493, 2013.
- Dimosthenis Karatzas, Lluís Gomez-Bigorda, Anguelos Nicolaou, Suman Ghosh, Andrew Bagdanov, Masakazu Iwamura, Jiri Matas, Lukas Neumann, Vijay Ramaseshan Chandrasekhar, Shijian Lu, et al. Icdar 2015 competition on robust reading. In *ICDAR*, pp. 1156–1160, 2015.
- Aniruddha Kembhavi, Min Joon Seo, Dustin Schwenk, Jonghyun Choi, Ali Farhadi, and Hannaneh Hajishirzi. Are you smarter than a sixth grader? textbook question answering for multimodal machine comprehension. In *CVPR*, pp. 5376–5384, 2017.
- Jianfeng Kuang, Wei Hua, Dingkan Liang, Mingkun Yang, Deqiang Jiang, Bo Ren, and Xiang Bai. Visual information extraction in the wild: Practical dataset and end-to-end solution. In *ICDAR*, volume 14192, pp. 36–53, 2023.
- Zhibin Lan, Jiawei Yu, Xiang Li, Wen Zhang, Jian Luan, Bin Wang, Degen Huang, and Jinsong Su. Exploring better text image translation with multimodal codebook. In Anna Rogers, Jordan L. Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pp. 3479–3491. Association for Computational Linguistics, 2023.
- Jordy Van Landeghem, Rafal Powalski, Rubèn Tito, Dawid Jurkiewicz, Matthew B. Blaschko, Lukasz Borchmann, Mickaël Coustaty, Sien Moens, Michal Pietruszka, Bertrand Anckaert, Tomasz Stanislawek, Pawel Józiaek, and Ernest Valveny. Document understanding dataset and evaluation (DUDE). In *ICCV*, pp. 19471–19483, 2023.
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *ICML*, pp. 19730–19742. PMLR, 2023a.
- Zhang Li, Biao Yang, Qiang Liu, Zhiyin Ma, Shuo Zhang, Jingxu Yang, Yabo Sun, Yuliang Liu, and Xiang Bai. Monkey: Image resolution and text label are important things for large multi-modal models. *arXiv preprint arXiv:2311.06607*, 2023b.
- Chaohu Liu, Kun Yin, Haoyu Cao, Xinghua Jiang, Xin Li, Yinsong Liu, Deqiang Jiang, Xing Sun, and Linli Xu. Hrvda: High-resolution visual document assistant. In *CVPR*, 2024a.
- Cheng-Lin Liu, Fei Yin, Da-Han Wang, and Qiu-Feng Wang. CASIA online and offline chinese handwriting databases. In *ICDAR*, pp. 37–41, 2011.
- Fangyu Liu, Julian Martin Eisenschlos, Francesco Piccinno, Syrine Krichene, Chenxi Pang, Kenton Lee, Mandar Joshi, Wenhua Chen, Nigel Collier, and Yasemin Altun. Deplot: One-shot visual language reasoning by plot-to-table translation. In *ACL*, pp. 10381–10399, 2023a.
- Fangyu Liu, Francesco Piccinno, Syrine Krichene, Chenxi Pang, Kenton Lee, Mandar Joshi, Yasemin Altun, Nigel Collier, and Julian Martin Eisenschlos. Matcha: Enhancing visual language pretraining with math reasoning and chart derendering. In *ACL*, pp. 12756–12770, 2023b.
- Fuxiao Liu, Xiaoyang Wang, Wenlin Yao, Jianshu Chen, Kaiqiang Song, Sangwoo Cho, Yaser Yacoub, and Dong Yu. Mmc: Advancing multimodal chart understanding with large-scale instruction tuning. *arXiv preprint arXiv:2311.10774*, 2023c.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *NeurIPS*, volume 36, 2024b.
- Yixin Liu, Alexander R. Fabbri, Pengfei Liu, Yilun Zhao, Linyong Nan, Ruilin Han, Simeng Han, Shafiq Joty, Chien-Sheng Wu, Caiming Xiong, and Dragomir Radev. Revisiting the gold standard: Grounding summarization evaluation with robust human evaluation. In *ACL*, pp. 4140–4170, 2023d.

- Yuliang Liu, Lianwen Jin, Shuaitao Zhang, and Sheng Zhang. Detecting curve text in the wild: New dataset and new solution. *CoRR*, abs/1712.02170, 2017.
- Yuliang Liu, Jiaxin Zhang, Dezhi Peng, Mingxin Huang, Xinyu Wang, Jingqun Tang, Can Huang, Dahua Lin, Chunhua Shen, Xiang Bai, and Lianwen Jin. SPTS v2: Single-point scene text spotting. *TPAMI*, 45(12):15665–15679, 2023e.
- Yuliang Liu, Biao Yang, Qiang Liu, Zhang Li, Zhiyin Ma, Shuo Zhang, and Xiang Bai. Textmonkey: An ocr-free large multimodal model for understanding document. *arXiv preprint arXiv:2403.04473*, 2024c.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *ICCV*, pp. 9992–10002, 2021.
- Shangbang Long, Siyang Qin, Dmitry Panteleev, Alessandro Bissacco, Yasuhisa Fujii, and Michalis Raptis. Towards end-to-end unified scene text detection and layout analysis. In *CVPR*, pp. 1039–1049, 2022.
- Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Hao Yang, Yaofeng Sun, Chengqi Deng, Hanwei Xu, Zhenda Xie, and Chong Ruan. Deepseek-vl: Towards real-world vision-language understanding. *CoRR*, abs/2403.05525, 2024.
- Tengchao Lv, Yupan Huang, Jingye Chen, Lei Cui, Shuming Ma, Yaoyao Chang, Shaohan Huang, Wenhui Wang, Li Dong, Weiyao Luo, et al. Kosmos-2.5: A multimodal literate model. *arXiv preprint arXiv:2309.11419*, 2023.
- Pengyuan Lyu, Weihong Ma, Hongyi Wang, Yuechen Yu, Chengquan Zhang, Kun Yao, Yang Xue, and Jingdong Wang. Gridformer: Towards accurate table structure recognition via grid prediction. In *ACM Multimedia*, pp. 7747–7757, 2023.
- Ahmed Masry, Xuan Long Do, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In *ACL*, pp. 2263–2279, 2022.
- Ahmed Masry, Parsa Kavehzadeh, Do Xuan Long, Enamul Hoque, and Shafiq Joty. Unichart: A universal vision-language pretrained model for chart comprehension and reasoning. In *EMNLP*, pp. 14662–14684, 2023.
- Minesh Mathew, Lluís Gómez, Dimosthenis Karatzas, and C. V. Jawahar. Asking questions on handwritten document collections. *IJDAR*, 24(3):235–249, 2021a.
- Minesh Mathew, Dimosthenis Karatzas, and C. V. Jawahar. Docvqa: A dataset for VQA on document images. In *WACV*, pp. 2199–2208, 2021b.
- Minesh Mathew, Viraj Bagal, Rubèn Tito, Dimosthenis Karatzas, Ernest Valveny, and CV Jawahar. Infographicvqa. In *WACV*, pp. 1697–1706, 2022.
- Fanqing Meng, Wenqi Shao, Quanfeng Lu, Peng Gao, Kaipeng Zhang, Yu Qiao, and Ping Luo. Chartassistant: A universal chart multimodal language model via chart-to-table pre-training and multitask instruction tuning. *arXiv preprint arXiv:2401.02384*, 2024.
- Nitesh Methani, Pritha Ganguly, Mitesh M. Khapra, and Pratyush Kumar. Plotqa: Reasoning over scientific plots. In *WACV*, pp. 1516–1525, 2020.
- Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. OCR-VQA: visual question answering by reading text in images. In *ICDAR*, pp. 947–952, 2019.
- Nibal Nayef, Fei Yin, Imen Bizid, Hyunsoo Choi, Yuan Feng, Dimosthenis Karatzas, Zhenbo Luo, Umapada Pal, Christophe Rigaud, Joseph Chazalon, Wafa Khlif, Muhammad Muzzamil Luqman, Jean-Christophe Burie, Cheng-Lin Liu, and Jean-Marc Ogier. ICDAR2017 robust reading challenge on multi-lingual scene text detection and script identification - RRC-MLT. In *ICDAR*, pp. 1454–1459, 2017.

- Ankur P. Parikh, Xuezhong Wang, Sebastian Gehrmann, Manaal Faruqui, Bhuwan Dhingra, Diyi Yang, and Dipanjan Das. Totto: A controlled table-to-text generation dataset. In *EMNLP*, pp. 1173–1186, 2020.
- Seunghyun Park, Seung Shin, Bado Lee, Junyeop Lee, Jaeheung Surh, Minjoon Seo, and Hwalsuk Lee. Cord: A consolidated receipt dataset for post-ocr parsing. 2019.
- Panupong Pasupat and Percy Liang. Compositional semantic parsing on semi-structured tables. In *ACL*, pp. 1470–1480, 2015.
- Amanpreet Singh, Guan Pang, Mandy Toh, Jing Huang, Wojciech Galuba, and Tal Hassner. Textocr: Towards large-scale end-to-end reasoning for arbitrary-shaped scene text. In *CVPR*, pp. 8802–8812, 2021.
- Tomasz Stanislawek, Filip Gralinski, Anna Wróblewska, Dawid Lipinski, Agnieszka Kaliska, Paulina Rosalska, Bartosz Topolski, and Przemyslaw Biecek. Kleister: Key information extraction datasets involving long documents with complex layouts. In *ICDAR*, volume 12821, pp. 564–579, 2021.
- Hongbin Sun, Zhanghui Kuang, Xiaoyu Yue, Chenhao Lin, and Wayne Zhang. Spatial dual-modality graph reasoning for key information extraction. *arXiv preprint arXiv:2103.14470*, 2021.
- Yipeng Sun, Dimosthenis Karatzas, Chee Seng Chan, Lianwen Jin, Zihan Ni, Chee Kheng Chng, Yuliang Liu, Canjie Luo, Chun Chet Ng, Junyu Han, Errui Ding, and Jingtuo Liu. ICDAR 2019 competition on large-scale street view text with partial labeling - RRC-LSVT. In *ICDAR*, pp. 1557–1562, 2019.
- S Svetlichnaya. Deepform: Understand structured documents at scale, 2020.
- Ryota Tanaka, Kyosuke Nishida, and Sen Yoshida. Visualmrc: Machine reading comprehension on document images. In *AAAI*, pp. 13878–13888, 2021.
- Ryota Tanaka, Kyosuke Nishida, Kosuke Nishida, Taku Hasegawa, Itsumi Saito, and Kuniko Saito. Slidevqa: A dataset for document visual question answering on multiple images. In *AAAI*, pp. 13636–13645, 2023.
- Ryota Tanaka, Taichi Iki, Kyosuke Nishida, Kuniko Saito, and Jun Suzuki. Instructdoc: A dataset for zero-shot generalization of visual document understanding with instructions. In *AAAI*, pp. 19071–19079, 2024.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *NeurIPS*, pp. 5998–6008, 2017.
- Jiapeng Wang, Chongyu Liu, Lianwen Jin, Guozhi Tang, Jiabin Zhang, Shuaitao Zhang, Qianying Wang, Yaqiang Wu, and Mingxiang Cai. Towards robust visual information extraction in real world: New dataset and novel solution. In *AAAI*, pp. 2738–2745, 2021.
- Haoran Wei, Lingyu Kong, Jinyue Chen, Liang Zhao, Zheng Ge, Jinrong Yang, Jianjian Sun, Chunrui Han, and Xiangyu Zhang. Vary: Scaling up the vision vocabulary for large vision-language models. *arXiv preprint arXiv:2312.06109*, 2023.
- Haoran Wei, Lingyu Kong, Jinyue Chen, Liang Zhao, Zheng Ge, En Yu, Jianjian Sun, Chunrui Han, and Xiangyu Zhang. Small language model meets with reinforced vision vocabulary. *arXiv preprint arXiv:2401.12503*, 2024.
- Jingjing Wu, Pengyuan Lyu, Guangming Lu, Chengquan Zhang, Kun Yao, and Wenjie Pei. Decoupling recognition from detection: Single shot self-reliant scene text spotter. In *ACM Multimedia*, pp. 1319–1328, 2022.
- Yiheng Xu, Tengchao Lv, Lei Cui, Guoxin Wang, Yijuan Lu, Dinei A. F. Florêncio, Cha Zhang, and Furu Wei. XFUND: A benchmark dataset for multilingual visually rich form understanding. In *ACL*, pp. 3214–3224, 2022.

- Zhibo Yang, Rujiao Long, Pengfei Wang, Sibao Song, Humen Zhong, Wenqing Cheng, Xiang Bai, and Cong Yao. Modeling entities as semantic points for visual information extraction in the wild. In *CVPR*, 2023.
- Jiabo Ye, Anwen Hu, Haiyang Xu, Qinghao Ye, Ming Yan, Yuhao Dan, Chenlin Zhao, Guohai Xu, Chenliang Li, Junfeng Tian, Qian Qi, Ji Zhang, and Fei Huang. mplug-docowl: Modularized multimodal large language model for document understanding. *CoRR*, abs/2307.02499, 2023a.
- Jiabo Ye, Anwen Hu, Haiyang Xu, Qinghao Ye, Ming Yan, Guohai Xu, Chenliang Li, Junfeng Tian, Qi Qian, Ji Zhang, Qin Jin, Liang He, Xin Lin, and Fei Huang. Ureader: Universal ocr-free visually-situated language understanding with multimodal large language model. In *EMNLP*, pp. 2841–2858, 2023b.
- Wenwen Yu, Chengquan Zhang, Haoyu Cao, Wei Hua, Bohan Li, Huang Chen, Mingyu Liu, Mingrui Chen, Jianfeng Kuang, Mengjun Cheng, Yuning Du, Shikun Feng, Xiaoguang Hu, Pengyuan Lyu, Kun Yao, Yuechen Yu, Yuliang Liu, Wanxiang Che, Errui Ding, Cheng-Lin Liu, Jiebo Luo, Shuicheng Yan, Min Zhang, Dimosthenis Karatzas, Xing Sun, Jingdong Wang, and Xiang Bai. ICDAR 2023 competition on structured text extraction from visually-rich document images. In *ICDAR*, pp. 536–552, 2023a.
- Yuechen Yu, Yulin Li, Chengquan Zhang, Xiaoqiang Zhang, Zengyuan Guo, Xiameng Qin, Kun Yao, Junyu Han, Errui Ding, and Jingdong Wang. Structextv2: Masked visual-textual prediction for document image pre-training. In *ICLR*, 2023b.
- Rui Zhang, Mingkun Yang, Xiang Bai, Baoguang Shi, Dimosthenis Karatzas, Shijian Lu, C. V. Jawahar, Yongsheng Zhou, Qianyi Jiang, Qi Song, Nan Li, Kai Zhou, Lei Wang, Dong Wang, and Minghui Liao. ICDAR 2019 robust reading challenge on reading chinese text on signboard. In *ICDAR*, pp. 1577–1581, 2019.
- Yilun Zhao, Zhenting Qi, Linyong Nan, Boyu Mi, Yixin Liu, Weijin Zou, Simeng Han, Ruizhe Chen, Xiangru Tang, Yumo Xu, et al. Qtsumm: Query-focused summarization over tabular data. In *EMNLP*, 2023.
- Xinyi Zheng, Douglas Burdick, Lucian Popa, Xu Zhong, and Nancy Xin Ru Wang. Global table extractor (GTE): A framework for joint table identification and cell structure recognition using visual context. In *WACV*, pp. 697–706, 2021.
- Xu Zhong, Elaheh ShafieiBavani, and Antonio Jimeno-Yepes. Image-based table recognition: Data, model, and evaluation. In *ECCV*, pp. 564–580, 2020.