

Counting on General Run-Length Grammars^{*}

Gonzalo Navarro and Alejandro Pacheco

Center for Biotechnology and Bioengineering (CeBiB)
Department of Computer Science, University of Chile, Chile

Abstract. We introduce a data structure for counting pattern occurrences in texts compressed with any run-length context-free grammar. Our structure uses space proportional to the grammar size and counts the occurrences of a pattern of length m in a text of length n in time $O(m \log^{2+\epsilon} n)$, for any constant $\epsilon > 0$. This closes an open problem posed by Christiansen et al. [ACM TALG 2020] and enhances our abilities for computation over compressed data; we give an example application.

Keywords: Grammar-based indexing · Run-length context-free grammars · Counting pattern occurrences · Periods in strings.

1 Introduction

Context-free grammars (CFGs) have proven to be an elegant and efficient model for data compression. The idea of grammar-based compression [42,23] is, given a text $T[1..n]$, construct a context-free grammar G of size g that only generates T . One can then store G instead of T , which achieves compression if $g \ll n$. Compared to more powerful compression methods like Lempel-Ziv [28], grammar compression offers efficient direct access to arbitrary snippets of T without the need of full decompression [40,1]. This has been extended to offering indexed searches (i.e., in time $o(n)$) for the occurrences of string patterns in T [7,12,9,6,32], as well as more complex computations over the compressed sequence [26,16,13,14,33,22]. Since finding the smallest grammar G representing a given text T is NP-hard [40,3], many algorithms have been proposed to find small grammars for a given text [27,40,37,41,29,17,18]. Grammar compression is particularly effective when handling repetitive texts; indeed, the size g^* of the smallest grammar representing T is used as a measure of its repetitiveness [31].

Nishimoto et al. [38] proposed enhancing CFGs with “run-length rules” to handle irregularities when compressing repetitive strings. These run-length rules have the form $A \rightarrow B^s$, where B is a terminal or a non-terminal symbol and $s \geq 2$ is an integer. CFGs that may use run-length rules are called run-length context-free grammars (RLCFGs). Because CFGs are RLCFGs, the size g_{rl}^* of the smallest RLCFG generating T always satisfies $g_{rl}^* \leq g^*$, and it can be $g_{rl}^* = o(g^*)$ in text families as simple as $T = a^n$, where $g_{rl}^* = O(1)$ and $g^* = \Theta(\log n)$.

^{*} Supported by ANID Basal Funds FB0001, Fondecyt Grant 1-230755, and ANID/Scholarship Program/DOCTORADO BECAS CHILE/2018-21180760.

The use of run-length rules has become essential to produce grammars with size guarantees and convenient regularities that speed up indexed searches and other computations [26,16,13,6,22,24]. The progress made in indexing texts with CFGs has been extended to RLCFGs, reaching the same status in most cases. These extensions include extracting substrings, computing substring summaries, and locating all the occurrences of a pattern string [6, App. A]. It has also been shown that RLCFGs can be balanced [34] in the same way as CFGs [14], which simplifies many compressed computations on RLCFGs.

Interestingly, *counting* pattern occurrences efficiently, that is, determining how many times a pattern occurs in the text without spending the time to list those occurrences, can be done on CFGs, but not so far on RLCFGs. The counting query is useful in various fields, such as pattern discovery and ranked retrieval, for example to help determine the frequency or relevance of a pattern in the texts of a collection [30].

Navarro [35] showed how to count the occurrences of a pattern $P[1..m]$ in $T[1..n]$ in $O(m^2 + m \log^{2+\epsilon} n)$ time using $O(g)$ space if a CFG of size g represents T , for any constant $\epsilon > 0$. Christiansen et al. [6] improved this time to $O(m \log^{2+\epsilon} n)$ by using more recent underlying data structures for tries. Christiansen et al. [6] and Kociumaka et al. [24] managed to efficiently count on *particular* RLCFGs, but could not extend their mechanism to general RLCFGs. Christiansen et al.’s paper [6] finishes, referring to counting, with “However, this holds only for CFGs. Run-length rules introduce significant challenges [...] An interesting open problem is to generalize this solution to arbitrary RLCFGs.”

In this paper we close this open problem, by introducing an index that efficiently counts the occurrences of a pattern $P[1..m]$ in a text $T[1..n]$ represented by a RLCFG of size g_{rl} . Our index uses $O(g_{rl})$ space and answers queries in time $O(m \log^{2+\epsilon} n)$ for any constant $\epsilon > 0$. This is the same time complexity that holds for CFGs, which puts our capabilities to handle RLCFGs on par with those we have to handle CFGs on all the considered queries. As an example of our new capabilities, we show how a recent result on finding the maximal exact matches of P using CFGs [36] can now run on RLCFGs.

While our solution builds on the ideas developed for CFGs and particular RLCFGs [35,6,24], arbitrary RLCFGs lack crucial structure that holds in those particular cases, namely that if there exists a run-length rule $A \rightarrow B^s$, then the period [10] of the string represented by A is the length of B . We show, however, that the general case still retains some structure relating the shortest periods of P and the string represented by A . We exploit this relation to develop a solution that, while considerably more sophisticated than that for those particular cases, retains the same theoretical guarantees obtained for CFGs.

2 Basic Concepts

2.1 Strings

A *string* $S[1..n] = S[1] \cdot S[2] \cdots S[n]$ is a sequence of symbols, where each symbol belongs to a finite ordered set of integers called an *alphabet* $\Sigma = \{1, 2, \dots, \sigma\}$.

The *length* of S is denoted by $|S| = n$. We denote with ε the empty string, where $|\varepsilon| = 0$. A *substring* of S is $S[i..j] = S[i] \cdot S[i+1] \cdots S[j]$ (which is ε if $i > j$). A *prefix* (*suffix*) is a substring of the form $S[1..j] = S[1] \cdots S[j]$ ($S[j..n] = S[j] \cdots S[n]$); we also say that $S[1..j]$ ($S[j..n]$) *prefixes* (*suffixes*) S . We write $S \sqsubseteq S'$ if S prefixes S' , and $S \subset S'$ if in addition $S \neq S'$ (S strictly prefixes S').

A *power* $t \in \mathbb{N}$ of a string S , written S^t , is the concatenation of t copies of S . The *reverse* string of $S[1..n] = S[1] \cdot S[2] \cdots S[n]$ refers to $S[1..n]^{\text{rev}} = S[n] \cdot S[n-1] \cdots S[1]$. We also use the term *text* to refer to a string.

2.2 Periods of strings

Periods of strings [10] are crucial in this paper. We recall their definition(s) and a key property, the renowned Periodicity Lemma.

Definition 1. A string $S[1..n]$ has period $1 \leq p \leq n$ if, equivalently,

1. it consists of $\lfloor n/p \rfloor$ consecutive copies of $S[1..p]$ plus a (possibly empty) prefix of $S[1..p]$, that is, $S = (S[1..p]^{\lfloor n/p \rfloor})[1..n]$; or
2. $S[1..n-p] = S[p+1..n]$; or
3. $S[i+p] = S[i]$ for all $1 \leq i \leq n-p$.

We also say that p is a period of S . We define $p(S)$ as the shortest period of S and say S is periodic if $p(S) \leq n/2$.

Lemma 1 ([11]). If p and p' are periods of S and $|S| \geq p + p' - \gcd(p, p')$, then $\gcd(p, p')$ is a period of S . Thus, $p(S)$ divides all other periods $p \leq |S|/2$ of S .

2.3 Karp-Rabin signatures

Karp–Rabin [20] fingerprinting assigns a *signature* $\kappa(S) = (\sum_{i=1}^m S[i] \cdot c^{i-1}) \bmod \mu$ to the string $S[1..m]$, where c is a suitable integer and μ a prime number. Bille et al. [2] showed how to build, in $O(n \log n)$ randomized time, a Karp–Rabin signature having no collisions between substrings S of $T[1..n]$. We always assume those kind of signatures in this paper.

A useful well-known property is that we can compute the signatures of all the prefixes $S[1..j] \sqsubseteq S$ in time $O(m)$, and then obtain any $\kappa(S[i..j])$ in constant time by using arithmetic operations.

2.4 Range summary queries on grids

A discrete grid of r rows and c columns stores points at integer coordinates (x, y) , with $1 \leq x \leq c$ and $1 \leq y \leq r$. Grids storing m points can be stored in $O(m)$ space, so that some *summary* queries are performed on *orthogonal ranges* of the grid. In particular, it is possible to associate an integer to each point, and then, given an orthohonal range $[x_1, x_2] \times [y_1, y_2]$, compute the *sum* of all the integers associated with the points falling in that range. Chazelle [4] showed how to run that query in time $O(\log^{2+\epsilon} m)$, for any constant $\epsilon > 0$, within space $O(m)$.

2.5 Grammar compression and parse trees

A *context-free grammar (CFG)* $G = (V, \Sigma, R, S)$ is a language generation model consisting of a finite set of nonterminal symbols V and a finite set of terminal symbols Σ , disjoint from V . The set R contains a finite set of production rules $A \rightarrow \alpha$, where A is a nonterminal symbol and α is a string of terminal and nonterminal symbols. The language generation process starts from a sequence formed by just the nonterminal $S \in V$ and, iteratively, chooses a rule $A \rightarrow \alpha$ and replaces an occurrence of A in the sequence by α , until the sequence contains only terminals. The *size* of the grammar, $g = |G|$, is the sum of the lengths of the right-hand sides of the rules, $g = \sum_{A \rightarrow \alpha \in R} |\alpha|$. Given a string T , we can build a CFG G that generates only T . Then, especially if T is repetitive, G is a compressed representation of T . The *expansion* of a rule $\exp(A)$ refers to the string generated by the nonterminal A , for instance $\exp(S) = T$. We use $|A| = |\exp(A)|$; for terminals a we may use $\exp(a) = a$.

The *parse tree* of a grammar is an ordinal labeled tree where the root is labeled with the initial rule S , the leaves are labeled with terminal symbols, and internal nodes are labeled with nonterminals. If $A \rightarrow \alpha_1 \cdots \alpha_t$, with $\alpha_i \in V \cup \Sigma$, then a node v labeled A has t children labeled, left to right, $\alpha_1, \dots, \alpha_t$. A more compact version of the parse tree is the *grammar tree*, which is obtained by pruning the parse tree such that only one internal node labeled A is kept for each nonterminal A , while the rest become leaves. Unlike the parse tree, the grammar tree of G has only $g + 1$ nodes. Consequently, the text T can be divided into at most g substrings, called *phrases*, each covered by a grammar tree leaf. The starting phrase positions constitute a string attractor of the text [21]. Therefore, all text substrings have at least one occurrence that crosses a phrase boundary.

2.6 Run-length grammars

Run-length GFGs (RLCFGs) [38] extend CFGs by allowing in R rules of the form $A \rightarrow \beta^s$, where $s \geq 2$ is an integer and β is a string of terminals and nonterminals. These rules are equivalent to rules $A \rightarrow \beta \cdots \beta$ with s repetitions of β . However, the length of the right-hand side of the rule A is defined as $|\beta| + 1$, not $|\beta|^s$. To simplify, we will only allow run-length rules of the form $A \rightarrow B^s$, where B is a single terminal or nonterminal; this does not increase their asymptotic size because we can rewrite $A \rightarrow B^s$ and $B \rightarrow \beta$ for a fresh B .

RLCFGs are obviously never larger than general CFGs, and they can be asymptotically smaller. For example, the size g_{rl}^* of the smallest RLCFG that generates T is in $O(\delta \log(n/\delta))$, where δ is a measure of repetitiveness based on substring complexity [39,25], but such a bound does not always hold for the size g^* of the smallest grammar. The maximum stretch between g^* and g_{rl}^* is $O(\log n)$, as we can replace a rule $A \rightarrow B^s$ by $O(\log s)$ classic CFG rules.

In this paper, we denote the size of an RLCFG G as $g_{rl} = |G|$. To maintain the invariant that the grammar tree has size $g_{rl} + 1$ nodes, we represent rules $A \rightarrow B^s$ as a node labeled A with two children: the first is B and the second is a special leaf $B^{[s-1]}$, denoting $s - 1$ repetitions of B .

3 Indexing with Grammars for Locating

A *grammar index* represents a text $T[1..n]$ using a grammar G that generates only T . As opposed to mere compression, the index supports three primary pattern-matching queries: *locate* (returning all positions of a pattern in the text), *count* (returning the number of times a pattern appears in the text), and *display* (extracting any desired substring of T). In order to locate, grammar indexes identify “initial” pattern occurrences and then track their “copies” throughout the text. The former are the *primary occurrences*, which cross phrase boundaries, and the latter are the *secondary occurrences*, which are confined to a single phrase. This approach, introduced by Kärkkäinen and Ukkonen [19], forms the basis of most grammar indexes [7,8,9], which first locate the primary occurrences and then derive their secondary occurrences through the grammar tree.

As mentioned in Section 2.5, the grammar tree leaves cut the text into phrases. In order to report each primary occurrence of a pattern $P[1..m]$ exactly once, let v be the lowest common ancestor of the first and last leaves the occurrence spans; v is called the *locus node* of the occurrence. Let v have t children and the first leaf that covers the occurrence descend from the i th child of v . If v represents $A \rightarrow \alpha_1 \cdots \alpha_t$, it follows that $\text{exp}(\alpha_i)$ finishes with a pattern prefix $P[1..q]$ and that $\text{exp}(\alpha_{i+1}) \cdots \text{exp}(\alpha_t)$ starts with the suffix $P[q+1..m]$. This is the only partition of P with which this primary occurrence will be found.

Following the scheme of Kärkkäinen and Ukkonen, classic grammar indexing [7,8,9] builds two sets of strings, \mathcal{X} and \mathcal{Y} , to find primary occurrences. For each grammar rule $A \rightarrow \alpha_1 \cdots \alpha_t$, the set \mathcal{X} contains all the reverse expansions of the children of A , $\text{exp}(\alpha_i)^{\text{rev}}$, and \mathcal{Y} contains all the expansions of the nonempty rule suffixes, $\text{exp}(\alpha_{i+1}) \cdots \text{exp}(\alpha_t)$. Both sets are sorted lexicographically and placed on a grid with (less than) g points, $t-1$ for each rule $A \rightarrow \alpha_1 \cdots \alpha_t$. Given a pattern $P[1..m]$, then for each partition $P[1..q] \cdot P[q+1..m]$, we first find the lexicographic ranges $[s_x, e_x]$ of $P[1..q]^{\text{rev}}$ in \mathcal{X} and $[s_y, e_y]$ of $P[q+1..m]$ in \mathcal{Y} . Each point $(x, y) \in [s_x, e_x] \times [s_y, e_y]$ represents a primary occurrence of P . Grid points are augmented with their *locus node* v and offset $|\text{exp}(\alpha_1) \cdots \text{exp}(\alpha_i)|$.

Once we identify the locus node v (with label A) of a primary occurrence, we know that every other mention of A in the grammar tree contains a (secondary) occurrence with the same offset. Additionally, let u (with label C) be the parent of any node with label A . All other nodes labeled C in the grammar tree also contain secondary occurrences of the pattern (with a corrected offset). From each primary occurrence locus v labeled A , one recursively visits the parent of v (and adjusts the offset) and all the other mentions of A in the tree. Each recursive branch reaches the root of the grammar tree, discovering a distinct offset where P occurs in T . Claude and Navarro [8] showed that, if every nonterminal A appears at least twice in the grammar tree, the traversal cost amortizes to constant time per secondary occurrence, thereby modifying non-complaint grammars. Christiansen et al. [6] later showed that, if it is impossible to modify the grammar, each node can store a pointer to its lowest ancestor whose label appears at least twice in the grammar tree, using that ancestor instead of the parent. Both approaches report the secondary occurrences in optimal time.

The original approach [8,9] spends time $O(m^2)$ to find the ranges $[s_x, e_x]$ and $[s_y, e_y]$ for the $m - 1$ partitions of P ; this was later improved to $O(m \log n)$ [6]. Each primary occurrence found in the grid ranges takes time $O(\log^\epsilon g)$ using geometric data structures, whereas each secondary occurrence requires $O(1)$ time. Overall, the *occ* occurrences of P in T are listed in time $O(m \log n + \text{occ} \log^\epsilon g)$.

To generalize this solution to RLCFGs [6, App. A.4], rules $A \rightarrow B^s$ are added as a point $(x, y) = (\exp(B)^{\text{rev}}, \exp(B)^{s-1})$ in the grid. To see that this suffices to capture every primary occurrence, regard the rule as $A \rightarrow B \cdots B$. If there are primary occurrences with the cut $P[1..q] \cdot P[q+1..m]$ in $B \cdots B$, then one is aligned with the first phrase boundary, $\exp(B) \cdot \exp(B)^{s-1}$. Precisely, there is space to place $P[q+1..m]$ after the first $t = s - \lceil (m-q)/|B| \rceil$ phrase boundaries. When the point (x, y) is retrieved for a given cut at q , then, t primary occurrences are declared with offsets $|B| - q, 2|B| - q, \dots, t|B| - q$ within $\exp(A)$.

4 Counting with Grammars

Navarro [35] obtained the first result in counting the number of occurrences of a pattern $P[1..m]$ in a text $T[1..n]$ represented by a CFG of size g , within time $O(m^2 + m \log^{2+\epsilon} n)$, for any constant $\epsilon > 0$, and using $O(g)$ space. His method relies on the *consistency* of the secondary occurrences triggered across the grammar tree: given the locus node of a primary occurrence, the number of secondary occurrences it triggers is independent of the occurrence offset within the node. This property allows enhancing the grid described in Section 3 with the number of (primary and) secondary occurrences $c(A)$ associated with each point. At query time, for each pattern cut, one sums the number of occurrences in the corresponding grid range using the technique mentioned in Section 2.4. The final complexity is obtained by aggregating over all $m - 1$ partitions of P and considering the $O(m^2)$ time required to identify all the ranges. Christiansen et al. [6, Thm. A.5] later improved this time to just $O(m \log^{2+\epsilon} n)$, by resorting to more modern techniques to find the grid range of all partitions of P .

Christiansen et al. [6] also presented a method to count in $O(m + \log^{2+\epsilon} n)$ time on a *particular* RLCFG with “local consistency” properties, of size $g_{rl} = O(\gamma \log(n/\gamma))$, where γ is the size of the smallest string attractor [21] of T . They also show that by increasing the space to $O(\gamma \log(n/\gamma) \log^\epsilon n)$ one can reach the optimal counting time, $O(m)$. Local consistency allows reducing the number of cuts of P to check to $O(\log m)$, instead of the $m - 1$ cuts on general RLCFGs.

Christiansen et al. build on the same idea of enhancing the grid with the number of secondary occurrences, but the process is considerably more complex on RLCFGs, because the consistency property exploited by Navarro [35] does not hold: the number of secondary occurrences triggered by a primary occurrence with cut $P[1..q] \cdot P[q+1..m]$ found within a run-length rule $A \rightarrow B^s$ depends on s , $|B|$, and q . Their counting approach relies on another property that is specific of their RLCFG [6, Lem. 7.2]:

for every run-length rule $A \rightarrow B^s$, the shortest period of $\exp(A)$ is $|B|$.

This property facilitates the division of the counting process into two cases: one applies when the pattern is periodic and the other when it is not. For each run-length rule $A \rightarrow B^s$, they introduce two points, $(x, y') = (\exp(B)^{\text{rev}}, \exp(B))$ and $(x, y'') = (\exp(B)^{\text{rev}}, \exp(B)^2)$, in the grid. These points are associated with the values $c(A)$ and $(s-2) \cdot c(A)$, respectively. The counting process is as follows: for a cut $P[1..q] \cdot Q$ (i.e., $Q = P[q+1..m]$), if $Q \subseteq \exp(B)$, then it will be counted $c(A) + (s-2) \cdot c(A) = (s-1) \cdot c(A)$ times, as both points will be within the search range. Conversely, if Q exceeds $\exp(B)$ but still $Q \subseteq \exp(B)^2$, then it will be counted $(s-2) \cdot c(A)$ times, solely by point (x, y'') . Finally if Q exceeds $\exp(B)^2$, then Q is periodic (with $p(Q) = |B|$).

They handle the remaining case as follows. Given a cut $P[1..q] \cdot Q$ and the period $p = p(Q) = |B|$, where $m - q > 2p$, the number of primary occurrences of this cut inside rule $A \rightarrow B^s$ is $s - \lceil (m - q)/p \rceil$ (cf. the end of Section 3). Let D be the set of rules $A \rightarrow B^s$ within the grid range of the cut, and $c(A)$ the number of (primary and) secondary occurrences of A . Then, the number of occurrences triggered by the primary occurrences found within symbols in D for this cut is

$$\sum_{A \rightarrow B^s \in D} c(A) \cdot s - c(A) \cdot \lceil (m - q)/p \rceil.$$

For each run-length rule $A \rightarrow B^s$, they compute a Karp-Rabin signature (Section 2.3) $\kappa(\exp(B))$ and store it in a perfect hash table, associated with values

$$\begin{aligned} C(B, s) &= \sum \{c(A) : A \rightarrow B^{s'}, s' \geq s\}, \\ C'(B, s) &= \sum \{s' \cdot c(A) : A \rightarrow B^{s'}, s' \geq s\}. \end{aligned}$$

Additionally, for each such B , the authors store the set $s(B) = \{s : A \rightarrow B^s\}$.

At query time, they calculate the shortest period $p = p(P)$. For each cut $P[1..q] \cdot Q$, Q is periodic if $m - q > 2p$. If so, they compute $k = \kappa(Q[1..p]) = \kappa(P[q+1..q+p])$, and if there is an entry B associated with k in the hash table, they add to the number of occurrences found up to this point

$$C'(B, s_{\min}) - C(B, s_{\min}) \cdot \lceil (m - q)/p \rceil,$$

where $s_{\min} = \min\{s \in s(B), (s-1) \cdot |B| \geq m - q\}$ is computed using exponential search over $s(B)$ in $O(\log m)$ time. Note that they exploit the fact that *the number of repetitions to subtract*, $\lceil (m - q)/p \rceil$, depends only on $p = |B|$, and not on the exponent s of rules $A \rightarrow B^s$ using B .

Since the grammar is locally consistent, the number of cuts to consider is $O(\log m)$, which allows reducing the cost of computing the grid ranges to $O(m)$. The signatures of all substrings of P are also computed in $O(m)$ time, as mentioned in Section 2.3. Considering the grid searches, the total cost for counting the pattern occurrences is $O(m + \log^{2+\epsilon} g_{rl}) \subseteq O(m + \log^{2+\epsilon} n)$.

Recently, Kociumaka et al. [24] employed this same approach to count the occurrences of a pattern in a smaller RLCFG that uses $O(\delta \log \frac{n \log \delta}{\delta \log n})$ space, where $\delta \leq \gamma$. Kociumaka et al. demonstrated that the RLCFG they produce satisfies the same property [6, Lem. 7.2] necessary to apply the described scheme.

5 Our Proposal

We now describe a solution to count the occurrences in arbitrary RLCFGs, where the convenient property [6, Lem. 7.2] used in the literature may not hold. We start with a simple but useful observation.

Lemma 2. *Let $A \rightarrow B^s$ be a rule in a RLCFG. Then $p(\exp(A))$ divides $|B|$.*

Proof. Clearly $|B|$ is a period of $\exp(A)$ because $\exp(A) = \exp(B)^s$. By Lemma 1, then, since $|B| \leq |A|/2$, $p(\exp(A))$ divides $|B|$. \square

Some parts of our solution make use of the shortest period of $\exp(A)$. We define some related notation.

Definition 2. *Given a rule $A \rightarrow B^s$ with $s \geq 2$, let $p = p(\exp(A))$ (which divides $|B|$). The corresponding transformed rule is $A \rightarrow B_p^{s'}$, where B_p is a new nonterminal such that $\exp(B_p) = \exp(A)[1..p]$, and $s' = s \cdot (|B|/p)$.*

There seems to be no simple way to just transform all run-length rules (which would satisfy the convenient property $p(\exp(A)) = |B_p|$) without blowing up the RLCFG size by a logarithmic factor. We will instead divide the occurrences of P inside $\exp(A)$ into *type-1* and *type-2*. We define *type-1* primary occurrences as those where $m - q \leq 2|B|$, that is, $Q = P[q + 1..m]$ does not exceed two copies of $\exp(B)$. Conversely, *type-2* occurrences are those where $m - q > 2|B|$ and lie inside A . The general architecture of our solution is as follows; recall Section 4:

1. We start from Navarro's solution [35] for CFGs, which uses an enhanced grid where points count all the occurrences they trigger. The grid ranges are found with the more recent technique of Christiansen et al. [6], so that the overall time is $O(m \log^{2+\epsilon} n)$.
2. The run-length rules will be handled with some analogies to the solutions developed for particular RLCFGs [6,24], yet each type of occurrence requires adaptations.
3. Type-1 occurrences will be handled, as in the solutions of item 2, by adding some convenient points to the enhanced grid of item 1, so that those occurrences are automatically counted with the general process of CFG counting.
4. Type-2 occurrences will require, as in the solution of item 2, special data structures that rely on the period structure. These are more sophisticated than what was needed in the solutions of item 2, and require their own extra space and specific actions during the search. Their count is then added to the one obtained in item 3 to obtain the final answer.

5.1 Type-1 occurrences

For type-1 occurrences, as anticipated, we store two additional points in (the enhanced version of) the grid of Section 3: $(x, y') = (\exp(B)^{\text{rev}}, \exp(B))$ and $(x, y'') = (\exp(B)^{\text{rev}}, \exp(B)^2)$, with respective weights $c(A)$ and $c(A) \cdot (s - 2)$,

exactly as in Section 4. These points will capture precisely the type-1 occurrences of P inside $\exp(A)$.

As explained, type-1 occurrences do not need any additional work on top of what is already done for CFGs [6, App. A.5], other than incorporating the points (x, y') and (x, y'') to the grid, one pair per run-length rule. Type-1 occurrences will then be automatically added to the occurrences computed with this index, without increasing the asymptotic space or time.

5.2 Type-2 occurrences

In type-2 occurrences, $P[q + 1 \dots m]$ contains at least two copies of $\exp(B)$. Considering the solution to particular cases described in Section 4, the challenge with rules $A \rightarrow B^s$ that differ from their transformed version $A \rightarrow B_p^{s'}$ is that the number of alignments with cut $P[1 \dots q] \cdot Q$ inside $\exp(A)$ is $s' - \lceil (m - q)/p \rceil$, but $p = p(A)$ does not determine B : there could be rules $A_1 \rightarrow B_1^{s_1}$ and $A_2 \rightarrow B_2^{s_2}$, with the same period p and $|B_1| = 2p$ and $|B_2| = 3p$. We must compute the occurrences of all such rules at once, as a function of the period $p = p(P)$. The next lemmas show that there remains sufficient structure to exploit, however.

Lemma 3. *If $R = S^s$ with $s \geq 2$, then $p(R) = p(SS)$.*

Proof. Since $|S|$ is a period of SS , $p = p(SS)$ divides $|S|$ by Lemma 1, and thus $S = S[1 \dots p]^k$ for $k = |S|/p$. By branch 1 of Def. 1, then, p is also a period of $R = S^s = S[1 \dots p]^{ks}$. Suppose that the shortest period of R is some $p' = p(R) < p$. Then, by Lemma 1, p' divides p . Therefore, p' is also a period of $SS = S[1 \dots p]^{2k} = R[1 \dots p]^{2k} = R[1 \dots p']^{2kp/p'}$, again by branch 1 of Def. 1; a contradiction. Thus $p = p(R) = p(SS)$. \square

Lemma 4. *Let $P = P[1 \dots m]$, $p = p(P)$, $Q = P[q + 1 \dots m]$ for some q , and assume $SS \subseteq Q$, with $|S| \geq p$. Then $p = p(SS)$.*

Proof. Note $|Q| \geq 2p$. By branch 3 of the definition of period (Def. 1), $Q[i + p] = P[q + i + p] = P[q + i] = Q[i]$ for all $1 \leq i \leq m - q - p = |Q| - p$, thus Q has also period p . Further, if Q had a shorter period, then $p(Q) = p' < p$, p' would divide p by Lemma 1, and then P would also have period p' , which is a contradiction, so $p(Q) = p$. To see that $p' = p(Q)$ would be a period of P , we can show that $P[i] = P[i + p']$ for all $1 \leq i \leq m - p'$. Let $t \geq 0$ be the minimum value such that $q < i + tp \leq m$ (which exists because $|Q| = m - q \geq p$). Similarly, let $t' \geq 0$ be the minimum such that $q < i + p' + t'p \leq m$ (which again exists). Let $j = i + tp - q$ and $j' = i + p' + t'p - q$. Because p is a period of P , $P[i] = P[i + tp] = Q[j]$ and $P[i + p'] = P[i + p' + t'p] = Q[j']$. But $Q[j] = Q[j']$ because $j - j'$ is a multiple of p' , which is a period of Q . Thus $P[i] = P[i + p']$.

By branch 1 of Def. 1, then, SS has period p as it prefixes a concatenation of one or more copies of $Q[1 \dots p]$. If now SS had a period $p' < p$ (dividing p by Lemma 1), then $Q[1 \dots p] = S[1 \dots p]$ would also have period p' and then Q would have period $p' < p$ (as Q is the concatenation of several copies of $Q[1 \dots p]$), a contradiction again. Thus $p = p(SS)$. \square

In type-2 occurrences, $\exp(B)^2 \sqsubset Q \sqsubseteq \exp(B)^{s-1}$. Lemma 4 shows that, if $p = p(P)$, $|B| \geq p$, and $\exp(B)^2 \sqsubseteq Q$, then $p(\exp(B)^2) = p$. Further, by Lemma 3, $p = p(\exp(A))$ as well. That is, we capture all the relevant rules $A \rightarrow B^s$ if we organize them by their shortest period $p(\exp(A))$, as it must match $p = p(P)$ whenever Q has type-2 occurrences in A . Note that we cannot lose occurrences where $\exp(B)^2 \sqsubset Q \sqsubseteq \exp(B)^{s-1}$ and $|B| < p(P)$, because then Q prefixes a concatenation of copies of $\exp(B)$ and, by branch 1 of Def. 1, $|B| < p(P)$ should be a period of Q . This is not possible because, in such an occurrence, $P[1..q]$ suffixes $\exp(B)$ and $P = P[1..q] \cdot Q$ is also a concatenation of at least two copies of a rotation of B , so by branch 1 of Def. 1 P should have period $|B| < p(P)$, a contradiction.

We then compute, for each transformed rule $A \rightarrow B_p^{s'}$, its signature $\kappa(\exp(B_p))$ and store it in a perfect hash table H . Each entry in table H , corresponding to some $\kappa(\pi)$, will be associated with a grid G_π , where each row represents a rule $A \rightarrow B^s$ whose transformed version is $A \rightarrow B_p^{s'}$, that is, such that $\pi = \exp(B_p) = \exp(B)[1..p]$. The rows are sorted by increasing lengths $|B|$ (note $|B| \geq |\pi| = p$ for all B in G_π). The columns represent the different exponents s' of the transformed rules. We associate two values with each point: $C'_\pi = c(A)$ and $C''_\pi = s' \cdot c(A)$. Each point in the grid represents a rule A . Since no rule appears in more than one grid, the total space for all grids is in $O(g_{rl})$.

Given a pattern $P[1..m]$, we calculate its shortest period $p = p(P)$. For each cut $1 \leq q \leq \min(p-1, m-p)$, we calculate $\kappa(\pi)$, for $\pi = P[q+1..q+p]$, to find the corresponding grid G_π in H . Note we consider only the splits $P[1..q] \cdot Q$ where $q < p$ to avoid overcounting; the others yield repeated strings π . We will find in H every (transformed) rule $A \rightarrow B_p^{s'}$ where $B_p = \pi$, sharing the period p with Q , and its prefix: $\pi = \exp(B)[1..p] = Q[1..p]$. If $2|B| < |Q| = m-q$, then $\exp(B)^2 \sqsubset Q$. Those are precisely the type-2 occurrences we want to count, where such rules contribute $c(A) \cdot (s' - \lceil (m-q)/p \rceil) = C''_\pi(A) - C'_\pi(A) \cdot \lceil (m-q)/p \rceil$, provided $s' - \lceil (m-q)/p \rceil \geq 1$, that is, Q fits within $\exp(A)$. We also limit $q \leq m-p$ as otherwise Q cannot have type-2 occurrences.

To enforce those conditions, we find in G_π the largest row y representing a rule $A \rightarrow B^s$ such that $2|B| < m-q$. We also find the smallest column x where $(s' =) x \geq \lceil (m-q)/p \rceil + 1$. It is easy to see that the points in the range $[x, n] \times [1, y]$ of the grid correspond to the set D of run-length rules where we have a type-2 occurrence: each point satisfies $m-q > 2|B|$ (i.e., it is type-2) and $s' - \lceil (m-q)/p \rceil \geq 1$ (i.e., it fits within $\exp(A)$); see Figure 1. We aggregate the values C'_π and C''_π from the range, subtracting from C''_π the product of C'_π by $\lceil (m-q)/p \rceil$. This yields the correct sum of all type-2 occurrences:

$$\sum_{A \rightarrow B^s \in D} c(A) \cdot s' - c(A) \cdot \left\lceil \frac{m-q}{p} \right\rceil.$$

5.3 The final result

For type-1 occurrences, we extend the grid built for non-run-length rules with one point per run-length rule, thus the structure is of size $O(g_{rl})$ and range queries

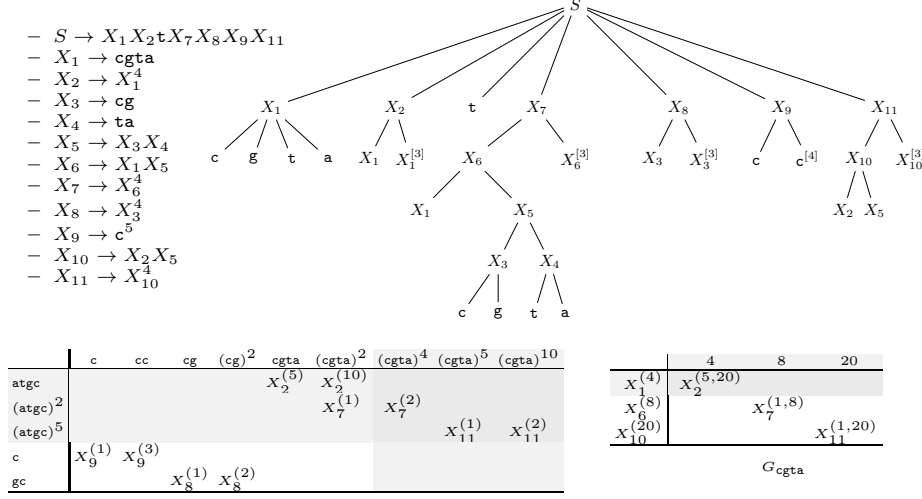


Fig. 1. On top, a RLCFG on the left and its grammar tree on the right. On the bottom left we show the points that must be added to the standard grid in order to handle the type-1 occurrences of rules $A \rightarrow B^s$; points appear as $A^{((s-1) \cdot c(A))}$. On the bottom right we display the grid G_π for the rules $A \rightarrow B_p^{s'}$ where $B_p = \pi = \text{cgta}$. The row labels show $B^{(|B|)}$ and the column labels show s' ; the points show $A^{(C', C'')}$. Consider $P = \text{acgtacgtac}$ with $q = 1$; $p(P) = 4$. We find 5 type-1 occurrences on the left table (inside X_7 and X_{11}), and 5 type-2 occurrences on the right table (all inside $\exp(X_2) = (\text{cgta})^4$, where X_2 appears 5 times). The last occurrence of P for $q = 1$ is found with normal CFG rules at $\exp(S)[4..13]$ ($X_1 \cdot X_2$).

on the grid take time $O(\log^{2+\epsilon} g_{rl})$. The precise time to count occurrences using such a grid is $O(m \log n + m \log^{2+\epsilon} g_{rl})$ [6, Thm. A.5].

For type-2 occurrences, we can calculate $p(P)$ in $O(m)$ time [10], and compute all prefix signatures of P in $O(m)$ time as well, so that later any substring signature is computed in $O(1)$ time (Section 2.3). The limits in the grids G_π can be found with exponential search in time $O(\log m)$ (we might need to group rows/columns with identical values to achieve this). The range sums for $C'(p)$ and $C''(p)$ take time $O(\log^{2+\epsilon} g_{rl})$. They are repeated for each of the $\min(p-1, m-p) \leq m$ cuts of P , adding up to time $O(m \log^{2+\epsilon} g_{rl})$. Type-2 occurrences then add $O(g_{rl})$ space and $O(m \log^{2+\epsilon} g_{rl})$ time to the general scheme.

Theorem 1. *Let text $T[1..n]$ be represented by a RLCFG of size g_{rl} . Then, there is a data structure of size $O(g_{rl})$ that can count the number of occurrences of a pattern $P[1..m]$ in T in time $O(m \log n + m \log^{2+\epsilon} g_{rl}) \subseteq O(m \log^{2+\epsilon} n)$ for any constant $\epsilon > 0$. The structure is built in $O(n \log n)$ expected time.*

Just as for previous schemes [6], the construction time is dominated by the $O(n \log n)$ expected time to build the collision-free Karp-Rabin functions [2].

We note that the bulk of the search cost are the geometric queries, which are easily done in $O(\log n)$ time if we can store cumulative sums in all the levels of

the data structure [5]. This raises the space to $O(g_{rl} \log n)$ and reduces the total counting time to $O(m \log n)$. Further, sampling one cumulative sum out of $\log^\delta n$ for any $\delta > 0$, the space is $O(g_{rl} \log^{1-\delta} n)$ and the time is $O(m \log^{1+\epsilon+\delta} n)$.

5.4 An application

Recent work [15,33] shows how to compute the maximal exact matches (MEMs) of $P[1..m]$ in $T[1..n]$, which are the maximal substrings of P that occur in T , in case T is represented with an arbitrary RLCFG. Navarro [36] extends the results to k -MEMs, which are maximal substrings of P that occur at least k times in T . To obtain good time complexities for large enough k , he resorts to counting occurrences of substrings $P[i..j]$ with the grammar. His Thm. 7, however, works only for CFGs, as no efficient counting algorithm existed on RLCFGs. In turn, his Thm. 8 works only for a particular RLCFG. We can now state his result on an arbitrary RLCFG; by his Thm. 11 this also extends to “ k -rare MEMs”.

Corollary 1 (cf. [36, Thm. 7]). *Assume we have a RLCFG of size g_{rl} that generates only $T[1..n]$. Then, for any constant $\epsilon > 0$, we can build a data structure of size $O(g_{rl})$ that finds the k -MEMs of any given pattern $P[1..m]$, for any $k > 0$ given with P , in time $O(m^2 \log^{2+\epsilon} g_{rl})$.*

6 Conclusion

We have closed the problem of counting the occurrences of a pattern in a text represented by an arbitrary RLCFG, which was open by Christiansen et al. [6] in 2020 and solved only for particular cases. This required combining solutions to CFGs [35] and particular RLCFGs [6], but also new insights for the general case. The particular existing solutions required that $|B|$ is the shortest period of $\exp(A)$ in rules $A \rightarrow B^s$. While this does not hold in general RLCFGs, we proved that, except in some borderline cases that can be handled separately, the shortest periods of the pattern and of $\exp(A)$ must coincide. While the particular solutions could associate $\exp(B)$ with the period of the pattern, we must associate many strings $\exp(A)$ that share the same shortest period, and require a more sophisticated geometric data structure to collect only those that qualify for our search. Despite those complications, however, we manage to define a data structure of size $O(g_{rl})$ from a RLCFG of size g_{rl} , that counts the occurrences of $P[1..m]$ in $T[1..n]$ in time $O(m \log^{2+\epsilon} n)$ for any constant $\epsilon > 0$, the same result that existed for the simpler case of CFGs. Our approach extends the applicability of arbitrary RLCFGs to cases where only CFGs could be used, setting the available tools to handle both types of grammar at the same level.

References

1. Bille, P., Landau, G.M., Raman, R., Sadakane, K., Rao, S.S., Weimann, O.: Random access to grammar-compressed strings and trees. *SIAM Journal on Computing* **44**(3), 513–539 (2015)

2. Bille, P., Gørtz, I.L., Sach, B., Vildhøj, H.W.: Time–space trade-offs for longest common extensions. *Journal of Discrete Algorithms* **25**, 42–50 (2014)
3. Charikar, M., Lehman, E., Liu, D., Panigrahy, R., Prabhakaran, M., Sahai, A., Shelat, A.: The smallest grammar problem. *IEEE Transactions on Information Theory* **51**(7), 2554–2576 (2005)
4. Chazelle, B.: A functional approach to data structures and its use in multidimensional searching. *SIAM Journal on Computing* **17**(3), 427–462 (1988)
5. Chazelle, B.: A functional approach to data structures and its use in multidimensional searching. *SIAM Journal on Computing* **17**(3), 427–462 (1988)
6. Christiansen, A.R., Ettienne, M.B., Kociumaka, T., Navarro, G., Prezza, N.: Optimal-time dictionary-compressed indexes. *ACM Transactions on Algorithms (TALG)* **17**(1), 1–39 (2020)
7. Claude, F., Navarro, G.: Self-indexed grammar-based compression. *Fundamenta Informaticae* **111**(3), 313–337 (2010)
8. Claude, F., Navarro, G.: Improved grammar-based compressed indexes. In: *Proc. 19th International Symposium on String Processing and Information Retrieval (SPIRE)*. pp. 180–192 (2012)
9. Claude, F., Navarro, G., Pacheco, A.: Grammar-compressed indexes with logarithmic search time. *Journal of Computer and System Sciences* **118**, 53–74 (2021)
10. Crochemore, M., Rytter, W.: *Jewels of stringology: text algorithms*. World Scientific (2002)
11. Fine, N.J., Wilf, H.S.: Uniqueness theorems for periodic functions. *Proceedings of the American Mathematical Society* **16**(1), 109–114 (1965)
12. Gagie, T., Gawrychowski, P., Kärkkäinen, J., Nekrich, Y., Puglisi, S.J.: A faster grammar-based self-index. In: *Proc. 6th International Conference on Language and Automata Theory and Applications (LATA)*. pp. 240–251. LNCS 7183 (2012)
13. Gagie, T., Navarro, G., Prezza, N.: Fully-functional suffix trees and optimal text searching in BWT-runs bounded space. *Journal of the ACM* **67**(1), article 2 (2020)
14. Ganardi, M., Jez, A., Lohrey, M.: Balancing straight-line programs. *Journal of the ACM* **68**(4), 27:1–27:40 (2021)
15. Gao, Y.: Computing matching statistics on repetitive texts. In: *Proc. 32nd Data Compression Conference (DCC)*. pp. 73–82 (2022)
16. Gawrychowski, P., Karczmarz, A., Kociumaka, T., Lacki, J., Sankowski, P.: Optimal dynamic strings. In: *Proc. 29th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*. pp. 1509–1528 (2018)
17. Jez, A.: Approximation of grammar-based compression via recompression. *Theoretical Computer Science* **592**, 115–134 (2015)
18. Jez, A.: A really simple approximation of smallest grammar. *Theoretical Computer Science* **616**, 141–150 (2016)
19. Kärkkäinen, J., Ukkonen, E.: Lempel-ziv parsing and sublinear-size index structures for string matching. In: *Proc. 3rd South American Workshop on String Processing (WSP)*. pp. 141–155 (1996)
20. Karp, R.M., Rabin, M.O.: Efficient randomized pattern-matching algorithms. *IBM Journal of Research and Development* **2**, 249–260 (1987)
21. Kempa, D., Prezza, N.: At the roots of dictionary compression: String attractors. In: *Proc. 50th Annual ACM Symposium on the Theory of Computing (STOC)*. pp. 827–840 (2018)
22. Kempa, D., Kociumaka, T.: Collapsing the hierarchy of compressed data structures: Suffix arrays in optimal compressed space. In: *Proc. 64th IEEE Annual Symposium on Foundations of Computer Science (FOCS)*. pp. 1877–1886 (2023)

23. Kieffer, J.C., Yang, E.H.: Grammar-based codes: A new class of universal lossless source codes. *IEEE Transactions on Information Theory* **46**(3), 737–754 (2000)
24. Kociumaka, T., Navarro, G., Olivares, F.: Near-optimal search time in δ -optimal space, and vice versa. *Algorithmica* **86**(4), 1031–1056 (2024)
25. Kociumaka, T., Navarro, G., Prezza, N.: Toward a definitive compressibility measure for repetitive sequences. *IEEE Transactions on Information Theory* **69**(4), 2074–2092 (2023)
26. Kociumaka, T., Radoszewski, J., Rytter, W., Walen, T.: Internal pattern matching queries in a text and applications. In: *Proc. 26th Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*. pp. 532–551 (2015)
27. Larsson, J., Moffat, A.: Off-line dictionary-based compression. *Proceedings of the IEEE* **88**(11), 1722–1732 (2000)
28. Lempel, A., Ziv, J.: On the complexity of finite sequences. *IEEE Transactions on Information Theory* **22**(1), 75–81 (1976)
29. Maruyama, S., Sakamoto, H., Takeda, M.: An online algorithm for lightweight grammar-based compression. *Algorithms* **5**(2), 214–235 (2012)
30. Navarro, G.: Spaces, trees and colors: The algorithmic landscape of document retrieval on sequences. *ACM Computing Surveys* **46**(4), article 52 (2014), 47 pages
31. Navarro, G.: Indexing highly repetitive string collections, part I: Repetitiveness measures. *ACM Computing Surveys* **54**(2), article 29 (2021)
32. Navarro, G.: Indexing highly repetitive string collections, part II: Compressed indexes. *ACM Computing Surveys* **54**(2), article 26 (2021)
33. Navarro, G.: Computing MEMs on repetitive text collections. In: *Proc. 34th Annual Symposium on Combinatorial Pattern Matching (CPM)*. p. article 22 (2023)
34. Navarro, G., Olivares, F., Urbina, C.: Balancing run-length straight-line programs. In: *Proc. 29th International Symposium on String Processing and Information Retrieval (SPIRE)*. pp. 117–131 (2022)
35. Navarro, G.: Document listing on repetitive collections with guaranteed performance. *Theoretical Computer Science* **772**, 58–72 (2019)
36. Navarro, G.: Computing MEMs and relatives on repetitive text collections. *CoRR* **2210.09914** (2023)
37. Nevill-Manning, C., Witten, I., Maulsby, D.: Compression by induction of hierarchical grammars. In: *Proc. 4th Data Compression Conference (DCC)*. pp. 244–253 (1994)
38. Nishimoto, T., I, T., Inenaga, S., Bannai, H., Takeda, M.: Fully dynamic data structure for LCE queries in compressed space. In: *Proc. 41st International Symposium on Mathematical Foundations of Computer Science (MFCS)*. pp. 72:1–72:15 (2016)
39. Raskhodnikova, S., Ron, D., Rubinfeld, R., Smith, A.: Sublinear algorithms for approximating string compressibility. *Algorithmica* **65**, 685–709 (2013)
40. Rytter, W.: Application of Lempel-Ziv factorization to the approximation of grammar-based compression. *Theoretical Computer Science* **302**(1-3), 211–222 (2003)
41. Sakamoto, H.: A fully linear-time approximation algorithm for grammar-based compression. *Journal of Discrete Algorithms* **3**(2–4), 416–430 (2005)
42. Storer, J.A., Szymanski, T.G.: Data compression via textual substitution. *Journal of the ACM* **29**(4), 928–951 (1982)