
MINI HONOR OF KINGS: A LIGHTWEIGHT ENVIRONMENT FOR MULTI-AGENT REINFORCEMENT LEARNING

Lin Liu¹, Jian Zhao², Cheng Hu⁴, Zhengtao Cao², Youpeng Zhao³, Zhenbin Ye¹,
Meng Meng¹, Wenjun Wang¹, Zhaofeng He⁴, Houqiang Li³, Xia Lin¹, Lanxiao Huang¹

¹Tencent Timi Studio

²Polixir

³University of Science and Technology of China

⁴Beijing University of Posts and Telecommunications

{linliu, zhenbinye, promengmeng}@tencent.com

{jamesonwang, hugolin, jackiehuang}@tencent.com

{jian.zhao, zhengtao.cao}@polixir.ai

zyp123@mail.ustc.edu.cn, lihq@ustc.edu.cn

hucheng@bupt.edu.cn, zhaofenghe@bupt.edu.cn

June 18, 2024

ABSTRACT

Games are widely used as research environments for multi-agent reinforcement learning (MARL), but they pose three significant challenges: limited customization, high computational demands, and oversimplification. To address these issues, we introduce the first publicly available map editor for the popular mobile game Honor of Kings and design a lightweight environment, Mini Honor of Kings (Mini HoK), for researchers to conduct experiments. Mini HoK is highly efficient, allowing experiments to be run on personal PCs or laptops while still presenting sufficient challenges for existing MARL algorithms. We have tested our environment on common MARL algorithms and demonstrated that these algorithms have yet to find optimal solutions within this environment. This facilitates the dissemination and advancement of MARL methods within the research community. Additionally, we hope that more researchers will leverage the Honor of Kings map editor to develop innovative and scientifically valuable new maps. Our code and user manual are available at: <https://github.com/tencent-ailab/mini-hok>.

1 Introduction

Cooperative multi-agent systems are essential in numerous real-world scenarios where a group of agents collaborate to accomplish a task and maximize cumulative rewards for the team. [1, 2]. The emergence of reinforcement learning techniques [3, 4, 5] has propelled the progress of multi-agent reinforcement learning (MARL) across an array of domains, including autonomous vehicles [6], traffic light control [7], robotics [8] and the smart grid [9]. However, for algorithm research, games are still the most commonly utilized experimental environment for MARL.

As an experimental environment, the game environment offers several inherent advantages. Firstly, games are inherently engaging and can easily capture the interest of users. Secondly, popular games typically have large user bases and have undergone extensive testing, resulting in robust environments that are less prone to bugs. Lastly, being designed for general consumers, games are intuitive and do not require extensive domain knowledge to understand. The MARL research encompasses a variety of game environments, including Hanabi Learning Environment [10], PettingZoo [11], StarCraft Multi-Agent Challenge (SMAC) [12] and Google Research Football (GRF) [13].

As the number of MARL environments grows, the evaluation system for these environments must be correspondingly enhanced and refined. We propose that a purely research-oriented game environment should embody the following characteristics:

- **Lightweight:** Given that reinforcement learning necessitates the collection of vast amounts of data, the interaction between the agent and the environment must be efficient.
- **Potential:** While maintaining a lightweight design, the environment should not be overly simplistic. An environment that allows existing MARL algorithms to quickly converge to a global optimal solution fails to effectively evaluate these algorithms.
- **Customizable:** Different MARL algorithms often address various challenges within multi-agent systems. Therefore, the environment should include an editor that allows for the modification and customization of its elements.

Unfortunately, existing game environments often struggle to simultaneously meet all these criteria.

In this paper, we introduce the latest Honor of Kings map editor. Leveraging this powerful tool, researchers can design a variety of engaging tasks, such as quick search, tower defense and boss battle. These generated environments support fast execution without the need for rendering an interface on Linux or Windows operating system. Upon completion, the runs produce video files that can be played back using specific software for visual review. A notable advantage of this map editor over others is independence on a UI interface for modifications, which can be inconvenient and restrict flexibility in parameter adjustments. Instead, users can simply adjust the configuration files to change the number, type, and properties of agents in the environment. This feature facilitates convenient training and learning for tasks such as curriculum learning and transfer learning.



Figure 1: Examples to show characteristics of our environment. (a) An example to show the battling scenario of our Mini HoK environment, where heroes are cooperating to fight against the Dark Dragon. (b) An example to present the start positions of heroes in the environment. The default start positions are designated as points 1-5. The middle point is initial position of the Dark Dragon.

With this tool, we have designed a new MARL environment, Mini Honor of Kings (Mini HoK), based on the popular game Honor of Kings. Prior to this, Honor of Kings had introduced two environments: Hok Arena (1v1) [14] and Hok 3v3 [15]. However, these environments are aimed at researchers with a solid foundation in MARL and the computational resources for in-depth scientific research. Mini HoK is set in the classic “Fighting the Dark Dragon” scenario from Honor of Kings. Users can choose any number and type of heroes to participate, with the objective being to cause as much damage as possible on the Dark Dragon within a specified time frame. In this paper, we have designed 7 different modes, each corresponding to a specific setting, to facilitate users in testing the performance of their algorithms.

We have evaluated common MARL algorithms in this environment and observed efficient interaction between the environment and the agents. Using a Nvidia GeForce RTX 4090 GPU and a 4-core CPU for training, one episode can be completed every second. This efficiency makes the environment highly suitable for educational purposes and for beginners. Moreover, this environment has demonstrated significant potential. The performance of common MARL algorithms in the Mini HoK environment still lags behind that of a rule-based method. This gap presents an opportunity for researchers to explore and develop more effective MARL algorithms within this environment.

In addition to supporting the study of general MARL algorithms, this environment simplifies research on curriculum reinforcement learning and transfer reinforcement learning. We have open-sourced the entire environment and provided user manual at <https://github.com/tencent-ailab/mini-hok>. Looking ahead, we hope contributions from the community to enhance various algorithms within the Mini Honor of Kings environment. We also encourage the use of the map editor to design more interesting and scientifically meaningful game environments.

2 Related Work

A variety of reinforcement learning environments have played a pivotal role in advancing the study of multi-agent reinforcement learning (MARL). However, existing benchmarks own some limitations. To address these drawbacks, we propose the novel Mini Honor of Kings Environment for further MARL research.

Firstly, with the development of MARL algorithms demonstrating increasingly superior performance, quite a few benchmark environments have become easy to solve. For instance, the cooperative scenarios provided by OpenSpiel [16] and PettingZoo [11] are set in grid-worlds and board games, which are characterized by simplistic dynamics or a limited number of agents, rendering them susceptible to facile solutions. Moreover, in the mainstream MARL benchmark, SMAC [12], recent work has reported remarkable achievements, even near-perfect win rates, across most scenarios [17, 18, 19]. In light of these developments, there arises a pressing need for the creation of a novel MARL benchmark environment capable of presenting substantial challenges, thereby facilitating the discernment of algorithmic performance.

What’s more, many prevalent MARL benchmark environments are based on video games or intricate simulators. For example, SMAC is built on the game Starcraft II, GRF is rooted in the GameplayFootball simulator [13] and Multi-Agent Mujoco [20] represents a multi-agent adaptation of the MuJoCo environment [21] tailored for robotic control. These benchmarks are characterized by the complex engine featuring multiple agents, intricate rules, and dynamic interactions. Consequently, training MARL algorithms within these environments are computationally intensive and time-consuming, thereby curtailing accessibility for researchers with limited resources. Furthermore, this inherent complexity poses challenges in scaling up the number of agents due to computational constraints. Conversely, our Mini Honor of Kings Environment possesses exceptional computational efficiency, enabling researchers to conduct experiments even with limited computational resources.

Last but not least, certain advanced simulators impose restrictive use terms or necessitate access to closed-source binaries, thereby limiting the ability to modify the environments [21, 22]. What’s worse, some environments have witnessed maintenance cessation, exemplified by the discontinuation of updates for SMAC due to the cessation of updates for the StarCraft II game. These factors collectively poses challenges to editing the environments for researchers, rendering the scenarios outdated and unable to cater to the evolving and diverse requirements of future research. Conversely, our environment is built on the game Honor of Kings, known as one of the world’s most popular and high-grossing games of all time. The continuous updates of the original game ensure ongoing support, enabling developers to facilitate the development of this benchmark. Moreover, the endeavor of continuous benchmark environment updating incurs significant costs, underscoring the need for a benchmark environment that supports user customization. In this regard, our work offers a tool that enables users to modify environments, thus facilitating the generation of diverse scenarios aligned with research requirements.

Apart from our proposed environment, another reinforcement learning benchmark environment, named Honor of Kings Arena [14], is also derived from the game Honor of Kings. This environment closely resembles the original game dynamics, where players control heroes to gain gold and experience by eliminating other in-game units. The primary objective is to destroy opponent turrets and the base crystal while safeguarding one’s own structures. However, Honor of Kings Arena is a 1v1 environment, predominantly catering to single-agent reinforcement learning rather than cooperative multi-agent systems. Although the developers have recently updated the Hok3v3 environment, its complexity is heightened due to the diverse array of units and intricate map configurations. Consequently, the computational demands for training are substantial, potentially exceeding the resources available to common researchers. In contrast, our Mini Honor of Kings Environment is centered on the task of combating the Dark Dragon, offering a streamlined and efficient training process conducive to convenient experiments.

3 Honor of Kings Map Editor

As the foundation of our Mini HoK environment, the Honor of Kings Map Editor allows users to freely customize scenarios. As depicted in Figure 1b, there are twenty initial positions where heroes can be placed, providing users with the flexibility to determine start positions using the map editor. Moreover, users can configure the behavior of agents, thereby altering the objectives of the scenario. For example, setting the dragon to stay still can transform the scenario into a navigation task, where agents have to reach targeted positions. Although we provide tasks where agents cooperate to fight the dragon, the editor enables users to create a wide range of tasks for MARL research.

The map editor endows our environment with high expansibility, allowing users to modify various aspects of the settings. Figure 2 demonstrates this trait clearly, showcasing the ability to adjust parameters such as the number and identity of heroes, their respective levels, and the health points of the dragon. Furthermore, although not depicted in the figure, users retain the option to determine whether heroes are equipped or other parameters. In comparison to existing

benchmarks like SMAC where scenario editing is feasible, our map editor offers more convenience and autonomy, as SMAC only allows users to manipulate the number and types of units rather than changing specific attributes.



Figure 2: Examples to show the expansibility of our Mini Honor of Kings Environment. In figure (a) and (b), five heroes engage in battle against dragon, featuring Zhuang Zhou in the former and Zhang Fei in the latter. Figure (c) showcases a scenario with three heroes participating in combat. Also, the levels of the heroes and the dragon’s health points can be adjusted. Additionally, users can toggle the presence of equipment for the heroes or other parameters within our environment, thereby offering a comprehensive array of customization options.

4 Mini Honor of Kings Environment

Setting	Hero level	Skill 1	Skill 2	Skill 3	Equipment	Hero composition
(A)	1	0	0	0	✗	basic
(B)	4	0	0	0	✗	basic
(C)	15	0	0	0	✗	basic
(D)	15	6	6	3	✗	basic
(E)	15	6	6	3	✗	homo (Sun Wukong)
(F)	4	2	1	1	✗	basic
(G)	4	2	1	1	✓	basic

Table 1: Different configurations of the experiments. Table entries denote the levels of heroes and their respective three skills. The symbol ✗ indicates absence of equipment for all heroes, while ✓ signifies all heroes possess six pre-set equipment, as determined by the game engine. When all skill levels are set to zero, it implies that the heroes are only capable of executing normal attacks. The basic hero configuration includes the five aforementioned heroes, while the homogeneous hero composition consists of five Sun Wukong for simplicity.

Our Mini Honor of Kings Environment is based on the engine offered by Honor of Kings and accessible to all individuals for non-commercial activities. This environment consists of two components to interact with the gamecore, namely client and server. The server hosts the map editor and game engine, allowing users to input starting command or change environment configurations when simulating battles between heroes and the Dark Dragon. On the other hand, users can develop their programs within the client. To aid users in this process, we provide example code based on the Pymarl2 algorithm library [23], demonstrating the application of above mentioned classic MARL algorithms within our benchmark environment.

4.1 Environment Settings

Overview The simulated environment portrays a scenario wherein heroes, under the control of a multi-agent system, collaborate to combat the Dark Dragon. Controlled by heuristic rules characterized by significant stochasticity, the Dark Dragon possesses three skills whose release occurs randomly. By default, the combat involves five heroes, each representing different hero types and possessing distinct attributes. The basic attributes of each hero contains health point volume, magical point volume, attack, defence, resistance and so on. Additionally, the game’s difficulty level can be modified by adjusting parameters such as the health points of the dragon or specifying whether the heroes have equipment.

State & Observations We delineate the concept of state as the comprehensive set of data provided by the environment subsequent to action execution. Meanwhile, observations, defined as inputs for the system, consist of individual observations and joint observations, where the former is the input for each agent while the latter involves the amalgamation of individual observations. Notably, the joint observation feature is only accessible to agents during centralised training for value estimation. Leveraging the state information, users can customize and redefine their observations according to their specific needs. In this work, we furnish rudimentary observation features for each agent, encompassing the agent’s own location and health point volume, as well as those of the Dark Dragon. This simplistic design aims to accommodate diverse settings irrespective of the hero selections and showcase the extensibility of our environment.

Actions The available actions for an individual agent encompass movement in eight directions and various attack maneuvers, including standard attack, three hero-specific skills and a summoner skill, which is selected according to specific rules for each hero. Hero skills can be categorized based on their release mechanisms, including targeting specific entities, directions, or positions. To streamline the action space of agents, users can modify functions that transform actions into commands required by the gamecore, implementing rules to account for the unique skill sets of each hero. Given the inherent complexity arising from the distinct skill sets possessed by each hero, such adjustments are helpful for managing the intricate nature of the problem. In our current configuration, skills are by default directed towards the dragon for simplicity. To enhance the complexity of the problem, considerations such as the existence of additional adversaries or supportive skills for teammates can be integrated into the action space, thereby expanding the range of possible actions. Furthermore, both hero skills and summoner skills have cooldown time, which may render certain actions temporarily unavailable. Utilizing the state information provided by the environment, legal actions features can be derived to judge which actions are permissible for selection.

Rewards In our setup, we provide a basic configuration for dense reward. To be specific, the reward computation at each time step relies on the difference in the health points of the dragon, adjusted by a factor of -0.01 to reflect the decrement in current health points. This configuration gives dense feedback to the system, facilitating the models in discerning actions conducive to inflicting damage upon the dragon. Moreover, users can use the reduction in the agents’ health points as a signal to encourage the agents to evade enemy attacks. In situations that require sparse rewards, the outcome of defeating the dragon can serve as a viable reward signal. Leveraging the state information, rewards can be tailored by users to accommodate a spectrum of research requirements.

Stochasticity The stochastic nature of the environment in reinforcement learning plays a pivotal role by introducing variability and uncertainty into the interactions of agents, thereby incentivizing exploration and aiding in the generalization and adaptation of agents. Our environment possesses enough stochasticity, providing an ideal platform for research endeavors. For example, being built on the game Honor of Kings, the heroes’ skills may have some random characteristics and critical strikes may occur. Similarly, the Dark Dragon’s skill release also exhibit randomness, further contributing to the unpredictability of the environment. Additionally, users retain the option to generate randomized starting positions tailored to their specific experimental needs.

4.2 APIs and Implementation

Composed of both client and server components, the environment transmits data through JSON strings for communication purposes. To enhance usability, we encapsulate the interaction with the environment using Python. An illustrative example of the interface and config is provided in Figure 3, accompanied by descriptions of key functions outlined below:

- **reset():** This function starts a new episode, initializing and storing information for the game.
- **get_state(); get_obs(); get_avail_actions():** These functions retrieve joint observations, individual observations, and available actions for the multi-agent system, as elucidated in Section 4. Notably, the observations and available actions are vectorized to encompass information for all agents.
- **select_actions():** This function obtains the decision of each agent, typically derived from models trained by MARL algorithms.
- **step():** This function is used to transmit each agent’s decision to the simulator and update the state information of environment. It also returns the reward, episode termination flags, and debugging information. Additionally, it encompasses a subordinate function to convert actions into executable commands for the environment.

To be noted, the encapsulation provides a clear and accessible interface conducive to the swift development of novel algorithms. Users retain considerable flexibility to tailor these functions according to their specific requirements.

Moreover, the underlying engine of our benchmark environment is crafted with highly optimized code, allowing it to operate efficiently even on standard laptop configurations. This efficiency surpasses that of comparable MARL

```

import random
from hok import mini_HokEnv
# load environment
env = mini_HokEnv(env_config)
# reset environment
env.reset()
# start an episode
terminated = False
episode_return = 0
while not terminated:
    avail_action_s = []
    obs_s = []
    state_s = env.get_state()
    for i in range(env.num_agents):
        avail_action = env.get_avail_actions(i)
        obs = env.get_obs_agent(i)
        avail_action_s.append(avail_action)
        obs_s.append(obs)
    actions = select_actions(state_s, avail_action_s, obs_s)
    reward, terminated, env_info = env.step(actions)
    episode_return += reward

```

(a) Python example

```

{
  "Hero": [
    {
      "AgentID": 1,
      "HeroID": 11301,
      "Camp": 1,
      "HeroLevel": 15,
      "HeroSkills": { "SkillOne": 6, "SkillTwo": 6,
        "SkillThree": 3 },
      "SummonerSpells": 80110,
      "Equipment": 0
    },
    ...
  ],
  "Monster": {
    "AgentID": 0,
    "MonsterID": 10122,
    "MonsterHP": 40000,
    "MonsterAttack": 600,
    "MonsterDefense": 1500
  }
}

```

(b) Config example

Figure 3: Python example and config example.

benchmarks, which often require server-level resources to run. Consequently, our environment is notably lightweight and accessible. Leveraging a solitary CPU core, the environment executes a full episode within a mere second, thereby achieving a performance of approximately 0.5 million samples per hour. Such expedited processing capabilities afford researchers with limited computational resources the ability to swiftly assess the efficacy of MARL algorithms.

4.3 Efficiency Analysis

To further illustrate the efficiency of our Mini HoK environment, we conduct analysis of the training resources required for our environment versus other environments based on the game Honor of Kings. Given the significant differences in tasks across environments, we focus on the computing resources utilized when running experiments, as detailed in the accompanying Table 2. It can be observed that our Mini HoK operates with substantially higher efficiency compared to its counterparts. Notably, while Hok Arena and Hok 3v3 necessitate distributed reinforcement learning techniques to enhance training efficiency, our environment does not require such techniques, underscoring its inherent efficiency.

Moreover, our experiments utilized simple and general feature designs, facilitating the use of straightforward network architectures. In contrast, other environments, due to their complexity, necessitate elaborately designed features with extensive information, resulting in higher-dimensional input vectors and more intricate network architectures. In summary, the efficiency of our Mini HoK environment is exceptional. Despite its simplicity and lightweight characteristic, the environment still offers ample improvement space for MARL algorithms, inviting further research and exploration.

	Observation Space	Action Space	CPU Cores	GPU	Training Hours	Final Result
Hok Arena [14]	491	83	128	NVIDIA Tesla V100	6.16	Beat BT AI
Hok 3v3 [15]	4586	161	64	NVIDIA Tesla T4	54.30	Beat BT AI
Mini HoK	6	13	4	Nvidia GeForce RTX 4090	13.21	Converge
Mini HoK	6	13	40	/	15.41	Converge

Table 2: Efficiency analysis of environments based on game Honor of Kings, including the training resources required to run the environments and the observation and action spaces, which influence the complexity of neural networks adopted. We also include the training outcomes in these environments, where Hok Arena and Hok 3v3 reports the training duration until the system defeats behaviour-tree (BT) opponents while our experiments focus on the time required to achieve convergence.

4.4 Experiment Results

As a reference, we evaluate the performance of VDN [24], QMIX [25], QATTEN [26], QPLEX [17], MAPPO [18] and HAPPO [19] in the environment, all of which are introduced in supplement materials. In order to facilitate these evaluations, we provide example code based on the Pymarl2 algorithm library [23]. Given the significant variability among heroes in the Honor of Kings game, the basic hero configuration we adopt consists of five heroes, namely Zhuang Zhou, Di Renjie, Diao Chan, Sun Wukong and Cao Cao, comprising a standard five-hero team of the game. Performance is evaluated based on the system’s ability to engage in combat, measured by the total number of damage the system can cause. This metric effectively circumvents the limitation in measuring the upper bound of algorithm performance, as the maximum health points of the Dragon can be adjusted.

As our benchmark is a lightweight environment, the multi-agent system can swiftly acquire relevant knowledge and we run every algorithm for 10000 episodes across 5 random seeds. The observation feature adopted in the algorithms follows the descriptions in Section 4. To ensure fair comparisons among different algorithms, each agent’s network utilized the same architecture. Further technical details of the experiments can be found in the appendix.

In order to assess the system’s performance under varying configurations, we devise several experimental setups. To be noted, although quite a few parameters of the environment can be adjusted, our benchmark is built on the Honor of Kings game engine, necessitating adherence to certain foundational principles. For instance, in the game heroes can upgrade their skills once every time they level up, which can result in increased damage and reduce the cooldown time. Skill 1 and skill 2 can undergo six upgrades, whereas skill 3 can only be upgraded when the hero’s level is a multiple of 4. In our experiments, we have the flexibility to configure heroes to abstain from learning skills and only utilize normal attacks, even when their levels are set to 15 but it should be noted that skill 3 cannot be acquired until the hero attains level 4. In addition to parameter adjustments, our environment allows for the configuration of different hero compositions to examine the impact of heterogeneity in MARL. Specifically, we conduct experiments using five identical heroes to investigate the effects of homogeneous team configurations.

Based on these considerations, the settings of the conducted experiments are shown in table 1, illustrating the levels of heroes, their respective skill levels, hero compositions and whether they possess equipment. To be noted, each experimental configuration maintains consistent settings for all heroes to ensure simplicity and coherence, namely, the skill levels and whether to have equipment are uniform for each hero within a given setting. Moreover, under current setting, a hero equipped with equipment possesses six pre-set equipment, which is determined by the game engine.

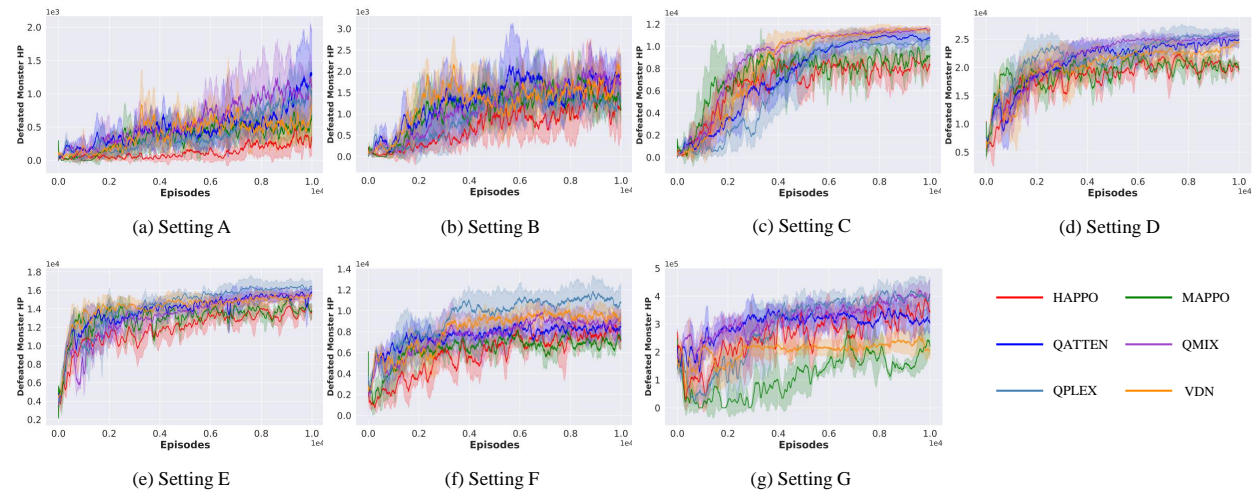


Figure 4: Experiment results for different settings that reflects the damage that the system can cause during the training. The solid lines show the average performance across 5 random seeds and the shaded areas reflect the standard error of the performance outcomes.

4.5 Experiment Analysis

The experimental results for each setting are presented in figure 4 and table 3. In addition to the classic MARL algorithms, we include a method based on heuristic rules for better comparison. The results indicate that agents with higher hero levels, enhanced skill levels, and equipment inflict more damage. Furthermore, the basic hero composition, which includes a variety of hero types, outperforms homogeneous team configurations, underscoring the potential

Method \ Setting	VDN [24]	QMIX [25]	QATTEN [26]	QPLEX [17]	MAPPO [18]	HAPPO [19]	Rule
A	808 ± 391	1099 ± 343	1280 ± 661	964 ± 358	664 ± 434	349 ± 294	3806
B	1830 ± 473	1726 ± 360	1810 ± 450	1309 ± 208	1115 ± 315	1088 ± 649	5101
C	11399 ± 385	11562 ± 59	10753 ± 426	10548 ± 922	9187 ± 879	8344 ± 978	12313
D	24465 ± 960	25571 ± 835	24973 ± 1343	25661 ± 1064	19545 ± 562	19906 ± 1224	28133
E	15614 ± 123	15606 ± 685	15750 ± 426	16427 ± 670	13769 ± 858	13698 ± 733	18131
F	9458 ± 674	8709 ± 1268	8502 ± 1011	10814 ± 1481	7261 ± 830	7126 ± 825	15556
G	198927 ± 26453	408239 ± 49792	303081 ± 34428	401821 ± 67922	221668 ± 37440	348075 ± 34815	500000

Table 3: The caused damage of the multi-agent system under different settings using different methods. To be noted, we also provide a method based on heuristic rules for better comparison. We report the average performance across 5 random seeds and the standard errors.



Figure 5: The lazy agent scenario.

of heterogeneous agents in MARL problems, as diverse agents can assume different roles and enhance cooperation. Additionally, value decomposition algorithms tend to outperform policy gradient MARL algorithms in our environment, yet they still fall short of surpassing the heuristic-based method. Despite employing straightforward and universal feature designs in our experiments, which could potentially constrain the efficacy of MARL algorithms, the results still indicate that current MARL algorithms are not fully capable to master the environment. This observation highlights significant opportunities for improvement in future MARL research endeavors.

In this experiment, we observed that Zhuang Zhou consistently maintained a certain distance from the monster and did not participate in the actual attack, while the other four agents were actively engaging the monster, as shown in Figure 5. By reviewing the battle replay video and analyzing Zhuang Zhou’s position data and behavior trajectory, we found that Zhuang Zhou did not inflict any damage on the monster throughout the entire attack, exhibiting clear signs of lazy behavior.

The reason behind Zhuang Zhou’s inaction may be attributed to his role as a support character, which inherently limits his ability to cause obvious damage to the monster. This observation highlights a critical issue in multi-agent collaborative tasks: the emergence of lazy behavior among agents. Addressing this challenge is crucial for advancing MARL research.

5 Conclusion

In this study, we introduce a map editor for Honor of Kings and develop a lightweight MARL environment, Mini Honor of Kings, utilizing this tool. Constructed on the foundation of the game Honor of Kings and a highly optimized simulator, our environment operates with exceptional efficiency, making it accessible to researchers with limited computing resources. We provide example code based on the popular Pymarl2 algorithm library and conduct evaluations using several classic MARL algorithms to validate the utility of our benchmark and enable users to swiftly engage with the environment. The results reveal ample room for improvement for common MARL algorithms within the environment, awaiting further investigation. With the flexible map editor, users can freely customize the environment and design diverse scenarios according to their requirements. We are enthusiastic about sharing the map editor and environment with the broader community and anticipate positive contribution to MARL research endeavors.

A Environment Details

A.1 Setup

An example of the experimental setup is shown in Table 4, the environment contains five heroes and the Dark Dragon. The default five heroes are Zhuang Zhou, Di Renjie, Diao Chan, Sun Wukong, Cao Cao. They have different attributes, for example, Zhuang Zhou has high health points while Di Renjie has low health points. The normal attack range of each hero is also different. In addition, each hero has three skills, and these skills can be divided into four types: “obj_skill”, “dir_skill”, “pos_skill” and “talent_skill”.

5Heroes VS Dark Dragon							
	name	ID	Health Points	Normal Attack Range	Skill1 Type	Skill2 Type	Skill3 Type
Heroes	ZhuangZhou	11301	14572	2800	dir_skill	obj_skill	obj_skill
	Di Renjie	13301	5706	8000	dir_skill	dir_skill	dir_skill
	Diao Chan	14101	8409	6000	dir_skill	dir_skill	obj_skill
	Sun Wukong	16701	8743	3000	obj_skill	dir_skill	obj_skill
	Cao Cao	12801	9885	2800	dir_skill	dir_skill	obj_skill
Dark Dragon	-	12202	40000				

Table 4: Detailed attributes of the 5 heroes and Dark Dragon in the environment, including name, ID, health points, normal attack range, skill type.

A.2 Attribute parameters of the environment

Here are some basic attributes of the environment. In the future, multiple maps may be involved, so it is necessary to specify the “map_name”. The “n_agents” parameter represents the number of heroes, allowing for the selection of different numbers of heroes subsequently. Additionally, it is necessary to specify the number of steps per episode during training, which is currently set to 150. There are also parameters such as the action space and observation space dimensions for each agent, as well as attributes like the health points of the Dragon at the end of each episode and the types of skills for the heroes.

```

# Name of the map
self.map_name = map_name
# Number of agents
self.n_agents = num_agents

# The maximum number of steps in an episode
self.episode_limit = episode_limit
# Step count for each episode
self._episode_steps = 0

# The action space dimension is 13
self.action_space = 13
# The number of executable actions
self.n_actions = self.action_space

# The observation space dimension is 6
self.observation_space = 6
# Initialize state and observation variables

# Save the health points of the Dragon in the current episode
self.monster_hp_total = []
# The offset after the movement is discretized is 1500 based on the original coordinates.
self.pos_delta = 1500
# Four skill types
self.SKILL_TYPE = ["obj_skill", "dir_skill", "pos_skill", "talent_skill"]

```

A.3 Map

As illustrated in the figure 6, this is an overhead view of the map. At the start of the game, the Dragon spawns in the central position of the map. Surrounding the Dragon are 20 distinct points, and each hero can choose to spawn at any one of these points.



Figure 6: Aerial view of the map.

A.4 Reset

Figure 7 presents a python example of initializing the environment. Before the game starts, it initializes various parameters such as health points of the Dragon and the number of game steps. Once the game begins, the client receives game data from the server, which provides the observation and state information for each agent.

A.5 State

Figure 8 illustrates a python example for obtaining observations and states. During each step of an episode, the following function is called to retrieve the observation and state information for each agent. This information is then used for decision-making for the next step.

As shown in Figure 9, during actual training, the observation space dimension of each agent is 6, which is a one-dimensional vector of length 6. The specific information includes six pieces of information: its own x coordinate, its own z coordinate, its own health points, x coordinate of the Dragon, z coordinate of the dragon, Dragon's health points. The state is to concatenate the observations of each agent. There are 5 agents in total, and the observation space of each agent is 6, so state is a one-dimensional vector with a length of 30.

In fact, the server returns a wealth of information. Figure 10 provides an example of all the information a hero can obtain at a specific step, mainly including two parts: hero status and skill status. Besides the agent's coordinates and its health, the information includes physical attack power, magic attack power, health recovery, cooldown reduction, skill levels, and more. This comprehensive data provides robust support for the future expansion of the environment.

```

def reset(self, if_test=False, args=None, cur_time=None):
    # Store the health points of each frame of Dragon
    self.monster_hp_total = []
    # The initial step is 0
    self._episode_steps = 0
    # Additional information returned for each frame
    self.info_re = {'win_rate': 0., 'test_win_rate': 0., 'battle_won': None, 'monster_last_hp': None}
    # Start the game, initial the game
    self.reset_game()
    .....
    # Receive the game information of the initial frame
    self.message_name, self.message_proto = self.recv_request()
    # Receive game judgment information
    if self.message_name == "FightStartReq":
        self.rsp = FightStartRsp()
    elif self.message_name == "StepFrameReq":
        self.rsp = StepFrameRsp()
        # Parse step frame request from game core
        self._parse_frame_info(self.message_proto)
    elif self.message_name == "FightOverReq":
        self.rsp = FightOverRsp()
        gameover_state = self.message_proto.gameover_state
        self.game_over = True
        # The status code returned by the game core is used to determine the end of the game
        if gameover_state == 1:
            self.game_status = NC_CONFIG["game_status"]["win"]
        elif gameover_state == 2:
            self.game_status = NC_CONFIG["game_status"]["fail"]
        elif gameover_state == 4:
            self.game_status = NC_CONFIG["game_status"]["error"]
    else:
        self.logger.warning("Warning: receiving message fails")
    # Add the health points of this frame of Dragon
    self.monster_hp_total.append(self.monster_hp)
    # Get the observations
    self.obs = self.agent_loc_np
    # State Normalization -> [-1, 1]
    self.obs = self.obs - np.mean(self.obs)
    self.obs = self.obs / np.max(np.abs(self.obs))
    return self.get_obs(), self.get_state()

```

Figure 7: Python example of environment initialization.

A.6 Actions

The action space dimension of each agent is 13, which is a one-dimensional vector with a length of 13. The specific action information includes: up, down, left, right, normal attack, skill1, skill2, skill3, skill4, left_up, right_up, right_down, left_down. The first 4 actions and the last 4 actions are the movement actions of the agent, which are moving up, moving down, moving left, moving right, moving to the upper left, moving to the upper right, moving to the lower right, moving to the upper left. The 5th to 9th actions are attack actions, respectively normal attack, skill1, skill2, skill3, and summoner skill. Normal attack can only be performed within the attack range. Both hero skills and summoner skill have cooldown time, during which the skills are unavailable. The cooldown time of skills is related to the level and equipment of the hero. The higher the level of the hero, the shorter the cooldown time of the skills. Some equipment can also reduce the cooldown time of skills.

As shown in Figure 11, before executing an action, each agent needs to query the available actions at this moment and filter out the unavailable actions. A list with a length equal to the action space, which is 13, is then returned. Each index position represents whether the action can be executed, and 0/1 represents cannot/can be executed respectively.

```

def get_obs(self):
    #Returns all agent observations in a two-dim list
    agents_obs = [self.get_obs_agent(i) for i in range(self.n_agents)]
    return agents_obs

def get_obs_agent(self, agent_id):
    return self.obs[agent_id].reshape(-1)

def get_obs_size(self):
    #Return the size of the observation
    return self.observation_space

def get_global_state(self):
    #Return Global State
    return self.obs.flatten()

def get_state(self):
    #Returns the global state
    return self.get_global_state()

def get_state_size(self):
    #Returns the size of the global state
    return self.get_obs_size() * self.n_agents

```

Figure 8: Python example for obtaining observations and states.

```

self.hero_hp: {'1': 16772, '2': 5706, '3': 8409, '4': 8743, '5': 9885}
self.monster_hp: 40000 # An int number
self.agent_loc: [
    [ 842, 2956, agenthp, 14501, -3754, monsterhp]
    [ 861, -1095, agenthp, 14501, -3754, monsterhp]
    [ 769, -4468, agenthp, 14501, -3754, monsterhp]
    [ 639, -7465, agenthp, 14501, -3754, monsterhp]
    [ 515, -10797, agenthp, 14501, -3754, monsterhp]]

```

Figure 9: Information used in training.

As shown in Figure 11, before executing directional skills, it is necessary to calculate the direction angle of the Dragon relative to the agent, and then release the skill in the direction of the Dragon.

A.7 Step

As illustrated in the figure 12, each interaction with the environment takes the actions of all agents as input and then determines whether the game is over, and parses the information returned by the server. Ultimately, it returns the overall reward, an indicator of whether the game is over, and other state information. It is important to note that the reward is calculated based on the Dragon's health points. The more health the dragon loses, the higher the reward is.

A.8 Coordinate

As shown in Figure 12, this is a python example for calculating the coordinates of an agent after it moves. Based on the action of the agent in the current time step, an offset is obtained, and the coordinates of each agent in the previous time step are added to the offset to obtain the coordinates after the action is performed. There are 8 movement actions, namely up, down, left, right, lower right, upper right, lower left, and upper left.

<pre> actor_state { config_id: 13301 runtime_id: 2 actor_type: ACTOR_HERO camp: playerCamp_1 behav_mode: State_Idle location { x: -63 y: 100 z: -5329 } hp: 2516 max_hp: 5706 values { phy_atk: 770 phy_def: 453 mgc_atk: 0 mgc_def: 282 mov_spd: 5475 atk_spd: 15800 ep: 645 max_ep: 1770 hp_recover: 54 ep_recover: 29 phy_armor_hurt: 126 mgc_armor_hurt: 0 crit_rate: 4500 crit_eff: 14000 phy_vamp: 3536 mgc_vamp: 0 cd_reduce: 0 ctrl_reduce: 0 } attack_range: 8000 attack_target: 2 } </pre>	<pre> slot_states { configId: 17100 slot_type: SLOT_SKILL_0 level: 1 usable: true cooldown: 0 cooldown_max: 980 usedTimes: 4 hitHeroTimes: 0 attack_range: 3000 } slot_states { configId:17110 slot_type: SLOT_SKILL_1 level: 1 usable: true cooldown:0 cooldown_max:6000 usedTimes: 18 hitHeroTimes: 0 attack_range: 4000 } slot_states { configId: 17120 slot_type: SLOT_SKILL_2 level: 1 usable: false cooldown: 2872 cooldown_max: 10000 usedTimes: 2 hitHeroTimes: 0 attack_range: 6500 } </pre>	<pre> slot_states { configId: 17130 slot_type: SLOT_SKILL_3 level: 1 usable: false cooldown: 0 cooldown_max: 40000 usedTimes: 0 hitHeroTimes: 0 attack_range: 10000 } slot_states { configId: 80110 level: 5 usable: true cooldown: 0 cooldown_max: 60000 usedTimes: 0 hitHeroTimes: 0 attack_range: 5000 } </pre>
---	--	---

(a) Status information example

(b) Skills information example

Figure 10: Example of all the information a hero can obtain from the environment.

A.9 Replay

After each episode, the server generates a replay file with an “abs” suffix. And there is a Windows-based player that can play these replay files. To play them, simply download the replay files and place them in the appropriate folder on the player. Figure 13 shows a screenshot of a replay, where you can see the positions, actions, health points, hero levels, skill levels of all heroes, as well as the position, actions, and health points of the Dragon. This clearly illustrates the dynamics between both sides during the match, making it easier and more intuitive for researchers to review the agents’ performance and other game information.

It is important to note that the server’s configuration files must match the corresponding configuration files in the player to ensure that the abs file plays normally.

```

def get_avail_actions(self):
    # Returns the available actions of all agents in a list
    all_actor_legal_skill = []
    for hero in self.heroes:
        if hero.actor_id == 6:
            break
    # Direction movement does not need to consider cooldown time
    hero_legal_skill = [1,1,1,1]
    # The current hero only selects legal skills
    cur_legal_skill = [1 if slot.usable == True else 0 for slot in
                      hero.skill_state.slot_states]
    hero_legal_skill.extend(cur_legal_skill)
    # Direction movement does not need to consider cooldown time
    hero_legal_skill.extend([1,1,1,1])
    all_actor_legal_skill.append(hero_legal_skill)
    return all_actor_legal_skill

def get_avail_agent_actions(self, agent_id):
    # Returns the available actions for agent_id
    return self.get_avail_actions()[agent_id]

def get_total_actions(self):
    # Returns the total number of actions an agent could ever take
    return self.action_space

```

Obtaining available actions.

```

import math

def get_angle(self, point_1=None, point_2=None):
    # Using two coordinates, calculate the angle of
    # point_2 at point_1 for the release of directional
    # skills
    x1, y1 = point_1[0], point_1[1]
    x2, y2 = point_2[0], point_2[1]

    delta_x = x2 - x1
    delta_y = y2 - y1
    angle_rad = math.atan2(delta_y, delta_x)
    angle_deg = math.degrees(angle_rad)
    # Adjust the angle to the range of 0 to 360 degrees
    angle_deg = angle_deg % 360

    return angle_deg

```

Environment interaction.

Figure 11: Python examples for different scenarios.

B Environment Modes

As shown in Table 5, this experiment includes seven different modes, each varying in hero levels, skill levels, equipment, and different health points of the Dragon. Compared to other modes, Mode (E) features five identical heroes, which reflects the situation of both homogeneous and heterogeneous. This setup highlights the diversity of the environment and underscores its potential for future expansion.

Setting	Hero level	Skill 1	Skill 2	Skill 3	Equipment	Hero composition
(A)	1	0	0	0	×	basic
(B)	4	0	0	0	×	basic
(C)	15	0	0	0	×	basic
(D)	15	6	6	3	×	basic
(E)	15	6	6	3	×	homo (Sun Wukong)
(F)	4	2	1	1	×	basic
(G)	4	2	1	1	✓	basic

Table 5: Different modes of the experiments. Table entries denote the levels of heroes and their respective three skills. The symbol × indicates absence of equipment for all heroes, while ✓ signifies all heroes possess six pre-set equipment, as determined by the game engine. When all skill levels are set to zero, it implies that the heroes are only capable of executing normal attacks. The basic hero configuration includes the five aforementioned heroes, while the homogeneous hero composition consists of five Sun Wukong for simplicity.

B.1 Game configuration

The server configuration allows for the adjustment of various parameters, including hero levels, skill levels, summoner skills, and whether equipment is worn. As shown in Figure 14a, the level of each skill of each hero can be set. For the Dragon, attributes such as health points, attack power, and defense can be modified to create different levels of task difficulty. By adjusting server configuration, a wide range of experimental modes can be created to validate various multi-agent tasks.

```

def step(self, actions, if_test=False):
    self._episode_steps+=1
    if self.message_name == "FightStartReq":
        self.send_response(self.rsp)
    elif self.message_name == "StepFrameReq":
        # Action Transition
        cmd_list, stop_game = self.act_2_cmd(actions)
        # Send action cmd
        self.rsp.cmd_list.extend(cmd_list)
        self.send_response(self.rsp)
    elif self.message_name == "FightOverReq":
        self.send_response(self.rsp)
    reward = 0.
    terminated = False
    # Two ways to judge the end of the program
    if (self._episode_steps >= self.episode_limit) or \
        ((self._episode_steps < self.episode_limit) and self.game_status==1):
        terminated = True
        self.game_over = True
    if not self.game_over:
        self.message_name, self.message_proto = self.recv_request()
        if self.message_name == "FightStartReq":
            self.rsp = FightStartRsp()
        elif self.message_name == "StepFrameReq":
            self.rsp = StepFrameRsp()
            # Parse step frame request from game core
            self._parse_frame_info(self.message_proto)
            self._print_debug_log(freq=1)
        elif self.message_name == "FightOverReq":
            self.rsp = FightOverRsp()
            gameover_state = self.message_proto.gameover_state
            self.game_over = True
        # Record the Dragon's health points for reward calculation
        self.monster_hp_total.append(self.monster_hp)
        # Obs of the next time step
        self.obs = self.agent_loc_np
        # Obs normalize -> [-1,1]
        self.obs = self.obs - np.mean(self.obs)
        self.obs = self.obs / np.max(np.abs(self.obs))
        reward = self.get_curr_reward()
        terminated = False
    else:
        # Game over
        self.controller.stop_game()
        # Record game result
        if self.game_status == 1:
            self.info_re["battle_won"] = True
        elif self.game_status == 2 or 3:
            self.info_re["battle_won"] = False
        # Return the Dragon's health points of current frame
        self.info_re["monster_last_hp"] = self.monster_hp_total[-1]
    return reward, terminated, self.info_re

def get_curr_reward(self):
    # Return rewards based on the health points of the Dragon
    return (self.monster_hp_total[-1] - self.monster_hp_total[-2]) * -0.01

```

Environment interaction.

```

def position_change(self, agent_id, act):
    dst_pos=VInt3()
    # Get the x, z coordinate of the hero at the previous time step
    last_loc_x = self.agent_loc_np[agent_id][0]
    last_loc_z = self.agent_loc_np[agent_id][1]
    if act==0:
        # Right
        dst_pos.x = last_loc_x + self.pos_delta
        dst_pos.z = last_loc_z
        dst_pos.y = 100
    elif act==1:
        # Left
        dst_pos.x = last_loc_x - self.pos_delta
        dst_pos.z = last_loc_z
        dst_pos.y = 100
    elif act==2:
        # Up
        dst_pos.x = last_loc_x
        dst_pos.z = last_loc_z + self.pos_delta
        dst_pos.y = 100
    elif act==3:
        # Down
        dst_pos.x = last_loc_x
        dst_pos.z = last_loc_z - self.pos_delta
        dst_pos.y = 100
    elif act==9:
        # Lower right
        dst_pos.x = last_loc_x + self.pos_delta
        dst_pos.z = last_loc_z - self.pos_delta
        dst_pos.y = 100
    elif act==10:
        # Upper right
        dst_pos.x = last_loc_x + self.pos_delta
        dst_pos.z = last_loc_z + self.pos_delta
        dst_pos.y = 100
    elif act==11:
        # Upper left
        dst_pos.x = last_loc_x - self.pos_delta
        dst_pos.z = last_loc_z + self.pos_delta
        dst_pos.y = 100
    elif act==12:
        # Lower left
        dst_pos.x = last_loc_x - self.pos_delta
        dst_pos.z = last_loc_z - self.pos_delta
        dst_pos.y = 100
    # Boundary processing
    if dst_pos.x > 28700:
        dst_pos.x = 28700
    elif dst_pos.x < -28700:
        dst_pos.x = -28700
    if dst_pos.z > 9000:
        dst_pos.z = 9000
    elif dst_pos.z < -16800:
        dst_pos.z = -16800
    return dst_pos

```

Coordinates Calculation after moving.

Figure 12: Python examples for environment interaction and calculating the coordinates after moving.

Figure 14b shows an example of a client configuration, which primarily includes hero ID information that must match the corresponding hero ID information on the server. After updating the hero of the server configuration, you need to make the same changes to the hero in the client configuration. Refer to the hero order in the server configuration.

B.2 Parameter configuration of 5 heroes and Dragon

When a hero's level changes, their skills also change accordingly, affecting attributes such as cooldown time, attack power, and recovery. The table 6 below list various attribute values for heroes and the Dragon at different levels. It is evident that higher hero levels result in significantly increased values for attributes like health points and attack power.

As shown in Table 7, there are 8 summoner skills in total, each with its own specific application scenarios. For the sake of simplicity in our experiments, we have standardized all heroes' summoner skills to "Berserk". However, in future



Figure 13: Example of replay screen.

studies, it will be possible to assign suitable summoner skills to each hero based on their individual characteristics, which will increase the diversity of the environment.

B.3 Equipment

As shown in Table 5, for Mode (G), each hero wears equipment that significantly enhances their abilities. For the sake of experimental convenience, we provide each hero with six pieces of equipment, as detailed in Table 8. In future studies, the types and quantities of equipment each hero carries can be adjusted to create a more diverse environment, thereby accommodating a wider range of task requirements.

C Algorithms and Hyperparameters

In our experiments, we use 6 different MARL algorithms, including QMIX, VDN, QPLEX, QATTEN, MAPPO and HAPPO. These algorithms use different methods and strategies to optimize the learning process of agents, aiming to solve the decision-making problem of multiple agents in complex dynamic environments.

C.1 QMIX

QMIX can be thought of as an extension of DQN to the Dec-POMDP setting. The joint optimal action is found by forcing the joint Q to adhere to the individual global max (IGM) principle, which states that the joint action can be found by maximising individual agents' Q_i functions:

$$\arg \max_a Q(s, \tau, a) = \begin{cases} \arg \max_a Q_1(\tau_1, a_1) \\ \arg \max_a Q_2(\tau_2, a_2) \\ \vdots \\ \arg \max_a Q_n(\tau_n, a_n) \end{cases}$$

This central Q is trained to regress to a target $r + \gamma \hat{Q}(s, \tau, a)$ where \hat{Q} is a target network that is updated slowly. The central Q estimate is computed by a mixing network, whose weights are conditioned on the state, which takes as input the utility function Q_i of the agents. The weights of the mixing network are restricted to be positive, which enforces the IGM principle by ensuring the central Q is monotonic in each Q_i . The relevant hyperparameters are shown in Table C.2. To be mentioned, these are the values in the corresponding configuration file in Pymarl. Mac is the code responsible for marshalling inputs to the neural networks, learner is the code used for learning and runner determines whether experience is collected in serial or parallel.


```

{
  "Hero": [
    {
      "AgentID": 1,
      "HeroID": 11301,
      "Camp": 1,
      "HeroLevel": 15,
      "HeroSkills": { "SkillOne": 6, "SkillTwo": 6, "SkillThree": 3 },
      "SummonerSpells": 80110,
      "Equipment": 0
    },
    {
      "AgentID": 2,
      "HeroID": 13301,
      "Camp": 1,
      "HeroLevel": 15,
      "HeroSkills": { "SkillOne": 6, "SkillTwo": 6, "SkillThree": 3 },
      "SummonerSpells": 80110,
      "Equipment": 0
    },
    {
      "AgentID": 3,
      "HeroID": 14101,
      "Camp": 1,
      "HeroLevel": 15,
      "HeroSkills": { "SkillOne": 6, "SkillTwo": 6, "SkillThree": 3 },
      "SummonerSpells": 80110,
      "Equipment": 0
    },
    {
      "AgentID": 4,
      "HeroID": 16701,
      "Camp": 1,
      "HeroLevel": 15,
      "HeroSkills": { "SkillOne": 6, "SkillTwo": 6, "SkillThree": 3 },
      "SummonerSpells": 80110,
      "Equipment": 0
    },
    {
      "AgentID": 5,
      "HeroID": 12801,
      "Camp": 1,
      "HeroLevel": 15,
      "HeroSkills": { "SkillOne": 6, "SkillTwo": 6, "SkillThree": 3 },
      "SummonerSpells": 80110,
      "Equipment": 0
    }
  ],
  "Monster": {
    "AgentID": 0,
    "MonsterID": 10122,
    "MonsterHP": 40000,
    "MonsterAttack": 600,
    "MonsterDefense": 1500
  }
}

```

(a) Example of server configuration.

```

{
  "game_status": {
    "error": 0,
    "win": 1,
    "fail": 2,
    "overtime": 3,
    "running": 4,
    "pending": 5
  },
  "hero_id": {
    "1": "zhuangzhou",
    "2": "direnjie",
    "3": "diaochan",
    "4": "sunwukong",
    "5": "caocao"
  },
  "config_id": {
    "zhuangzhou": 11301,
    "direnjie": 13301,
    "diaochan": 14101,
    "sunwukong": 16701,
    "caocao": 12801
  }
}

```

(b) Example of client configuration.

Figure 14: Examples of server and client configurations.

C.2 VDN

VDN (Value Decomposition Networks) decomposes the joint action-value function $Q(s, \mathbf{a})$ into a sum of individual value functions:

$$Q(s, \mathbf{a}) = \sum_{i=1}^n Q_i(s_i, a_i)$$

This approach allows each agent to independently maximize its own value function, which simplifies the training process. The individual value functions Q_i are conditioned only on the local observations s_i and actions a_i of each agent, promoting decentralization. VDN is particularly useful in scenarios where multiple agents need to work together to achieve a common goal, such as in team-based games or collaborative robotics. The simplicity of VDN makes it easy to implement and extend. The relevant hyperparameters are shown in Table C.2.

Name	Di Renjie	Diao Chan	Sun Wukong	Zhuang Zhou	Cao Cao	Dragon
ID	13301	14101	16701	11301	12801	12202
Type	Hero	Hero	Hero	Hero	Hero	Monster
Camp	1	1	1	1	1	2
Hero Level	15 / 3	15 / 3	15 / 3	15 / 3	15 / 3	
Maximum health points	5706 / 3594	5609 / 3389	7843 / 5023	7738 / 3802	8185/4753	10000
Physical attack	449 / 281	279 / 183	370 / 325	296 / 188	377 / 221	600
Physical defense	333 / 129	325 / 121	374 / 134	486 / 198	412 / 221	600
Magic attack	0	126	0	0	0	204
Magic defense	162 / 66	162 / 66	162 / 66	162 / 66	162 / 66	600
Movement speed	3607	3500	3800	3900	3807	3500
Attack speed bonus	2800 / 400	1400 / 200	1400 / 200	1400 / 200	1423 / 1223	0
Maximum potential energy	1770 / 570	1960 / 700	1790 / 620	1694 / 602	0	0
Health points recover	54 / 42	71 / 47	78 / 54	94 / 58	96 / 60	0
Potential energy recover	29 / 17	31 / 19	29 / 17	29 / 17	0	0
Physical armor hurt	126	0	126	0	126	0
Magic armor hurt	0	42	0	0	0	0
Critical hit rate	0	0	2008	0	0	0
Critical hit effect	10000	10000	5042	10000	10000	0
Physical vamp	0	0	0	0	0	0
Magic vamp	0	0	0	0	0	0
Cooldown time reduction	0	0	0	0	0	0
Control reduce	0	0	0	0	0	0
Attack range	8000	6000	3000	2800	2800	3000

Table 6: Detailed parameter configuration table of heroes and Dragon when the heroes are at level 15 and level 3. To be mentioned, if one attribute of a hero changes when leveling up, we report the respective value at level 15 and 3.

Hyperparameters	Value
Action Selector	epsilon greedy
ϵ Start	1.0
ϵ Finish	0.05
ϵ Anneal Time	100000
Runner	episode
Batch Size Run	1
Buffer Size	5000
Batch Size	64
Optimizer	Adam
t_{max}	1500000
Target Update Interval	200
Mac	n_mac
Agent	n_rnn
Agent Output Type	q
Learner	nq_learner
Mixer	qmix
Mixing Embed Dimension	32
Hypernet Embed Dimension	64
Learning Rate	0.001
td_lambda	0.6
q_lambda	False

Hyperparameters	Value
Action Selector	epsilon greedy
ϵ Start	1.0
ϵ Finish	0.05
ϵ Anneal Time	100000
Runner	episode
Batch Size Run	1
Buffer Size	5000
Batch Size	64
Optimizer	Adam
t_{max}	1500000
Target Update Interval	200
Mac	n_mac
Agent	n_rnn
Agent Output Type	q
Learner	nq_learner
Mixer	vdn
Mixing Embed Dimension	32
Hypernet Embed Dimension	64
Learning Rate	0.001
td_lambda	0.6
q_lambda	False

Table 9: Hyperparameters used for QMIX experiments. Table 10: Hyperparameters used for VDN experiments.

Summoner skill name	Corresponding id	Cooldown time	Introduction
Sprint	80109	90s	Increases movement speed by 30% for 10 seconds. When activated, removes the slowing effect on the player, reduces the slowing effect by 50% during sprinting, and increases movement speed by an additional 20% when out of combat.
Heal	80102	120s	Restore 15% of your own and nearby teammates' health, and increase nearby friendly forces' movement speed by 15% for 2 seconds.
Execute	80108	60s	Immediately causes true damage to nearby enemy heroes equal to 14% of their lost health.
Berserk	80110	60s	Increases damage by 10%, toughness by 15%, physical vamp and magic vamp by 20% for 7 seconds
Stun	80103	90s	Stuns all nearby enemies for 0.75 seconds and slows them down for 1 second.
Purify	80107	120s	Removes all negative and control effects on the player and makes them immune to control for 1.5 seconds.
Weaken	80121	90s	Reduces nearby enemy damage by 25% and increases your own damage reduction rate by 20% for 4 seconds.
Flash	80115	120s	Move a certain distance in a specified direction.

Table 7: Introduction to summoner skills.

Name	Equipment1	Equipment2	Equipment3	Equipment4	Equipment5	Equipment6
ZhuangZhou	Boots of Resistance	Guardian's Glory	Red Lotus Cape	Ominous Premonition	Succubus Cloak	Overlord's Platemail
Di Renjie	Boots of Dexterity	Doomsday	Endless Edge	Sparkforged Dagger	Bloodweeper	Dawn Harvester
Diao Chan	Boots of Tranquility	Book of Blood	Mask of Pain	Glacial Buckler	Eye of the Phoenix	Savant's Wrath
Sun Wukong	Boots of Dexterity	Endless Edge	Master Sword	Muramasa	Claves Sancti	Nightmare
Cao Cao	Boots of Resistance	Spikemail	Nightmare	Claves Sancti	Eye of the Phoenix	Sword of Glory

Table 8: Equipment information for each hero.

C.3 QPLEX

QPLEX extends the QMIX framework by using a duplex dueling network architecture. This architecture splits the Q function into two streams: an advantage stream and a value stream. The advantage stream estimates the relative value of each action, and the value stream estimates the overall value of the state. The final Q value is computed by combining these two streams:

$$Q(s, \tau, a) = V(s, \tau) + \left(A(\tau, a) - \frac{1}{|A|} \sum_{a'} A(\tau, a') \right)$$

By separating the representation of state value and action advantage, QPLEX can more effectively represent complex interactions among agents. The relevant hyperparameters are shown in Table C.4.

C.4 QATTEN

QATTEN incorporates attention mechanisms into multi-agent Q-learning. It uses self-attention to compute a weighted representation of each agent's information and cross-attention to capture the interactions between agents. The attention mechanisms allow QATTEN to dynamically adjust the importance of different agents' information, which helps in coordinating joint actions:

$$Q(s, \tau, a) = \sum_{i=1}^n \alpha_i Q_i(\tau_i, a_i)$$

where α_i are attention weights computed based on the agents' states and actions. The technique can improve coordination among agents, leading to better performance in complex tasks. The relevant hyperparameters are shown in Table C.4.

Hyperparameters	Value	Hyperparameters	Value
Action Selector	epsilon greedy	Action Selector	epsilon greedy
ϵ Start	1.0	ϵ Start	1.0
ϵ Finish	0.05	ϵ Finish	0.05
ϵ Anneal Time	100000	ϵ Anneal Time	100000
Runner	episode	Runner	episode
Batch Size Run	1	Batch Size Run	1
Buffer Size	5000	Buffer Size	5000
Batch Size	64	Batch Size	64
Optimizer	Adam	Optimizer	Adam
t_{max}	1500000	t_{max}	1500000
Target Update Interval	200	Target Update Interval	200
Agent Output Type	q	Mac	n_mac
Learner	dmaq_qatten_learner	Agent	n_rnn
double_q	True	Agent Output Type	q
Mixer	dmaq	Learner	nq_learner
Mixing Embed Dimension	32	Mixer	qatten
Hypernet Embed Dimension	64	Learning Rate	0.001
adv_hypernet_layers	2	td_lambda	0.6
adv_hypernet_embed	64	n_query_embedding_layer1	64
Learning Rate	0.001	n_query_embedding_layer2	32
td_lambda	0.6	n_key_embedding_layer1	32
num_kernel	4	n_head_embedding_layer1	64
is_minus_one	True	n_head_embedding_layer2	4
weighted_head	True	n_attention_head	4
is_adv_attention	True	n_constraint_value	32
is_stop_gradient	True	type	weighted
		agent_own_state_size	False

Table 11: Hyperparameters used for QPLEX experiments. Table 12: Hyperparameters used for QATTEN experiments.

C.5 MAPPO

MAPPO (Multi-Agent Proximal Policy Optimization) adapts the single-agent PPO algorithm to the multi-agent setting. It uses a centralized value function to estimate the joint value of all agents’ states and actions while maintaining decentralized policies for each agent. MAPPO optimizes a clipped surrogate objective to ensure stable updates:

$$L^{CLIP}(\theta) = \mathbb{E}_t \left[\min \left(\frac{\pi_\theta(a_t|s_t)}{\pi_{\theta_{old}}(a_t|s_t)} \hat{A}_t, \text{clip} \left(\frac{\pi_\theta(a_t|s_t)}{\pi_{\theta_{old}}(a_t|s_t)}, 1 - \epsilon, 1 + \epsilon \right) \hat{A}_t \right) \right]$$

This helps in achieving stable and efficient learning in multi-agent environments. The relevant hyperparameters are shown in Table 13.

C.6 HAPPO

HAPPO (Heterogeneous-Agent Proximal Policy Optimization) extends MAPPO by allowing for heterogeneous agents with different observation spaces, action spaces, and network architectures. HAPPO maintains a centralized critic for the joint value function but uses individual actor networks for each agent. The objective function for HAPPO is similar to MAPPO, ensuring stable updates while allowing for diverse agent capabilities:

$$L^{HAPPO}(\theta) = \sum_{i=1}^n \mathbb{E}_t \left[\min \left(\frac{\pi_\theta^i(a_t^i|s_t^i)}{\pi_{\theta_{old}}^i(a_t^i|s_t^i)} \hat{A}_t^i, \text{clip} \left(\frac{\pi_\theta^i(a_t^i|s_t^i)}{\pi_{\theta_{old}}^i(a_t^i|s_t^i)}, 1 - \epsilon, 1 + \epsilon \right) \hat{A}_t^i \right) \right]$$

HAPPO allows for more flexible and scalable multi-agent learning by accommodating heterogeneity among agents. The relevant hyperparameters are shown in Table 13.

D Characteristics and limitations

Aiming to contribute to MARL research, Mini Honor of Kings environment offers several notable advantages. Firstly, it is built on a highly optimized simulator, ensuring efficient performance even for researchers with limited computing

Hyperparameters	MAPPO	HAPPO
use_valuenorm	True	True
Activation	ReLU	ReLU
initialization_method	orthogonal	orthogonal
use_naive_recurrent_policy	False	False
data_chunk_length	10	10
weight_decay	0	0
std_y_coef	0.5	0.5
value_loss_coef	1	1
max_grad_norm	10.0	10.0
GAE lambda	0.95	0.95
use_policy_active_masks	True	True
action_aggregation_	prod	prod
accept_ratio	0.5	0.5
use_proper_time_limits	True	True
use_feature_normalization	True	True
Gain	0.01	0.01
num_GRU_layers	1	1
optim_eps	1e-5	1e-5
std_x_coef	1	1
use_clipped_value_loss	True	True
use_max_grad_norm	True	True
Use GAE	True	True
use_huber_loss	True	True
huber_delta	10.0	10.0
hidden_sizes	[128,128]	[128,128]
Agent	n_rnn	n_rnn
Learner	mappo_learner	happo_learner
num_env_steps	1500000	1500000
torch_threads	1	1
ppo_epoch	5	5
clip_param	0.2	0.2
entropy_coef	0.01	0.01
backtrack_coef	0.8	0.8
use_linear_lr_decay	False	False
actor_lr	5e-4	5e-4
critic_lr	5e-4	5e-4
critic_epoch	5	5
actor_mini_batch	1	1
critic_mini_batch	1	1
Gamma	0.99	0.99
kl_threshold	0.005	0.005

Table 13: Hyperparameters used for MAPPO and HAPPO experiments.

resources, and is a particularly lightweight environment. Secondly, Honor of Kings is a popular game with many people playing and familiar with it. Mini Honor of Kings, based on the game mechanism of Honor of Kings and can simulate various complex tasks and challenging scenarios, which helps researchers quickly test and verify the performance of different algorithms in MARL tasks. Furthermore, it includes a flexible map editor that allows researchers to customize the environment and design diverse scenarios, including modifying the hero’s level, skills, whether to possess equipment, and health points of the Dragon to meet different research needs. Additionally, in the experimental evaluations, all reinforcement learning algorithms performed worse than the simple rule-based approach, indicating that there is still considerable potential for improvement and optimization in reinforcement learning. This environment, therefore, holds significant research potential.

The main limitation of Mini Hok environment is that only heroes can be controlled by the RL agent. The Dragon is controlled by simple rules with few modifiable attributes, making this environment unsuitable for adversarial scenarios.

References

- [1] Lucian Busoniu, Robert Babuska, and Bart De Schutter. A comprehensive survey of multiagent reinforcement learning. *IEEE Transactions on Systems, Man, and Cybernetics*, 38(2):156–172, 2008.
- [2] Karl Tuyls and Gerhard Weiss. Multiagent learning: Basics, challenges, and prospects. *AI Magazine*, 33(3):41–41, 2012.
- [3] David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. Mastering the game of go with deep neural networks and tree search. *Nature*, 529(7587):484–489, 2016.
- [4] Oriol Vinyals, Igor Babuschkin, Wojciech M Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H Choi, Richard Powell, Timo Ewalds, Petko Georgiev, et al. Grandmaster level in starcraft II using multi-agent reinforcement learning. *Nature*, 575(7782):350–354, 2019.
- [5] Christopher Berner, Greg Brockman, Brooke Chan, Vicki Cheung, Przemysław Debiak, Christy Dennison, David Farhi, Quirin Fischer, Shariq Hashme, Chris Hesse, et al. Dota 2 with large scale deep reinforcement learning. *arXiv preprint arXiv:1912.06680*, 2019.
- [6] Yongcan Cao, Wenwu Yu, Wei Ren, and Guanrong Chen. An overview of recent progress in the study of distributed multi-agent coordination. *IEEE Transactions on Industrial Informatics*, 9(1):427–438, 2012.
- [7] Tong Wu, Pan Zhou, Kai Liu, Yali Yuan, Xiumin Wang, Huawei Huang, and Dapeng Oliver Wu. Multi-agent deep reinforcement learning for urban traffic light control in vehicular networks. *IEEE Transactions on Vehicular Technology*, 69(8):8243–8256, 2020.
- [8] Abubakr O Al-Abbasi, Arnob Ghosh, and Vaneet Aggarwal. Deeppool: Distributed model-free algorithm for ride-sharing using deep reinforcement learning. *IEEE Transactions on Intelligent Transportation Systems*, 20(12):4714–4727, 2019.
- [9] Kaiqing Zhang, Zhuoran Yang, and Tamer Başar. Decentralized multi-agent reinforcement learning with networked agents: recent advances. *Frontiers of Information Technology & Electronic Engineering*, 22(6):802–814, 2021.
- [10] Nolan Bard, Jakob N Foerster, Sarath Chandar, Neil Burch, Marc Lanctot, H Francis Song, Emilio Parisotto, Vincent Dumoulin, Subhodeep Moitra, Edward Hughes, et al. The hanabi challenge: A new frontier for ai research. *Artificial Intelligence*, 280:103216, 2020.
- [11] Jordan Terry, Benjamin Black, Nathaniel Grammel, Mario Jayakumar, Ananth Hari, Ryan Sullivan, Luis S Santos, Clemens Dieffendahl, Caroline Horsch, Rodrigo Perez-Vicente, et al. Pettingzoo: Gym for multi-agent reinforcement learning. *Advances in Neural Information Processing Systems (NeurIPS)*, 34:15032–15043, 2021.
- [12] Mikayel Samvelyan, Tabish Rashid, Christian Schroeder De Witt, Gregory Farquhar, Nantas Nardelli, Tim GJ Rudner, Chia-Man Hung, Philip HS Torr, Jakob Foerster, and Shimon Whiteson. The starcraft multi-agent challenge. *CoRR*, abs/1902.04043, 2019.
- [13] Karol Kurach, Anton Raichuk, Piotr Stańczyk, Michał Zajac, Olivier Bachem, Lasse Espeholt, Carlos Riquelme, Damien Vincent, Marcin Michalski, Olivier Bousquet, et al. Google research football: A novel reinforcement learning environment. In *AAAI conference on artificial intelligence (AAAI)*, volume 34, pages 4501–4510, 2020.
- [14] Hua Wei, Jingxiao Chen, Xiyang Ji, Hongyang Qin, Minwen Deng, Siqin Li, Liang Wang, Weinan Zhang, Yong Yu, Liu Linc, et al. Honor of kings arena: an environment for generalization in competitive reinforcement learning. *Advances in Neural Information Processing Systems (NeurIPS)*, 35:11881–11892, 2022.
- [15] Lin Liu, Jianzhun Shao, Xinkai Chen, Yun Qu, Boyuan Wang, Zhenbin Ye, Yuexuan Tu, Hongyang Qin, Yang Jun Feng, Lin Lai, Yuanqin Wang, Meng Meng, Wenjun Wang, Xiyang Ji, QIANG FU, Lanxiao Huang, Minwen Deng, Yang Wei, Houqiang Li, Wengang Zhou, Ning Xie, Xiangyang Ji, Lvfang Tao, Lin Yuan, Juchao Zhuo, YANG GUANG, and Deheng Ye. Hok3v3: an environment for generalization in heterogeneous multi-agent reinforcement learning, 2023.
- [16] Marc Lanctot, Edward Lockhart, Jean-Baptiste Lespiau, Vinicius Zambaldi, Satyaki Upadhyay, Julien Pérolat, Sriram Srinivasan, Finbarr Timbers, Karl Tuyls, Shayegan Omidshafiei, et al. Openspiel: A framework for reinforcement learning in games. *arXiv preprint arXiv:1908.09453*, 2019.
- [17] Jianhao Wang, Zhizhou Ren, Terry Liu, Yang Yu, and Chongjie Zhang. Qplex: Duplex dueling multi-agent q-learning. In *International Conference on Learning Representations (ICLR)*, pages 1–16, 2020.
- [18] Chao Yu, Akash Velu, Eugene Vinitzky, Jiaxuan Gao, Yu Wang, Alexandre Bayen, and Yi Wu. The surprising effectiveness of ppo in cooperative multi-agent games. *Advances in Neural Information Processing Systems (NeurIPS)*, 35:24611–24624, 2022.

- [19] Jakub Grudzien Kuba, Ruiqing Chen, Muning Wen, Ying Wen, Fanglei Sun, Jun Wang, and Yaodong Yang. Trust region policy optimisation in multi-agent reinforcement learning. In *International Conference on Learning Representations (ICLR)*, 2021.
- [20] Christian Schroeder de Witt, Bei Peng, Pierre-Alexandre Kamienny, Philip Torr, Wendelin Böhmer, and Shimon Whiteson. Deep multi-agent reinforcement learning for decentralized continuous cooperative control. *arXiv preprint arXiv:2003.06709*, 19, 2020.
- [21] Emanuel Todorov, Tom Erez, and Yuval Tassa. Mujoco: A physics engine for model-based control. In *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 5026–5033. IEEE, 2012.
- [22] Oriol Vinyals, Timo Ewalds, Sergey Bartunov, Petko Georgiev, Alexander Sasha Vezhnevets, Michelle Yeo, Alireza Makhzani, Heinrich Küttler, John Agapiou, Julian Schrittwieser, et al. Starcraft ii: A new challenge for reinforcement learning. *arXiv preprint arXiv:1708.04782*, 2017.
- [23] Jian Hu, Siyang Jiang, Seth Austin Harding, Haibin Wu, and Shih wei Liao. Rethinking the implementation tricks and monotonicity constraint in cooperative multi-agent reinforcement learning. 2021.
- [24] Peter Sunehag, Guy Lever, Audrunas Gruslys, Wojciech Marian Czarnecki, Vinicius Zambaldi, Max Jaderberg, Marc Lanctot, Nicolas Sonnerat, Joel Z Leibo, Karl Tuyls, et al. Value-decomposition networks for cooperative multi-agent learning based on team reward. In *International Conference on Autonomous Agents and MultiAgent Systems (AAMAS)*, pages 2085–2087, 2018.
- [25] Tabish Rashid, Mikayel Samvelyan, Christian Schroeder, Gregory Farquhar, Jakob Foerster, and Shimon Whiteson. Qmix: Monotonic value function factorisation for deep multi-agent reinforcement learning. In *International Conference on Machine Learning (ICML)*, pages 4295–4304. PMLR, 2018.
- [26] Yaodong Yang, Jianye Hao, Ben Liao, Kun Shao, Guangyong Chen, Wulong Liu, and Hongyao Tang. Qatten: A general framework for cooperative multiagent reinforcement learning. In *arXiv preprint arXiv:2002.03939*, pages 1–14, 2020.