
VCR: Visual Caption Restoration

Tianyu Zhang^{1,2,3*}, Suyuchen Wang^{1,3*}, Lu Li⁴, Ge Zhang⁵,
Perouz Taslakian², Sai Rajeswar², Jie Fu⁶, Bang Liu^{1,3}, Yoshua Bengio^{1,3}
¹ Mila, Québec AI Institute ² ServiceNow Research ³ Université de Montréal
⁴ University of Pennsylvania ⁵ University of Waterloo ⁶ HKUST
{tianyu.zhang, yoshua.bengio}@mila.quebec
{suyuchen.wang, bang.liu}@umontreal.ca
luli1@upenn.edu ge.zhang@uwaterloo.ca
{perouz.taslakian, sai.rajeswar}@servicenow.com jiefu@ust.hk

Abstract

We introduce Visual Caption Restoration (VCR), a novel vision-language task that challenges models to accurately restore partially obscured texts using pixel-level hints within images. This task stems from the observation that text embedded in images is intrinsically different from common visual elements and natural language due to the need to align the modalities of vision, text, and text embedded in images. While numerous works have integrated text embedded in images into visual question-answering tasks, approaches to these tasks generally rely on optical character recognition or masked language modeling, thus reducing the task to mainly text-based processing. However, text-based processing becomes ineffective in VCR as accurate text restoration depends on the combined information from provided images, context, and subtle cues from the tiny exposed areas of masked texts. We develop a pipeline to generate synthetic images for the VCR task using image-caption pairs, with adjustable caption visibility to control the task difficulty. With this pipeline, we construct a dataset for VCR called VCR-WIKI using images with captions from Wikipedia, comprising 2.11M English and 346K Chinese entities in both *easy* and *hard* configurations. Our results reveal that current vision language models significantly lag behind human performance in the VCR task, and merely fine-tuning the models on our dataset does not lead to notable improvements. We release VCR-WIKI and the data construction code to facilitate future research.

1 Introduction

Recent advancements in large language models, such as ChatGPT [50, 49] and Llama [58], have spurred significant interest and progress in the field of vision-language models. With models like GPT-4V [49] and Llava [37, 38, 39] blending textual and visual information, the intersection of computer vision and natural language processing has become a vibrant research frontier. These integrated models aim to leverage the potential of vision and language modalities to understand and interpret multimedia content more effectively.

Amidst this evolving landscape, we introduce Visual Caption Restoration (VCR), a novel vision-language task designed to challenge existing models uniquely. VCR challenges these models to restore obscured texts within images, a task that demands an intricate synthesis of text, vision, and text embedded in the



Figure 1: An example of the VCR task.

*Equal contribution.

image. The VCR task is grounded in two key insights: (1) text embedded within images, with its characteristics different from common visual elements, represents a distinct modality that requires careful alignment of vision, textual data, and the structure of written texts, and (2) neuroscience findings that suggest that humans are proficient in recognizing partially occluded objects through sophisticated visual and cognitive processes [57, 51, 59, 16, 34]. By leveraging these insights, VCR seeks to explore how well vision-language models can handle texts embedded within images, aligning visual elements and natural language to mimic human-like multi-modal understanding and recognition.

The Visual Question Answering (VQA) task [3, 61, 46, 54] has been a popular benchmark in assessing how well models align and interpret visual and linguistic information. Traditional VQA approaches, however, predominantly focus on direct queries about visible elements in images and do not address the nuanced relationship between textual content embedded within the image and the overall image context. This gap underscores the limited capabilities of current models in processing integrated visual-textual data, particularly when the textual component, which plays a critical role, is partially obscured or altered.

To address these limitations, our VCR task builds on the premise that effective text restoration from images requires an integrated understanding beyond current VQA benchmarks' capabilities. For instance, in extreme cases, models rely on existing Optical Character Recognition (OCR) system to extract text from documents [54, 7]. The extracted text is then used as context for generating answers, without a true semantic alignment between the text and the visual elements of the document. This approach, while effective in simple scenarios, falls short in more complex settings where text is intricately woven into the visual narrative of the image.

To develop the VCR task, in this work, we introduce a pipeline for generating synthetic images that allows for manipulation of the visibility of the textual components of the image. This not only enhances the challenge posed by the task, but also provides a scalable way to adjust task difficulty. The resulting dataset, VCR-WIKI, comprises 2.11M English data and 346K Chinese data sourced from Wikipedia, featuring captions in both languages across 'easy' and 'hard' difficulty levels. Our evaluations indicate that existing vision-language models significantly underperform compared to human benchmarks, underscoring the need for novel model architectures and training paradigms specifically geared towards this complex intermodal alignment.

By releasing VCR-WIKI and the accompanying dataset construction code, we aim to stimulate further research in this area, encouraging the development of models that can more adeptly navigate the nuanced landscape of the restoration of text embedded in images. This effort aligns with the broader goal of advancing vision-language models to achieve deeper, more intuitive understanding of multimedia content, bridging the gap between human and machine perception. Code is available at <https://github.com/tianyu-z/VCR>.

Contributions The main contributions of this paper are:

- C1** Introduce the Visual Caption Restoration (VCR) task to challenge vision-language models to restore occluded texts in images.
- C2** Develop a pipeline for generating synthetic images with embedded text that allows for adjusting visibility of such text, thus providing a rich testing environment for VCR.
- C3** Create and release VCR-WIKI, a dataset with multilingual captions from Wikipedia images, designed to benchmark vision-language models (VLMs) on text restoration tasks.
- C4** Conduct empirical evaluations showing significant gaps between current models and human performance on the VCR task. This highlights the effectiveness of VCR for assessing advancements in VLMs, and underscores the necessity for innovative model architectures and training techniques.

2 VCR Task Description

In this section, we compare the VCR task with other existing tasks and aim to answer the following questions:

- Q1** What is the difference between VCR and other visual reconstruction tasks?
- Q2** Why should we care about VCR?

For better clarity, we define *text embedded in image (TEI)* as text incorporated within the image. The term *visual image (VI)* pertains to the portion of the image that excludes the text embedded in the image. The *string text (ST)* is not part of the image itself, but is associated with it as a distinct textual element. It is usually the question prompt in the form of natural language, e.g., ‘What are the covered texts in the image? Please only guess the covered texts without outputting an explanation.’. Consequently, an element of a Visual Caption Restoration (VCR) task can be expressed as $(ST, (VI, TEI))$, where ST is represented as string and both VI and TEI are presented in image form. This notation does not imply that VI and TEI can be physically separated into two distinct image components. Instead, this definition is adopted merely to facilitate a clearer explanation of the concepts involved. Please refer to Figure 2 for an illustration of VI , TEI , and ST .

A1 Existing tasks that are similar to VCR are the tasks of VQA and OCR. VQA takes as input images and a natural language question, and generates a free-form response. As the ground-truth response is not unique, evaluating VQA poses a major challenge. In contrast to VQA, OCR is a task where the ground truth responses are unique: OCR takes as input complete characters in image form and outputs a string representing the characters in the image, without considering the image context. Models pretrained with OCR are able to retrieve texts embedded in the input image, even if they are incomplete or vague. However, as the vagueness or occlusion of the textual components of the image increases, retrieving the original text without considering the remaining non-textual image context becomes harder, and OCR is no longer a good approach. VCR bridges the gap between OCR and VQA: it reconstructs the unique text found in the image while also considering the visual context of the rest of the image.

Figure 2 is an example VCR task in the hard mode, and Figure 1 shows an example VCR task in the easy mode. Although humans can still fill the blanks easily in the hard mode, it is nearly impossible for models with only OCR capabilities to recover the covered texts without using the context. This is because the pixel-level hints of single characters no longer correspond to a unique solution.

A2 The proposed VCR task is significant in two aspects.

The first aspect of importance stems from neuroscience discoveries about human cognitive abilities to recognize partially occluded objects [16, 34]. Although existing models can recognize objects and texts in images, they often struggle with the complexity of occluded objects due to significant information loss in the images. In contrast, humans excel at filling in missing information using a combination of low-level visual processing and high-level cognitive functions, such as those managed by the prefrontal cortex. This cortical area is known to handle complex cognitive processes like decision-making and memory retention, essential for integrating fragmented visual inputs into coherent objects. We believe that the occlusion restoration task serves as a probe that can effectively distinguish a model’s low-level recognition and high-level cognition involving reasoning. Besides, understanding these neural mechanisms can inspire new algorithms capable of mimicking human-like perception and interpretation in dynamic, real-world conditions where occlusion is common.

The second aspect underscores the unique challenge presented by the VCR task, distinguishing it significantly from existing benchmarks like traditional VQA or occluded object restoration task. By occluding texts instead of common visual objects, VCR targets the models’ text-image alignment capability, which is one of the major challenges for vision-language models. VCR mandates that models align textual and visual information in a manner that replicates human-like understanding involving the utilization of both textual and visual clues. This task necessitates a deep integration of visual (VI), embedded textual (TEI), and contextual interpretation across modalities, pushing beyond simple text extraction as performed in OCR tasks. In OCR, the focus is primarily on recognizing visible characters, often without a need to understand their contextual relevance within the image narrative. In contrast, VCR introduces complexity by requiring the model to use available partial texts and the visual context collaboratively to reconstruct the obscured content accurately. This not only tests the model’s ability to process TEI - VI modalities effectively, but also challenges it to maintain internal consistency, akin to human cognitive processes where context and visual clues guide understanding and response. Besides, the difficulty of the task can be adjusted by altering the extent of text occlusion, offering a scalable and flexible framework for systematically enhancing model capabilities in text-visual alignment and semantic comprehension. This rigorous testing ground will help evolve vision-language models to better grasp the nuanced interplay between text and imagery.

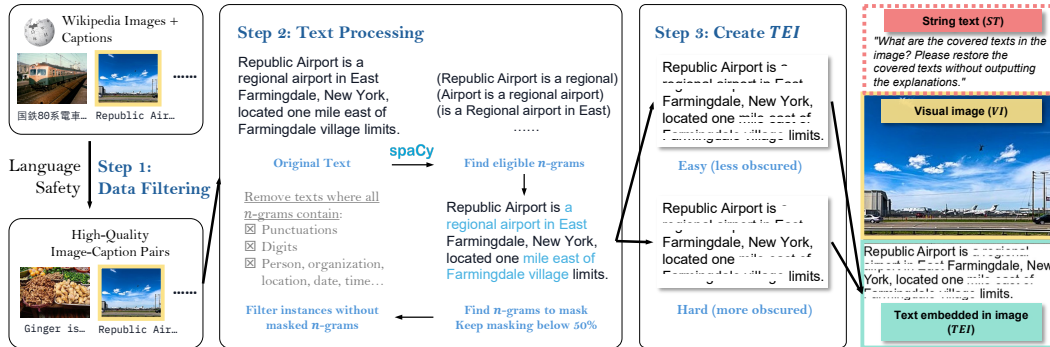


Figure 2: Illustration of the dataset creation pipeline for VCR-WIKI. visual image (VI), text embedded in image (TEI) and string text (ST) in an example of the English Hard configuration of VCR-WIKI. The solid line-enclosed contents (VI and TEI) are part of the image, whereas the dotted line-enclosed content (ST) is given separately from the image.

3 Dataset Creation

The VCR task requires aligning visual images (VI) with text embedded in images (TEI). Therefore, the dataset creation process relies on a set of highly correlated image-text pairs. We utilize the primary images and their corresponding captions from Wikipedia as the data source² to create VCR-WIKI, a Wikipedia-based VCR dataset. The creation pipeline for VCR-WIKI is shown in Figure 2. Before constructing the dataset, we first filter out the instances with sensitive content, including NSFW and crime-related terms, to mitigate AI risk and biases.

The VCR-WIKI dataset is formatted as a VQA task, where each instance includes an image, a question, and a ground-truth answer. The images are synthesized from the text-image pairs by stacking the image (VI) with its corresponding text description (TEI) vertically, mimicking the format of a captioned image. This stacked image is referred to as a stacked $VI + TEI$ image. Each $VI + TEI$ image is resized to a width of 300 pixels. To prevent excessive image height, we truncate TEI to a maximum of five lines. We filter the dataset to exclude instances with $VI + TEI$ images exceeding 900 pixels in height to avoid drastic resolution change during data preprocessing.

Within TEI , we use spaCy to randomly select several 5-grams in the caption for masking. To ensure the restoration process is doable by a human without too much professional domain knowledge, the 5-grams do not contain numbers, person names, religious or political groups, facilities, organizations, locations, dates and time labeled by spaCy, and the total masked token does not exceed 50% of the tokens in the caption. We exclude all instances that do not have a single eligible 5-gram. The selected 5-grams are partially obscured by a white rectangle that reveals only the top and bottom parts of the text, with the proportion of coverage varying to adjust task difficulty. Furthermore, to assess the impact of VI on model performance, we create an ablation for each image, maintaining the resolution of the $VI + TEI$ image, but retaining only the TEI part in the center of the image.

The VCR task involves a predefined question that prompts the model to produce the text obscured in the image. The ground-truth answer corresponds to the caption displayed in the uncovered portion of the stacked image. Due to the extensive availability of vision-language models and a significant user base in both English and Chinese, we have chosen to develop the dataset in these two languages. For each language, we meticulously select the covering proportion to create two task variants: (1) an easy version, where the task is easy for native speakers but open-source OCR models almost always fail, and (2) a hard version, where the revealed part consists of only one to two pixels for the majority of letters or characters, yet the restoration task remains feasible for native speakers of the language.

We release the dataset under the CC BY-SA 4.0 license. All configurations of VCR-WIKI are publicly available at <https://huggingface.co/collections/vcr-org/vcr-visual-caption-recognition-6661393b1761e2aff7b967b9>.

²Datasource: https://huggingface.co/datasets/wikimedia/wit_base.

3.1 Dataset Format and Statistics

Table 1: Basic statistics of the dataset. Note that the Easy and Hard configurations for each language share the same statistics. We report the mean, standard deviation, and the 5th and 95th percentile ($\eta_{.5}$ and $\eta_{.95}$) for the stacked image height and the number of obscured text spans. Unit is in pixels.

	# Train	# Val	# Test	VI +TEI Image Height				# Obscured Text Spans			
				Mean	SD	$\eta_{.5}$	$\eta_{.95}$	Mean	SD	$\eta_{.5}$	$\eta_{.95}$
English	2095733	5000	5000	375.52	106.01	253	564	1.62	0.63	1	3
Chinese	336448	5000	5000	360.44	102.76	239	562	2.06	0.94	1	4

The VCR dataset comprises four configurations: English Easy, English Hard, Chinese Easy, and Chinese Hard. Each configuration can be further divided into training, validation, and test splits. Validation and test splits contain 5,000 entities each. The training set for English configurations and the Chinese configurations contain 2,095,733 and 336,448 instances, respectively, which can be used for model continuous pretraining. We include more detailed statistics of the dataset in Table 1.

4 Experiments

In this section, we report the experiment results of existing state-of-the-art vision-language models on our proposed VCR tasks. The fine-tuning and evaluation of open-source models are conducted on a mix of NVIDIA A100 80G and L40S 48G GPUs in an internal cluster.

4.1 Models

We report evaluation results of the following models:

Closed-source Models. We evaluate several most advanced proprietary models with their provided APIs. The evaluated models include GPT-4o (gpt-4o-2024-0513), GPT-4 Turbo (gpt-4-turbo-2024-04-09), GPT-4V (gpt-4-1106-vision-preview) [50, 49], Claude Opus [2], and Qwen-VL-Max [4].

Open-source Models. We evaluate open-source models with the best performance on the OpenVLM Leaderboard³ and state-of-the-art Chinese VLM models. The evaluated models include InternVL-Chat-V1.5[11], MiniCPM-Llama3-V2.5 [25], InternLM-XComposer2-VL-7B [14], CogVLM2-Llama3-19B-Chat [63], Idifics2-8B [32], Yi-VL-34B [1], Yi-VL-6B [1], Qwen-VL-Chat [4], DeepSeek-VL-7B-Chat [42], DeepSeek-VL-1.3B-Chat [42], TextMonkey [40] and DocOwl-1.5 [22]. Out of these models, Idifics2-8B is an English-only model, and CogVLM2-Llama3-19B-Chat has its Chinese variant, CogVLM2-Llama3-19B-Chinese-Chat. Please refer to Table 2 for the model specifications.

Finetuned Models. To test whether VLMs can learn to conduct VCR via fine-tuning, we select two models from the open-sourced models, CogVLM2-Llama3-19B-Chat and MiniCPM-Llama3-V2.5, and fine-tune them on a subset of VCR’s training set.

More specifically, We fine-tune CogVLM2-Llama3-19B-Chat and MiniCPM-Llama3-V2.5 on the English Hard configuration, and CogVLM2-Llama3-19B-Chinese-Chat and MiniCPM-Llama3-V2.5 on the Chinese Hard configuration. The models are finetuned using LoRA [23] with $r = 8$ and $\alpha = 32$. We adopt the schedule-free AdamW optimizer [12] with a learning rate $2e - 4$. The effective batch size is 64. Each model is trained on the first 16000 examples of the training set for 1 epoch. All fine-tuning experiments are performed on a single node with 4 NVIDIA L40S 48G GPUs.

³We selected the highest-performing open-source models with fewer than 40 billion parameters from the OpenVLM Leaderboard as of May 23, 2024. Details are available at: https://huggingface.co/spaces/opencompass/open_vlm_leaderboard.

4.2 Metrics

We measure the quality of the model’s restoration of each masked n -gram (where $n = 5$ in our setting, as specified in Section 3). Due to the variability of different models’ outputs, for each masked n -gram $m \in \mathbb{V}_e^n$, where \mathbb{V}_e is the vocabulary of the evaluation tokenizer⁴, we extract the most similar n -gram $\hat{m} \in \mathbb{V}_e^n$ with the least edit distance in the model’s generation.

We report the two metrics below in our experiment section to measure the restoration quality: **Exact Match** (EM), which measures whether the restored n -gram \hat{m} totally matches the ground-truth m ; and **Jaccard Index** (J), which measures the similarity of \hat{m} and m as bag-of-words.

- **Exact Match** (EM), which measures whether the restored n -gram \hat{m} totally matches the ground-truth m ;

$$EM(m, \hat{m}) = \begin{cases} 1 & \text{if } m = \hat{m}, \\ 0 & \text{otherwise} \end{cases}.$$

- **Jaccard Index** (J), which is a more relaxed metric that measures the similarity of \hat{m} and m as bag-of-words.

$$J(m, \hat{m}) = \frac{|S(m) \cap S(\hat{m})|}{|S(m) \cup S(\hat{m})|},$$

where $S(m)$ represents the set of tokens in m .

4.3 Experimental Results

Please refer to the exact match score and the Jaccard-index of the evaluation in Table 3.

Open-Source Models. We evaluate each open-source model based on the whole 5,000 examples in the test set. Note that Idefics2-8B only supports the English task, hence it has no evaluation score on the Chinese task.

Although achieving state-of-the-art performance on the Open VLM leaderboard, almost all the tested models achieve a low exact match accuracy on the English Easy configuration and fail on the other settings. The best open-source model across the 4 configurations (English Easy, English Hard, Chinese Easy and Chinese Hard) is CogVLM2-Llama3-Chat. This might be attributed to its pretraining process and the special architecture. We also notice that VI has negative impact to most models on the exact match scores ($\Delta < 0$) which means the image information is not properly utilized. The best performed open-source model, CogVLM2-Llama3-Chat and its finetuned version has positive Δ except the Chinese Hard configuration. This indicates that information from VI could help improve the model performance on VCR.

For different languages, we noticed a large performance drop when testing the model in Chinese configurations, despite the fact that all the models claim to have basic English-Chinese duolingual capabilities. This is somehow surprising, since Chinese characters, due to their logographic nature, may exhibit a higher degree of recognizability compared to languages that utilize alphabetic scripts in one order [65, 73].

Table 2: Model specifications

Model name	Model size	Open-sourced
Claude 3 Opus	-	×
GPT-4 Turbo	-	×
GPT-4o	-	×
GPT-4V	-	×
Qwen-VL-Max	-	×
CogVLM2 ⁵	19B	✓
CogVLM2-Chinese ⁶	19B	✓
DeepSeek-VL ⁷	1.3B	✓
DeepSeek-VL ⁸	7B	✓
Idefics2 ⁹	8B	✓
InternVL-V1.5 ¹⁰	25.5B	✓
InternLM-XComposer2-VL ¹¹	7B	✓
MiniCPM-V2.5 ¹²	8B	✓
Qwen-VL ¹³	7B	✓
Yi-VL ¹⁴	34B	✓
Yi-VL ¹⁵	6B	✓
TextMonkey ¹⁶	7B	✓
DocOwl-1.5-Omni ¹⁷	8B	✓

⁴We utilize spaCy’s en_core_web_sm’s and zh_core_web_sm’s tokenizer for English and Chinese evaluation, respectively.

Table 3: Results of various open-source and closed-source vision language models on the VCR task, using both English (EN) and Chinese (ZH), in both easy and hard modes. FT means the model is finetuned on the VCR task. Subscripts provide the standard deviation obtained from bootstrap.

Lang	Mode	Model	Model size	Exact match (%) \uparrow			Jaccard index (%) \uparrow		
				VI + TEI	TEI	Δ	VI + TEI	TEI	Δ
EN	Easy	<i>Closed-source models</i>							
		Claude 3 Opus	-	62.0 _{0.3}	77.0 _{0.21}	-15	77.67 _{0.18}	88.41 _{0.15}	-10.74
		GPT-4 Turbo	-	78.74 _{0.23}	81.94 _{0.34}	-3.2	88.54 _{0.09}	92.18 _{0.11}	-3.65
		GPT-4o	-	91.55_{0.21}	94.56_{0.13}	-3.01	96.44_{0.05}	97.76_{0.09}	-1.32
		GPT-4V	-	52.04 _{0.3}	37.86 _{0.31}	14.17	65.36 _{0.23}	54.13 _{0.49}	11.23
		Qwen-VL-Max	-	76.8 _{0.33}	85.53 _{0.14}	-8.74	85.71 _{0.18}	91.45 _{0.2}	-5.74
		<i>Open-source models</i>							
		CogVLM2	19B	83.25 _{0.07}	78.29 _{0.04}	4.96	89.75 _{0.1}	88.07 _{0.08}	1.68
		CogVLM2-FT	19B	93.27_{0.03}	92.63_{0.07}	0.64	97.62_{0.02}	97.4_{0.01}	0.22
		DeepSeek-VL	1.3B	23.04 _{0.05}	31.09 _{0.12}	-8.04	46.84 _{0.07}	52.36 _{0.06}	-5.52
		DeepSeek-VL	7B	38.01 _{0.12}	45.94 _{0.1}	-7.93	60.02 _{0.15}	64.72 _{0.04}	-4.7
		DocOwl-1.5-Omni	8B	0.84 _{0.01}	1.55 _{0.02}	-0.71	13.34 _{0.03}	14.62 _{0.04}	-1.28
		TextMonkey	7B	50.66 _{0.1}	56.2 _{0.08}	-5.54	67.6 _{0.09}	72.82 _{0.08}	-5.22
		Idefics2	8B	15.75 _{0.11}	27.77 _{0.11}	-12.02	31.97 _{0.02}	51.0 _{0.03}	-19.03
	InternLM-XComposer2-VL	7B	46.64 _{0.1}	46.4 _{0.11}	0.24	70.99 _{0.1}	72.14 _{0.07}	-1.14	
	InternVL-V1.5	25.5B	14.65 _{0.13}	75.06 _{0.1}	-60.41	51.42 _{0.04}	87.1 _{0.03}	-35.68	
	MiniCPM-V2.5	8B	31.81 _{0.08}	40.05 _{0.09}	-8.25	53.24 _{0.1}	63.2 _{0.1}	-9.96	
	MiniCPM-V2.5-FT	8B	40.96 _{0.14}	44.62 _{0.07}	-3.67	64.4 _{0.05}	67.62 _{0.1}	-3.22	
	Qwen-VL	7B	49.71 _{0.17}	52.15 _{0.15}	-2.44	69.94 _{0.07}	72.28 _{0.08}	-2.34	
	Yi-VL	34B	0.82 _{0.03}	1.61 _{0.04}	-0.79	5.59 _{0.04}	7.72 _{0.03}	-2.13	
	Yi-VL	6B	0.75 _{0.01}	1.65 _{0.01}	-0.9	5.54 _{0.02}	7.76 _{0.03}	-2.22	
	Hard	<i>Closed-source models</i>							
		Claude 3 Opus	-	37.8 _{0.21}	50.0 _{0.32}	-12.2	57.68 _{0.2}	70.16 _{0.17}	-12.48
		GPT-4 Turbo	-	45.15 _{0.27}	48.64 _{0.17}	-3.5	65.72 _{0.14}	67.86 _{0.2}	-2.14
		GPT-4o	-	73.2_{0.22}	82.43_{0.2}	-9.22	86.17_{0.23}	92.01_{0.06}	-5.84
		GPT-4V	-	25.83 _{0.28}	14.95 _{0.36}	10.87	44.63 _{0.17}	30.08 _{0.25}	14.56
		Qwen-VL-Max	-	41.65 _{0.19}	52.72 _{0.25}	-11.07	61.18 _{0.11}	70.19 _{0.39}	-9.01
		<i>Open-source models</i>							
CogVLM2		19B	37.98 _{0.18}	17.68 _{0.06}	20.3	59.99 _{0.05}	39.69 _{0.03}	20.3	
CogVLM2-FT		19B	77.44_{0.05}	66.07_{0.13}	11.38	90.17_{0.03}	83.41_{0.07}	6.76	
DeepSeek-VL		1.3B	0.16 _{0.01}	0.39 _{0.02}	-0.23	11.89 _{0.02}	11.47 _{0.03}	0.42	
DeepSeek-VL		7B	1.0 _{0.02}	1.75 _{0.03}	-0.75	15.9 _{0.08}	17.2 _{0.04}	-1.3	
DocOwl-1.5-Omni		8B	0.04 _{0.0}	0.02 _{0.0}	0.01	7.76 _{0.01}	7.74 _{0.02}	0.03	
TextMonkey		7B	1.96 _{0.04}	2.43 _{0.03}	-0.48	14.02 _{0.03}	14.11 _{0.03}	-0.09	
Idefics2		8B	0.65 _{0.01}	0.94 _{0.02}	-0.29	9.93 _{0.05}	12.57 _{0.02}	-2.64	
InternLM-XComposer2-VL	7B	0.7 _{0.01}	0.92 _{0.01}	-0.22	12.51 _{0.02}	13.23 _{0.02}	-0.72		
InternVL-V1.5	25.5B	1.99 _{0.02}	6.49 _{0.04}	-4.5	16.73 _{0.06}	26.4 _{0.03}	-9.67		
MiniCPM-V2.5	8B	1.41 _{0.03}	1.96 _{0.02}	-0.55	11.94 _{0.02}	13.37 _{0.04}	-1.43		
MiniCPM-V2.5-FT	8B	13.86 _{0.1}	13.73 _{0.05}	0.12	36.89 _{0.06}	36.51 _{0.06}	0.38		
Qwen-VL	7B	2.0 _{0.03}	2.32 _{0.03}	-0.32	15.04 _{0.05}	14.27 _{0.05}	0.77		
Yi-VL	34B	0.07 _{0.0}	0.05 _{0.0}	0.02	4.31 _{0.02}	5.89 _{0.02}	-1.58		
Yi-VL	6B	0.06 _{0.0}	0.04 _{0.0}	0.02	4.46 _{0.02}	5.91 _{0.01}	-1.46		
ZH	Easy	<i>Closed-source models</i>							
		Qwen-VL-Max	-	6.34_{0.24}	9.92_{0.14}	-3.58	13.45_{0.15}	22.86_{0.21}	-9.42
		<i>Open-source models</i>							
		CogVLM2-Chinese	19B	33.24 _{0.04}	30.7 _{0.07}	2.54	57.57 _{0.06}	53.66 _{0.04}	3.91
		CogVLM2-Chinese-FT	19B	61.69_{0.05}	59.85_{0.08}	1.84	78.14_{0.05}	77.12_{0.04}	1.02
		DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	6.56 _{0.01}	3.17 _{0.02}	3.4
		DeepSeek-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	4.08 _{0.01}	6.84 _{0.01}	-2.76
	DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	1.14 _{0.01}	3.38 _{0.01}	-2.23	
	TextMonkey	7B	0.62 _{0.01}	1.44 _{0.01}	-0.82	8.34 _{0.06}	10.95 _{0.03}	-2.61	
	InternLM-XComposer2-VL	7B	0.27 _{0.01}	0.23 _{0.01}	0.04	12.32 _{0.02}	12.28 _{0.03}	0.04	
	InternVL-V1.5	25.5B	4.78 _{0.02}	5.32 _{0.02}	-0.55	26.43 _{0.03}	21.7 _{0.04}	4.72	
	MiniCPM-V2.5	8B	4.1 _{0.02}	5.05 _{0.08}	-0.95	18.03 _{0.07}	22.94 _{0.04}	-4.9	
	MiniCPM-V2.5-FT	8B	7.44 _{0.03}	7.92 _{0.03}	-0.49	29.87 _{0.04}	31.32 _{0.03}	-1.45	
	Qwen-VL	7B	0.04 _{0.01}	0.0 _{0.0}	0.04	1.5 _{0.01}	0.34 _{0.01}	1.15	
Yi-VL	34B	0.0 _{0.0}	0.0 _{0.0}	0	4.44 _{0.01}	1.8 _{0.01}	2.64		
Yi-VL	6B	0.0 _{0.0}	0.0 _{0.0}	0	4.37 _{0.01}	1.76 _{0.0}	2.6		
Hard	<i>Closed-source models</i>								
	Qwen-VL-Max	-	0.89_{0.04}	1.38_{0.06}	-0.49	5.4_{0.11}	12.29_{0.09}	-6.89	
	<i>Open-source models</i>								
	CogVLM2-Chinese	19B	1.34 _{0.03}	2.67 _{0.02}	-1.32	17.35 _{0.03}	19.51 _{0.03}	-2.16	
	CogVLM2-Chinese-FT	19B	42.11_{0.09}	45.63_{0.06}	-3.51	65.67_{0.15}	69.28_{0.04}	-3.61	
	DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	6.46 _{0.01}	3.22 _{0.02}	3.24	
	DeepSeek-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	5.11 _{0.01}	7.21 _{0.01}	-2.1	
DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	1.37 _{0.01}	4.07 _{0.02}	-2.7		
TextMonkey	7B	0.12 _{0.01}	0.07 _{0.0}	0.05	6.36 _{0.01}	6.68 _{0.03}	-0.32		
InternLM-XComposer2-VL	7B	0.07 _{0.01}	0.09 _{0.0}	-0.02	8.97 _{0.02}	8.51 _{0.01}	0.46		
InternVL-V1.5	25.5B	0.03 _{0.0}	0.1 _{0.01}	-0.07	8.46 _{0.01}	6.27 _{0.04}	2.19		
MiniCPM-V2.5	8B	0.09 _{0.0}	0.08 _{0.0}	0.01	7.39 _{0.02}	7.89 _{0.01}	-0.5		
MiniCPM-V2.5-FT	8B	1.53 _{0.01}	1.11 _{0.02}	0.42	18.0 _{0.03}	15.35 _{0.02}	2.65		
Qwen-VL	7B	0.01 _{0.0}	0.01 _{0.0}	0	1.17 _{0.01}	0.12 _{0.0}	1.06		
Yi-VL	34B	0.0 _{0.0}	0.0 _{0.0}	0	4.12 _{0.0}	1.81 _{0.01}	2.31		
Yi-VL	6B	0.0 _{0.0}	0.0 _{0.0}	0	4.0 _{0.01}	1.88 _{0.01}	2.12		

Moreover, we found that models, such as internlm-xcomposer2, are good at OCR and understanding image documents (as demonstrated by DocOwl 1.5 and TextMonkey) still have the potential to be improved in the VCR task. This highlights the unique and indispensable role of VCR in the current suite of benchmarks. Excelling in other document-related benchmarks does not guarantee similar performance in VCR tasks, emphasizing VCR’s distinct challenges and value.

Closed-Source Models. We evaluate every closed-source model with the first 500 examples in the test set. In English tasks, GPT-4o achieves the best scores among the models which have not been finetuned. Even as GPT-4 series and Claude support Chinese, we found that they cannot completely recognize Chinese words embedded in the image even without any occlusion. Thus, we do not test GPT-4 and Claude model series on Chinese tasks.

In the English configurations, closed-source models outperform all open-source models except CogVLM2, which indicates that model scaling might help improve performance on the VCR task. However, compared with the human evaluation results in Section 4.4, we notice a large performance gap, especially in the English Hard configuration. This shows significant room for improvement in the current state-of-the-art models.

Refer to Table 6 to compare open-source and closed-source models using the same 500 test cases.

4.4 Human Evaluation

We recruited 7 volunteers to conduct human evaluation on a subset of the samples of our datasets. Two out of the seven evaluators are native English speakers, while five are native Chinese speakers who are also fluent in English¹⁸. All the volunteers have earned post-graduate degrees majoring in one of biology, statistics, computer science, economy, etc. The evaluations were conducted on a voluntary basis and participants received no rewards.

We gave the volunteer the following instructions: (1) We ask the volunteers to focus on the puzzles. Each example in the hard collection may require 30 seconds to 2 minutes of focused attention; and (2) We ask the volunteers to utilize the context rather than directly brute-force the puzzle.

Every sample is solved by at least 3 volunteers. In English, we release the exact match score in 2 splits: all errors counted (All), and only count errors not related to date and person names (Filtered).

Table 4: Human evaluation results on the VCR task for in terms of exact matches. N is the number of puzzles in each language.

	EN Easy (N = 169)		EN Hard (N = 169)		ZH Easy (N = 188)		ZH Hard (N = 188)	
	Mean (%)	SD (%)	Mean (%)	SD (%)	Mean (%)	SD (%)	Mean (%)	SD (%)
All	96.65	0.34	91.12	1.18	98.58	0.31	91.84	0.81
Filtered	98.62	0.34	97.63	2.13	99.47	0.00	96.63	1.11

Refer to Table 5 to compare all models with human evaluation results using the same test cases.

⁵<https://huggingface.co/THUDM/CogVLM2-Llama3-chat-19B>

⁶<https://huggingface.co/THUDM/cogvlm2-llama3-Chinese-chat-19B>

⁷<https://huggingface.co/deepseek-ai/deepseek-vl-1.3b-chat>

⁸<https://huggingface.co/deepseek-ai/deepseek-vl-7b-chat>

⁹<https://huggingface.co/HuggingFaceM4/Idefics2-8B>

¹⁰<https://huggingface.co/OpenGVLab/InternVL-Chat-V1-5>

¹¹<https://huggingface.co/InternLM/InternLM-XComposer2-VL-7B>

¹²https://huggingface.co/OpenBMB/MiniCPM-Llama3-V-2_5

¹³<https://huggingface.co/Qwen/Qwen-VL-Chat>

¹⁴<https://huggingface.co/01-ai/Yi-VL-34B>

¹⁵<https://huggingface.co/01-ai/Yi-VL-6B>

¹⁶<https://huggingface.co/echo840/Monkey-Chat>

¹⁷<https://huggingface.co/mPLUG/DocOwl1.5-Omni>

¹⁸The participants’ TOEFL scores range from 102/120 to 112/120.

5 Related Work

Masked modeling. Masked language modeling (MLM) introduced by BERT [13] and its autoregressive counterparts by GPT [8] have been the foundations of pre-training modern natural language processing (NLP) models. Both are trained to predict a masked-out proportion based on the context. Similarly, inspired by BERT and GPT, iGPT [9] uses the input sequences of pixels to predict the next unknown pixels. Masked Autoencoders (MAE) [19] introduce Masked Image Modeling (MIM) by masking out random patches from input images and reconstructing the missing parts in the images in pixel space. The goal is to encourage the model to learn the representations of the image by understanding the context and structure of the visible patches, which helps reconstruct the masked images accurately.

Visual Question Answering (VQA). Several datasets have been proposed for visual question answering VQA [3, 71, 17, 46]. FVQA [61] and OK-VQA[43] are datasets about knowledge-based visual question answering and contains questions that necessitate the usage of external knowledge resources. CLEVR [30] is a synthetic VQA dataset that mainly focuses on visual reasoning abilities. Recognizing the need to develop VQA models that can understand text, Text-VQA [54, 6, 47, 64] aims to read and reason about texts embedded within images in the context of image-question answering. Several datasets [54, 6, 47] have been developed for the Text-VQA task, such as the TextVQA dataset [54] and the ST-VQA dataset [6] on natural images, the OCR-VQA dataset [46] on book or movie covers, the InfographicVQA [44] dataset on infographics, and the DocVQA dataset [45] on document images.

Vision Language Model. Vision-language models are designed for tasks that involve understanding and generating content from images and text [56, 39, 31, 32]. For example, models have been developed to combine Llama3 with advanced vision-language processing capabilities to handle complex multimodal tasks [70, 66, 24, 69, 63, 14]. Qwen-VL [4] enhances visual-linguistic representations for more accurate contextual interpretations, while OpenGVLab-InternVL-Chat [11, 10] merges the InternVL framework with interactive chat capabilities. General-purpose models like GPT-4 series models [50, 49], Claude series models [2] have also been adapted for vision-language tasks, demonstrating strong performance in multimodal tasks. Finally, DocLLM [60] specializes in document understanding by integrating visual and textual data to enhance the interpretation and generation of document-related content. These models collectively represent significant advancements in vision-language integration, contributing unique capabilities and enhancements to the understanding and generation of multimodal information.

Optical Character Recognition (OCR). OCR [48] and its subproblems [21, 55, 52, 15] have been well-studied in the literature in the constrained setting. However, classical OCR methods often cannot perform well on images captured in the wild in an unconstrained setting. Many new methods have been developed for advancing scene-text recognition on camera-captured images [5, 18, 26, 28, 62, 53, 75, 33]. In addition to the detection and recognition of OCR tasks, visual question answering has emerged as an important downstream task in the OCR literature. With the development of Text-VQA, new methods for improving the reading abilities in VQA utilizing OCR have been proposed. For example, LoRRA [54] extends a VQA model Pythia [29] with an OCR module to better handle Text-VQA tasks. TAP [67] incorporates scene texts that are generated from OCR engines during pretraining to further improve Text-VQA capabilities.

Scene Text Detection (STD). Identifying and interpreting text in natural images serves as a foundational step towards developing a comprehensive VQA system. This capability allows for the integration of textual information, enhancing overall scene comprehension. Existing approaches mainly consist of two steps: text detection and recognition. Several methods based on Fully Convolutional Neural Networks have been proposed for scene text detection [35, 36, 75, 20, 74]. In terms of text recognition, [27] proposed to directly recognize texts from entire input images using a 90k-class convolutional neural network with each class corresponding to an English word [36]. In addition, several methods [68, 72, 41] have been proposed to tackle the issue of irregular text in scene text detection.

6 Conclusion

In this work, we introduced the Visual Caption Restoration (VCR) task, a novel vision-language challenge aimed at promoting the integration of visual and textual modalities, including text embedded in both natural language tokens and image formats and highly obscured text embedded in the image. We developed a specialized pipeline to create a dataset tailored to this task, utilizing correlated image-text pairs. This task stands out from existing methods by requiring a more profound integration of visual cues and partially obscured text, highlighting its uniqueness and importance in the field.

We conducted extensive evaluations of state-of-the-art vision-language models (VLMs) in both English and Chinese. The results demonstrated significant room for improvement, suggesting that current models have not yet fully harnessed the capabilities necessary for VCR. We selected models representing both the highest and average performance tiers for additional fine-tuning with our dataset. Although fine-tuning exhibited potential for enhancing VCR capabilities, it did not consistently result in significant improvements, indicating the complexity and challenges of adapting models to this task.

By introducing the VCR task and its specialized dataset, we aim to advance research in vision-language interaction. The unique challenges of VCR seek to enhance model development and training, extending the limits of multimodal AI. We invite the community to utilize our dataset and develop innovative strategies to boost VLM model performance.

Acknowledgments and Disclosure of Funding

We acknowledge the contribution of Mila for supporting the evaluation of various models on our datasets through providing GPU access. None of the authors received third-party funding during the last 36 months prior to this submission.

References

- [1] 01.AI, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue, Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu, and Zonghong Dai. Yi: Open foundation models by 01.ai, 2024.
- [2] Anthropic. The claude 3 model family: Opus, sonnet, haiku. 2024.
- [3] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C. Lawrence Zitnick, and Devi Parikh. VQA: Visual Question Answering. In *International Conference on Computer Vision (ICCV)*, 2015.
- [4] Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A versatile vision-language model for understanding, localization, text reading, and beyond. *arXiv preprint arXiv: 2308.12966*, 2023.
- [5] Alessandro Bissacco, Mark Cummins, Yuval Netzer, and Hartmut Neven. Photoocr: Reading text in uncontrolled conditions. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, December 2013.
- [6] Ali Furkan Biten, Ruben Tito, Andres Mafla, Lluís Gomez, Marçal Rusinol, Ernest Valveny, C.V. Jawahar, and Dimosthenis Karatzas. Scene text visual question answering. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [7] Fedor Borisov, Albert Gordo, and Viswanath Sivakumar. Rosetta: Large scale system for text detection and recognition in images. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining, KDD '18*, page 71–79, New York, NY, USA, 2018. Association for Computing Machinery.
- [8] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In H. Larochelle,

- M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc., 2020.
- [9] Mark Chen, Alec Radford, Rewon Child, Jeffrey Wu, Heewoo Jun, David Luan, and Ilya Sutskever. Generative pretraining from pixels. In *International conference on machine learning*, pages 1691–1703. PMLR, 2020.
- [10] Zhe Chen, Weiyun Wang, Hao Tian, Shenglong Ye, Zhangwei Gao, Erfei Cui, Wenwen Tong, Kongzhi Hu, Jiapeng Luo, Zheng Ma, et al. How far are we to gpt-4v? closing the gap to commercial multimodal models with open-source suites. *arXiv preprint arXiv:2404.16821*, 2024.
- [11] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023.
- [12] Aaron Defazio, Xingyu Yang, Harsh Mehta, Konstantin Mishchenko, Ahmed Khaled, and Ashok Cutkosky. The road less scheduled, 2024.
- [13] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [14] Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Xilin Wei, Songyang Zhang, Haodong Duan, Maosong Cao, Wenwei Zhang, Yining Li, Hang Yan, Yang Gao, Xinyue Zhang, Wei Li, Jingwen Li, Kai Chen, Conghui He, Xingcheng Zhang, Yu Qiao, Dahua Lin, and Jiaqi Wang. Internlm-xcomposer2: Mastering free-form text-image composition and comprehension in vision-language large model. *arXiv preprint arXiv: 2401.16420*, 2024.
- [15] Volkmar Frinken, Andreas Fischer, R Manmatha, and Horst Bunke. A novel word spotting method based on recurrent neural networks. *IEEE transactions on pattern analysis and machine intelligence*, 34(2):211–224, 2011.
- [16] Amber M Fyall, Yasmine El-Shamayleh, Hannah Choi, Eric Shea-Brown, and Anitha Pasupathy. Dynamic representation of partially occluded objects in primate prefrontal and visual cortex. *eLife*, 6:e25784, September 2017.
- [17] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the V in VQA matter: Elevating the role of image understanding in Visual Question Answering. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017.
- [18] Ankush Gupta, Andrea Vedaldi, and Andrew Zisserman. Synthetic data for text localisation in natural images. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.
- [19] Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16000–16009, 2022.
- [20] Wenhao He, Xu-Yao Zhang, Fei Yin, and Cheng-Lin Liu. Deep direct regression for multi-oriented scene text detection. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, Oct 2017.
- [21] Nicholas R Howe. Document binarization with automatic parameter tuning. *International journal on document analysis and recognition (ijdar)*, 16:247–258, 2013.
- [22] Anwen Hu, Haiyang Xu, Jiabo Ye, Ming Yan, Liang Zhang, Bo Zhang, Chen Li, Ji Zhang, Qin Jin, Fei Huang, and Jingren Zhou. mplug-docowl 1.5: Unified structure learning for ocr-free document understanding. *arXiv preprint arXiv: 2403.12895*, 2024.
- [23] Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022.
- [24] Jinyi Hu, Yuan Yao, Chongyi Wang, Shan Wang, Yinxu Pan, Qianyu Chen, Tianyu Yu, Hanghao Wu, Yue Zhao, Haoye Zhang, Xu Han, Yankai Lin, Jiao Xue, Dahai Li, Zhiyuan Liu, and Maosong Sun. Large multilingual models pivot zero-shot multimodal learning across languages. *arXiv preprint arXiv:2308.12038*, 2023.

- [25] Shengding Hu, Yuge Tu, Xu Han, Chaoqun He, Ganqu Cui, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Weilin Zhao, Xinrong Zhang, Zheng Leng Thai, Kaihuo Zhang, Chongyi Wang, Yuan Yao, Chenyang Zhao, Jie Zhou, Jie Cai, Zhongwu Zhai, Ning Ding, Chao Jia, Guoyang Zeng, Dahai Li, Zhiyuan Liu, and Maosong Sun. Minicpm: Unveiling the potential of small language models with scalable training strategies, 2024.
- [26] Weilin Huang, Yu Qiao, and Xiaoou Tang. Robust scene text detection with convolution neural network induced msr trees. In David Fleet, Tomas Pajdla, Bernt Schiele, and Tinne Tuytelaars, editors, *Computer Vision – ECCV 2014*, pages 497–511, Cham, 2014. Springer International Publishing.
- [27] Max Jaderberg, Karen Simonyan, Andrea Vedaldi, and Andrew Zisserman. Reading text in the wild with convolutional neural networks. *International journal of computer vision*, 116:1–20, 2016.
- [28] Max Jaderberg, Andrea Vedaldi, and Andrew Zisserman. Deep features for text spotting. In David Fleet, Tomas Pajdla, Bernt Schiele, and Tinne Tuytelaars, editors, *Computer Vision – ECCV 2014*, pages 512–528, Cham, 2014. Springer International Publishing.
- [29] Yu Jiang, Vivek Natarajan, Xinlei Chen, Marcus Rohrbach, Dhruv Batra, and Devi Parikh. Pythia v0.1: the winning entry to the vqa challenge 2018, 2018.
- [30] Justin Johnson, Bharath Hariharan, Laurens van der Maaten, Li Fei-Fei, C. Lawrence Zitnick, and Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017.
- [31] Hugo Laurençon, Lucile Saulnier, Léo Tronchon, Stas Bekman, Amanpreet Singh, Anton Lozhkov, Thomas Wang, Siddharth Karamcheti, Alexander M. Rush, Douwe Kiela, Matthieu Cord, and Victor Sanh. Obelics: An open web-scale filtered dataset of interleaved image-text documents, 2023.
- [32] Hugo Laurençon, Léo Tronchon, Matthieu Cord, and Victor Sanh. What matters when building vision-language models?, 2024.
- [33] Chen-Yu Lee and Simon Osindero. Recursive recurrent nets with attention modeling for ocr in the wild. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2016.
- [34] Bao Li, Chi Zhang, Long Cao, Panpan Chen, Tianyuan Liu, Hui Gao, Linyuan Wang, Bin Yan, and Li Tong. Brain Functional Representation of Highly Occluded Object Recognition. *Brain Sciences*, 13(10):1387, October 2023.
- [35] Minghui Liao, Baoguang Shi, and Xiang Bai. Textboxes++: A single-shot oriented scene text detector. *IEEE Transactions on Image Processing*, 27(8):3676–3690, 2018.
- [36] Minghui Liao, Baoguang Shi, Xiang Bai, Xinggang Wang, and Wenyu Liu. Textboxes: A fast text detector with a single deep neural network. In *Proceedings of the AAAI conference on artificial intelligence*, volume 31, 2017.
- [37] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023.
- [38] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024.
- [39] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024.
- [40] Yuliang Liu, Biao Yang, Qiang Liu, Zhang Li, Zhiyin Ma, Shuo Zhang, and Xiang Bai. Textmonkey: An ocr-free large multimodal model for understanding document. *arXiv preprint arXiv: 2403.04473*, 2024.
- [41] David G Lowe. Distinctive image features from scale-invariant keypoints. *International journal of computer vision*, 60:91–110, 2004.
- [42] Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Hao Yang, Yaofeng Sun, Chengqi Deng, Hanwei Xu, Zhenda Xie, and Chong Ruan. Deepseek-vl: Towards real-world vision-language understanding, 2024.

- [43] Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. Ok-vqa: A visual question answering benchmark requiring external knowledge. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019.
- [44] Minesh Mathew, Viraj Bagal, Rubèn Tito, Dimosthenis Karatzas, Ernest Valveny, and C.V. Jawahar. Infographicvqa. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 1697–1706, January 2022.
- [45] Minesh Mathew, Dimosthenis Karatzas, and C.V. Jawahar. Docvqa: A dataset for vqa on document images. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 2200–2209, January 2021.
- [46] Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual question answering by reading text in images. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 947–952, 2019.
- [47] Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual question answering by reading text in images. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 947–952, 2019.
- [48] G. Nagy. Twenty years of document image analysis in pami. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 22(01):38–62, jan 2000.
- [49] OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Courier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jiang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeesh Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil

- Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. Gpt-4 technical report. *arXiv preprint arXiv: 2303.08774*, 2023.
- [50] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [51] Luiz Pessoa, Evan Thompson, and Alva Noë. Finding out about filling-in: A guide to perceptual completion for visual science and the philosophy of perception. *Behavioral and Brain Sciences*, 21(6):723–748, 1998.
- [52] Faisal Shafait, Daniel Keysers, and Thomas Breuel. Performance evaluation and benchmarking of six-page segmentation algorithms. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 30(6):941–954, 2008.
- [53] Baoguang Shi, Xiang Bai, and Cong Yao. An end-to-end trainable neural network for image-based sequence recognition and its application to scene text recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 39(11):2298–2304, 2017.
- [54] Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8317–8326, 2019.
- [55] Ray Smith. A simple and efficient skew detection algorithm via text row accumulation. In *Proceedings of 3rd International Conference on Document Analysis and Recognition*, volume 2, pages 1145–1148. IEEE, 1995.
- [56] Zeyi Sun, Ye Fang, Tong Wu, Pan Zhang, Yuhang Zang, Shu Kong, Yuanjun Xiong, Dahua Lin, and Jiaqi Wang. Alpha-clip: A clip model focusing on wherever you want. *arXiv preprint arXiv: 2312.03818*, 2023.
- [57] G. Thinés, A. Costall, and G. Butterworth. *Michotte’s Experimental Phenomenology of Perception*. Routledge Library Editions: Phenomenology. Taylor & Francis, 2013.
- [58] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv: 2307.09288*, 2023.
- [59] Rob van Lier and Walter Gerbino. Perceptual completions. In *The Oxford Handbook of Perceptual Organization*. Oxford University Press, 08 2015.
- [60] Dongsheng Wang, Natraj Raman, Mathieu Sibue, Zhiqiang Ma, Petr Babkin, Simerjot Kaur, Yulong Pei, Armineh Nourbakhsh, and Xiaomo Liu. Doclm: A layout-aware generative language model for multimodal document understanding. *arXiv preprint arXiv: 2401.00908*, 2023.
- [61] Peng Wang, Qi Wu, Chunhua Shen, Anthony Dick, and Anton van den Hengel. Fvqa: Fact-based visual question answering. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 40(10):2413–2427, 2018.

- [62] Tao Wang, David J. Wu, Adam Coates, and Andrew Y. Ng. End-to-end text recognition with convolutional neural networks. In *Proceedings of the 21st International Conference on Pattern Recognition (ICPR2012)*, pages 3304–3308, 2012.
- [63] Weihang Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, Jiazheng Xu, Bin Xu, Juanzi Li, Yuxiao Dong, Ming Ding, and Jie Tang. CogVLM: Visual expert for pretrained language models, 2023.
- [64] Xinyu Wang, Yuliang Liu, Chunhua Shen, Chun Chet Ng, Canjie Luo, Lianwen Jin, Chee Seng Chan, Anton van den Hengel, and Liangwei Wang. On the general value of evidence, and bilingual scene-text visual question answering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020.
- [65] Shilian Wu, Yongrui Li, and Zengfu Wang. Chinese text recognition enhanced by glyph and character semantic information. *International Journal on Document Analysis and Recognition (IJDAR)*, 27(1):45–56, March 2024.
- [66] Ruyi Xu, Yuan Yao, Zonghao Guo, Junbo Cui, Zanlin Ni, Chunjiang Ge, Tat-Seng Chua, Zhiyuan Liu, and Gao Huang. LLaVA-UHD: an lmm perceiving any aspect ratio and high-resolution images. *arXiv preprint arXiv:2403.11703*, 2024.
- [67] Zhengyuan Yang, Yijuan Lu, Jianfeng Wang, Xi Yin, Dinei Florencio, Lijuan Wang, Cha Zhang, Lei Zhang, and Jiebo Luo. Tap: Text-aware pre-training for text-vqa and text-caption. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 8751–8761, June 2021.
- [68] Cong Yao, Xiang Bai, Wenyu Liu, Yi Ma, and Zhuowen Tu. Detecting texts of arbitrary orientations in natural images. In *2012 IEEE Conference on Computer Vision and Pattern Recognition*, pages 1083–1090, 2012.
- [69] Tianyu Yu, Yuan Yao, Haoye Zhang, Taiwen He, Yifeng Han, Ganqu Cui, Jinyi Hu, Zhiyuan Liu, Hai-Tao Zheng, Maosong Sun, et al. RLHF-v: Towards trustworthy mllms via behavior alignment from fine-grained correctional human feedback. *arXiv preprint arXiv:2312.00849*, 2023.
- [70] Tianyu Yu, Haoye Zhang, Yuan Yao, Yunkai Dang, Da Chen, Xiaoman Lu, Ganqu Cui, Taiwen He, Zhiyuan Liu, Tat-Seng Chua, and Maosong Sun. RLHF-v: Aligning mllms through open-source ai feedback for super gpt-4v trustworthiness. *arXiv preprint arXiv:2405.17220*, 2024.
- [71] Peng Zhang, Yash Goyal, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Yin and Yang: Balancing and answering binary visual questions. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [72] Zhengdong Zhang, Arvind Ganesh, Xiao Liang, and Yi Ma. Tilt: Transform invariant low-rank textures. *International journal of computer vision*, 99:1–24, 2012.
- [73] Yuliang Zhao, Xinyue Zhang, Boya Fu, Zhikun Zhan, Hui Sun, Lianjiang Li, and Guanglie Zhang. Evaluation and recognition of handwritten chinese characters based on similarities. *Applied Sciences*, 12(17), 2022.
- [74] Zhuoyao Zhong, Lianwen Jin, and Shuangping Huang. Deeptext: A new approach for text proposal generation and text detection in natural images. In *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 1208–1212, 2017.
- [75] Xinyu Zhou, Cong Yao, He Wen, Yuzhi Wang, Shuchang Zhou, Weiran He, and Jiajun Liang. East: An efficient and accurate scene text detector. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, July 2017.

A Additional evaluation results on first 100 and 500 test cases

Table 5: Results of various open-source and closed-source vision language models on the VCR task using the first 100 test cases. Each test case includes one or more puzzles. FT means the model is finetuned on the VCR task. Subscripts provide the standard deviation obtained from bootstrap.

Lang	Mode	Model	Model size	Exact match (%) ↑			Jaccard index (%) ↑		
				VI + TEI	TEI	Δ	VI + TEI	TEI	Δ
EN	Easy	<i>Closed-source models</i>							
		Claude 3 Opus	-	62.0 _{0.76}	82.0 _{0.63}	-20	78.06 _{0.24}	91.12 _{0.13}	-13.06
		GPT-4 Turbo	-	78.47 _{0.22}	86.60 _{0.79}	-8.13	88.08 _{0.25}	94.15 _{0.2}	-6.07
		GPT-4o	-	90.91 _{0.36}	95.69 _{0.23}	-4.78	96.77 _{0.16}	98.45 _{0.06}	-1.68
		GPT-4V	-	25.36 _{0.5}	18.18 _{0.54}	7.18	35.64 _{0.22}	28.49 _{0.23}	7.15
		Qwen-VL-Max	-	82.3 _{0.19}	88.04 _{0.43}	-5.74	89.73 _{0.32}	92.55 _{0.17}	-2.82
		<i>Open-source models</i>							
		CogVLM2	19B	86.39 _{0.66}	84.62 _{0.92}	1.78	91.39 _{0.11}	91.63 _{0.11}	-0.24
		CogVLM2-FT	19B	94.08 _{0.2}	94.67 _{0.26}	-0.59	98.03 _{0.07}	98.22 _{0.03}	-0.2
		DeepSeek-VL	1.3B	19.53 _{0.69}	26.04 _{1.47}	-6.51	43.73 _{0.18}	48.03 _{0.16}	-4.3
		DeepSeek-VL	7B	36.09 _{1.36}	44.97 _{0.79}	-8.88	57.81 _{0.18}	61.83 _{0.33}	-4.01
		DocOwl-1.5-Omni	8B	0.59 _{0.14}	1.18 _{0.14}	-0.59	12.69 _{0.04}	13.3 _{0.06}	-0.61
		TextMonkey	7B	46.75 _{0.44}	48.52 _{0.41}	-1.78	67.82 _{0.22}	68.59 _{0.13}	-0.76
		Idefics2	8B	14.73 _{0.72}	26.63 _{0.37}	-11.83	34.2 _{0.37}	51.96 _{0.1}	-17.76
		InternLM-XComposer2-VL	7B	47.93 _{0.69}	47.34 _{0.57}	0.59	73.88 _{0.22}	74.58 _{0.16}	-0.7
		InternVL-V1.5	25.5B	15.38 _{0.29}	75.15 _{0.7}	-59.76	52.21 _{0.16}	85.87 _{0.29}	-33.66
		MiniCPM-V2.5	8B	30.18 _{0.66}	36.09 _{0.34}	-5.92	53.1 _{0.18}	59.06 _{0.14}	-5.96
		MiniCPM-V2.5-FT	8B	39.05 _{0.69}	46.75 _{0.59}	-7.69	63.05 _{0.28}	69.89 _{0.33}	-6.84
	Qwen-VL	7B	47.34 _{0.44}	46.75 _{0.57}	0.59	69.02 _{0.35}	69.19 _{0.37}	-0.17	
	Yi-VL	34B	1.78 _{0.16}	1.18 _{0.11}	0.59	6.21 _{0.06}	7.5 _{0.08}	-1.3	
	Yi-VL	6B	2.37 _{0.13}	1.78 _{0.22}	0.59	6.24 _{0.07}	8.05 _{0.11}	-1.81	
	<i>Closed-source models</i>								
	Claude 3 Opus	-	34.0 _{1.12}	51.0 _{0.5}	-17	57.02 _{0.24}	70.32 _{0.15}	-13.31	
	GPT-4 Turbo	-	53.11 _{0.46}	57.42 _{0.5}	-4.31	71.75 _{0.19}	73.82 _{0.24}	-2.07	
	GPT-4o	-	74.16 _{0.31}	84.69 _{0.31}	-10.53	86.99 _{0.09}	93.19 _{0.07}	-6.21	
	GPT-4V	-	28.71 _{0.49}	16.27 _{0.73}	12.44	49.89 _{0.15}	33.64 _{0.16}	16.25	
	Qwen-VL-Max	-	40.67 _{0.38}	55.02 _{0.46}	-14.35	61.8 _{0.19}	72.46 _{0.15}	-10.66	
	<i>Open-source models</i>								
	CogVLM2	19B	44.97 _{0.83}	21.3 _{0.47}	23.67	65.39 _{0.2}	43.86 _{0.27}	21.53	
	CogVLM2-FT	19B	75.74 _{0.72}	67.46 _{0.64}	8.28	90.6 _{0.13}	84.26 _{0.08}	6.34	
	DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	11.17 _{0.03}	10.88 _{0.06}	0.29	
	DeepSeek-VL	7B	0.59 _{0.09}	1.78 _{0.17}	-1.18	16.71 _{0.11}	18.09 _{0.13}	-1.38	
	DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	7.89 _{0.05}	8.28 _{0.05}	-0.4	
	TextMonkey	7B	1.18 _{0.22}	3.55 _{0.18}	-2.37	12.66 _{0.21}	15.97 _{0.08}	-3.31	
Idefics2	8B	1.18 _{0.2}	0.59 _{0.1}	0.59	10.81 _{0.08}	11.34 _{0.12}	-0.53		
InternLM-XComposer2-VL	7B	0.0 _{0.0}	0.59 _{0.09}	-0.59	12.69 _{0.08}	14.05 _{0.11}	-1.35		
InternVL-V1.5	25.5B	1.78 _{0.21}	7.1 _{0.22}	-5.33	16.28 _{0.09}	26.6 _{0.14}	-10.32		
MiniCPM-V2.5	8B	1.18 _{0.12}	1.78 _{0.12}	-0.59	12.02 _{0.12}	12.41 _{0.07}	-0.39		
MiniCPM-V2.5-FT	8B	10.06 _{0.43}	13.02 _{0.54}	-2.96	34.67 _{0.2}	36.43 _{0.19}	-1.76		
Qwen-VL	7B	1.78 _{0.21}	2.96 _{0.12}	-1.18	15.7 _{0.14}	15.06 _{0.19}	0.63		
Yi-VL	34B	0.59 _{0.09}	0.0 _{0.0}	0.59	4.39 _{0.07}	5.49 _{0.08}	-1.1		
Yi-VL	6B	0.59 _{0.13}	0.0 _{0.0}	0.59	5.12 _{0.03}	5.5 _{0.06}	-0.38		
ZH	Easy	<i>Closed-source models</i>							
		Qwen-VL-Max	-	5.93 _{0.19}	8.7 _{0.37}	-2.77	13.53 _{0.11}	18.5 _{0.1}	-4.97
		<i>Open-source models</i>							
		CogVLM2-Chinese	19B	34.57 _{0.66}	34.04 _{1.01}	0.53	58.78 _{0.13}	57.26 _{0.12}	1.52
		CogVLM2-Chinese-FT	19B	66.49 _{0.74}	67.55 _{0.73}	-1.06	79.48 _{0.17}	81.78 _{0.09}	-2.3
		DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	6.69 _{0.07}	2.92 _{0.02}	3.78
		DeepSeek-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	3.99 _{0.07}	6.71 _{0.02}	-2.72
		DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	1.23 _{0.04}	2.97 _{0.02}	-1.75
		TextMonkey	7B	1.06 _{0.12}	0.53 _{0.06}	0.53	9.23 _{0.08}	12.29 _{0.13}	-3.06
		InternLM-XComposer2-VL	7B	1.06 _{0.09}	0.53 _{0.07}	0.53	13.1 _{0.03}	13.26 _{0.03}	-0.16
		InternVL-V1.5	25.5B	4.26 _{0.28}	3.19 _{0.38}	1.06	26.9 _{0.23}	16.31 _{0.14}	10.59
		MiniCPM-V2.5	8B	4.79 _{0.16}	7.45 _{0.35}	-2.66	20.58 _{0.11}	25.38 _{0.13}	-4.81
	MiniCPM-V2.5-FT	8B	6.91 _{0.33}	7.98 _{0.4}	-1.06	30.8 _{0.07}	31.46 _{0.52}	-0.66	
	Qwen-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	1.41 _{0.02}	0.66 _{0.03}	0.76	
	Yi-VL	34B	0.0 _{0.0}	0.0 _{0.0}	0	4.53 _{0.03}	1.84 _{0.05}	2.69	
	Yi-VL	6B	0.0 _{0.0}	0.0 _{0.0}	0	4.73 _{0.02}	1.55 _{0.02}	3.18	
	<i>Closed-source models</i>								
	Qwen-VL-Max	-	1.19 _{0.12}	1.98 _{0.09}	-0.79	6.19 _{0.1}	11.09 _{0.11}	-4.9	
	<i>Open-source models</i>								
	CogVLM2-Chinese	19B	3.19 _{0.19}	3.19 _{0.32}	0	18.33 _{0.14}	21.38 _{0.09}	-3.05	
	CogVLM2-Chinese-FT	19B	46.81 _{0.32}	46.28 _{0.49}	0.53	66.85 _{0.39}	69.79 _{0.12}	-2.95	
	DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	6.5 _{0.03}	4.16 _{0.03}	2.34	
	DeepSeek-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	5.22 _{0.04}	7.45 _{0.06}	-2.23	
	DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	1.35 _{0.02}	3.57 _{0.04}	-2.23	
	TextMonkey	7B	0.0 _{0.0}	0.0 _{0.0}	0	6.15 _{0.11}	6.62 _{0.11}	-0.47	
	InternLM-XComposer2-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	8.17 _{0.03}	7.99 _{0.03}	0.18	
	InternVL-V1.5	25.5B	0.0 _{0.0}	0.0 _{0.0}	0	7.7 _{0.08}	4.67 _{0.04}	3.03	
	MiniCPM-V2.5	8B	0.53 _{0.07}	0.53 _{0.07}	0	7.28 _{0.06}	7.71 _{0.06}	-0.43	
	MiniCPM-V2.5-FT	8B	1.06 _{0.08}	2.13 _{0.19}	-1.06	18.46 _{0.1}	16.42 _{0.22}	2.03	
	Qwen-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	1.1 _{0.04}	0.06 _{0.01}	1.04	
Yi-VL	34B	0.0 _{0.0}	0.0 _{0.0}	0	4.17 _{0.04}	2.02 _{0.04}	2.15		
Yi-VL	6B	0.0 _{0.0}	0.0 _{0.0}	0	4.15 _{0.06}	2.38 _{0.04}	1.77		

Table 6: Results of various open-source and closed-source vision language models on the VCR task using the first 500 test cases. Each test case includes one or more puzzles. FT means the model is finetuned on the VCR task. Subscripts provide the standard deviation obtained from bootstrap.

Lang	Mode	Model	Model size	Exact match (%) \uparrow			Jaccard index (%) \uparrow		
				VI + TEI	TEI	Δ	VI + TEI	TEI	Δ
EN	Easy	<i>Closed-source models</i>							
		Claude 3 Opus	-	62.0 _{0.13}	77.0 _{0.5}	-15	77.67 _{0.32}	88.41 _{0.39}	-10.74
		GPT-4 Turbo	-	78.74 _{0.13}	81.94 _{0.25}	-3.2	88.54 _{0.24}	92.18 _{0.3}	-3.65
		GPT-4o	-	91.55 _{0.29}	94.56 _{0.13}	-3.01	96.44 _{0.11}	97.76 _{0.06}	-1.32
		GPT-4V	-	52.04 _{0.24}	37.86 _{0.22}	14.17	65.36 _{0.39}	54.13 _{0.41}	11.23
		Qwen-VL-Max	-	76.8 _{0.5}	85.53 _{0.19}	-8.74	85.71 _{0.28}	91.45 _{0.29}	-5.74
		<i>Open-source models</i>							
		CogVLM2	19B	83.11 _{0.28}	79.63 _{0.33}	3.48	89.43 _{0.27}	88.65 _{0.26}	0.79
		CogVLM2-FT	19B	92.8 _{0.06}	92.67 _{0.13}	0.12	97.51 _{0.24}	97.45 _{0.07}	0.06
		DeepSeek-VL	1.3B	21.86 _{0.17}	30.68 _{0.3}	-8.82	45.4 _{0.33}	52.02 _{0.73}	-6.62
		DeepSeek-VL	7B	37.76 _{0.42}	45.47 _{0.21}	-7.7	59.07 _{0.43}	64.26 _{0.57}	-5.2
		DocOwl-1.5-Omni	8B	0.62 _{0.06}	1.86 _{0.06}	-1.24	12.65 _{0.3}	14.09 _{0.12}	-1.44
		TextMonkey	7B	47.2 _{0.2}	54.16 _{0.41}	-6.96	65.7 _{0.4}	71.17 _{0.72}	-5.47
		Idefics2	8B	14.91 _{0.14}	29.07 _{0.2}	-14.16	31.63 _{0.3}	51.5 _{0.21}	-19.87
		InternLM-XComposer2-VL	7B	46.09 _{0.35}	46.34 _{0.25}	-0.25	71.11 _{0.2}	71.76 _{0.67}	-0.65
		InternVL-V1.5	25.5B	15.78 _{0.23}	74.91 _{0.27}	-59.13	52.0 _{0.31}	86.82 _{0.47}	-34.82
		MiniCPM-V2.5	8B	32.8 _{0.16}	36.77 _{0.25}	-3.98	52.56 _{0.25}	60.89 _{0.19}	-8.32
		MiniCPM-V2.5-FT	8B	42.36 _{0.3}	45.34 _{0.35}	-2.98	65.39 _{0.6}	67.85 _{0.43}	-2.46
	Qwen-VL	7B	45.47 _{0.35}	52.17 _{0.33}	-6.71	66.81 _{0.74}	71.73 _{0.59}	-4.93	
	Yi-VL	34B	0.87 _{0.06}	1.24 _{0.04}	-0.37	5.61 _{0.28}	7.63 _{0.42}	-2.02	
	Yi-VL	6B	1.12 _{0.03}	1.37 _{0.14}	-0.25	5.93 _{0.16}	7.33 _{0.23}	-1.39	
	Hard	<i>Closed-source models</i>							
		Claude 3 Opus	-	37.8 _{0.28}	50.0 _{0.33}	-12.2	57.68 _{0.8}	70.16 _{0.64}	-12.48
		GPT-4 Turbo	-	45.15 _{0.28}	48.64 _{0.57}	-3.5	65.72 _{0.25}	67.86 _{0.2}	-2.14
		GPT-4o	-	73.2 _{0.16}	82.43 _{0.17}	-9.22	86.17 _{0.21}	92.01 _{0.2}	-5.84
		GPT-4V	-	25.83 _{0.44}	14.95 _{0.3}	10.87	44.63 _{0.48}	30.08 _{0.67}	14.56
		Qwen-VL-Max	-	41.65 _{0.32}	52.72 _{0.2}	-11.07	61.18 _{0.35}	70.19 _{0.37}	-9.01
		<i>Open-source models</i>							
		CogVLM2	19B	41.74 _{0.25}	16.77 _{0.22}	24.97	62.56 _{0.33}	38.41 _{0.44}	24.15
		CogVLM2-FT	19B	75.9 _{0.13}	65.22 _{0.18}	10.68	89.75 _{0.14}	82.71 _{0.27}	7.04
DeepSeek-VL		1.3B	0.37 _{0.02}	0.12 _{0.01}	0.25	11.42 _{0.09}	11.41 _{0.22}	0.01	
DeepSeek-VL		7B	0.75 _{0.02}	1.61 _{0.1}	-0.87	15.8 _{0.29}	17.18 _{0.41}	-1.38	
DocOwl-1.5-Omni		8B	0.0 _{0.0}	0.0 _{0.0}	0	7.34 _{0.06}	7.61 _{0.16}	-0.27	
TextMonkey		7B	1.37 _{0.05}	2.24 _{0.15}	-0.87	13.16 _{0.18}	14.45 _{0.24}	-1.29	
Idefics2		8B	0.62 _{0.02}	0.62 _{0.06}	0	9.24 _{0.11}	11.0 _{0.16}	-1.75	
InternLM-XComposer2-VL		7B	0.5 _{0.04}	0.37 _{0.05}	0.12	12.38 _{0.13}	13.22 _{0.11}	-0.83	
InternVL-V1.5		25.5B	1.74 _{0.13}	6.34 _{0.13}	-4.6	16.85 _{0.17}	26.11 _{0.24}	-9.26	
MiniCPM-V2.5		8B	1.74 _{0.08}	1.61 _{0.08}	0.12	11.55 _{0.24}	11.69 _{0.38}	-0.15	
MiniCPM-V2.5-FT		8B	11.43 _{0.11}	14.29 _{0.16}	-2.86	35.13 _{0.19}	36.65 _{0.68}	-1.52	
Qwen-VL	7B	1.61 _{0.03}	1.74 _{0.03}	-0.12	15.28 _{0.13}	14.43 _{0.54}	0.85		
Yi-VL	34B	0.12 _{0.01}	0.0 _{0.0}	0.12	4.31 _{0.08}	5.45 _{0.13}	-1.14		
Yi-VL	6B	0.12 _{0.02}	0.0 _{0.0}	0.12	4.49 _{0.05}	5.7 _{0.12}	-1.21		
ZH	Easy	<i>Closed-source models</i>							
		Qwen-VL-Max	-	6.34 _{0.08}	9.92 _{0.09}	-3.58	13.45 _{0.41}	22.86 _{0.46}	-9.42
		<i>Open-source models</i>							
		CogVLM2-Chinese	19B	33.63 _{0.15}	31.44 _{0.19}	2.2	57.97 _{0.56}	54.05 _{0.54}	3.92
		CogVLM2-Chinese-FT	19B	63.97 _{0.55}	62.67 _{0.17}	1.3	79.71 _{0.41}	79.22 _{0.47}	0.49
		DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	6.1 _{0.1}	3.25 _{0.05}	2.85
	DeepSeek-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	4.28 _{0.07}	7.3 _{0.05}	-3.02	
	DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	1.19 _{0.05}	3.83 _{0.06}	-2.63	
	TextMonkey	7B	0.2 _{0.01}	1.4 _{0.05}	-1.2	7.89 _{0.3}	10.26 _{0.24}	-2.37	
	InternLM-XComposer2-VL	7B	0.6 _{0.05}	0.2 _{0.04}	0.4	12.34 _{0.25}	12.52 _{0.14}	-0.18	
	InternVL-V1.5	25.5B	3.99 _{0.09}	4.69 _{0.18}	-0.7	25.88 _{0.45}	20.73 _{0.53}	5.15	
	MiniCPM-V2.5	8B	4.59 _{0.11}	4.89 _{0.09}	-0.3	18.12 _{0.33}	22.28 _{0.18}	-4.17	
	MiniCPM-V2.5-FT	8B	7.29 _{0.14}	7.09 _{0.12}	0.2	29.36 _{0.39}	30.67 _{0.38}	-1.31	
	Qwen-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	1.25 _{0.03}	0.43 _{0.06}	0.82	
	Yi-VL	34B	0.0 _{0.0}	0.0 _{0.0}	0	4.69 _{0.09}	1.71 _{0.06}	2.98	
	Yi-VL	6B	0.0 _{0.0}	0.0 _{0.0}	0	4.28 _{0.06}	1.66 _{0.04}	2.62	
	Hard	<i>Closed-source models</i>							
		Qwen-VL-Max	-	0.89 _{0.06}	1.38 _{0.1}	-0.49	5.4 _{0.19}	12.29 _{0.18}	-6.89
		<i>Open-source models</i>							
		CogVLM2-Chinese	19B	1.2 _{0.07}	2.3 _{0.09}	-1.1	16.83 _{0.22}	19.86 _{0.23}	-3.04
		CogVLM2-Chinese-FT	19B	42.51 _{0.32}	45.91 _{0.23}	-3.39	65.79 _{0.24}	69.46 _{0.46}	-3.68
		DeepSeek-VL	1.3B	0.0 _{0.0}	0.0 _{0.0}	0	6.87 _{0.09}	3.53 _{0.07}	3.33
		DeepSeek-VL	7B	0.0 _{0.0}	0.0 _{0.0}	0	5.49 _{0.07}	7.57 _{0.05}	-2.08
		DocOwl-1.5-Omni	8B	0.0 _{0.0}	0.0 _{0.0}	0	1.68 _{0.04}	4.42 _{0.07}	-2.73
TextMonkey		7B	0.0 _{0.0}	0.0 _{0.0}	0	5.69 _{0.15}	6.3 _{0.13}	-0.61	
InternLM-XComposer2-VL		7B	0.0 _{0.0}	0.0 _{0.0}	0	8.36 _{0.09}	7.92 _{0.09}	0.44	
InternVL-V1.5		25.5B	0.0 _{0.0}	0.0 _{0.0}	0	7.9 _{0.12}	6.11 _{0.26}	1.79	
MiniCPM-V2.5		8B	0.2 _{0.03}	0.2 _{0.01}	0	7.23 _{0.18}	7.6 _{0.13}	-0.37	
MiniCPM-V2.5-FT		8B	1.2 _{0.03}	1.4 _{0.06}	-0.2	18.01 _{0.35}	15.25 _{0.25}	2.76	
Qwen-VL		7B	0.0 _{0.0}	0.0 _{0.0}	0	1.1 _{0.07}	0.15 _{0.01}	0.94	
Yi-VL		34B	0.0 _{0.0}	0.0 _{0.0}	0	4.49 _{0.09}	1.73 _{0.1}	2.76	
Yi-VL		6B	0.0 _{0.0}	0.0 _{0.0}	0	3.95 _{0.05}	2.08 _{0.09}	1.87	

we show the table of evaluation results on first 100 and 500 test cases for better comparison with human evaluation results and closed-source models correspondingly.