

A topological analysis of the space of recipes

Emerson G. Escolar^a, Yuta Shimada^a, Masahiro Yuasa^a

^aKobe University Graduate School of Human Development and Environment, 3-11 Tsurukabuto, Nada, Kobe City, 657-8501, Hyogo, Japan

Abstract

In recent years, the use of data-driven methods has provided insights into underlying patterns and principles behind culinary recipes. In this exploratory work, we introduce the use of topological data analysis, especially persistent homology, in order to study the space of culinary recipes. In particular, persistent homology analysis provides a set of recipes surrounding the multiscale “holes” in the space of existing recipes. We then propose a method to generate novel ingredient combinations using combinatorial optimization on this topological information. We made biscuits using the novel ingredient combinations, which were confirmed to be acceptable enough by a sensory evaluation study. Our findings indicate that topological data analysis has the potential for providing new tools and insights in the study of culinary recipes.

Keywords: computational gastronomy, topological data analysis, novel recipe generation

1. Introduction

The application of data science to food is a novel and rapidly growing field with the potential to answer many interesting questions in gastronomy (Ahnert, 2013; Mouritsen et al., 2017; Bagler and Singh, 2018; Min et al., 2019b; Herrera, 2021; Goel and Bagler, 2022). In this study, we introduce the application of new ideas from topological data analysis in the study of cooking recipes. In particular, persistent homology (Landi and Frosini, 1997; Frosini and Landi, 1999; Robins, 1999; Edelsbrunner et al., 2002), one of the main tools in topological data analysis (see for example the books (Edelsbrunner and Harer, 2010; Carlsson and Vejdemo-Johansson, 2021; Dey and Wang, 2022)), is able to describe the multi-scale connected components, holes, voids (cavities), and so on, in data. The hope is that by understanding the shape of the data via topological quantities describing it, one can get hints as to the data generating process behind the phenomenon (Chazal and Michel, 2021). An initial impetus for this work is to apply this novel data analysis method (and related methods) in order to further understand the “shape” of the space of cooking recipes. Furthermore, once “holes” can be identified in the recipe space, these may point to potential opportunities for creating novel recipes.

Contributions. In this exploratory work, we introduce the use of topological data analysis, especially persistent homology, in order to study the space of culinary recipes. For this, we provide both an intuitive description with examples in the main text, and also provide mathematically precise definitions in the Appendix. Persistent homology analysis provides a set of recipes surrounding the multiscale “holes” in the space of existing recipes, which we exploit using combinatorial optimization in order to generate novel ingredient combinations. Our method optimizes the dissimilarity of the ingredient combination compared to existing recipes, while at the same time maintaining coherence by using the topological information consisting of a cycle of recipes detected by persistent homology. We perform analysis showing that the ingredient combinations generated by our method are novel with respect to the input data. We also selected some related ingredient combinations obtained from the analysis and confirmed that we can cook variations of a dish (cream cheese biscuits) from it. A sensory evaluation study confirmed that these biscuits were acceptable enough. We also discuss some limitations of our study and the potential for further explorations in Section 4.

Email addresses: e.g.escolar@people.kobe-u.ac.jp (Emerson G. Escolar), 246d502d@stu.kobe-u.ac.jp (Yuta Shimada), yuasa@people.kobe-u.ac.jp (Masahiro Yuasa)

URL: <https://emerson-escolar.github.io> (Emerson G. Escolar)

Preprint submitted to Somewhere

June 17, 2024

1.1. Related literature

Network science and topological ideas. Our use of topological data analysis is related to prior work applying network analysis to the study of food recipes (Herrera, 2021). One groundbreaking work in this field is the paper (Ahn et al., 2011), approaching the problem of identifying general principles of “food-pairing” (Blumenthal, 2008; Briscione and Parkhurst, 2018; Coucquyt et al., 2020). That is, they studied whether or not there are any general principles that support the ingredient combinations used in existing recipes, versus the astronomical number of theoretical possible ingredient combinations. The work (Ahn et al., 2011) approaches the topic using mathematical techniques from complex networks, to encode relations between ingredients and flavors as a network, called the *flavor network* (nodes are ingredients and edges are determined by shared flavor compounds between ingredients). Via their analysis, they argue that Western cuisines tends to prefer recipes that contains ingredients with similar flavor compounds, while Eastern Asian cuisines tend to avoid flavor sharing (Ahn et al., 2011). Further investigations into food-pairing have also been performed to other regional cuisines (Varshney et al., 2013; Jain et al., 2015; Issa et al., 2018; Tallab and Alrazgan, 2016; Al-Razgan et al., 2021; Doğan and Değerli, 2023), and an extension called food bridging (Simas et al., 2017) has been proposed.

Following (Ahn et al., 2011), we also focus our attention on the food recipes, but for this initial proof-of-concept study, we do not consider the flavor profiles of different ingredients, but instead focus on combinations of ingredients. We believe that our approach gives a complementary view on the recipe space, but a further study involving flavor profiles would also be interesting.

A similar approach has been adopted by (Kular et al., 2011). In that study, they constructed a network of 300 recipes from many different cuisines, where the nodes are recipes and edges are determined by the shared ingredients between recipes. They found that the network exhibits small-world and scale free properties. Furthermore, for some non-European cuisines, they (Kular et al., 2011) were able to detect those cuisines using network community analysis.

Persistent homology. In the field of text mining and image analysis, the paper (Wagner and Dłotko, 2014) uses persistent homology to reveal a global structure of similarities in their context of image and text documents. Furthermore, they argue that it is essential to incorporate higher-dimensional relationships, and suggests that topological data analysis can “point to parts of the feature-space which are not populated.” This is the perspective we adopt, as we use the topological methods to find regions (“holes”) of the recipe space we could exploit to suggest novel recipes. In particular, we take persistent homology as a tool for exploratory data analysis.

Another line of application of persistent homology is in materials science (Hiraoka et al., 2016; Saadatfar et al., 2017; Kimura et al., 2018). There, the interpretation of “holes” as detected by persistent homology is straightforward, as the data is usually a set of points (or an image) in 2D or 3D space, and a hole corresponds directly with a “physical” hole that one can visualize as-is¹. In contrast, our target space of the recipe space is high-dimensional, and thus similar visualizations are not as straightforward.

Machine learning and recipes. In recent years, the application of machine learning techniques for research into various tasks related to recipes and food. As a detailed survey and complete review of literature is beyond the scope of this paper, we refer the reader to survey papers (Min et al., 2019b,a; Goel and Bagler, 2022; Bondevik et al., 2023). We especially note a few papers that are more closely related to our theme of ingredient combinations. For example, (Kazama et al., 2018) proposes a system that can quantify the “regional cuisine style” mixture of recipes and can suggest ingredient substitutions to transform a recipe to fit better to a selected regional cuisine style. The work (Park et al., 2019) uses Siamese neural networks to propose a model called “KitcheNette” that predicts food ingredient pairing scores and can be used to recommend ingredient pairings. Furthermore, (Park et al., 2021) incorporates large-scale information about flavor molecules in food ingredients as a “FlavorGraph” and uses that information to recommend ingredient pairings.

¹Note that (persistent) homology describes a hole by an equivalence class of cycles surrounding it, and thus the representative cycles that can be used to illustrate it are not unique. This issue is discussed further in Subsection 2.3, and is independent of the point being raised here, which simply says that once a representative cycle for a hole is chosen and fixed, it can be directly drawn in 2D or 3D.

Recipes and chef’s creativity. Recipes are important tools for any food and culinary culture, especially for preparing dishes in a delicious, nutritious, and safe manner (Borghini, 2015). In general, recipes consist mainly of food ingredients and their quantities or weights, cooking methods and time, kitchen utensils and equipment, and food presentation. In general, recipes are employed for various reasons and in various situations, for example when cooking a dish for the first time, cooking traditional cuisines, for cooking practice or culinary training, for regulating nutritional qualities of dishes², for reducing cooking time and cost, and so on. In addition, various types of media exist for recipes, such as books, magazines, web pages, and apps. In this work, due to limitations in data and to simplify our analysis, we take a simplified view of recipes as combinations of ingredients; see the subsection 2.1 on data.

In general, chefs are experts who can use many recipes and cook many different dishes. Especially, creative chefs are regarded as culinary artists (Ekincek and Günay, 2023), because a chef’s culinary creativity is defined as the artistic and novel expression of the chef’s inner world, and the creativity is transferred to cuisine (Lee, 2021; Lee et al., 2020). Ekincek and Günay (2023) suggested that creative chefs are influenced by internal factors such as memories, instincts, travels, and experiences as well as external factors such as family, physical environment, culture, professional environment, and art (Ekincek and Günay, 2023). However, the variety of dishes that a chef can create depends on the chef’s creativity, which can be subjective and potentially limited by the range of internal and external factors. A tool for suggesting novel ideas for dishes may be beneficial for augmenting a creative chef’s potential for novelty, and the use of tools from data science may contribute to this.

2. Materials and Methods

2.1. Data

We obtained recipe data from Supplementary Dataset 2 of (Ahn et al., 2011). The data³ is a list of recipes, where each recipe is given as a list (set) of ingredients used, and a “region”⁴ associated to that recipe. The data contains duplicated ingredient lists, possibly caused by differently-named recipes using the same ingredients; these duplicates are removed. The basic statistics of this cleaned data are described in Table 1.

Number of recipes	48,983
Number of ingreds.	381
Ave. num. ingreds. per recipe	8.4936
Std. dev. num. ingreds. per recipe	3.5091

Table 1: Basic Statistics

In the network science perspective (see for example (Herrera, 2021)), this data forms a *recipe–ingredient bipartite network*, where the nodes are recipes and ingredients and edges are formed by linking each recipe to the ingredients it uses. Focusing on relationships between ingredients, one can consider the network with ingredients as nodes and with edges determined by whether or not two ingredients appear together in some recipe. This forms the *ingredient co-occurrence network*. Instead, our focus is on the recipes themselves, and we consider recipes as the nodes in our network. We discuss this construction below.

Each recipe is considered as a 0-1 vector via one-hot encoding of ingredients. In particular, we first order the list of all possible (relevant) ingredients i_1, i_2, \dots, i_M . Then, a recipe is considered as the vector $x \in \mathbb{R}^M$, where the j th coordinate x_j is 1 if the recipe uses ingredient i_j , and 0 otherwise. Throughout, we shall freely identify (sub)sets with 0-1 vectors. We let X be the set of all the 0-1 vectors of the recipes.

We use the cosine similarity (as used in the field of information retrieval; see for example (Singhal, 2001)), to measure the similarity of any two given recipes. In general, for vectors $x, y \in \mathbb{R}^M$, the cosine similarity between x and

²For example, it is indicated that online diet management apps are useful for health management in type 2 diabetes patients (Tominaga et al., 2022; Hironaka et al., 2024).

³Furthermore, this is different from the ingredient – flavor compound data used in the same work (Ahn et al., 2011) from which they constructed the flavor network (nodes are ingredients and edges are determined by shared flavor compounds between ingredients).

⁴For this dataset, the regions are ‘African’, ‘EastAsian’, ‘EasternEuropean’, ‘LatinAmerican’, ‘MiddleEastern’, ‘NorthAmerican’, ‘NorthernEuropean’, ‘SouthAsian’, ‘SoutheastAsian’, ‘SouthernEuropean’, and ‘WesternEuropean’

y is defined to be

$$s_{\cos}(x, y) := \frac{x \cdot y}{\|x\| \|y\|} = \cos(\theta)$$

where θ is the angle between x and y . For use with persistent homology, instead of similarity, we need a dissimilarity measure, so we use the *cosine dissimilarity* defined as

$$d_{\cos}(x, y) := 1 - s_{\cos}(x, y) = 1 - \frac{x \cdot y}{\|x\| \|y\|}.$$

In general, the more the vectors x and y are pointing in the same direction, d_{\cos} becomes closer to 0, while if x and y are closer to pointing in opposite directions, d_{\cos} becomes closer to its maximum possible value of 2. For our data, since recipes x and y have non-negative entries, the maximum possible value of $d_{\cos}(x, y)$ is 1, attained when x and y are orthogonal ($x \cdot y = 0$). We also remark that, given the way we are encoding recipes as vectors, the inner product $x \cdot y$ is exactly equal to the number of ingredients shared between recipes x and y . In Appendix B.1 we perform further analysis of the distribution of dissimilarities in the data.

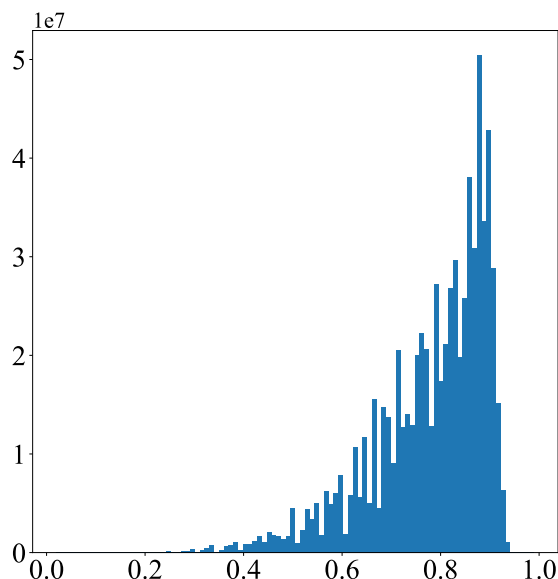


Figure 1: Histogram of cosine dissimilarities of distinct pairs of distinct recipes from the recipe data (Ahn et al., 2011), restricted to dissimilarities less than 1. There were 482,978,610 (out of 1,199,642,653) pairs with dissimilarity exactly equal to 1. These are the pairs of recipes that share no ingredients at all.

2.2. The Vietoris-Rips complex

We review basic ideas from topological data analysis. See for example the books (Edelsbrunner and Harer, 2010; Carlsson and Vejdemo-Johansson, 2021; Dey and Wang, 2022).

We associate a geometric shape to the recipe data using the mathematical construction known as the Vietoris-Rips complex, which is an example of a simplicial complex. The idea is the following. Choose some threshold value t . For each pair of recipes, if they are sufficiently similar (that is, if their dissimilarity is at most the chosen threshold) then we connect them by an edge. Similarly, for every triple of recipes, if each pair in the triple is sufficiently similar then we create a triangle, and so on.

In general, an *abstract simplicial complex* on a set of nodes (also called *vertices*) $X = \{x_1, x_2, \dots, x_n\}$ is a set K of nonempty subsets of X satisfying the condition that $\sigma \in K$ and $\emptyset \neq \tau \subset \sigma$ implies that $\tau \in K$. The elements $\sigma \in K$ (i.e. $\sigma \subset X$) are called the *simplices* of K . The simplices of K can be interpreted in the following way. A singleton $\{v\}$ in K is just the node v , a two-element set $\{x, y\}$ in K can be thought of as an edge connecting x and y , a three-element set $\{x, y, z\}$ in K can be thought of as a triangle involving x, y, z , and so on. The *dimension* of a simplex σ is its number

of elements minus 1. A vertex is 0-dimensional, an edge 1-dimensional, and so on. A simplex with dimension q will be also called a q -simplex. Each nonempty $\tau \subset \sigma$ is called a *face* of the simplex σ . For example, the faces of triangle $\sigma = \{x, y, z\}$ are: σ itself, the three edges $\{x, y\}$, $\{y, z\}$, $\{x, z\}$, and the three vertices $\{x\}$, $\{y\}$, $\{z\}$. Furthermore, one can think of a simplicial complex as a higher-dimensional generalization of a graph. In fact, a simple graph (with no loops and multiple edges) with vertex set X and edge set E can be thought of as a simplicial complex (with $K = \{\{v\} \mid v \in X\} \cup E$).

For a set X , a *dissimilarity* on X is a function $d : X \times X \rightarrow \mathbb{R}_{\geq 0}$ satisfying $d(x, x) = 0$ and $d(x, y) = d(y, x)$ for all $x, y \in X$. A pair (X, d) of a finite set X together with a dissimilarity d on X is called a (finite) *dissimilarity space*. Then, for a dissimilarity space (X, d) , its *Vietoris-Rips complex*⁵ at scale t , denoted $V_t(X)$, is the abstract simplicial complex containing all nonempty subsets σ of X such that every pair x, y in σ has dissimilarity at most t , or in symbols:

$$V_t(X) := \{\emptyset \neq \sigma \subset X \mid d(x, y) \leq t \text{ for all } x, y \in \sigma\}.$$

This definition captures the above intuition of forming edges, triangles, etc. based on comparing pairwise dissimilarities against the threshold value t .

Example 2.1. Let us consider a small example of a Vietoris-Rips complex $K = V_t(X)$ for the set $X = \{x_1, x_2, x_3, x_4, x_5\} \subset \mathbb{R}^4$ with

$$\begin{aligned} x_1 &= [1, 0, 0, 1] \\ x_2 &= [0, 0, 1, 1] \\ x_3 &= [0, 1, 1, 0] \\ x_4 &= [1, 1, 0, 0] \\ x_5 &= [1, 0, 0, 0] \end{aligned}$$

For example, this could arise from a data set of five recipes x_1, \dots, x_5 involving four ingredients i_1, \dots, i_4 , say, i_1 = coffee, i_2 = milk, i_3 = sugar, i_4 = cinammon powder where x_1 corresponds to the “recipe” using coffee and cinammon powder, x_2 the “recipe” of sugar and cinammon power, and so on.

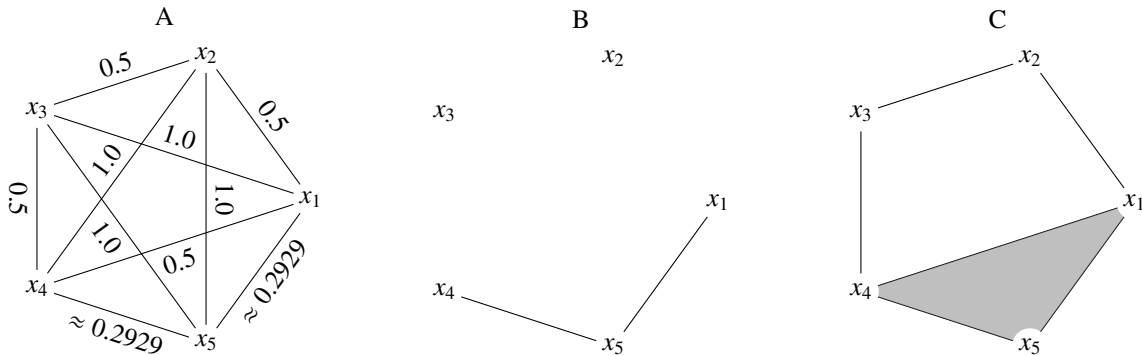


Figure 2: Illustrations for the Vietoris-Rips complex in Example 2.1. A, cosine dissimilarities between pairs of points. B, Vietoris-Rips complex $V_{t_1}(X)$ with threshold $t_1 = 1 - \frac{1}{\sqrt{2}}$. C, Vietoris-Rips complex $V_{t_2}(X)$ with threshold $t_2 = 0.5$.

In Figure 2A, we show the pairwise cosine dissimilarities between points of X as labels on edges, where for example

$$d_{\cos}(x_4, x_5) = d_{\cos}(x_1, x_5) = 1 - \frac{1}{\sqrt{2}} \approx 0.2929.$$

⁵We note that the usual definition of a Vietoris-Rips complex assumes that d is a metric; that is, $d(y, x) = d(x, y)$ for all $x, y \in X$, with $d(x, y) = 0$ if and only if $x = y$, and the triangle inequality ($d(x, z) \leq d(x, y) + d(y, z)$ for all $x, y, z \in X$) is satisfied. However, as also noted in (Chazal et al., 2014), the definition continues to make sense for a dissimilarity d , as we have presented here. We also remark that the cosine dissimilarity is not a metric, because the triangle inequality may not hold for certain choices of x, y, z .

Then, for example $V_0(X)$ (with threshold $t = 0$) is simply the set of points X , and $V_{t_1}(X)$ with threshold $t_1 = 1 - \frac{1}{\sqrt{2}}$ is as illustrated in Figure 2B and $V_{t_2}(X)$ with threshold $t_2 = 0.5$ is as illustrated in Figure 2C.

We compare and contrast this with a common way of constructing a network from recipes (for example the “Network of Recipes” construction of (Kular et al., 2011), see also (Herrera, 2021)), where nodes are recipes and each pair of recipes r_1 and r_2 is given an edge with weighting equal to the number of shared ingredients between r_1 and r_2 (we can delete the edges with weighting 0, i.e. no shared ingredients). Note that when recipes are encoded as 0-1 vectors with respect to the ingredients, the number of shared ingredients can also be expressed by the inner product $r_1 \cdot r_2$. In contrast, our construction uses the cosine dissimilarity $d_{\cos}(r_1, r_2) = 1 - \frac{r_1 \cdot r_2}{\|r_1\| \|r_2\|}$, which normalizes the inner product and turns it into a dissimilarity measure. Furthermore, the Vietoris-Rips complex considers higher-order relations (triples of recipes, quadruples, and so on) instead of just pairs of recipes.

2.3. (Persistent) homology

Here, we provide a quick introduction to the basic ideas and definitions for homology and persistent homology (Edelsbrunner et al., 2002). For any $q \in \{0, 1, 2, \dots\}$, we construct below a vector space called the “ q th-degree homology group with coefficients in \mathbb{F}_2 ”, denoted $H_q(K)$, of a simplicial complex K (for example, the Vietoris-Rips complex $K = V_t(X)$ at a fixed scale t). We give precise definitions in Appendix A.

Intuitively, $H_q(K)$ represents the q -dimensional “holes” (features) in K , where its dimension as a vector space counts the number of independent features. For example, $H_0(K)$ counts the number of connected components of K , $H_1(K)$ the number of independent loops, $H_2(K)$ the number of independent cavities, and so on. In Example 2.1, the 1st (i.e. $q = 1$) homology group of the Vietoris-Rips complex $K = V_{t_2}(X)$ with threshold $t_2 = 0.5$ is the vector space generated by the homology class of the cycle

$$z_1 = \{x_3, x_2\} + \{x_2, x_1\} + \{x_1, x_4\} + \{x_4, x_3\}$$

which represents the simple cycle that goes around the vertices x_3, x_2, x_1, x_4 and back to x_3 . Such a z_1 is called a *representative cycle*, and the set of cycles *equivalent* to it (i.e. cycles that differ from it by the boundary of a set of triangles) is called its homology class $[z_1]$. This homology class $[z_1]$ can also be given by the representative

$$z_2 = \{x_3, x_2\} + \{x_2, x_1\} + \{x_1, x_5\} + \{x_5, x_4\} + \{x_4, x_3\}$$

which takes a detour through x_5 . Their difference is the boundary of the triangle $\{x_1, x_5, x_4\}$, and thus $[z_1] = [z_2]$; at the homological level, these two cycles are considered the same.

For the Vietoris complex, what is the correct threshold t to use? Persistent homology bypasses this question by considering all possible (relevant) choices of $t \in \mathbb{R}$ simultaneously, as follows. First, we note that for $t \leq t'$, $V_t(X) \subseteq V_{t'}(X)$. This means that $V_t(X)$ forms a *filtration* of simplicial complexes (an increasing sequence of simplicial complexes). Persistent homology tracks the appearance (birth) and disappearance (death) of homology classes as we increase t .

A more precise statement is given in Appendix A, and the conditions below refer to the conditions in Theorem A.1. For each $q \in \{0, 1, 2, \dots\}$, persistent homology of the Vietoris-Rips filtration $\{V_t(X)\}_t$ provides a multiset of pairs of thresholds $\{(b_i, d_i)\}_{i=1}^s$ together with a set of q -cycles $\{c_i\}_{i=1}^s$, satisfying the following conditions. First, for each $i \in \{1, 2, \dots, s\}$, the cycle c_i is created exactly at threshold $t = b_i$ (conditions 1 and 2). Then, looking at its homology class at threshold t , $[c_i]_t$ is nonzero for t satisfying $b_i \leq t < d_i$ (condition 3), and becomes zero at threshold $t = d_i$ and beyond (condition 4). Finally, the choice of the set $\{c_i\}$ and pairs $\{(b_i, d_i)\}_{i=1}^s$ should capture all independent features at every scale t (condition 5).

The multiset of pairs is called the q th-degree persistence diagram of $\{V_t(X)\}_t$, which we shall denote by $D_q(X) = \{(b_i, d_i)\}_{i=1}^s$. While the multiset $\{(b_i, d_i)\}_{i=1}^s$ is uniquely defined, the set of cycles $\{c_i\}_{i=1}^s$ is not. We call c_i a *representative cycle* for the *birth-death pair* (b_i, d_i) . For a birth-death pair (b_i, d_i) , its *lifespan* is the value $d_i - b_i$.

A more direct interpretation can be given in our chosen setting (see also the interpretation in (Wagner and Dłotko, 2014, Section 7)), especially for $q = 1$. Consider a q -cycle c associated to the birth-death pair (b, d) . A q -cycle is composed of q -simplices; with $q = 1$, this is just a collection of edges (pairs of recipes). At the birth scale $t = b$ (when the cycle c is just created), each pair of recipes in the cycle have dissimilarity at most b , as a threshold. As we increase the threshold, more and more dissimilar recipes (equivalently, less and less similar recipes) are considered.

Eventually, at threshold d , the death scale, enough 2-simplices (i.e. triplets of recipes) with dissimilarity at most d are created, filling-in the cycle.

Furthermore, while we do not use it directly in our work, it is worth mentioning the following stability result for persistence diagrams of the Vietoris-Rips filtration of dissimilarity spaces. It guarantees that persistence diagrams are stable under small perturbations of the dissimilarities.

Theorem 2.2 ((Chazal et al., 2014, Theorem 5.2 and Subsection 4.2.5), also stated in (Turner, 2019)). Let (X, d_X) and (Y, d_Y) be finite dissimilarity spaces. Then,

$$d_l(D_q(X), D_q(Y)) \leq 2d_{\text{GH}}(X, Y)$$

where d_{GH} is the Gromov-Hausdorff distance (see (Burago et al., 2001, Definition 7.3.10)).

2.4. Recombination and simplification of identified recipes

Let us consider the 1st-degree ($q = 1$) persistence diagram and the representative cycles of the Vietoris complex of the recipe data (X, d_{cos}) . Each representative cycle c is a 1-cycle, and thus is a sum of 1-simplices (edges) $e_1 + e_2 + \dots + e_p$ with boundary equal to 0. The set of vertices (existing recipes) $\{r_1, r_2, \dots, r_\ell\}$ incident to these edges are the important recipes for this representative cycle detected by persistent homology.

In the case that c is a simple cycle, the cycle c is in the form $c = \{r_1, r_2\} + \{r_2, r_3\} + \dots + \{r_{\ell-1}, r_\ell\} + \{r_\ell, r_1\}$, forming a ring around a hole (technically, at least one hole) in $V_b(X)$ at the birth threshold $t = b$. In the case that c is not a simple cycle (see Figure B.9 in Appendix B.2), we can still consider the recipes $\{r_1, r_2, \dots, r_\ell\}$ involved in the representative cycle c as-is for the analysis below, or decompose c into simple cycles and use those instead. For our analysis we perform the latter procedure.

Next, we want to generate a new recipe r that is located somewhere in the hole surrounded by the cycle c . Naively, we can consider the centroid, in the following way. Each recipe r_i is a 0-1 vector in \mathbb{R}^M . The centroid of the points of c is therefore

$$\bar{c} := \frac{1}{\ell} \sum_{i=1}^{\ell} r_i.$$

However, \bar{c} is not a 0-1 vector, and its set of nonzero entries S corresponds simply to the union of all the ingredients in the recipes r_i . Furthermore, the size of S tends to be larger⁶ than the number of ingredients used in actual recipes, and so it is difficult to actually create a dish using all the ingredients in S .

Instead, we consider the following combinatorial optimization problem. Given an integer $\nu \geq 2$, we seek a size- ν subset y of S that is as far (dissimilar) as possible from existing recipes X . We want a solution

$$y_* := \operatorname{argmax}_{y \subset S, |y|=\nu} d_{\text{cos}}(y, X), \quad (1)$$

where the dissimilarity is $d_{\text{cos}}(y, X) := \min_{x \in X} d_{\text{cos}}(y, x)$. Note that we identify subsets $y \subset S \subset \{1, \dots, M\}$ with 0-1 vectors in \mathbb{R}^M . This is equivalent to finding solutions y_* for the following min-max problem:

$$\operatorname{argmin}_{y \subset S, |y|=\nu} \max_{x \in X} \frac{y \cdot x}{\|y\| \|x\|} \quad (2)$$

(each y_* is a recipe whose *similarity* with existing recipes is as small as possible).

To reduce the dimensionality, we restrict vectors to S , so that we can consider 0-1 vectors in $\mathbb{R}^{|S|}$ instead of in \mathbb{R}^M . Without loss of generality, let $S = \{1, 2, \dots, s\}$. For a vector $x = [x_1, x_2, \dots, x_M]^T \in \mathbb{R}^M$, let $\pi_S(x) := [x_1, x_2, \dots, x_s]^T \in \mathbb{R}^s$. Then, for $y \subset S$, (a 0-1 vector in \mathbb{R}^M whose support is contained in S), $\|\pi_S(y)\| = \|y\|$, and $\pi_S(y) \cdot \pi_S(x) = y \cdot x$ for all $x \in \mathbb{R}^M$. Furthermore, for 0-1 vectors y with exactly ν entries equal to 1, $\|y\| = \sqrt{\nu}$. Thus,

$$\frac{y \cdot x}{\|y\| \|x\|} = \pi_S(y) \cdot \frac{\pi_S(x)}{\sqrt{\nu} \|x\|}.$$

⁶Average of 36.6 for the top 10 cycles with the longest lifespans (see Table B.4) versus the average of 8.49 for the dataset.

For cases with the number of possible combinations $\binom{|S|}{\nu}$ is small enough, and with the above dimension reduction, a brute-force search to solve for y_* in Problem 2 may be enough.

We can also further transform Problem 2. Using the epigraph trick, this problem is equivalent to solving the following optimization problem

$$\operatorname{argmin} \left\{ \lambda \mid y \subset S, |y| = \nu, \lambda \in \mathbb{R}, \lambda \geq \frac{x \cdot y}{\|x\| \|y\|} \text{ for all } x \in X \right\}. \quad (3)$$

Applying the dimensionality reduction to Problem (3), we obtain the following mixed-integer linear programming problem, where we let $X_{S,t} := \left\{ \frac{\pi_S(x)}{\sqrt{\nu} \|x\|} \mid x \in X \right\} \subset \mathbb{R}^S$ and where $\mathbb{1}$ is the vector with all entries equal to 1.

$$\begin{aligned} & \text{minimize} && \lambda \\ & \text{subject to} && \nu^T y - \lambda \leq 0, \quad \text{for all } \nu \in X_{S,t} \\ & && \mathbb{1}^T y = \nu, \\ & && y \in \{0, 1\}^S, \\ & && \lambda \in \mathbb{R}. \end{aligned}$$

Note that there can be multiple optimal solutions, representing ties in the dissimilarity to existing recipes. After obtaining one optimal solution z , we add the condition $z^T y \leq \nu - 1$ to the linear programming problem, which excludes z from the set of feasible solutions without adding any unnecessary constraints. Then, we can solve the problem again and get a different optimal solution. We repeat this process as necessary. We use GLPK (GNU Linear Programming Kit, Version 5.0, <http://www.gnu.org/software/glpk/glpk.html>) to solve the mixed-integer linear programming problems.

In essence, the above method:

1. uses the existing recipes $\{r_1, r_2, \dots, r_\ell\}$ involved in a representative cycle c as identified by the persistent homology analysis as a starting point,
2. considers the set S of ingredients used in these existing recipes,
3. and sets up an optimization problem to find a (hopefully) new combination of ν ingredients in S that is as dissimilar as possible to existing recipes.

Thus, the method optimizes the dissimilarity of the ingredient combination compared to existing recipes, while at the same time maintaining coherence by using the topological information consisting of the cycle of recipes detected by persistent homology. We call a combination of ingredients obtained from our method a “solution” or a “suggestion” or a “suggested combination”.

2.5. Biscuits preparation

To confirm the potential viability of the suggested combinations from our method, four solutions (from the representative cycle with the longest lifespan) were selected. The four suggested combinations consisted of whole grain wheat flour, starch (corn starch), cranberry (dried cranberry), raisin, gin, and cream cheese (see List 1), suggesting biscuits. The composition of the biscuits prepared is presented in Table 2. Sugar was added because the recipe data (Ahn et al., 2011) does not contain seasonings (e.g. salt and sugar) as ingredients. Water was added to the No gin (NG) biscuit to equalize the dough weight with other biscuits. Corn starch was selected as starch because it is used commonly in baked goods. The control biscuit was prepared using all the ingredients.

The biscuits cooking method and the weights of the ingredients were decided by one of the authors (M.Y.) of this work, who is a dietitian, by reference to 19 cream cheese cookies and biscuits recipes (see Appendix B.4). Cream cheese (Yotsuba Milk Products Co., Ltd., Hokkaido, Japan) was stirred, and sugar (Fuji Nihon Seito Corporation., Tokyo, Japan) was added and mixed. Then, gin (THE BOTANIST, Scotland, England) was added and mixed, and minced dried cranberry (Tomizawa Shouten, Tokyo, Japan) and raisin (Tomizawa Shouten, Tokyo, Japan) were added and stirred. Subsequently, mixed whole grain wheat flour (Tomizawa Shouten, Tokyo, Japan) and corn starch (Tomizawa Shouten, Tokyo, Japan) were added and stirred, and this dough was cooled at 4 °C for 60 min. The dough was flattened out to a thickness of 3 mm, and was cut out to a diameter of 50 mm using the cookie cutter. Then, these were baked at 180 °C for 18 min, and were cooled down to room temperature. Biscuits were packed and sealed in a vacuum package, and were stored at 20 °C for 24 h for the sensory evaluation.

Ingredients (g)	Control	No corn starch (NCS)	No raisin (NR)	No gin (NG)	No cranberry (NCB)
Sugar	30	30	30	30	30
Whole grain wheat flour	45	90	45	45	45
Starch (corn starch)	45	-	45	45	45
Cranberry (dried cranberry)	10	10	20	10	-
Raisin	10	10	-	10	20
Gin	10	10	10	-	10
Water	-	-	-	10	-
Cream cheese	80	80	80	80	80

Table 2: Composition of biscuits

2.6. Sensory evaluation

Five biscuits (Control, NCS, NR, NG, and NCB) were placed on white dishes and randomly tasted by blinded subjects. The sensory evaluation was conducted by 19 untrained non-expert Japanese male and female students between the ages of 21.3 ± 2.6 years old. Perception of the intensity of color (-3 [bright] to +3 [dark]), texture (-3 [hard] to +3 [crispy]), sweetness and sourness (-3 [weak] to +3 [strong]) of the biscuits were examined. The individual preferences for the aroma, color, texture, taste, and overall judgment (-3 [dislike] to +3 [like]), and palatability (-3 [bad] to +3 [good]) of the biscuits were also examined. Additionally, the preference ranking was evaluated using a rank test for significance (Newell and MacFarlane, 1987). This sensory evaluation was approved by the Human Ethics Committee of Graduate School of Human Development and Environment, Kobe University (approval number: 653-2).

Statistical analysis for results of sensory evaluation were performed using Excel 2019 (Microsoft Japan Co., Ltd., Tokyo, Japan) and EZR software (Saitama Medical Center, Jichi Medical University, Saitama, Japan) (Kanda, 2013), which is a graphical user interface for R (The R Foundation for Statistical Computing, Vienna, Austria, version 4.0.3). The differences between the biscuits were compared using the Tukey’s honest significant difference (HSD) test. The ranking test was analyzed using the Newell and MacFarlane tables (Newell and MacFarlane, 1987). A p -value < 0.05 was considered significant.

3. Results

3.1. Topological data analysis of the recipe data

Persistence diagrams. We use the software “Ripser” (Bauer, 2021) to compute persistent homology and representative cycles⁷ for each birth-death pair in the persistence diagram. The 1st degree persistence diagram of the Vietoris-Rips filtration of the recipe data with respect to the cosine dissimilarity is shown in Figure 3A. As suggested by the histogram of lifespans in Figure 3B, there are some birth-death pairs (b, d) that have longer lifespans compared to the other birth-death pairs (i.e. are far from the diagonal). These are the birth-death pairs with lifespans greater than 0.27, where a gap occurs in the histogram (see also Table B.4 in the Appendix).

As explained in the beginning of subsection 2.4, each representative cycle c is associated to a list of recipes $(r_1, r_2, \dots, r_\ell)$ involved in its edges. For example, in Figure 4A, we display a partial list of the recipes involved in the cycle with the longest lifespan, while List 2 in the Appendix are the recipes involved in a cycle with the third longest lifespan. We observed that (for the computed representative cycles with large lifespans) going from one recipe r_i to the next recipe r_{i+1} in a cyclic fashion, only one ingredient is added or removed; that is, neighboring recipes in the detected cycles only differ by one ingredient.

In Figure 4B we display a bar plot of the regions associated to the 97 recipes appearing in the representative cycle of the birth-death pair with the longest lifespan. Note that due to the existence of multiple recipes with exactly the same list of ingredients in the data, some ingredient combinations are associated to multiple regions (possibly the same region multiple times), and thus the total number of regions exceeds the number of recipes 97. We see that

⁷Using the branch “representative-cycles” of Ripser.

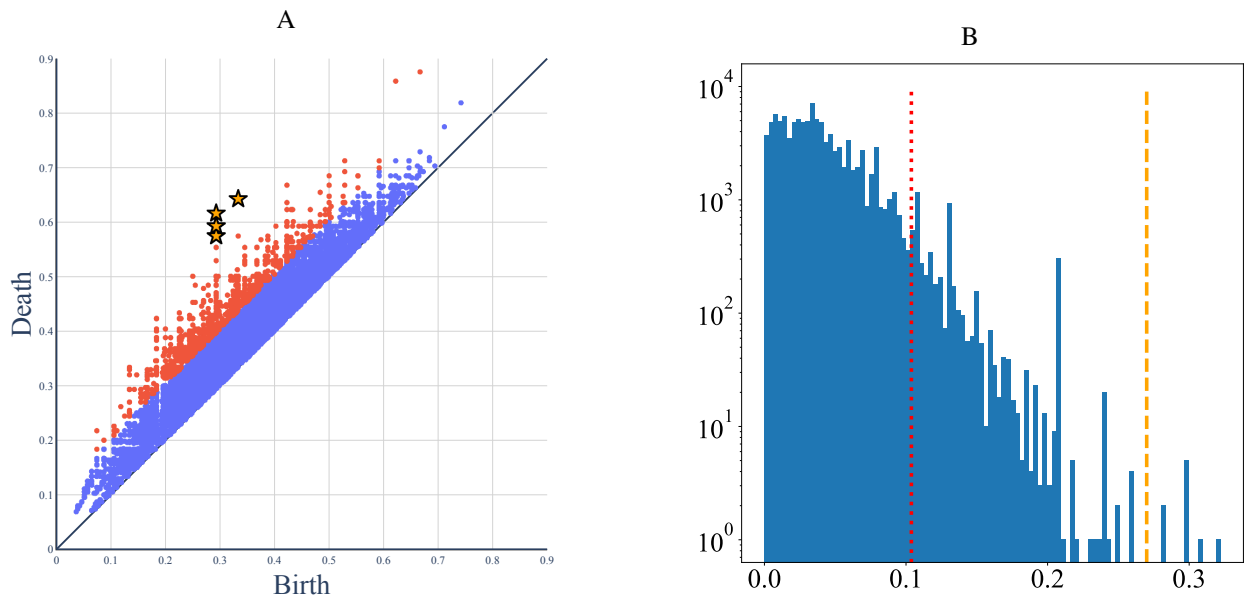


Figure 3: Result of the persistent homology analysis of the recipe data from (Ahn et al., 2011). A, 1st degree persistence diagram. The birth-death pairs with the top nine longest lifespans (lifespan > 0.27) are starred. Out of all the birth-death pairs, 5% (5,272 birth-death pairs) with the longest lifespans (“the top 5% birth-death pairs”), are shown in red. B, Histogram (with frequency in log-scale) of lifespans for the persistence diagram. The dissimilarity 0.27 is marked with the dashed line. The dotted red line is at the smallest lifespan (≈ 0.104) of the top 5% birth-death pairs.

the representative cycle is mostly formed of recipes from North American cuisine with some recipes from European cuisine mixed in.

In addition, we examine the top 5,272 birth-death pairs (5% of the total number, counting multiplicities) with the longest lifespans (birth-death pairs colored red in Figure 3A). Hereafter we shall use phrases such as “top 5% birth-death pairs” or “with the top 5% longest lifespans”⁸ to refer to these birth-death pairs.

We first examine the regionality of the recipes appearing in the representative cycles of the top 5% birth-death pairs. In Figure 5A, for these representative cycles, we plot a histogram of the number of distinct regions involved, and see that most representative cycles involve recipes from around four different regions. On the other hand, plotting the relative frequencies of the regions of the representative cycles in aggregate, versus the relative frequencies of the regions in the original data in Figure 5B, shows no significant difference (visually) in overall regions used in the representative cycles compared to the original recipe.

We then set up the combinatorial optimization problem described in subsection 2.4 with $\nu = 5$ in order to obtain, for a birth death pair (b, d) and its associated representative cycle c , a set of solutions to the optimization problem (1). Each solution is a set of $\nu = 5$ ingredients from the candidate set S determined from c , such that the solution is as dissimilar as possible to existing recipes. Note that there can be multiple solutions, representing ties in the dissimilarity to existing recipes. For example, applied to the cycle with the longest lifespan, we obtain solutions listed in List 1 (showing 5 out of 635 total number of solutions). For the analysis below, we perform the

```

('cranberry', 'cream cheese', 'gin', 'olive oil', 'raisin')
('cranberry', 'cream cheese', 'gin', 'raisin', 'starch')
('cranberry', 'cream cheese', 'gin', 'raisin', 'whole grain wheat flour')
('cranberry', 'cream cheese', 'gin', 'starch', 'whole grain wheat flour')
('cranberry', 'cream cheese', 'raisin', 'starch', 'whole grain wheat flour')

```

List 1: List of some solutions obtained to the combinatorial optimization problem associated to the representative cycles with longest lifespan.

⁸Note that we need take into account multiplicity. The same birth-death pair may appear multiple times, and there may be ties in the lifespans. For example, simply ordering the *distinct* lifespans as numbers (i.e. without repetition for the ties) and taking the top 5% gives a different (larger) list of birth-death pairs.

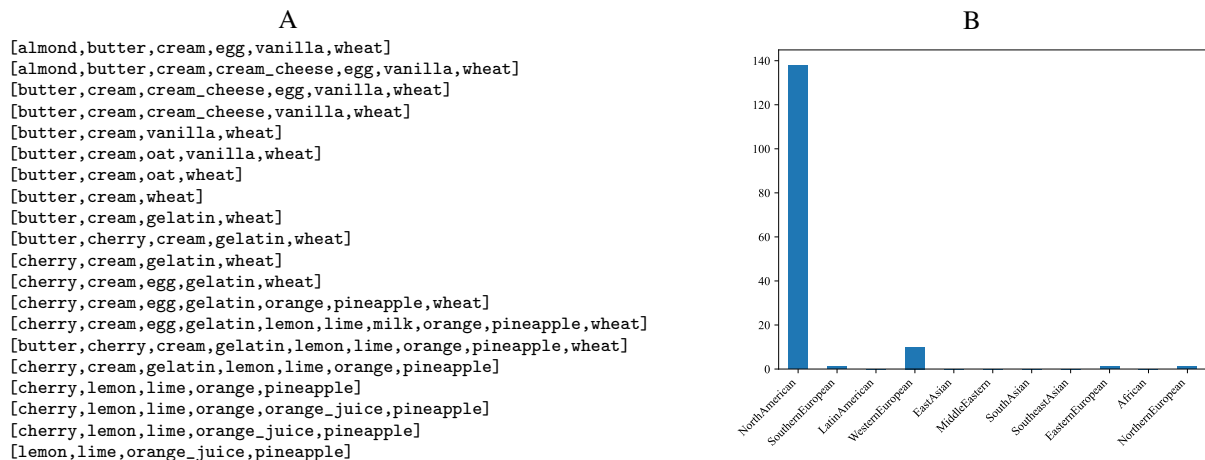


Figure 4: Basic information about the representative cycle of the birth-death pair with the longest lifespan. A, partial list of the existing recipes (showing only 20 out of a total of 97 recipes) in a representative cycle for the birth-death pair with the longest lifespan. B, regions associated to the 97 recipes appearing in the representative cycle of the birth-death pair with the longest lifespan.

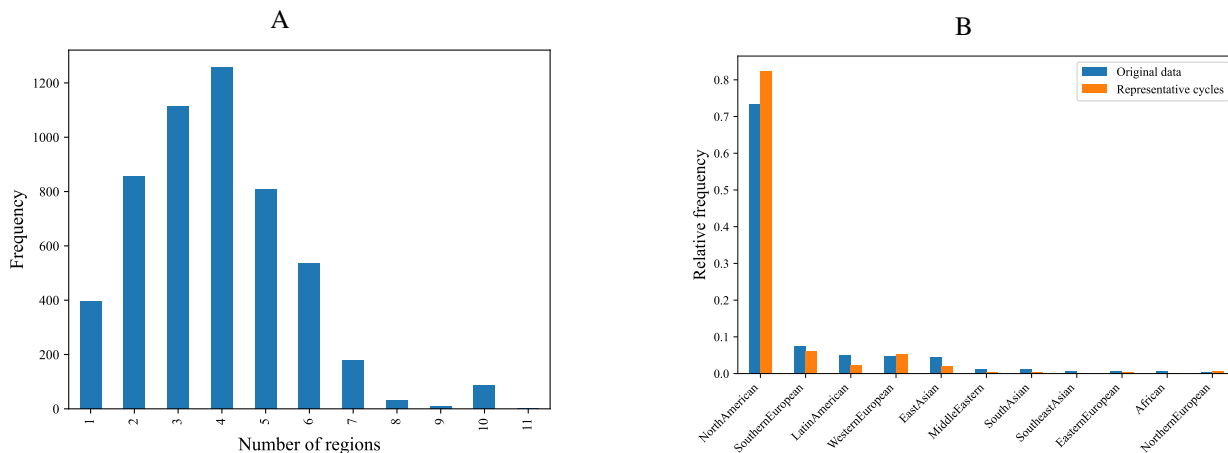


Figure 5: Regionality of the representative cycles of the top 5% birth-death pairs (5,272 cycles). A, histogram of number of distinct regions involved in the recipes of representative cycles of the top 5% birth-death pairs. B, relative frequencies of the regions associated to the recipes in the representative cycles of the top 5% birth-death pairs, versus in those in the original data.

computation for the representative cycles of the top 5% birth-death pairs, but we only pick up a sample of up to 20 solutions for each cycle, as obtained by the applying the solver GLPK (GNU Linear Programming Kit, Version 5.0, <http://www.gnu.org/software/glpk/glpk.html>) to solve the optimization problem described in subsection 2.4. Some cycles provide less than 5 candidate ingredients; these provide no solutions. Different cycles may lead to the same solutions; we remove duplicate solutions. We obtain a total of 31,478 distinct solutions (suggested combinations) in total, on which we perform further analysis below.

Combination novelty and ingredient usage statistics. We first analyze the 31,478 suggestions from our method (consisting of up to 20 solutions for the representative cycles of the top 5% birth-death pairs), by checking whether or not they are present in the existing data as-is, or as a sub-recipe of an existing recipe in the data. We found that out of the 31,478 suggestions, a small number 61 (0.19%) were in fact existing combinations in the dataset, and 506 (1.6%) were strict subcombinations of existing recipes⁹. For the former, this occurs when, given the set of candidate ingredients S

⁹Note that these two conditions are not mutually exclusive. A suggestion can be equal to an existing recipe, while at the same time being a strict subcombination of a (different) existing recipe.

computed from a representative cycle, all combinations of specified size ($v = 5$ in our case) of S are existing recipes. Intuitively, this is more likely to happen for a shorter representative cycle, which contains fewer recipes and thus fewer total ingredients to use as candidates. In our collected sample of suggestions, the largest lifespan where this occurs is ≈ 0.150 . For the latter, we are checking whether or not a solution y_* (a suggested combination from our method) satisfies the property that $y_* \subsetneq r$ for some existing recipe r in the dataset. In our collected sample of suggestions, the largest lifespan where this occurs is ≈ 0.207 . From the point of view of the novelty of the suggestions (with respect to the input data), the following interpretation can be given for these two possibilities. Clearly, the former cases cannot be considered as novel since they are existing recipes as-is, while the latter cases could be taken to mean removing one or more ingredients from an existing recipe. Note that the majority of the suggestions from our method does not fall into either of these cases.

To further investigate the characteristics of the combinations of ingredients suggested by our method, we explore ingredient usage statistics for both the original data and the sample of 31,478 suggested combinations obtained from our method. We plot the relative frequencies of ingredient usage in Figure 6. A visual inspection suggests that our method tends to suggest using ingredients not commonly used in the original data. This makes sense, as we are maximizing dissimilarity of ingredient combinations compared to the existing recipes. However, the method does not just preferentially use only rare ingredients (the right tail of Figure 6), because the initial analysis using persistent homology constrains candidate ingredients to only those appearing in representative cycles. Furthermore, it has been

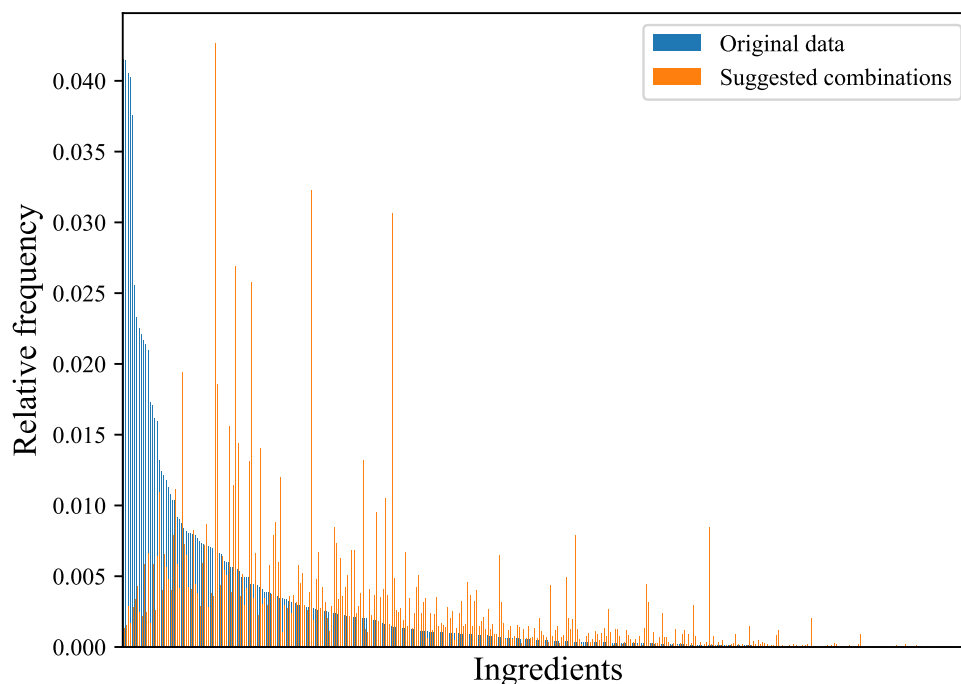


Figure 6: Relative frequencies of ingredients used in the original data (blue) versus in the suggestions obtained from our method (orange). We only apply our method to the representative cycles of the top 5% birth-death pairs (5,272 cycles), and only compute up to 20 solutions for each (for a total of 31,478 solutions). Ingredients are ordered in decreasing frequency of usage in the original data.

reported that ingredient usage frequencies follow a power law distribution (Kinouchi et al., 2008). In Appendix B.3 we consider the distribution of the frequencies themselves and performing curve fitting.

3.2. Cooking and sensory evaluation for biscuits

We checked that suggested ingredient combinations from the above analysis had viability as recipes of dishes. For cooking, we selected four similar ingredient combinations (List 1) obtained as solutions of our method. These combinations (List 1) were not existing combinations in the dataset nor strict subcombinations of existing recipes

¹⁰. Based on experience, the ingredient combinations were suggestive of ingredient lists for biscuits. Therefore, we prepared biscuits using these lists, and evaluated their sensory properties. The visual appearance of the resulting biscuits are displayed in Figure 7.

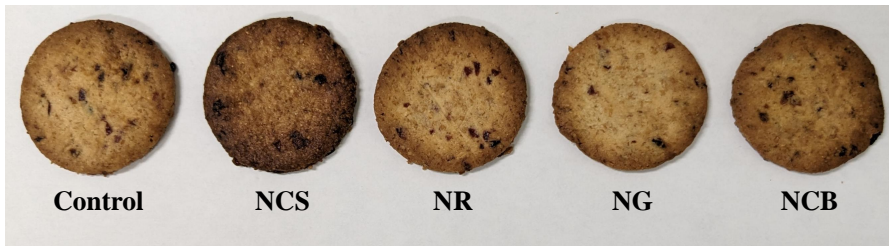


Figure 7: Visual appearance of biscuits

The results of the sensory evaluation are presented in Figure 8A and Figure 8B. Statistical analysis shows that the color of NCS and NCB biscuits were judged to be darker than the other biscuits. No statistically significant differences were found for the other evaluations and the rank orders of the biscuits. Scores of palatability and overall judgment of all biscuits were about 1.0, indicating that the suggested ingredient combinations (List 1 and Table 2) are potentially viable for recipes of biscuits.

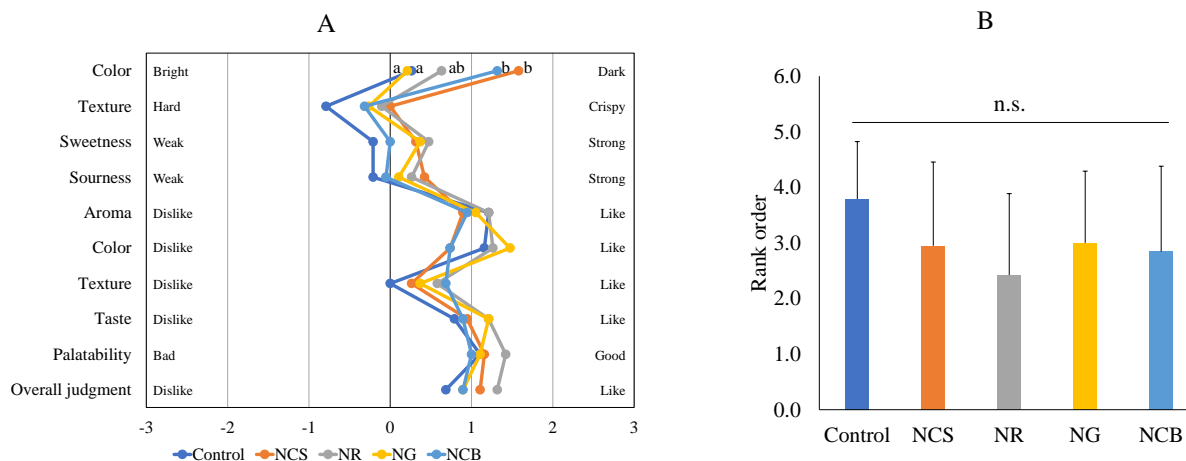


Figure 8: The results of sensory evaluation. NCS, no corn starch; NR, no raisin; NG, no gin; NCB, no cranberry. A, sensory properties of biscuits, values are the mean ($n = 19$). ^{a-b} $p < 0.05$ (Tukey's HSD test). B, ranking order of biscuits analyzing the Newell and MacFarlane tables (Newell and MacFarlane, 1987), values are mean \pm SD ($n = 19$).

4. Discussion

We discuss below some limitations of the current study.

In this work, for the data analysis we only considered recipes as combinations of ingredients, without regard to cooking methods or ingredient weights, etc. Indeed, we had to supplement the suggested combination from our method with cooking methods and ingredient weights using references to existing recipes. Furthermore, the method for vectorizing recipes uses a simple one-hot encoding of ingredients, and thus similar ingredients (for example, cheddar cheese and cream cheese) will be assigned different coordinates and treated as dissimilar objects.

¹⁰This can also be checked by noting the following. The critical lifespan (considering lifespans in descending order) where our method started producing suggestions that were subcombinations of existing recipes is ≈ 0.207 . The lifespan of the cycle from which these suggestions were produced is > 0.27 , and thus cannot be existing combinations nor strict subcombinations.

A priori, the following are some potential explanations for the presence of holes in recipe space: (1) missing data due to sampling issues; (2) “recipes” intentionally avoided, due to the resulting dish being judged as not delicious, etc.; or (3) novel recipes with culinary value. The latter two possibilities are inherent features of the dataset. Ideally one would like to be able to distinguish between the three cases.

Many solutions (ingredient combinations) were suggested by our method. While in this work we cooked variations of cream cheese biscuits from some of the solutions, further and more comprehensive investigation into viability of the other combinations for creating novel dishes is possible, especially from the point of view of assisting chefs’ creative cooking. For example, the following combinations were also obtained from our method, and could be interesting combinations to try to turn into novel dishes.

- cheddar cheese, melon, mustard, raisin, rum
- coffee, orange, pecan, shrimp, yeast
- bell pepper, chicken liver, cocoa, cucumber, maple syrup

We are preparing follow-up work to address the above limitations.

In the sensory evaluation, NCS and NCB biscuits were darker than other biscuits (Figure 8A). NCS biscuits did not include cornstarch, and thus these were darker than other biscuits. In addition, the sugar concentration of raisins is twice as much compared to dried cranberries (Swedish Food Agency, 2023). NCB biscuits did not contain any dried cranberry and contained twice the amount of raisin compared to other biscuits. Therefore, a potential explanation for why NCB biscuits were darker than other biscuits is a difference in the level of Maillard reaction.

5. Conclusion

We introduce the use of topological data analysis, especially persistent homology, for the study of the space of culinary recipes. In particular, we were able to identify sets of recipes surrounding the multiscale “holes” in the space of existing recipes, which we exploit using combinatorial optimization in order to generate novel ingredient combinations. We perform analysis showing that the ingredient combinations suggested by our method are novel with respect to the input data. We also selected some ingredient combinations obtained from the analysis and confirmed that we can cook variations of cream cheese biscuits from them. A sensory evaluation study confirmed that these biscuits were acceptable enough. Our findings indicate that topological data analysis has the potential for providing new insights in the study of culinary recipes and potentially for augmenting a chef’s creative process.

Implications for gastronomy

Recipes are important tools for any food and culinary culture, especially for preparing dishes in a delicious, nutritious, and safe manner. Chef’s culinary creativity is defined as the artistic and novel expression of the chef’s inner world, and the creativity is transferred to cuisine using their original recipes (Lee, 2021; Lee et al., 2020). However, creative chefs spend a lot of time creating novel recipes. In addition, the variety of dishes that a chef can create depends on the chef’s creativity, which can be subjective and potentially limited. A tool for suggesting novel ideas for dishes may be beneficial for augmenting a creative chef’s potential for novelty, and the use of tools from data science may contribute to this. In this study, we apply the topological data analysis in order to understand the “shape” of the space of cooking recipes, and “holes” are identified in the recipe space, and the potentiality of creating novel recipes is suggested. Our results will contribute to developing a tool for creating novel recipes and thus potentially contribute to the growth of gastronomy.

Funding

This research was supported by the Casio Science Promotion Foundation (Grant number 40-29) and by the Research Grant of Graduate School of Human Development and Environment, Kobe University. E.G.E is supported by JSPS Grant-in-Aid for Transformative Research Areas (A) (22H05105) and JSPS Grant-in-Aid for Scientific Research (C) (24K06846).

Acknowledgment

None.

Author Statement

E.G.E.: Conceptualization, Methodology, Formal analysis, Software, Investigation - statistical and topological data analysis, Writing, Funding acquisition. **Y.S.:** Software, Investigation - statistical and topological data analysis, Writing – review and editing. **M.Y.:** Conceptualization, Methodology, Investigation - cooking and sensory evaluation experiments, Writing.

Declaration of competing interest

The authors declare no conflict of interest.

Data availability

Primary data is the recipe data from Supplementary Dataset 2 of Ahn et al. (2011), available at <https://doi.org/10.1038/srep00196>.

References

- Ahn, Y.Y., Ahnert, S.E., Bagrow, J.P., Barabási, A.L., 2011. Flavor network and the principles of food pairing. *Scientific reports* 1, 196.
- Ahnert, S.E., 2013. Network analysis and data mining in food science: the emergence of computational gastronomy. *Flavour* 2, 1–3.
- Al-Razgan, M., Tallab, S., Alfakih, T., 2021. Exploring the food pairing hypothesis in saudi cuisine using genetic algorithm. *Mathematical Problems in Engineering* 2021, 1–16.
- Alstott, J., Bullmore, E., Plenz, D., 2014. Powerlaw: a Python package for analysis of heavy-tailed distributions. *PLoS ONE* 9, e85777. doi:10.1371/journal.pone.0085777.
- Bagler, G., Singh, N., 2018. Data-driven investigations of culinary patterns in traditional recipes across the world, in: 2018 IEEE 34th International Conference on Data Engineering Workshops (ICDEW), IEEE. pp. 157–162.
- Bauer, U., 2021. Ripser: efficient computation of Vietoris-Rips persistence barcodes. *J. Appl. Comput. Topol.* 5, 391–423. doi:10.1007/s41468-021-00071-5.
- Blumenthal, H., 2008. *The big fat duck cookbook*. Bloomsbury.
- Bondevik, J.N., Bennin, K.E., Babur, Ö., Ersch, C., 2023. A systematic review on food recommender systems. *Expert Systems with Applications* , 122166.
- Borghini, A., 2015. What is a recipe? *Journal of Agricultural and Environmental Ethics* 28, 719–738.
- Briscone, J., Parkhurst, B., 2018. *The flavor matrix: the art and science of pairing common ingredients to create extraordinary dishes*. Houghton Mifflin Harcourt.
- Burago, D., Burago, Y., Ivanov, S., 2001. *A course in metric geometry*. volume 33. American Mathematical Society Providence.
- Carlsson, G., Vejdemo-Johansson, M., 2021. *Topological data analysis with applications*. Cambridge University Press.
- Carlsson, G., Zomorodian, A., 2005. Computing persistent homology. *Discrete Comput. Geom* 33, 249–274.
- Chazal, F., De Silva, V., Oudot, S., 2014. Persistence stability for geometric complexes. *Geometriae Dedicata* 173, 193–214.
- Chazal, F., Michel, B., 2021. *An introduction to topological data analysis: fundamental and practical aspects for data scientists*. *Frontiers in artificial intelligence* 4, 108.
- Coucqy, P., Lahousse, B., Langenbick, J., 2020. *The Art & Science of Foodpairing: 10,000 Flavour Matches that Will Transform the Way You Eat*. Mitchell Beazley.
- De Silva, V., Morozov, D., Vejdemo-Johansson, M., 2011. Dualities in persistent (co) homology. *Inverse Problems* 27, 124003.
- Dey, T.K., Wang, Y., 2022. *Computational topology for data analysis*. Cambridge University Press.
- Doğan, M., Değerli, A.H., 2023. Computational gastronomy: A study to test the food pairing hypothesis in turkish cuisine. *International Journal of Gastronomy and Food Science* , 100795.
- Edelsbrunner, H., Harer, J., 2010. *Computational Topology: An Introduction*. American Mathematical Soc.
- Edelsbrunner, H., Letscher, D., Zomorodian, A., 2002. Topological persistence and simplification. *Discrete Comput Geom* 28, 511–533.
- Ekincek, S., Günay, S., 2023. A recipe for culinary creativity: Defining characteristics of creative chefs and their process. *International Journal of Gastronomy and Food Science* 31, 100633.
- Frosini, P., Landi, C., 1999. Size theory as a topological tool for computer vision. *Pattern Recognition and Image Analysis* 9, 596–603.
- Giller, G.L., 2012. The statistical properties of random bitstreams and the sampling distribution of cosine similarity. Available at SSRN 2167044 .
- Goel, M., Bagler, G., 2022. Computational gastronomy: A data science approach to food. *Journal of Biosciences* 47, 12.
- Herrera, J.C.S., 2021. The contribution of network science to the study of food recipes. a review paper. *Appetite* 159, 105048.

- Hiraoka, Y., Nakamura, T., Hirata, A., Escobar, E.G., Matsue, K., Nishiura, Y., 2016. Hierarchical structures of amorphous solids characterized by persistent homology. *Proceedings of the National Academy of Sciences* 113, 7035–7040.
- Hironaka, J., Okada, H., Minamida, M., Kondo, Y., Nakajima, H., Majima, S., Kitagawa, N., Okamura, T., Senmaru, T., Ushigome, E., Nakanishi, N., Hamada, K., Nojiri, T., Hamaguchi, M., Fukui, M., 2024. Impact of an online nutrition management application service on glycaemic management in individuals with diabetes: A propensity-score-matched retrospective cohort study. *Diabetes, Obesity and Metabolism* 26, 1757–1765. doi:<https://doi.org/10.1111/dom.15487>.
- Issa, L., Alghanim, F., Obeid, N., 2018. Analysis of food pairing in some eastern mediterranean countries, in: 2018 8th International Conference on Computer Science and Information Technology (CSIT), IEEE. pp. 167–172.
- Jain, A., NK, R., Bagler, G., 2015. Analysis of food pairing in regional cuisines of india. *PloS one* 10, e0139539.
- Kanda, Y., 2013. Investigation of the freely available easy-to-use software ‘ezr’ for medical statistics. *Bone marrow transplantation* 48, 452–458.
- Kazama, M., Sugimoto, M., Hosokawa, C., Matsushima, K., Varshney, L.R., Ishikawa, Y., 2018. A neural network system for transformation of regional cuisine style. *Frontiers in ICT* 5, 14.
- Kimura, M., Obayashi, I., Takeichi, Y., Muraio, R., Hiraoka, Y., 2018. Non-empirical identification of trigger sites in heterogeneous processes using persistent homology. *Scientific reports* 8, 3553.
- Kinouchi, O., Diez-Garcia, R.W., Holanda, A.J., Zambianchi, P., Roque, A.C., 2008. The non-equilibrium nature of culinary evolution. *New Journal of Physics* 10, 073020. doi:[10.1088/1367-2630/10/7/073020](https://doi.org/10.1088/1367-2630/10/7/073020).
- Kular, D.K., Menezes, R., Ribeiro, E., 2011. Using network analysis to understand the relation between cuisine and culture, in: 2011 IEEE Network Science Workshop, IEEE. pp. 38–45.
- Landi, C., Frosini, P., 1997. New pseudodistances for the size function space, in: *Vision Geometry VI*, SPIE. pp. 52–60.
- Lee, K.S., 2021. Pâte à choux, a love story: Expressions of a culinarian. *International Journal of Gastronomy and Food Science* 24, 100348.
- Lee, K.S., Blum, D., Miao, L., Tomas, S.R., 2020. The creative minds of extraordinary pastry chefs: an integrated theory of aesthetic expressions—a portraiture study. *International Journal of Contemporary Hospitality Management* 32, 3015–3034.
- Min, W., Jiang, S., Jain, R., 2019a. Food recommendation: Framework, existing solutions, and challenges. *IEEE Transactions on Multimedia* 22, 2659–2671.
- Min, W., Jiang, S., Liu, L., Rui, Y., Jain, R., 2019b. A survey on food computing. *ACM Computing Surveys (CSUR)* 52, 1–36.
- Mouritsen, O.G., Edwards-Stuart, R., Ahn, Y.Y., Ahnert, S.E., 2017. Data-driven methods for the study of food perception, preparation, consumption, and culture. *Frontiers in ICT* 4, 15.
- Newell, G.J., MacFarlane, J.D., 1987. Expanded tables for multiple comparison procedures in the analysis of ranked data. *Journal of Food science* 52, 1721–1725.
- Obayashi, I., 2018. Volume-optimal cycle: Tightest representative cycle of a generator in persistent homology. *SIAM Journal on Applied Algebra and Geometry* 2, 508–534.
- Park, D., Kim, K., Kim, S., Spranger, M., Kang, J., 2021. Flavorgraph: a large-scale food-chemical graph for generating food representations and recommending food pairings. *Scientific reports* 11, 931.
- Park, D., Kim, K., Park, Y., Shin, J., Kang, J., 2019. Kitchenette: Predicting and ranking food ingredient pairings using siamese neural networks, in: 28th International Joint Conference on Artificial Intelligence, IJCAI 2019, International Joint Conferences on Artificial Intelligence. pp. 5930–5936.
- Robins, V., 1999. Towards computing homology from finite approximations. *Topology proceedings* 24, 503–532.
- Saadatfar, M., Takeuchi, H., Robins, V., Francois, N., Hiraoka, Y., 2017. Pore configuration landscape of granular crystallization. *Nature communications* 8, 15082.
- Simas, T., Ficek, M., Diaz-Guilera, A., Obrador, P., Rodriguez, P.R., 2017. Food-bridging: a new network construction to unveil the principles of cooking. *Frontiers in ICT* 4, 14.
- Singhal, A., 2001. Modern information retrieval: A brief overview. *IEEE Data Eng. Bull.* 24, 35–43.
- Swedish Food Agency, 2023. The Swedish Food Agency food database, version 2023-06-13. URL: <https://soknaringsinnehall.livsmedelsverket.se>. accessed on May 14, 2024.
- Tallab, S.T., Alrazgan, M.S., 2016. Exploring the food pairing hypothesis in arab cuisine: A study in computational gastronomy. *Procedia Computer Science* 82, 135–137.
- Tominaga, H., Hamaguchi, M., Ando, S., Minamida, M., Kondo, Y., Hamada, K., Nojiri, T., Fukui, M., 2022. Individuals with type 2 diabetes mellitus tend to select low-carbohydrate, low-calorie food menus at home on diet application. *Nutrients* 14, 4290.
- Turner, K., 2019. Rips filtrations for quasimetric spaces and asymmetric functions with stability results. *Algebraic & Geometric Topology* 19, 1135–1170.
- Varshney, K.R., Varshney, L.R., Wang, J., Myers, D., 2013. Flavor pairing in medieval european cuisine: A study in cooking with dirty data. *arXiv preprint arXiv:1307.7982*.
- Wagner, H., Dlotko, P., 2014. Towards topological analysis of high-dimensional feature spaces. *Computer Vision and Image Understanding* 121, 21–26.
- Zipf, G.K., 1949. *Human behaviour and the principle of least-effort*. Reading: Addison-Wesley 24.

Appendix A. Detailed definitions

The details for the definition of homology are as follows. First, for mathematical simplicity, we consider homology (and vector spaces) with coefficients in \mathbb{F}_2 ; this is the field with two elements $\{0, 1\}$ and with addition $1 + 1 = 0$. Let $C_q(K)$ be the vector space of formal finite sums of q -simplices of K , with coefficients in \mathbb{F}_2 . Letting the q -simplices of K be $\{\sigma_1, \sigma_2, \dots, \sigma_{\ell_q}\}$, each element c of $C_q(K)$ (called a q -chain) is of the form $c = \sum_{i=1}^{\ell_q} \delta_i \sigma_i$ for some $\delta_i \in \mathbb{F}_2$. Geometrically, c can be thought of as the collection of q -simplices σ_i for i with $\delta_i \neq 0$ (i.e. $\delta_i = 1$). The *boundary* of a q -simplex $\sigma = \{v_0, v_1, \dots, v_q\} \in K$ is the $(q-1)$ -chain $\partial_q(\sigma) = \sum_{i=0}^q \{v_0, v_1, \dots, \hat{v}_i, \dots, v_q\}$ where \hat{v}_i means to remove the vertex v_i , i.e. $\{v_0, v_1, \dots, \hat{v}_i, \dots, v_q\}$ is the $(q-1)$ -simplex with vertices v_0, v_1, \dots, v_q , excluding v_i . Defined this way, the above extends to a linear map ∂_q from $C_q(K)$ to $C_{q-1}(K)$ called the q th *boundary operator* of K .

The kernel $Z_q(K) = \ker \partial_q = \{z \in C_q(K) \mid \partial_q(z) = 0\}$ is called the space of q -cycles of K , while the image $B_q(K) = \text{im } \partial_{q+1} = \{\partial_{q+1}(c) \mid c \in C_{q+1}(K)\}$ is called the space of q -boundaries of K . From the property that $\partial_q \partial_{q+1} = 0$, it follows that $B_q(K) \subseteq Z_q(K)$. The quotient vector space $H_q(K) = Z_q(K)/B_q(K)$ is called the q th *homology group* of K . For a q -cycle $z \in Z_q(K)$, its equivalence class $z + B_q(K)$ in $H_q(K)$ is also denoted by $[z] = z + B_q(K)$ and is called the *homology class* of z . On the other hand, for a homology class $[z]$, z is called a *representative* of the homology class $[z]$. Note that for a homology class $[z]$, any $z' \in [z]$ (i.e. $z' = z + b$ for some $b \in B_q(K)$) can serve as a representative, since in this case $[z] = [z']$.

For persistent homology, the following restatement of the main theorem of (Edelsbrunner et al., 2002; Carlsson and Zomorodian, 2005) (see also (Obayashi, 2018, Section 2.1), (De Silva et al., 2011, Theorem 2.6)) is one way of expressing the persistence diagram and a set of its representative cycles, applied to Vietoris-Rips filtrations. Below, for a q -cycle $c \in Z_q(V_t(X))$, we let the homology class of c in $H_q(V_t(X))$ be denoted by $[c]_t$, instead of just $[c]$, to specify the threshold t at which we are considering it.

Theorem A.1. There exists a set q -cycles $\{c_i\}_{i=1}^s$ and a unique multiset of pairs $\{(b_i, d_i)\}_{i=1}^s$ ($b_i \in \mathbb{R}$, $d_i \in \mathbb{R} \cup \{\infty\}$) such that the following hold.

1. If $t < b_i$ then $c_i \notin Z_q(V_t(X))$.
2. If $b_i \leq t$ then $c_i \in Z_q(V_t(X))$.
3. If $b_i \leq t < d_i$ then $[c_i]_t \neq 0$.
4. If $d_i \leq t$ then $[c_i]_t = 0$.
5. For each $t \in \mathbb{R}$, $\{[c_i]_t \mid i \text{ satisfies } b_i \leq t < d_i\}$ forms a basis for $H_q(V_t(X))$.

Appendix B. Additional analysis and results

Appendix B.1. Mean and standard deviation of the dissimilarities

We further explore the cosine dissimilarities of the recipe data, by considering the following random model. A *random bitstream* (Giller, 2012) is a vector B in $\{0, 1\}^M$ where each component is independently drawn from the Bernoulli distribution with parameter p . We write this as $B \sim \text{Bitstream}(M, p)$. Then, for $A \sim \text{Bitstream}(M, p)$ and $B \sim \text{Bitstream}(M, q)$ independent, the following approximations were given (Giller, 2012):

$$\mathbb{E}(d_{\cos}(A, B)) \approx 1 - \sqrt{pq} \tag{B.1}$$

$$\text{Var}(d_{\cos}(A, B)) \approx \frac{4 - 3p - 3q + 2pq}{4M}. \tag{B.2}$$

Using $p = q = \frac{\text{Ave. num. ingreds. per recipe}}{\text{Number of ingreds.}} \approx \frac{8.4936}{381} \approx 0.0223$, we obtained the numbers in Table B.3 column (a). The numbers in Table B.3 column (b) are computed using all pairwise dissimilarities of the data. Since this violates the independence assumption for A and B in $d_{\cos}(A, B)$, we also compute the mean and standard deviation of the cosine dissimilarities between the recipes randomly paired without replacement and give the result in Table B.3 column (c). Compared to the (approximate) theoretical values of the random model, the dissimilarities of recipes in the recipe data have smaller mean and larger standard deviation. This suggests that the random bitstream model (which is purely random) is not a good fit for the recipes. Indeed, a copy-mutate model has been proposed to model cuisine evolution Kinouchi et al. (2008).

	(a) from Eqs. (B.1)(B.2)	(b) all pairwise dissimilarities of recipes	(c) dissimilarities of randomly paired recipes
Mean d_{\cos}	0.9777	0.8681	0.8643
Std. dev d_{\cos}	0.05037	0.1414	0.1426

Table B.3: Statistics for cosine dissimilarities

Appendix B.2. Birth-death pairs and representative cycles

	birth-death pair	lifespan	num recipes in rep. cycle	num ingreds. in rep. cycle
1	(0.292893, 0.6151)	0.322207	97	40
2	(0.333333, 0.641431)	0.308098	64	27
3	(0.292893, 0.591752)	0.298859	85	41
4	(0.292893, 0.591752)	0.298859	35	20
5	(0.292893, 0.591752)	0.298859	83	34
6	(0.292893, 0.591752)	0.298859	77	34
7	(0.292893, 0.591752)	0.298859	125	53
8	(0.292893, 0.573599)	0.280706	99	41
9	(0.292893, 0.573599)	0.280706	84	36
10	(0.292893, 0.552786)	0.259893	93	40

Table B.4: Birth-death pairs and number of recipes and ingredients in the representative cycles for the top 10 largest lifespans.

```

['bean', 'beef', 'cayenne', 'cumin', 'garlic', 'onion', 'tomato']
['beef', 'cayenne', 'cumin', 'garlic', 'onion', 'tomato']
['beef', 'cayenne', 'garlic', 'onion', 'tomato']
['cayenne', 'garlic', 'onion', 'tomato']
['cayenne', 'garlic', 'olive_oil', 'onion', 'tomato']
['garlic', 'olive_oil', 'onion', 'tomato']
['olive_oil', 'onion', 'tomato']
['olive_oil', 'onion', 'pepper', 'tomato']
['olive_oil', 'onion', 'pepper']
['olive_oil', 'onion', 'pepper', 'pork']
['onion', 'pepper', 'pork']
['onion', 'pork']
['chicken', 'onion', 'pork']
['chicken', 'pork']
['pork']
['pork', 'sherry']
['sherry']
['cheese', 'sherry']
['cheese']
['bacon', 'cheese']
['bacon', 'cheese', 'pork']
['bacon', 'bean', 'cheese', 'pork', 'white_bread']
['bacon', 'bean', 'bread', 'cheese', 'onion', 'pork']
['bacon', 'bean', 'cheese', 'mushroom', 'onion']
['bean', 'mushroom', 'onion']
['mushroom', 'onion']
['beef', 'mushroom', 'onion']
['beef', 'mushroom', 'onion', 'tomato']
['beef', 'onion', 'tomato']
['beef', 'onion', 'tomato', 'vegetable']
['beef', 'black_pepper', 'onion', 'tomato', 'vegetable']
['beef', 'black_pepper', 'garlic', 'onion', 'red_kidney_bean', 'tomato', 'vegetable']
['beef', 'black_pepper', 'cayenne', 'garlic', 'onion', 'red_kidney_bean', 'tomato']
['bean', 'beef', 'black_pepper', 'cayenne', 'garlic', 'onion', 'tomato']
['bean', 'beef', 'black_pepper', 'cayenne', 'cumin', 'garlic', 'onion', 'tomato']

```

List 2: List of recipes in an example of a representative cycle.

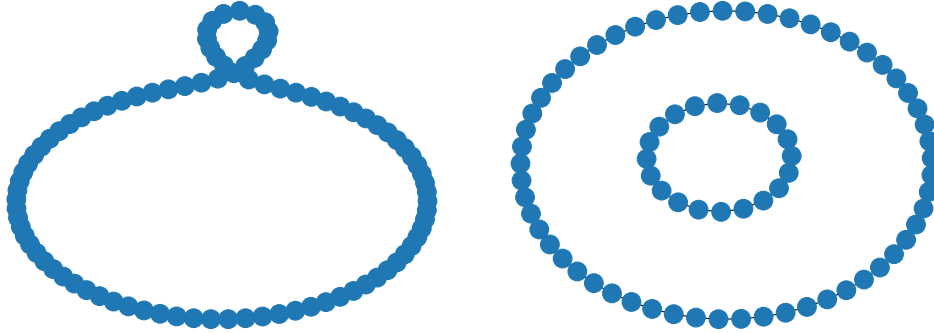


Figure B.9: Two examples of representative cycles that are not simple cycles.

Appendix B.3. Power law fitting

It has been reported that ingredient usage frequencies follow a power law distribution (Kinouchi et al., 2008). In such cases, the rank/frequency plot (Zipf, 1949) appears as a straight line when plotted on log-log scale. We perform power law fitting and show the results in Figure B.10.

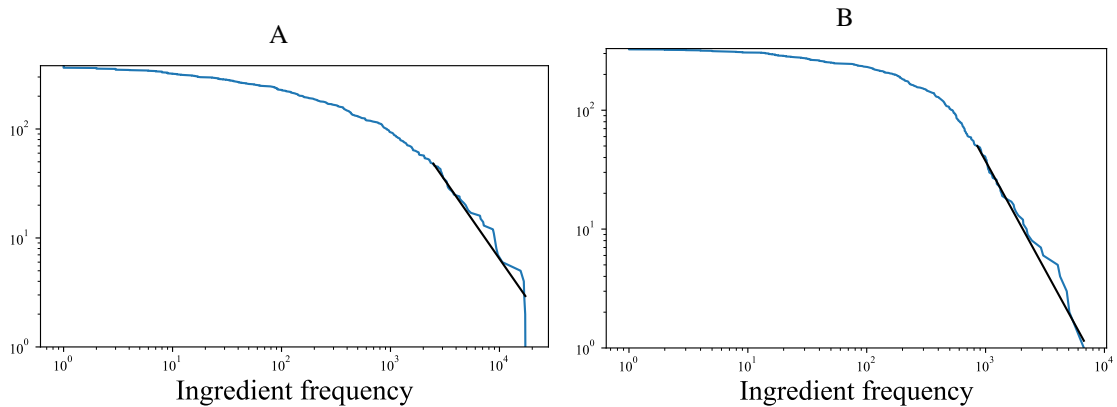


Figure B.10: Rank/frequency plots (Zipf, 1949) in log-log scale for the ingredients used in the recipes of the (A) original data and (B) the combinations suggested by our method consisting of up to 20 solutions for the representative cycles with the top 5% longest lifespans. Power law fitting computed using the python package “powerlaw” (Alstott et al., 2014). That is, we fit a curve $p(x) \sim x^{-\alpha}$ for $x \geq x_{\min}$ where x is frequency. The regions $x < x_{\min}$, which are excluded from the power law fit are shaded gray. A, fitted parameters $\alpha = 2.438$, $x_{\min} = 2,476$. B, fitted parameters $\alpha = 2.827$, $x_{\min} = 852$.

Appendix B.4. References for recipes

Biscuits cooking method and the weights of the ingredients were decided by reference to the 19 cream cheese cookie and biscuit recipes below. References are all in Japanese, and translations of recipe names and book titles are unofficial and provided for reference only.

Recipe 1 Cookpad, 2014. バターなし☆クリームチーズクッキー (recipe ID 2884806) (Non-butter cream cheese cookies)

<https://cookpad.com/recipe/2884806> (Accessed 8 May 2022, in Japanese)

Recipe 2 HomeBakery MARI no HEYA. 【レシピ】クリームチーズクッキー (Recipe. Cream cheese cookies)

<https://mari2.net/creamcheese-cookie/> (Accessed 8 May 2022, in Japanese)

- Recipe 3 Nadia, 2022. クリームチーズとくるみの米粉クッキー【バター不使用】 (recipe ID 431995) (Cream cheese and rice flour cookies with walnuts (non-butter))
<https://oceans-nadia.com/user/107837/recipe/431995> (Accessed 8 May 2022, in Japanese)
- Recipe 4 実験クッキング (Experimental cooking), 2016. 卵不使用米粉クリームチーズクッキー (Non-egg rice flour and cream cheese cookies)
<https://rdcooking.com/archives/393> (Accessed 8 May 2022, in Japanese)
- Recipe 5 DELISH KITCHEN. しっとりさくさく！絞り出しクリームチーズクッキー (Moisty and crispy! Squeezed cream cheese cookies)
<https://delishkitchen.tv/recipes/171942334252974483> (Accessed 8 May 2022, in Japanese)
- Recipe 6 手しごと私流 (Teshigotowatakushiryu), 2018. ビニール袋で簡単！クリームチーズクッキー (Easy cooking using a plastic bag! Cream cheese cookies)
<https://watashiryuu.jugem.jp/?eid=176> (Accessed 8 May 2022, in Japanese)
- Recipe 7 RAKUTEN recipe, 2011. 甘さ控えめ★クリームチーズクッキー レシピ・作り方 (recipe ID 1650000839) (Less sweetness. Cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1650000839/> (Accessed 8 May 2022, in Japanese)
- Recipe 8 RAKUTEN recipe, 2011. 卵いらず！簡単おやつ☆クリームチーズクッキー☆ レシピ・作り方 (recipe ID 1480001331) (Non-egg! Easy snack. Cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1480001331/> (Accessed 8 May 2022, in Japanese)
- Recipe 9 RAKUTEN recipe, 2013. クリームチーズクッキー レシピ・作り方 (recipe ID 1730008308) (Cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1730008308/> (Accessed 8 May 2022, in Japanese)
- Recipe 10 RAKUTEN recipe, 2011. クリームチーズクッキー レシピ・作り方 (recipe ID 1680000734) (Cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1680000734/> (Accessed 8 May 2022, in Japanese)
- Recipe 11 RAKUTEN recipe, 2020. 簡単！クリームチーズクッキー♡ レシピ・作り方 (recipe ID 1600033152) (Easy! Cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1600033152/> (Accessed 8 May 2022, in Japanese)
- Recipe 12 RAKUTEN recipe, 2011. 超サクサク！簡単クリームチーズクッキー♪ レシピ・作り方 (recipe ID 1130000693) (Very crispy! Easy cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1130000693/> (Accessed 8 May 2022, in Japanese)
- Recipe 13 RAKUTEN recipe, 2012. 真っ赤なクランベリーのクリームチーズクッキー レシピ・作り方 (recipe ID 1620006074) (Red cranberry cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1620006074/> (Accessed 8 May 2022, in Japanese)
- Recipe 14 RAKUTEN recipe, 2020. クリームチーズクッキー レシピ・作り方 (recipe ID 1230023044) (Cream cheese cookies recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1230023044/> (Accessed 8 May 2022, in Japanese)
- Recipe 15 RAKUTEN recipe, 2011. 洋酒の香りがおフランス ガレット・ブルトンヌ レシピ・作り方 (recipe ID 1140001988) (French galette and bretonne with the aroma of Western liquor recipe and instructions)
<https://recipe.rakuten.co.jp/recipe/1140001988/> (Accessed 8 May 2022, in Japanese)
- Recipe 16 S. Tamori, 2016. メープルビスケット (Maple biscuits). In: 米粉だから作れるとびきりおいしい焼き菓子 (Exceptionally delicious baked goods made with rice flour). IE-NO-HIKARI ASSOCIATION, pp. 48-51. (in Japanese)

- Recipe 17 T. Okamura, 2020. かぼちやの型抜きクッキー (Squash cookies). In: 卵, 牛乳, 白砂糖, 小麦粉なし. でも「ちゃんとおいしい」しあわせお菓子 (“Properly delicious” happy sweets that do not use eggs, milk, white sugar or flour). Kawade Shobo Shinsha., Ltd., pp. 52-53. (in Japanese)
- Recipe 18 Y. Imai, 2020. 2種のサブレ(紅茶レーズンとカモミールレモン) (Two type of sables (tea & raisin and chamomile & lemon)). In: 卵・乳製品・白砂糖をつかわない やさしいヴィーガン焼き菓子 (Easy vegan baked goods that do not use eggs, dairy products, or white sugar). Kawade Shobo Shinsha., Ltd., pp. 62-63. (in Japanese)
- Recipe 19 T. Miyashita, 2009. レーズンドロップクッキー (Raisin drop cookies). In: 新調理学実習 (Text of new cooking practice). Dobunshoin Publishers, pp. 155. (in Japanese)