

# ControlVAR: Exploring Controllable Visual Autoregressive Modeling

Xiang Li<sup>1\*</sup>, Kai Qiu<sup>1</sup>, Hao Chen<sup>1</sup>, Jason Kuen<sup>2</sup>, Zhe Lin<sup>2</sup>, Rita Singh<sup>1</sup>, Bhiksha Raj<sup>1,3</sup>  
<sup>1</sup>Carnegie Mellon University, <sup>2</sup>Adobe Research, <sup>3</sup>MBZUAI

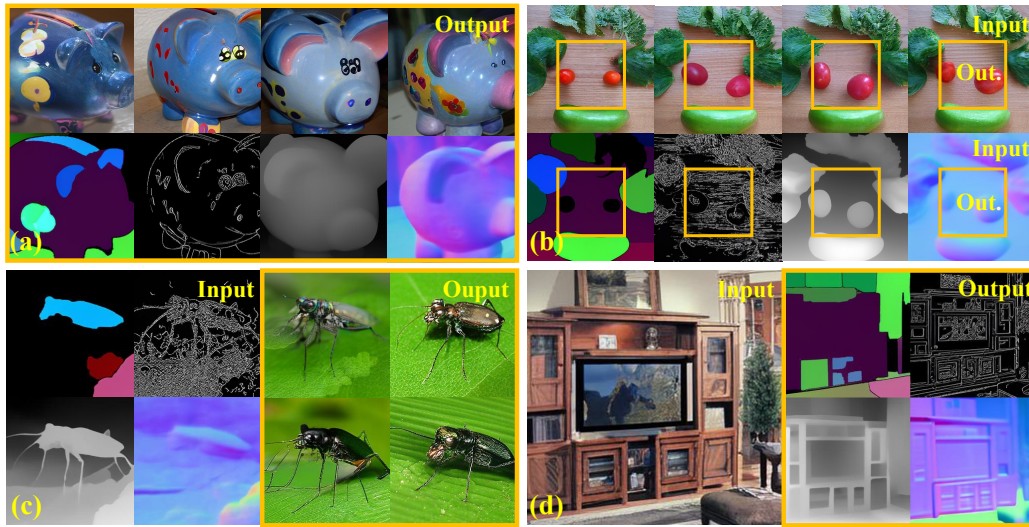


Figure 1: Visualization of ControlVAR for (a) joint control-image generation, (b) joint control-image completion, (c) control-to-image generation, and (d) image-to-control prediction (visual perception tasks). The yellow boxes denote the predicted images/controls.

## Abstract

Conditional visual generation has witnessed remarkable progress with the advent of diffusion models (DMs), especially in tasks like control-to-image generation. However, challenges such as expensive computational cost, high inference latency, and difficulties of integration with large language models (LLMs) have necessitated exploring alternatives to DMs. This paper introduces ControlVAR, a novel framework that explores pixel-level controls in visual autoregressive (VAR) modeling for flexible and efficient conditional generation. In contrast to traditional conditional models that learn the conditional distribution, ControlVAR jointly models the distribution of image and pixel-level conditions during training and imposes conditional controls during testing. To enhance the joint modeling, we adopt the next-scale AR prediction paradigm and unify control and image representations. A teacher-forcing guidance strategy is proposed to further facilitate controllable generation with joint modeling. Extensive experiments demonstrate the superior efficacy and flexibility of ControlVAR across various conditional generation tasks against popular conditional DMs, e.g., ControlNet and T2I-Adaptor.

\*xl6@andrew.cmu.edu

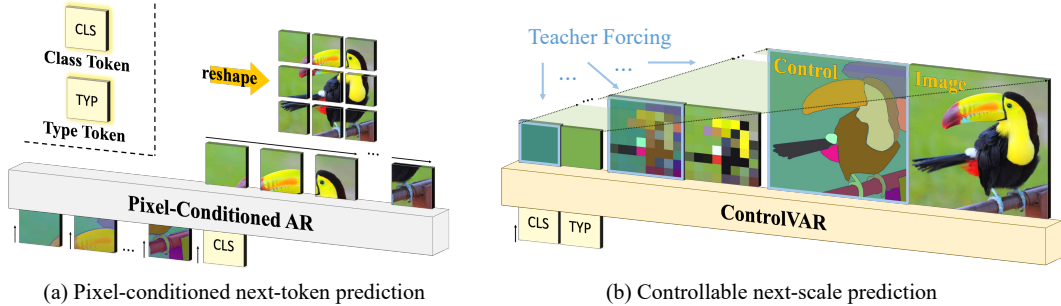


Figure 2: In contrast to previous methods [3, 24] that leverage prefix conditional tokens to impose controls, ControlVAR jointly models the pixel-level controls and image during training and conducts the conditional generation tasks during testing with the teacher forcing. Class and type tokens provide semantic and control type (mask, canny, depth and normal) information respectively.

## 1 Introduction

In recent years, conditional image generation [1, 2, 3, 4, 5] has attracted great attention and there have been significant advancements in text-to-image generation [6, 7, 8], image-to-image generation [1, 2, 9], and even more complex tasks [5, 10, 11]. Most recent approaches, e.g., ControlNet [1], leverage the powerful diffusion models (DMs) [6, 12] to model the large-scale image distribution and incorporate additional controls with classifier-free guidance [13]. However, the inherent nature of the diffusion process imposes many challenges for the diffusion-based visual generation: (1) the computational cost and inference time are significant due to the iterative diffusion steps [14, 15] and (2) the incorporation in mainstream intelligent systems, i.e., large language models (LLMs) [16, 17], is intricate due to the representation difference. This motivates the community to find a replacement for DMs for high-quality and efficient visual generation in the era of LLMs.

Inspired by the success of autoregressive (AR) language modeling [16, 17], AR visual modeling [3, 4] has been investigated as a counterpart to DMs given its strong scalability and generalizability [4, 18]. Several inspiring works, e.g., VQGAN [3], DALL-E [19] and VAR [4], have demonstrated promising image generation results with AR modeling. Nevertheless, compared to the prosperity of conditional DMs [1, 2, 20, 21, 22, 23], visual generation with conditional AR modeling [24, 3] remains significantly under-explored. Different from DMs, where all the pixels are modeled simultaneously, AR models are characterized by modeling sequential values based on their corresponding previous ones. This AR approach naturally leads to a conditional model, providing potential flexibility when incorporating additional controls. To leverage this property, teacher forcing is a popular approach that controls AR prediction by replacing partially predicted tokens with ground truth ones [3]. Thanks to this nature of AR modeling, we found that highly flexible conditional generation can be achieved by teacher forcing partial AR sequence with proper model designs.

In this paper, we explore the **Controllable Visual Autoregressive** modeling with both token-level and pixel-level conditions. A new conditional AR paradigm, ControlVAR is introduced, which permits a highly flexible conditional image generation by embracing the next-scale prediction of joint control and image (Fig. 2(b)). Previous wisdom [24, 3] typically utilizes prefix conditions (Fig. 2(a)) and mainly model images from raw pixel space in an AR manner. Differently, we notice that if we jointly model the control and image, the learned joint prediction can be easily guided by teacher forcing during inference. On the one hand, we unify the control and image representations and reformulate the sequential variables for the AR process to enable effective joint modeling. On the other hand, by analyzing the modeled probabilities, we introduce an effective sampling strategy, named teacher forcing guidance (TFG) to facilitate conditional sampling. Remarkably, a single ControlVAR model trained via TFG is capable of multiple meaningful tasks with different input-output combinations between control and image: (a) joint control-image generation, (b) control/image completion, (c) control-to-image generation, (d) image-to-control generation, as demonstrated in Fig. 1. Beyond the image-control tasks that are jointly modeled during training, we observe that ControlVAR also emerges capabilities for unseen tasks, e.g., control-to-control generation, further enhancing its flexibility and versatility. Our contribution can be summarized in three-fold:

- We present ControlVAR, a novel framework for controllable autoregressive image generation with strong flexibility for heterogeneous conditional generation tasks.
- We unify the image and control representations and reformulate the conditional generation process to jointly model the image and control during training. To perform conditional generation during inference, we introduce teacher-forcing guidance (TFG) that enables controllable sampling.
- We conduct comprehensive experiments to investigate the impacts of each component of ControlVAR and demonstrate that ControlVAR outperforms powerful DMs methods, e.g., ControlNet and T2I-Adapter on controlled image generation across several pixel-level controls, i.e., mask, canny, depth and normal.

## 2 Related Works

### 2.1 Diffusion-based Image Generation

The evolution of diffusion models, initially introduced by Sohl-Dickstein et al. [25] and later expanded into image generation using fixed Gaussian noise diffusion processes [15, 26], has witnessed significant advancements driven by various research efforts. Nichol et al. [27] and Dhariwal et al. [28] proposed techniques to enhance the effectiveness and efficiency of diffusion models, paving the way for improved image generation capabilities. Notably, the paradigm shift towards modeling the diffusion process in the latent space of pre-trained image encoders as a strong prior [29, 3] rather than raw pixels spaces [30, 31, 12] has been instrumental in achieving high-quality image generation with reasonable inference speed. This approach has led to the development of foundational diffusion models such as Glide [32], Cogview [33, 34, 35], Make-a-scene [36], Imagen [37], DALL.E [38], Stable Diffusion [39], MidJourney [40], SORA [41], among others, which are often pre-trained on large-scale data with conditions, typically text [42, 43, 44, 45]. Recent advancements include consistency models derived from diffusion models [46, 47, 48], enabling generation with reduced inference steps. These foundational diffusion models have not only opened doors to novel downstream applications like Text inversion [8], DreamBooth [9], T2I-Adapter [2], ControlNet [1], but also inspired a plethora of research in controllable generation [49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 24] and other innovative areas.

### 2.2 Autoregressive Image Generation.

Unlike diffusion-based models that typically leverage continuous image representation, autoregressive models [60, 3, 61, 4] leverage discrete image tokens. An image tokenizer [3, 62, 63, 64, 65] is utilized to encode the image into a sequence of discrete tokens. VQGAN [3] first patches the image and then employs a vector-quantization approach to discretize the image features. Following this paradigm, a series of following-up works improve the image tokenization by using more powerful quantization operations [60, 66, 62], reformulating the image representation [4, 67] and modifying the network architecture [68, 69]. With the discrete tokens, a transformer structure [70] is leveraged to model the image token sequences. RQ-GAN [66] improves the modeling by incorporating a hierarchy design and MQ-VAE [60] further utilizes StackTransformer to enhance the spatial focus. MUSE [7] is a large-scale pre-trained text-to-image model where a low-resolution image is first generated followed by a super-resolution transformer to refine the image. Recently, VAR [4] introduced a new next-scale autoregressive prediction paradigm where the image representation is shifted from patch to scales. The new representation is featured with the maintenance of spatial locality and much lower computational cost. In this paper, we follow the next-scale autoregressive paradigm and explore the incorporation of additional controls into the modeling process.

### 2.3 Conditional Image Generation

Though significant progress has been made in generating highly realistic images from textual descriptions, describing every intricate detail of an image solely through text poses challenges. To overcome this limitation, researchers have explored alternative approaches using various additional inputs to effectively control image and video diffusion models. These inputs encompass bounding boxes [58, 71], reference object images [9, 72], segmentation maps [73, 74, 1], sketches [1], and combinations thereof [75, 22, 76, 77, 78, 5, 79]. However, fine-tuning the vast array of parameters in

these diffusion models can be computationally intensive. To address this, methods like ControlNet [1] have emerged, enabling conditional control through parameter-efficient training strategies [1, 80, 2]. Notably, X-Adapter [81] innovatively learns an adapter module to adapt ControlNets pre-trained on smaller image diffusion models (e.g., SDv1.5) for larger models (e.g., SDXL). SparseCtrl [82] takes a different approach, guiding video diffusion models with sparse conditional inputs, such as few frames instead of full frames, to mitigate the data collection costs associated with video conditions. However, the implementation of SparseCtrl necessitates training a new variant of ControlNet from scratch, as it involves augmenting ControlNet with an additional channel for frame masks. Beyond traditional conditional image generation, the in-context learning capability of conditional models has also been explored [83, 78, 18, 84]. LVM [18] investigates the scaling learning capability of a large vision model without any linguistic data. 4M [78] investigate the large-scale visual generation with multimodal data using masked image modeling. Different from previous works which are mainly focusing on diffusion models, we aim to explore adding additional control to the autoregressive visual generation process.

### 3 ControlVAR

ControlVAR is an autoregressive Transformer [85] framework for conditional image generation tasks, using the following as conditions: image  $I \in \mathbb{R}^{3 \times H \times W}$ , pixel-level control  $C \in \mathbb{R}^{3 \times H \times W}$  and token-level control  $c \in \mathbb{R}^D$  where  $H, W$  and  $D$  denotes the image size and dimension of control token respectively. We denote the set of  $N$  different types of controls as  $\mathcal{C} = \{C_n\}_{n \in [N]}$ .

**Problem formulation.** Prior conditional approaches [1, 4] have often utilized distinct models for individual control type  $C$ , learning a conditional distribution in the form of  $p(I|C, c)$ , where each image  $I$  is encoded as a sequence of discrete tokens of length  $T$ , denoted as  $(x_1, x_2, \dots, x_T)$ . By employing autoregressive (AR) modeling, we can rewrite the conditional probability  $p(I|C, c)$  as

$$p(I|C, c) = p(x_1, x_2, \dots, x_T|C, c) = \prod_{t=1}^T p(x_t|x_{<t}, C, c) \quad (1)$$

where each image token  $x_t$  is conditioned on previous ones  $x_{<t}$  at position  $t$  and prefix controls  $C, c$ .

In this paper, we consider  $N$  different controls and reformulate the conditional AR generation to model the joint distribution  $p(I, C|c)$  during training. Specifically, we uniformly sample one control  $C \in \mathcal{C}$  at each training iteration and leverage an additional type token  $c_t$  to convey the control type information. Assuming the control tokens are of the same length as the image (which we will show in the next section), we represent it as a sequence of discrete tokens  $C = (y_1, y_2, \dots, y_T)$ . To jointly model the image and control while not losing the autoregressive properties, we group the image and control tokens as  $r_t = (x_t, y_t)$  and model the joint distribution as:

$$p(I, C|c, c_t) = p((x_1, y_1), (x_2, y_2), \dots, (x_T, y_T)|c, c_t) = \prod_{t=1}^T p(r_t|r_{<t}, c, c_t). \quad (2)$$

For inference, we introduce an innovative approach inspired by teacher forcing, which replaces the predicted token with the ground truth to perform conditional generation tasks. We will discuss the representation of  $r_t$  in Sec. 3.1, joint control-image AR modeling in Sec. 3.2, and conditional generation during inference in Sec. 3.3.

#### 3.1 Unified Image and Control Representation.

Images are generally represented in RGB, which is different from how pixel-level controls (e.g., mask, canny, and depth) are represented. Although using the original representation of respective controls may be beneficial for information preservation, doing so would lead to a larger vocabulary size of the predicted tokens thus hindering effective AR modeling. To this end, we aim to represent the controls with the same RGB representation of images.

**Control representation.** We consider four popular control types - entity mask, canny, depth, and normal in this paper. We notice that canny, depth, and normal can be easily converted to RGB by using simple transformations [1]. However, entity segmentation masks  $M \in \{0, 1\}^{N \times H \times W}$  which comprises  $N$  class-agnostic binary masks (Fig. 3(b)) cannot be easily converted.



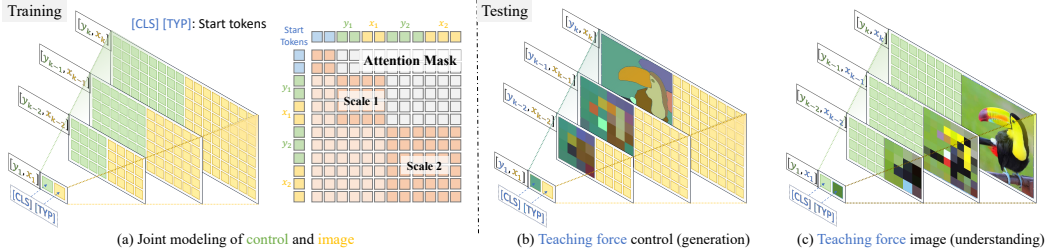


Figure 4: Illustration of ControlVAR. We jointly model the control and image during training with start tokens [CLS] and [TYP] to specify the semantics and control type. We conduct conditional generation by teacher forcing the AR prediction during testing.

Inspired by SOLO [86], we leverage a position-aware color map to encode the binary masks  $M$  into a colormap  $M' \in [0, 255]^{3 \times H \times W}$ . To better distinguish the color difference, we select 5 candidate values  $\{0, 64, 128, 192, 255\}$  from each RGB channel and combine them to  $124 = 5^3 - 1$  colors ( $(0, 0, 0)$  is preserved for background). To apply the colormap, as shown in Fig. 3, we divide the image into  $n_h \times n_w$  regions where each region represents a corresponding color. We calculate the centeredness of each mask and apply the colors to masks based on their centeredness locations. Therein, we can convert the entity masks to a RGB colormap.

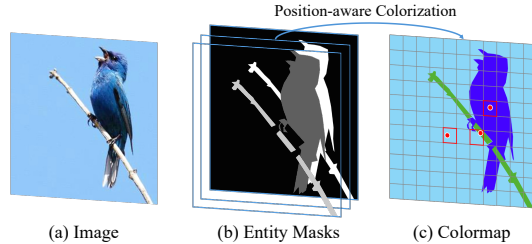


Figure 3: Illustration of colormap representation.

**Tokenization.** As the control and image share the same RGB representation, we can utilize the same approach to tokenize them. To represent an RGB image as a sequence of discrete tokens  $(x_1, x_2, \dots, x_T)$ , patch-level [3] and scale-level [4] representations have been explored. The patch-level tokenization process splits an image into  $T$  patches and represents each patch as a token  $x_t$  where  $x_t \in [V]^1$  is an integer from a vocabulary of size  $V$ . Recently, a scale-level representation has been introduced which decomposes the image into  $T$  scales where each scale is represented by a set of tokens  $x_t \in [V]^{h_t \times w_t}$  (Fig. 2(b)).  $h_t \times w_t$  denotes the size of the  $t$ -th scale. Compared to patch-level representation, scale-level representation can better preserve the spatial locality and capture global information which are desired for conditional image generation tasks. This motivates us to adopt the scale-level representation in our approach. Specifically, we obtain the image tokens and control tokens using the shared tokenizer  $\Phi$  as

$$(x_1, x_2, \dots, x_T) = \Phi(I), \quad (y_1, y_2, \dots, y_T) = \Phi(C). \quad (3)$$

Here,  $x_t \in [V]^{h_t \times w_t}$  and  $y_t \in [V]^{h_t \times w_t}$  share the same vocabularies, which makes it easier for joint control-image AR modeling.

### 3.2 Joint Control-Image Modeling

We demonstrate the network details for joint modeling in this section. Following VAR [4], we leverage a GPT-2 style Transformer network architecture for our ControlVAR models. As shown in Fig. 4 (a), we jointly model the control and image in each stage. A flatten operation is adopted to convert the sequence of 2D features into 1D. Full attention is enabled for both control and image tokens belonging to the same scale, which allows the model to maintain spatial locality and to exploit the global context between control and image. A standard cross entropy loss is used to supervise our autoregressive ControlVAR models.

Specifically, we employ two pre-defined special tokens  $c = [\text{CLS}] \in [N_{cls}]^1$  and  $c_t = [\text{TYP}] \in [N_{typ}]^1$  as the start tokens.  $N_{cls}$  and  $N_{typ}$  denote the number of classes and control types respectively. [CLS] token aims to provide semantic context for the generated image. [TYP] token is used to select the type of pixel-level control to be generated along with the image. Following previous works [7, 4], additional empty tokens are used to replace special tokens with a probability of  $\delta$  during training to apply classifier-free guidance [13].

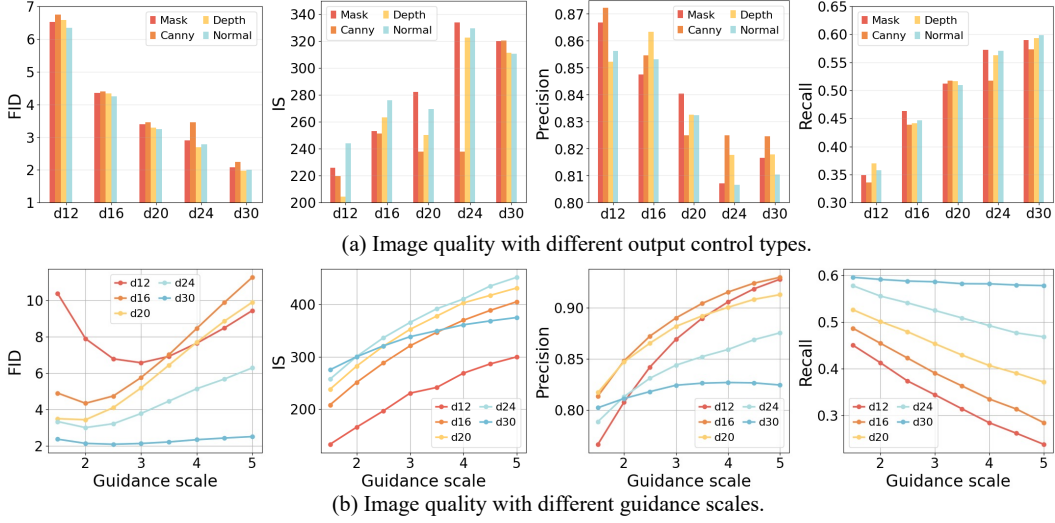


Figure 5: Joint control-image generation with (a) different output control types, (b) guidance scales.

### 3.3 Sampling with Teacher-forcing Guidance.

Classifier-free guidance (CFG) [13] was originally introduced to apply and enhance the effect of conditional controls on diffusion models without an explicit classifier. Extensive studies [87, 7, 4] have demonstrated that classifier-free guidance also works for AR models.

Here, we analyze how to achieve conditional generation by using the image generation task  $p(I|C, c, c_t)$  as an example. Given image  $I$ , pixel-level control  $C$  and token-level controls  $c, c_t$ , CFG [13] leverages Bayesian rule to rewrite the conditional distribution as

$$p(I|C, c, c_t) \propto p(c|I, C, c_t)p(c_t|I, C)p(C|I)p(I). \quad (4)$$

It can be seen that the class  $c$  and control type  $c_t$  are independent. By applying the Bayesian rule again, we have

$$p(c|I, C, c_t) = \frac{p(I, C|c, c_t)p(c, c_t)}{p(I, C|c_t)p(c_t)} = \frac{p(I, C|c, c_t)p(c)}{p(I, C|c_t)}. \quad (5)$$

Given the AR nature of ControlVAR,  $p(I, C|c, c_t)$  and  $p(I, C|c_t)$  can be induced by using the pixel-level condition  $C$  to teacher-force ControlVAR during the AR prediction. Similarly, after rewriting all terms in Eq. (4) to the form in Eq. (5), we derive an approach to sample with both pixel- and token-level controls for image generation as

$$x^* = x(\hat{r}\emptyset|\emptyset, \emptyset) + \gamma_{cls}(x(\hat{r}C|c, c_t) - x(\hat{r}C|\emptyset, c_t)) + \gamma_{typ}(x(\hat{r}C|\emptyset, c_t) - x(\hat{r}C|\emptyset, \emptyset)) + \gamma_{pix}(x(\hat{r}C|\emptyset, \emptyset) - x(\hat{r}\emptyset|\emptyset, \emptyset)) \quad (6)$$

where  $\gamma_{cls}, \gamma_{typ}, \gamma_{pix}$  are guidance scales for controlling the generation. As shown in Fig. 4 (b),  $x(\hat{r}C|c, c_t)$  denotes the image tokens obtained by prefix  $c, c_t$  and teacher forcing with  $C$ .  $\emptyset$  denotes an empty token that avoids teacher forcing with  $c, c_t$  and  $C$  respectively. After obtaining the predicted tokens, the image can be decoded by a decoder as

$$I = \Phi^{-1}(x_1^*, x_2^*, \dots, x_T^*). \quad (7)$$

For the image-to-condition generation (Fig. 4 (c)),  $y^*$  can be obtained similarly by teacher forcing with  $I$  and decoded similarly with the shared decoder  $\Phi^{-1}$ . Since teacher forcing is leveraged in the entire sampling process, we term the proposed strategy teacher-forcing guidance (TFG). More analysis of TFG is available in the Appendix.

## 4 Experiment

### 4.1 Evaluation Settings

**Dataset.** We conduct all the experiments on the ImageNet [88] dataset. To incorporate pixel-level controls, we leverage state-of-the-art image understanding models to pseudo-label the images.

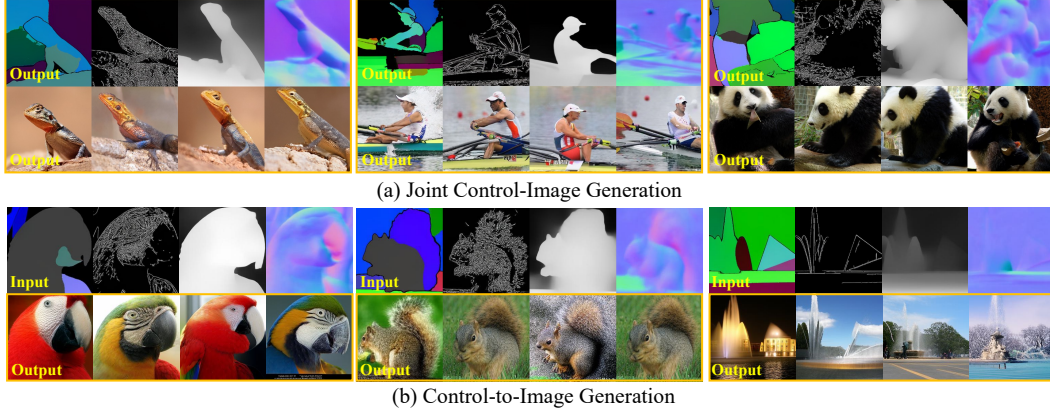


Figure 6: Visualization of (a) joint control-image generation and (b) control-to-image generation.

Specifically, we label entity masks [89], canny [90], depth [91] and normal [92] for both training and validation sets. This takes 500 Tesla V100 for about 4 days. We will release the pseudo-labeled datasets to facilitate the community to further explore conditional image generation.

**Evaluation metrics.** We utilize Fréchet Inception Distance (FID) [93], Inception Score (IS) [94], Precision, and Recall as metrics for assessing the quality of image generation. However, for the image-to-control prediction where ground truth is unavailable, we rely on qualitative visualization to demonstrate the perceptual quality.

**Implementation details.** We follow VAR [4] to use a GPT-2 [70] style transformer with adaptive normalization [95]. A transformer layer depth from 12 to 30 is explored. We leverage the pre-trained VAR tokenizer [4] to tokenize both image and control. We initialize the model with the weights from VAR [4] to shorten the training process. For each depth, we train the model for 30 epochs with an Adam optimizer. We follow the same learning rate and weight decay as VAR. During training, we sample each control type uniformly. To apply the classifier-free guidance, we replace class and control type conditions with empty tokens with 0.1 probability. We train the model with  $\text{batchsize} = 128$  for all the experiments. During inference, we utilize top- $k$  top- $p$  sampling with  $k = 900$  and  $p = 0.96$ . We utilize  $256 \times 256$  image size for all experiments. For simplicity, we leverage  $\gamma_{cls} = \gamma_{typ} = \gamma_{pix}$  for all the experiments.

## 4.2 Performance Analysis

**Joint image-control generation.** We demonstrate the performance of ControlVAR with different output control types, model sizes and guidance scales as shown in Fig. 5 (a) and Fig. 5 (b). As the model size increases, we notice ControlVAR performs better generation capability accordingly. Among all control types, jointly generating canny and image leads to a slightly inferior performance compared to other types. We consider the complex pattern of canny may impose difficulty in generating corresponding images thus leading to the degradation. In addition, we notice the optimum FID can be achieved with a guidance scale between 2 to 3. Though further increasing the guidance scale can still improve the IS, it will limit the mode diversity. We demonstrate qualitative visualization of joint generation in Fig. 6 (a) which shows high-quality and aligned image-control pairs. Furthermore, we compare the image FID with pure image generation model VAR [4] in Tab 1. We notice that ControlVAR shows a slight performance degradation compared to VAR which can be due to the difficulty enrolled to incorporate additional controls.

Depth	16	20	24	30
VAR	3.60	2.95	2.33	1.97
ControlVAR	4.25	3.25	2.69	1.98

Table 1: Image FID compared to VAR.

As the model size increases, we notice the performance gap shrinks, indicating joint modeling of image and control may require more network capacity compared to image-only modeling.

**Conditional image generation.** We introduce two baseline methods - ControlNet [1] and T2I-Adapter [2] to compare the conditional generation capability. We train both baselines on the same datasets as ours with the Diffuser [96] implementation (for a fair comparison, ImageNet-pretrained LDM [6] is used as the base model). We compare the image generation quality in terms of FID and

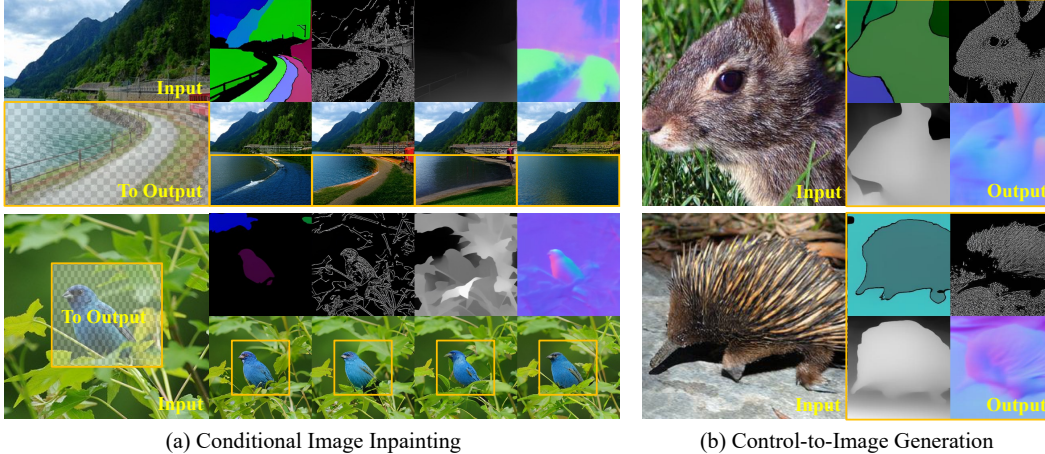


Figure 7: Visualization of conditional image inpainting (given pixel-level control and partial image).

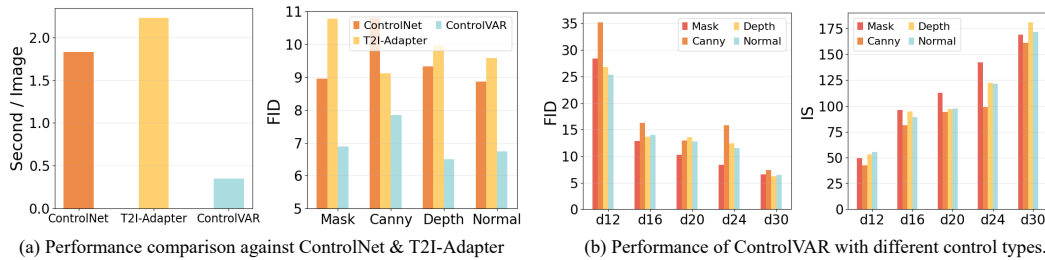


Figure 8: Quantitative results of conditional image generation.

speed in Fig. 8. We notice that ControlVAR achieves obvious superior FID compared to baselines. We evaluate the inference speed with batchsize = 1 on a single H100 GPU. We notice that ControlVAR inference is at least 5 times faster than the compared methods. We further explore the generation capability with different model sizes as shown in Fig. 8 (b), we notice that the model’s generation capability keeps improving as the model size increases. Similar to the joint image-control generation, we notice that canny-conditioned generation shows an inferior performance due to its complex pattern.

We further compare ControlVAR with conditional AR models - VQ-GAN [3] and IQ-VAE [24]. We finetune ControlVAR on ADE 20K for 1 epoch and report the FID of the generated images in Tab 2. ControlVAR demonstrates superior performance compared to previous AR methods.

Method	VQ-GAN	IQ-VAE	ControlVAR
FID	35.5	29.77	9.72

Table 2: FID comparison on ADE20K.

**Conditional image inpainting.** ControlVAR can support more complex image generation tasks by teacher-forcing with partial image/control. As shown in Fig. 7 (a), we showcase the conditional image inpainting results where pixel-level control and partial image are given to complete the missing part of the image. We notice that the contents align well with both the given control and image.

**Image-to-control prediction.** ControlVAR is also capable of image understanding tasks by teacher-forcing with images during inference. As shown in Fig. 7 (b), we demonstrate the visualization of the generated controls given images. Since the pseudo labels that we use during training and inference are mediocre in quality, we do not focus on the understanding capability of ControlVAR in this paper and leave it for future work instead.

### 4.3 Ablation Experiments

**Module effectiveness.** We conduct ablation experiments to validate the effectiveness of components in ControlVAR. We start with a depth 16 baseline which models the control and image in different scales without joint modeling. Tab 3 shows the impact of adding each component. We notice an obvious performance improvement by using joint modeling. Unlike the baseline setting, joint



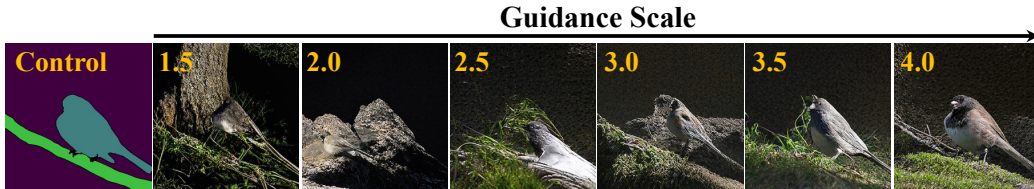


Figure 9: Visualization of images generated with different guidance scales.

ID	Method	Joint Control-Image		Control-to-Image	
		FID↓	IS↑	FID↓	IS↑
1	Baseline (w/o joint modeling)	12.23	119.65	35.92	42.50
2	+ Joint modeling	9.74 <sub>-2.49</sub>	142.08 <sub>+22.43</sub>	17.44 <sub>-18.48</sub>	77.38 <sub>+34.88</sub>
3	+ Multi-control training	5.19 <sub>-4.55</sub>	223.10 <sub>+81.02</sub>	16.33 <sub>-1.11</sub>	98.62 <sub>+21.24</sub>
4	+ Teacher-forcing guidance	-	-	15.21 <sub>-1.12</sub>	95.44 <sub>+3.18</sub>
5	+ Guidance scaling	4.35 <sub>-0.84</sub>	253.08 <sub>+29.98</sub>	12.97 <sub>-2.24</sub>	96.42 <sub>+0.98</sub>
6	+ Larger model size	2.09 <sub>-2.26</sub>	337.86 <sub>+84.78</sub>	6.57 <sub>-6.40</sub>	173.02 <sub>+76.6</sub>

Table 3: Ablation study on components in ControlVAR. We evaluate the FID and IS on the ImageNet validation set with masks as the target controls.

modeling enables both control and image to interact with each other on the same scale leading to better pixel-level alignment for the teacher forcing during inference. In addition, with the multi-control training and teacher forcing guidance, ControlVAR achieves 5.19 and 15.21 FID for joint control-image and control-to-image generation respectively. During inference, we linearly anneal the guidance scale using  $\gamma \cdot \frac{t}{T}$  (where  $t$  is the iteration number,  $T$  is the total AR iterations, and  $\gamma$  is a constant hyperparameter) which brings another 0.84 and 2.24 FID gains. Lastly, by scaling the model size to depth 30, we achieve the best results of 2.09 and 6.57 FID.

**Teacher forcing guidance.** Given the same mask control, we further visualize the images generated with different guidance scales in Fig. 9. As the guidance scale increases, the generated contents align more with the given control, indicating that the TFG can effectively enhance the guidance effect.

**Generalization to unseen tasks.** As shown in Fig. 10, we conduct an unseen task by teacher-forcing a mask in the AR prediction and setting the type token to predict the canny. We notice ControlVAR can successfully generate aligned results. We optimize ControlVAR with the joint distribution between the image and controls  $\sum_n p(I, C_n)$  during training which can be assumed as an alternating optimization of  $p(I, \{C_n\})$ . We consider this to explain the observed zero-shot capability with unseen control-to-control tasks. More visualizations are available in the Appendix.




Figure 10: Mask-to-Canny.

## 5 Conclusion

In this paper, we present ControlVAR, an autoregressive (AR) approach for conditional generation. Unlike traditional conditional generation models that leverage prefix pixel-level controls, e.g., mask, canny, normal, and depth, ControlVAR jointly models image and control conditions during training and enables flexible conditional generation during testing by teacher forcing. Inspired by the classifier-free guidance, we introduce a teacher-forcing guidance strategy to facilitate controllable sampling. Comprehensive and systematic experiments are conducted to demonstrate the effectiveness and characteristics of ControlVAR, showcasing its superiority over powerful DMs in handling multiple conditions for diverse conditional generation tasks.

**Limitations.** In spite of ControlVAR’s high performance on image generation with heterogeneous pixel-level controls, it does not support text prompts and therefore cannot be directly leveraged with natural language guidance. Developing text-guided capability can be achieved by replacing the class token with the language token, e.g., CLIP token [97], which is left as our future focus.

## References

- [1] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023.
- [2] Chong Mou, Xintao Wang, Liangbin Xie, Yanze Wu, Jian Zhang, Zhongang Qi, Ying Shan, and Xiaohu Qie. T2i-adapter: Learning adapters to dig out more controllable ability for text-to-image diffusion models. *arXiv preprint arXiv:2302.08453*, 2023.
- [3] Patrick Esser, Robin Rombach, and Bjorn Ommer. Taming transformers for high-resolution image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12873–12883, 2021.
- [4] Keyu Tian, Yi Jiang, Zehuan Yuan, Bingyue Peng, and Liwei Wang. Visual autoregressive modeling: Scalable image generation via next-scale prediction. *arXiv preprint arXiv:2404.02905*, 2024.
- [5] Jisu Nam, Heesu Kim, DongJae Lee, Siyoon Jin, Seungryong Kim, and Seunggyu Chang. Dreammatcher: Appearance matching self-attention for semantically-consistent text-to-image personalization. *arXiv preprint arXiv:2402.09812*, 2024.
- [6] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models, 2021.
- [7] Huiwen Chang, Han Zhang, Jarred Barber, AJ Maschinot, Jose Lezama, Lu Jiang, Ming-Hsuan Yang, Kevin Murphy, William T Freeman, Michael Rubinstein, et al. Muse: Text-to-image generation via masked generative transformers. *arXiv preprint arXiv:2301.00704*, 2023.
- [8] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion. *arXiv preprint arXiv:2208.01618*, 2022.
- [9] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. DreamBooth: Fine Tuning Text-to-Image Diffusion Models for Subject-Driven Generation. In *CVPR*, 2023.
- [10] Xiang Li, Yinpeng Chen, Chung-Ching Lin, Rita Singh, Bhiksha Raj, and Zicheng Liu. Completing visual objects via bridging generation and segmentation. *arXiv preprint arXiv:2310.00808*, 2023.
- [11] Xiang Li, Chung-Ching Lin, Yinpeng Chen, Zicheng Liu, Jinglu Wang, Rita Singh, and Bhiksha Raj. Paintseg: Painting pixels for training-free segmentation. *Advances in Neural Information Processing Systems*, 36, 2024.
- [12] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4195–4205, 2023.
- [13] Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022.
- [14] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502*, 2020.
- [15] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- [16] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [17] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [18] Yutong Bai, Xinyang Geng, Karttikeya Mangalam, Amir Bar, Alan Yuille, Trevor Darrell, Jitendra Malik, and Alexei A Efros. Sequential modeling enables scalable learning for large vision models. *arXiv preprint arXiv:2312.00785*, 2023.
- [19] Aditya Ramesh, Animesh Goyal, Maithra Raghu, Soumith Chintala, Christopher D. Manning, and Pushmeet J. Liu. Dall-e: Creating images from text. *arXiv preprint arXiv:2102.12092*, 2021.



- [20] Wenhu Chen, Hexiang Hu, Chitwan Saharia, and William W Cohen. Re-Imagen: Retrieval-augmented text-to-image generator. *arXiv preprint arXiv:2209.14491*, 2022.
- [21] Xingqian Xu, Zhangyang Wang, Gong Zhang, Kai Wang, and Humphrey Shi. Versatile diffusion: Text, images and variations all in one diffusion model. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 7754–7765, 2023.
- [22] Can Qin, Shu Zhang, Ning Yu, Yihao Feng, Xinyi Yang, Yingbo Zhou, Huan Wang, Juan Carlos Niebles, Caiming Xiong, Silvio Savarese, et al. Unicontrol: A unified diffusion model for controllable visual generation in the wild. In *NeurIPS 2023*, 2023.
- [23] Xuan Ju, Ailing Zeng, Chenchen Zhao, Jianan Wang, Lei Zhang, and Qiang Xu. Humansd: A native skeleton-guided diffusion model for human image generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15988–15998, 2023.
- [24] Fangneng Zhan, Yingchen Yu, Rongliang Wu, Jiahui Zhang, Kaiwen Cui, Changgong Zhang, and Shijian Lu. Auto-regressive image synthesis with integrated quantization. In *European Conference on Computer Vision*, pages 110–127. Springer, 2022.
- [25] Jascha Sohl-Dickstein, Eric Weiss, Niru Maheswaranathan, and Surya Ganguli. Deep unsupervised learning using nonequilibrium thermodynamics. In *International Conference on Machine Learning*, pages 2256–2265. PMLR, 2015.
- [26] Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456*, 2020.
- [27] Alexander Quinn Nichol and Prafulla Dhariwal. Improved denoising diffusion probabilistic models. In *International Conference on Machine Learning*, pages 8162–8171. PMLR, 2021.
- [28] Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. *Advances in neural information processing systems*, 34:8780–8794, 2021.
- [29] Aaron Van Den Oord, Oriol Vinyals, et al. Neural discrete representation learning. *Advances in Neural Information Processing Systems*, 30, 2017.
- [30] Arash Vahdat, Karsten Kreis, and Jan Kautz. Score-based generative modeling in latent space. *Advances in Neural Information Processing Systems*, 34:11287–11302, 2021.
- [31] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [32] Alex Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. Glide: Towards photorealistic image generation and editing with text-guided diffusion models. *arXiv preprint arXiv:2112.10741*, 2021.
- [33] Ming Ding, Zhuoyi Yang, Wenyi Hong, Wendi Zheng, Chang Zhou, Da Yin, Junyang Lin, Xu Zou, Zhou Shao, Hongxia Yang, et al. Cogview: Mastering text-to-image generation via transformers. *Advances in Neural Information Processing Systems*, 34:19822–19835, 2021.
- [34] Ming Ding, Wendi Zheng, Wenyi Hong, and Jie Tang. Cogview2: Faster and better text-to-image generation via hierarchical transformers. *Advances in Neural Information Processing Systems*, 35:16890–16902, 2022.
- [35] Wendi Zheng, Jiayan Teng, Zhuoyi Yang, Weihang Wang, Jidong Chen, Xiaotao Gu, Yuxiao Dong, Ming Ding, and Jie Tang. Cogview3: Finer and faster text-to-image generation via relay diffusion. *arXiv preprint arXiv:2403.05121*, 2024.
- [36] Oran Gafni, Adam Polyak, Oron Ashual, Shelly Sheynin, Devi Parikh, and Yaniv Taigman. Make-a-scene: Scene-based text-to-image generation with human priors. In *European Conference on Computer Vision*, pages 89–106. Springer, 2022.
- [37] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in neural information processing systems*, 35:36479–36494, 2022.
- [38] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International conference on machine learning*, pages 8821–8831. Pmlr, 2021.

- [39] Stability AI. Stable diffusion. Software available from Stability AI, 2022.
- [40] MidJourney Inc. Midjourney. Software available from MidJourney Inc., 2022.
- [41] OpenAI. Video generation models as world simulators. OpenAI Blog, 2024.
- [42] Brian Gordon, Yonatan Bitton, Yonatan Shafir, Roopal Garg, Xi Chen, Dani Lischinski, Daniel Cohen-Or, and Idan Szepkektor. Mismatch quest: Visual and textual feedback for image-text misalignment. *arXiv preprint arXiv:2312.03766*, 2023.
- [43] Ryan Webster, Julien Rabin, Loic Simon, and Frederic Jurie. On the de-duplication of laion-2b. *arXiv preprint arXiv:2303.12733*, 2023.
- [44] Yanai Elazar, Akshita Bhagia, Ian Magnusson, Abhilasha Ravichander, Dustin Schwenk, Alane Suhr, Pete Walsh, Dirk Groeneveld, Luca Soldaini, Sameer Singh, et al. What’s in my big data? *arXiv preprint arXiv:2310.20707*, 2023.
- [45] Hao Chen, Bhiksha Raj, Xing Xie, and Jindong Wang. On catastrophic inheritance of large foundation models. *arXiv preprint arXiv:2402.01909*, 2024.
- [46] Yang Song, Prafulla Dhariwal, Mark Chen, and Ilya Sutskever. Consistency models. *arXiv preprint arXiv:2303.01469*, 2023.
- [47] Yang Song and Prafulla Dhariwal. Improved techniques for training consistency models. *arXiv preprint arXiv:2310.14189*, 2023.
- [48] Simian Luo, Yiqin Tan, Longbo Huang, Jian Li, and Hang Zhao. Latent consistency models: Synthesizing high-resolution images with few-step inference. *arXiv preprint arXiv:2310.04378*, 2023.
- [49] Chenlin Meng, Yutong He, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sdedit: Guided image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021.
- [50] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023.
- [51] Nisha Huang, Fan Tang, Weiming Dong, Tong-Yee Lee, and Changsheng Xu. Region-aware diffusion for zero-shot text-driven image editing. *arXiv preprint arXiv:2302.11797*, 2023.
- [52] Narek Tumanyan, Michal Geyer, Shai Bagon, and Tali Dekel. Plug-and-play diffusion features for text-driven image-to-image translation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1921–1930, 2023.
- [53] Andrey Voynov, Kfir Aberman, and Daniel Cohen-Or. Sketch-guided text-to-image diffusion models. In *ACM SIGGRAPH 2023 Conference Proceedings*, pages 1–11, 2023.
- [54] Nisha Huang, Yuxin Zhang, Fan Tang, Chongyang Ma, Haibin Huang, Weiming Dong, and Changsheng Xu. Diffstyler: Controllable dual diffusion for text-driven image stylization. *IEEE Transactions on Neural Networks and Learning Systems*, 2024.
- [55] Lianghua Huang, Di Chen, Yu Liu, Yujun Shen, Deli Zhao, and Jingren Zhou. Composer: Creative and controllable image synthesis with composable conditions. *arXiv preprint arXiv:2302.09778*, 2023.
- [56] Dina Bashkirova, José Lezama, Kihyuk Sohn, Kate Saenko, and Irfan Essa. Masksketch: Unpaired structure-guided masked image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1879–1889, 2023.
- [57] Omer Bar-Tal, Lior Yariv, Yaron Lipman, and Tali Dekel. Multidiffusion: Fusing diffusion paths for controlled image generation. 2023.
- [58] Yuheng Li, Haotian Liu, Qingyang Wu, Fangzhou Mu, Jianwei Yang, Jianfeng Gao, Chunyuan Li, and Yong Jae Lee. Gligen: Open-set grounded text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22511–22521, 2023.
- [59] Lu Qi, Lehan Yang, Weidong Guo, Yu Xu, Bo Du, Varun Jampani, and Ming-Hsuan Yang. Unigs: Unified representation for image generation and segmentation. *arXiv preprint arXiv:2312.01985*, 2023.

- [60] Mengqi Huang, Zhendong Mao, Quan Wang, and Yongdong Zhang. Not all image regions matter: Masked vector quantization for autoregressive image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2002–2011, 2023.
- [61] Aaron Van den Oord, Nal Kalchbrenner, Lasse Espeholt, Oriol Vinyals, Alex Graves, et al. Conditional image generation with pixelcnn decoders. *Advances in neural information processing systems*, 29, 2016.
- [62] Lijun Yu, José Lezama, Nitesh B Gundavarapu, Luca Versari, Kihyuk Sohn, David Minnen, Yong Cheng, Agrim Gupta, Xiuye Gu, Alexander G Hauptmann, et al. Language model beats diffusion–tokenizer is key to visual generation. *arXiv preprint arXiv:2310.05737*, 2023.
- [63] Lijun Yu, Yong Cheng, Zhiruo Wang, Vivek Kumar, Wolfgang Macherey, Yanping Huang, David Ross, Irfan Essa, Yonatan Bisk, Ming-Hsuan Yang, et al. Spae: Semantic pyramid autoencoder for multimodal generation with frozen llms. *Advances in Neural Information Processing Systems*, 36, 2024.
- [64] Mengqi Huang, Zhendong Mao, Zhuowei Chen, and Yongdong Zhang. Towards accurate image coding: Improved autoregressive image generation with dynamic vector quantization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22596–22605, 2023.
- [65] Yuying Ge, Yixiao Ge, Ziyun Zeng, Xintao Wang, and Ying Shan. Planting a seed of vision in large language model. *arXiv preprint arXiv:2307.08041*, 2023.
- [66] Doyup Lee, Chiheon Kim, Saehoon Kim, Minsu Cho, and Wook-Shin Han. Autoregressive image generation using residual quantization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11523–11532, 2022.
- [67] Michael Tschannen, Cian Eastwood, and Fabian Mentzer. Givt: Generative infinite-vocabulary transformers. *arXiv preprint arXiv:2312.02116*, 2023.
- [68] Jiahui Yu, Xin Li, Jing Yu Koh, Han Zhang, Ruoming Pang, James Qin, Alexander Ku, Yuanzhong Xu, Jason Baldridge, and Yonghui Wu. Vector-quantized image modeling with improved vqgan. *arXiv preprint arXiv:2110.04627*, 2021.
- [69] Ali Razavi, Aaron Van den Oord, and Oriol Vinyals. Generating diverse high-fidelity images with vq-vae-2. *Advances in neural information processing systems*, 32, 2019.
- [70] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [71] Zhengyuan Yang, Jianfeng Wang, Zhe Gan, Linjie Li, Kevin Lin, Chenfei Wu, Nan Duan, Zicheng Liu, Ce Liu, Michael Zeng, and Lijuan Wang. Reco: Region-controlled text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- [72] Dongxu Li, Junnan Li, and Steven C. H. Hoi. BLIP-Diffusion: Pre-trained Subject Representation for Controllable Text-to-Image Generation and Editing. In *NeurIPS*, 2023.
- [73] Oran Gafni, Adam Polyak, Oron Ashual, Shelly Sheynin, Devi Parikh, and Yaniv Taigman. Make-A-Scene: Scene-Based Text-to-Image Generation with Human Priors. In *ECCV*, 2022.
- [74] Omri Avrahami, Thomas Hayes, Oran Gafni, Sonal Gupta, Yaniv Taigman, Devi Parikh, Dani Lischinski, Ohad Fried, and Xi Yin. SpaText: Spatio-Textual Representation for Controllable Image Generation. In *CVPR*, nov 2023.
- [75] Sungnyun Kim, Junsoo Lee, Kibeom Hong, Daesik Kim, and Namhyuk Ahn. Diffblender: Scalable and composable multimodal text-to-image diffusion models. *arXiv preprint arXiv:2305.15194*, 2023.
- [76] Shihao Zhao, Dongdong Chen, Yen-Chun Chen, Jianmin Bao, Shaozhe Hao, Lu Yuan, and Kwan-Yee K Wong. Uni-controlnet: All-in-one control to text-to-image diffusion models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [77] Xiang Wang, Hangjie Yuan, Shiwei Zhang, Dayou Chen, Jiuniu Wang, Yingya Zhang, Yujun Shen, Deli Zhao, and Jingren Zhou. Videocomposer: Compositional video synthesis with motion controllability. *Advances in Neural Information Processing Systems*, 36, 2024.
- [78] David Mizrahi, Roman Bachmann, Oguzhan Kar, Teresa Yeo, Mingfei Gao, Afshin Dehghan, and Amir Zamir. 4m: Massively multimodal masked modeling. *Advances in Neural Information Processing Systems*, 36, 2024.

- [79] Yufan Zhou, Ruiyi Zhang, Jiuxiang Gu, and Tong Sun. Customization assistant for text-to-image generation. *arXiv preprint arXiv:2312.03045*, 2023.
- [80] Simo Ryu. Low-rank adaptation for fast text-to-image diffusion fine-tuning, 2022.
- [81] Lingmin Ran, Xiaodong Cun, Jia-Wei Liu, Rui Zhao, Song Zijie, Xintao Wang, Jussi Keppo, and Mike Zheng Shou. X-adapter: Adding universal compatibility of plugins for upgraded diffusion model. In *CVPR*, 2024.
- [82] Yuwei Guo, Ceyuan Yang, Anyi Rao, Maneesh Agrawala, Dahua Lin, and Bo Dai. Sparsectrl: Adding sparse controls to text-to-video diffusion models. *arXiv preprint arXiv:2311.16933*, 2023.
- [83] Mehdi Safaee, Aryan Mikaeili, Or Patashnik, Daniel Cohen-Or, and Ali Mahdavi-Amiri. Clic: Concept learning in context. *arXiv preprint arXiv:2311.17083*, 2023.
- [84] Yuanhan Zhang, Kaiyang Zhou, and Ziwei Liu. What makes good examples for visual in-context learning? *Advances in Neural Information Processing Systems*, 36, 2024.
- [85] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [86] Xinlong Wang, Tao Kong, Chunhua Shen, Yuning Jiang, and Lei Li. Solo: Segmenting objects by locations. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XVIII 16*, pages 649–665. Springer, 2020.
- [87] Guillaume Sanchez, Honglu Fan, Alexander Spangher, Elad Levi, Pawan Sasanka Ammanamanchi, and Stella Biderman. Stay on topic with classifier-free guidance. *arXiv preprint arXiv:2306.17806*, 2023.
- [88] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. *2009 IEEE Conference on Computer Vision and Pattern Recognition*, pages 248–255, 2009.
- [89] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023.
- [90] John Canny. A computational approach to edge detection. *IEEE Transactions on pattern analysis and machine intelligence*, (6):679–698, 1986.
- [91] René Ranftl, Katrin Lasinger, David Hafner, Konrad Schindler, and Vladlen Koltun. Towards robust monocular depth estimation: Mixing datasets for zero-shot cross-dataset transfer. *IEEE transactions on pattern analysis and machine intelligence*, 44(3):1623–1637, 2020.
- [92] Igor Vasiljevic, Nick Kolkin, Shanyi Zhang, Ruotian Luo, Haochen Wang, Falcon Z Dai, Andrea F Daniele, Mohammadreza Mostajabi, Steven Basart, Matthew R Walter, et al. Diode: A dense indoor and outdoor depth dataset. *arXiv preprint arXiv:1908.00463*, 2019.
- [93] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. *Advances in Neural Information Processing Systems*, 30, 2017.
- [94] Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training gans. *Advances in Neural Information Processing Systems*, 29, 2016.
- [95] Han Zhang, Ian Goodfellow, Dimitris Metaxas, and Augustus Odena. Self-attention generative adversarial networks. In *International Conference on Machine Learning*, pages 7354–7363, 2018.
- [96] Patrick von Platen, Suraj Patil, Anton Lozhkov, Pedro Cuenca, Nathan Lambert, Kashif Rasul, Mishig Davaadorj, Dhruv Nair, Sayak Paul, William Berman, Yiyi Xu, Steven Liu, and Thomas Wolf. Diffusers: State-of-the-art diffusion models. <https://github.com/huggingface/diffusers>, 2022.
- [97] Alec Radford, Jong Wook Kim, Chris Hallacy, A. Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, 2021.

- [98] Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2818–2826, 2016.
- [99] Tuomas Kynkäänniemi, Tero Karras, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Improved precision and recall metric for assessing generative models. *Advances in neural information processing systems*, 32, 2019.

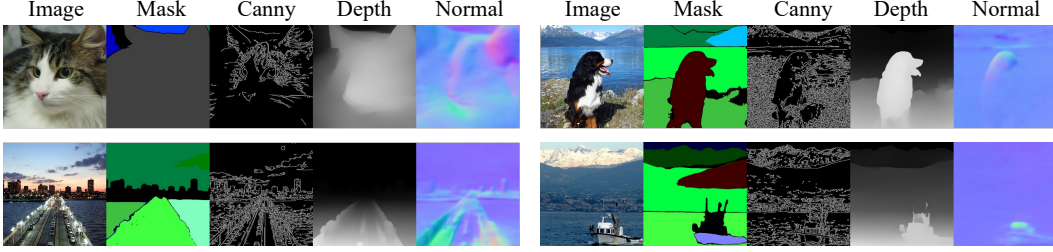


Figure A: Example of image and corresponding controls in the pseudo-labeled dataset.

## A Dataset Creation

We conduct all the experiments on the ImageNet [88] dataset. To incorporate pixel-level controls, we leverage state-of-the-art image understanding

Type	Mask	Canny	Depth	Normal
# Sample	1277548	1277653	1277636	1277639

Table A: Statistics of the generated dataset.

models to pseudo-label the images. Specifically, we label entity masks [89], canny [90], depth [91] and normal [92] for both training and validation sets. This takes 500 Tesla V100 for about 4 days. We demonstrate the label number after filtering in Tab A. In addition, we also manually check the quality of the pseudo labels. We show a visualization of the generated datasets in Fig. A. We notice that image understanding models predict reasonable results on ImageNet images.

## B Discussion of the Teacher Forcing Guidance

Inspired by the classifier-free guidance [13] from diffusion models, we empirically find a similar form of guidance that can be used for autoregressive sample conditional images based on teacher forcing. In this section, we aim to analyze the spirit of classifier-free guidance (CFG) and analogy it to our teacher-forcing guidance (TFG).

### B.1 Classifier-free Guidance

For the image generation task  $p(I|C, c, c_t)$ , given image  $I$ , pixel-level control  $C$  and token-level controls  $c_c, c_t$ , CFG leverages Bayesian rule to rewrite the conditional distribution as

$$p(I|C, c, c_t) = \frac{p(c|I, C, c_t)p(c_t|I, C)p(C|I)p(I)}{p(C, c, c_t)}$$

$$\implies \log p(I|C, c, c_t) = \log p(c|I, C, c_t) + \log p(c_t|I, C) + \log p(C|I) + \log p(I) - \log p(C, c, c_t)$$

$$\implies \nabla_I \log p(I|C, c, c_t) = \nabla_I \log p(c|I, C, c_t) + \nabla_I \log p(c_t|I, C) + \nabla_I \log p(C|I) + \nabla_I \log p(I)$$

By applying the Bayesian rule again, we have

$$p(c|I, C, c_t) = \frac{p(I|c, c_t, C)p(c, c_t, C)}{p(I|c_t, C)p(c_t, C)}$$

$$\implies \nabla_I \log p(c|I, C, c_t) = \nabla_I \log p(I|c, c_t, C) - \nabla_I \log p(I|c_t, C).$$

Similarly, by applying the Bayesian rule to all terms, we have

$$\begin{aligned} \nabla_I \log p(I|c, c_t, C) &= \nabla_I \log p(I) \\ &+ \nabla_I \log p(I|c, c_t, C) - \nabla_I \log p(I|c_t, C) \\ &+ \nabla_I \log p(I|c_t, C) - \nabla_I \log p(I|C) \\ &+ \nabla_I \log p(I|C) - \nabla_I \log p(I) \end{aligned}$$

In the diffusion models,  $\nabla_I \log p(I|*)$  is represented by the logits outputted by the diffusion-UNet. In this way, during inference, the classifier-free guidance can be calculated as

$$\begin{aligned} x^* &= x(\emptyset, \emptyset, \emptyset) \\ &+ \gamma_c(x(c, c_t, C) - x(\emptyset, c_t, C)) \\ &+ \gamma_{c_t}(x(\emptyset, c_t, C) - x(\emptyset, \emptyset, C)) \\ &+ \gamma_C(x(\emptyset, \emptyset, C) - x(\emptyset, \emptyset, \emptyset)) \end{aligned}$$



where  $\gamma_C, \gamma_c, \gamma_{c_t}$  are the guidance scales that are used to adjust the amplitude to apply the conditional guidance.  $\emptyset$  denotes leveraging a special empty token to replace the original token to disable the additional conditional information [13].

## B.2 Teacher Forcing Guidance

Classifier-free guidance has been proven to be effective in AR models [7, 4] which take the same form as diffusion models as

$$p(I|C, c, c_t) \propto p(c|I, C, c_t)p(c_t|I, C)p(C|I)p(I).$$

In ControlVAR, we model the joint distribution of the controls and images. Therefore, we leverage a different extension of the probabilities as

$$p(c|I, C, c_t) = \frac{p(I, C|c, c_t)p(c, c_t)}{p(I, C|c_t)p(c_t)} = \frac{p(I, C|c, c_t)p(c)}{p(I, C|c_t)}$$

where  $p(I, C|c, c_t)$  and  $p(I, C|c_t)$  can be found from the output of ControlVAR. We follow previous works [4, 3] to ignore the constant probabilities  $p(c)$ . By rewriting all terms with Bayesian rule, we have

$$\begin{aligned} \log p(I|C, c, c_t) &\propto \log p(I) \\ &\quad + \log p(I, C|c, c_t) - \log p(I, C|c_t) \\ &\quad + \log p(I, C|c_t) - \log p(I, C) \\ &\quad + \log p(I, C) - \log p(I). \end{aligned}$$

This corresponds to the image logits as discussed in the Eq. (6)

$$\begin{aligned} x^* &= x(\hat{r}\emptyset|\emptyset, \emptyset) + \gamma_{cls}(x(\hat{r}C|c, c_t) - x(\hat{r}C|\emptyset, c_t)) \\ &\quad + \gamma_{typ}(x(\hat{r}C|\emptyset, c_t) - x(\hat{r}C|\emptyset, \emptyset)) \\ &\quad + \gamma_{pix}(x(\hat{r}C|\emptyset, \emptyset) - x(\hat{r}\emptyset|\emptyset, \emptyset)) \end{aligned} \tag{8}$$

where  $\gamma_{cls}, \gamma_{typ}, \gamma_{pix}$  are guidance scales for controlling the generation.

## C Full Results of Performance Analysis

### C.1 Details of Evaluation Metrics

**Fréchet Inception Distance (FID)** [93]. FID measures the distance between real and generated images in the feature space of an ImageNet-1K pre-trained classifier [98], indicating the similarity and fidelity of the generated images to real images.

**Inception Score (IS)** [94]. IS also measures the fidelity and diversity of generated images. It consists of two parts: the first part measures whether each image belongs confidently to a single class of an ImageNet-1K pre-trained image classifier [98] and the second part measures how well the generated images capture diverse classes.

**Precision and Recall** [99]. The real and generated images are first converted to non-parametric representations of the manifolds using k-nearest neighbors, on which the Precision and Recall can be computed. Precision is the probability that a randomly generated image from estimated generated data manifolds falls within the support of the manifolds of estimated real data distribution. Recall is the probability that a random real image falls within the support of generated data manifolds. Thus, precision measures the general quality and fidelity of the generated images, and recall measures the coverage and diversity of the generated images.

### C.2 Joint Control-Image Generation

We demonstrate more detailed results for each control type for joint control-image generation in Fig. B. As the model size increases, ControlVAR demonstrates better performance. The control generated along with the image shows a minor impact on the image quality.

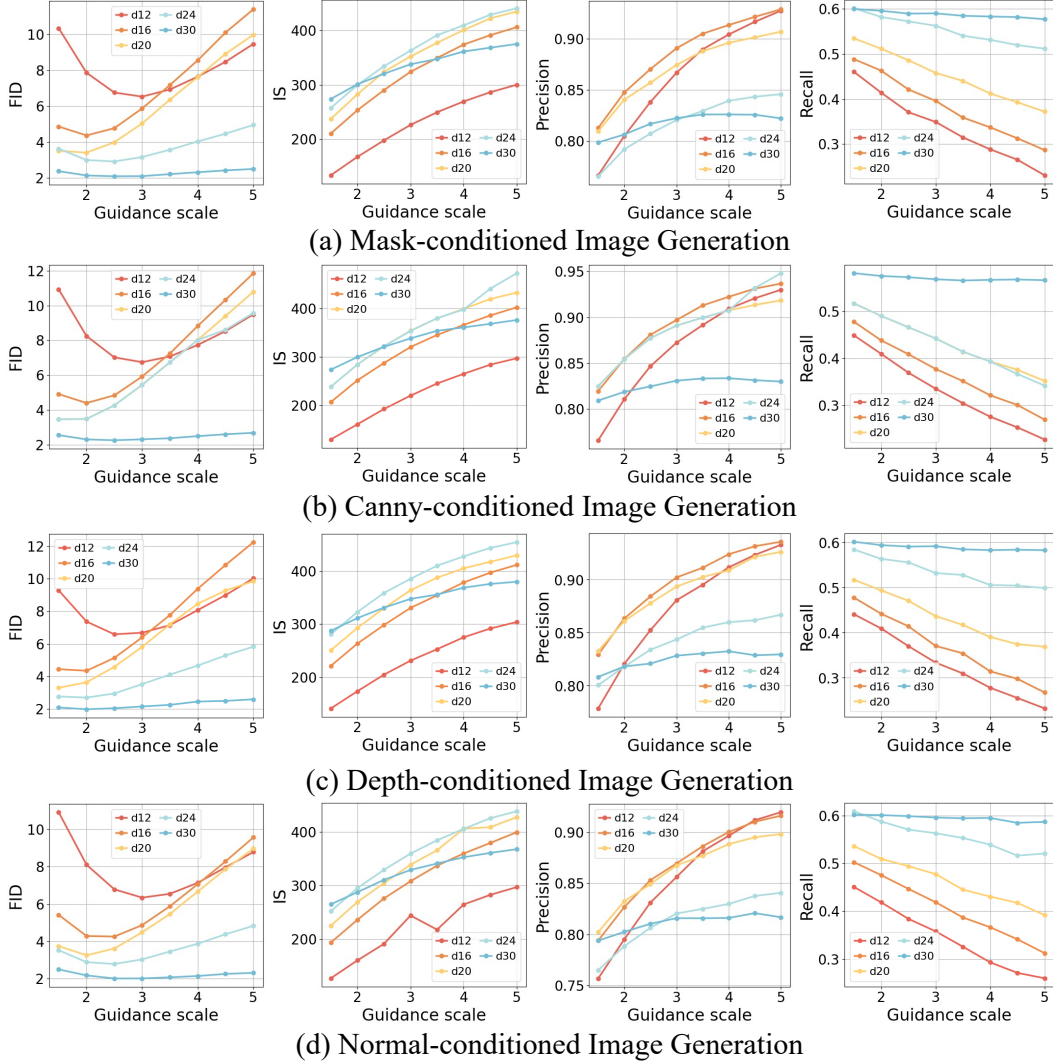


Figure B: Performance of joint image-control generation for different control types. The performance is evaluated on the ImageNet validation set with our created pseudo labels.

### C.3 Control-to-Image Generation

We demonstrate more results when comparing with baseline models - ControlNet and T2I-Adapter in Fig. C and Fig. I. The performance is evaluated on the ImageNet validation set with our created pseudo labels. We notice that ControlVAR demonstrates a superior performance for different tasks. Specifically, we notice that ControlNet outperforms ControlVAR for canny-conditioned image generation. We consider this to be due to the difficulty of handling the joint modeling of the complex canny and image. In addition, we notice that when the guidance scale increases, ControlNet and T2I-Adapter demonstrate a superior inception score and an inferior FID, we consider this attributed to the increasing mode collapse resulting from the larger guidance scale. In contrast, the performance of ControlVAR is more robust.

## D More visualization

We demonstrate more qualitative visualization for joint control-image generation (Fig. F), image/control completion (Fig. G), image perception (Fig. H), conditional image generation (Fig. I) and unseen control-to-control generation (Fig. E).



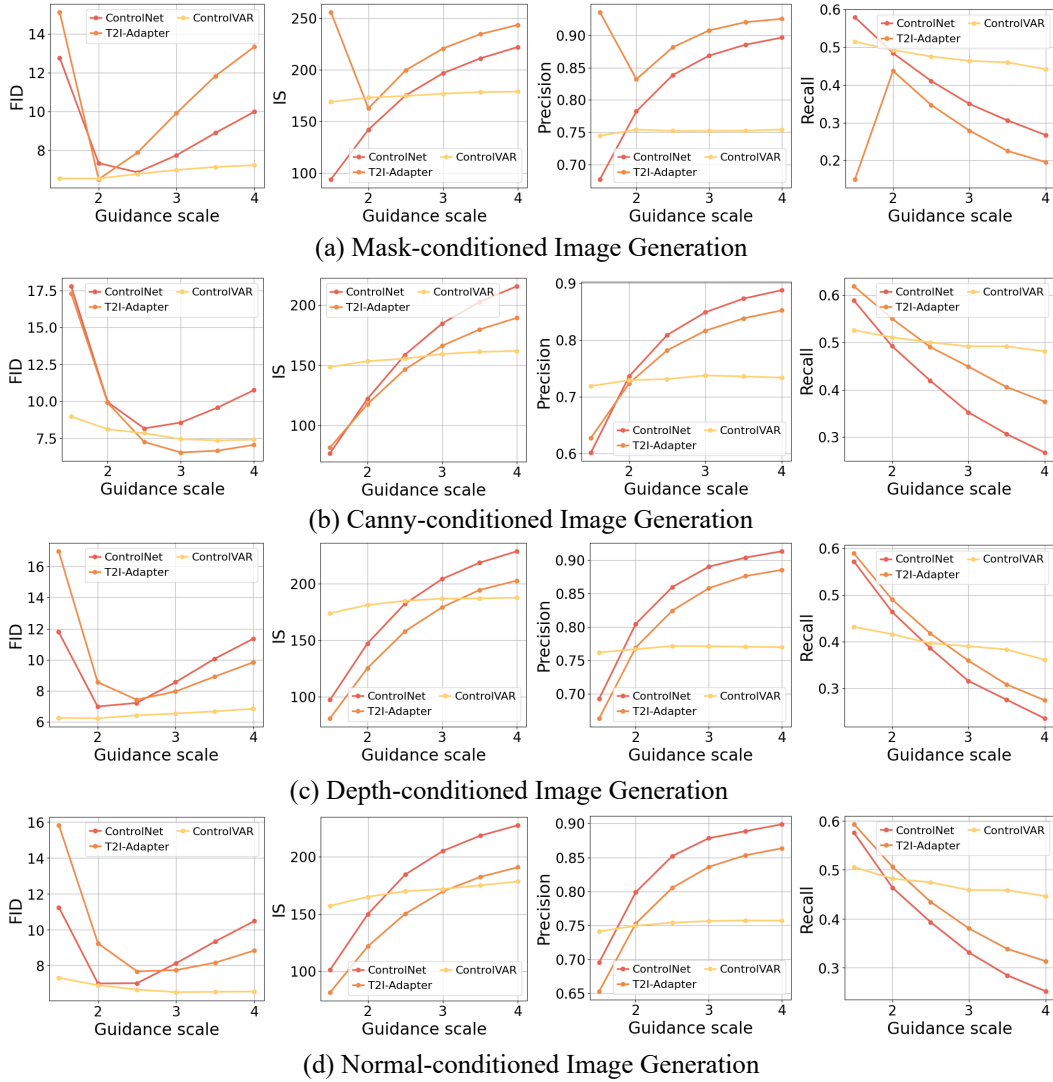


Figure C: Performance of conditional generation for different condition types. We first introduce two baseline methods - ControlNet [1] and T2I-Adapter [2] to compare the conditional generation capability. We train both baselines on the same datasets as ours with the Diffuser [96] implementation (for a fair comparison, ImageNet-pretrained LDM [6] is used as the base model). The performance is evaluated on the ImageNet validation set with our created pseudo labels.

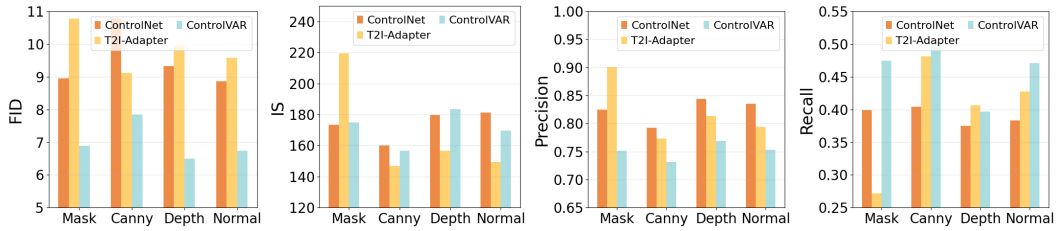


(a) Performance comparison against ControlNet & T2I-Adapter

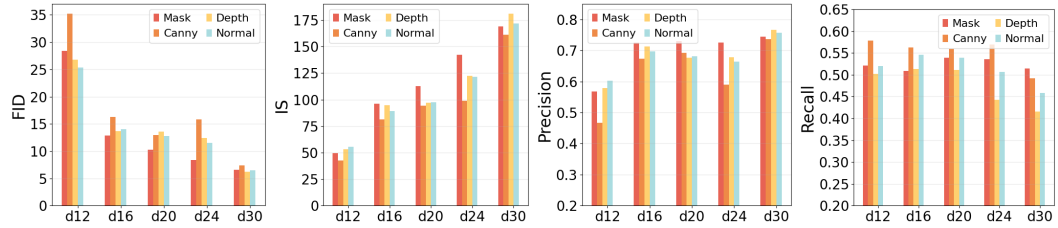


(b) Performance of ControlVAR with different control types and model sizes.

Figure D: Performance of conditional generation for different condition types. We first introduce two baseline methods - ControlNet [1] and T2I-Adapter [2] to compare the conditional generation capability. We train both baselines on the same datasets as ours with the Diffuser [96] implementation (for a fair comparison, ImageNet-pretrained LDM [6] is used as the base model). The performance is evaluated on the ImageNet validation set with our created pseudo labels.

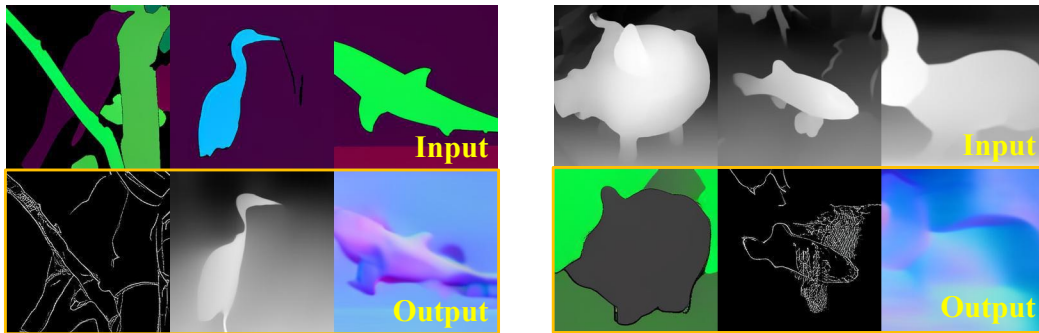

(a) Mask to other controls

(c) Depth to other controls

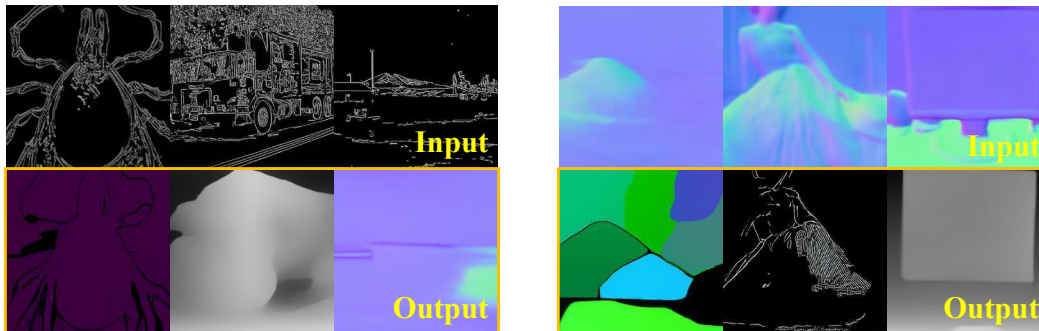

(b) Canny to other controls

(d) Normal to other controls

Figure E: Qualitative visualization for zero-shot condition understanding task. The yellow boxes denote the predicted controls.

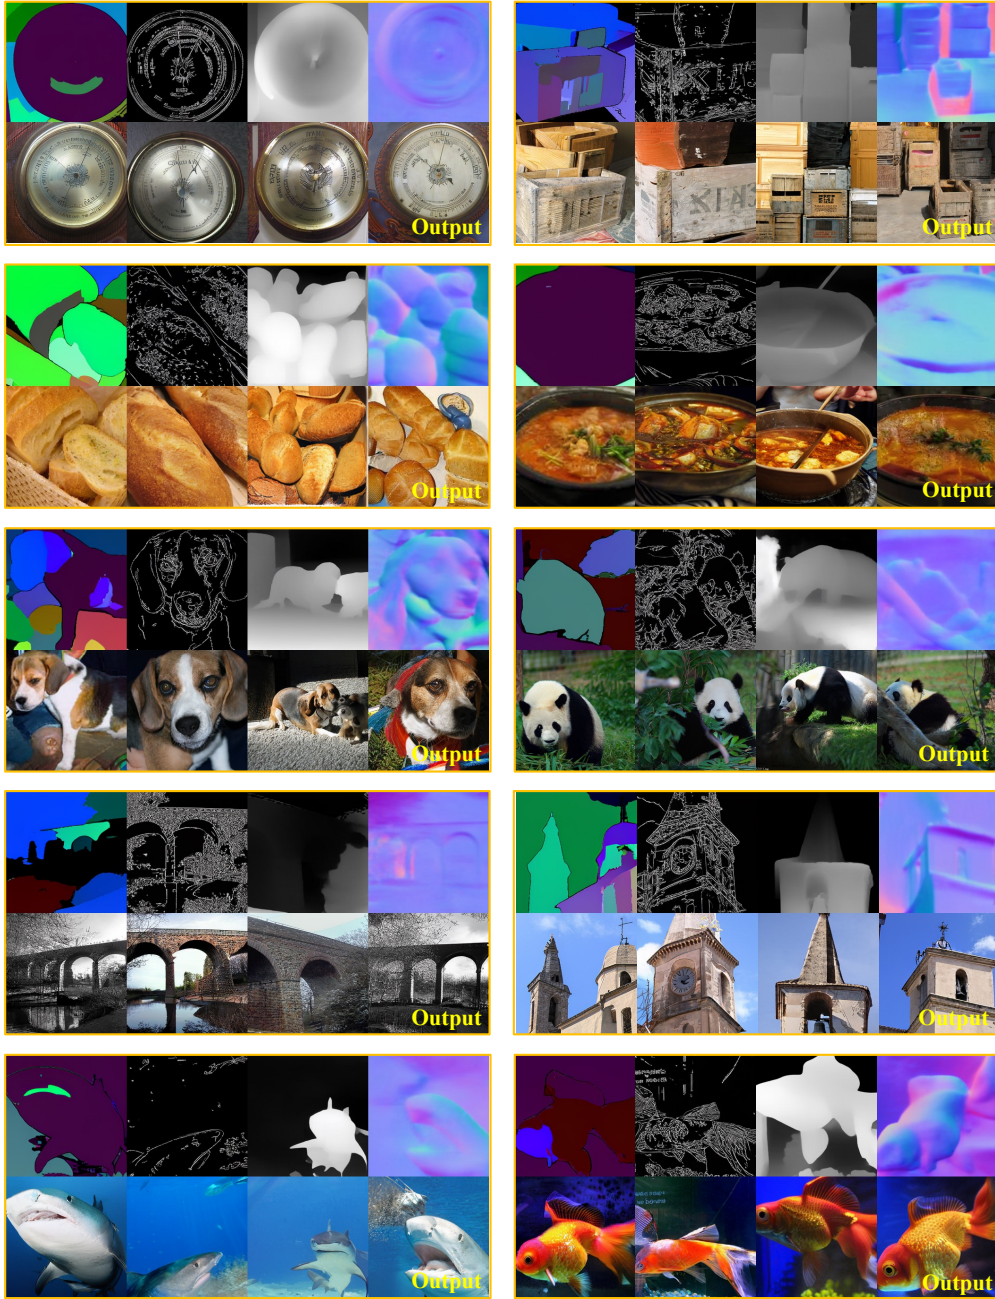


Figure F: Qualitative visualization for joint control-image generation task. The yellow boxes denote the predicted images & controls.



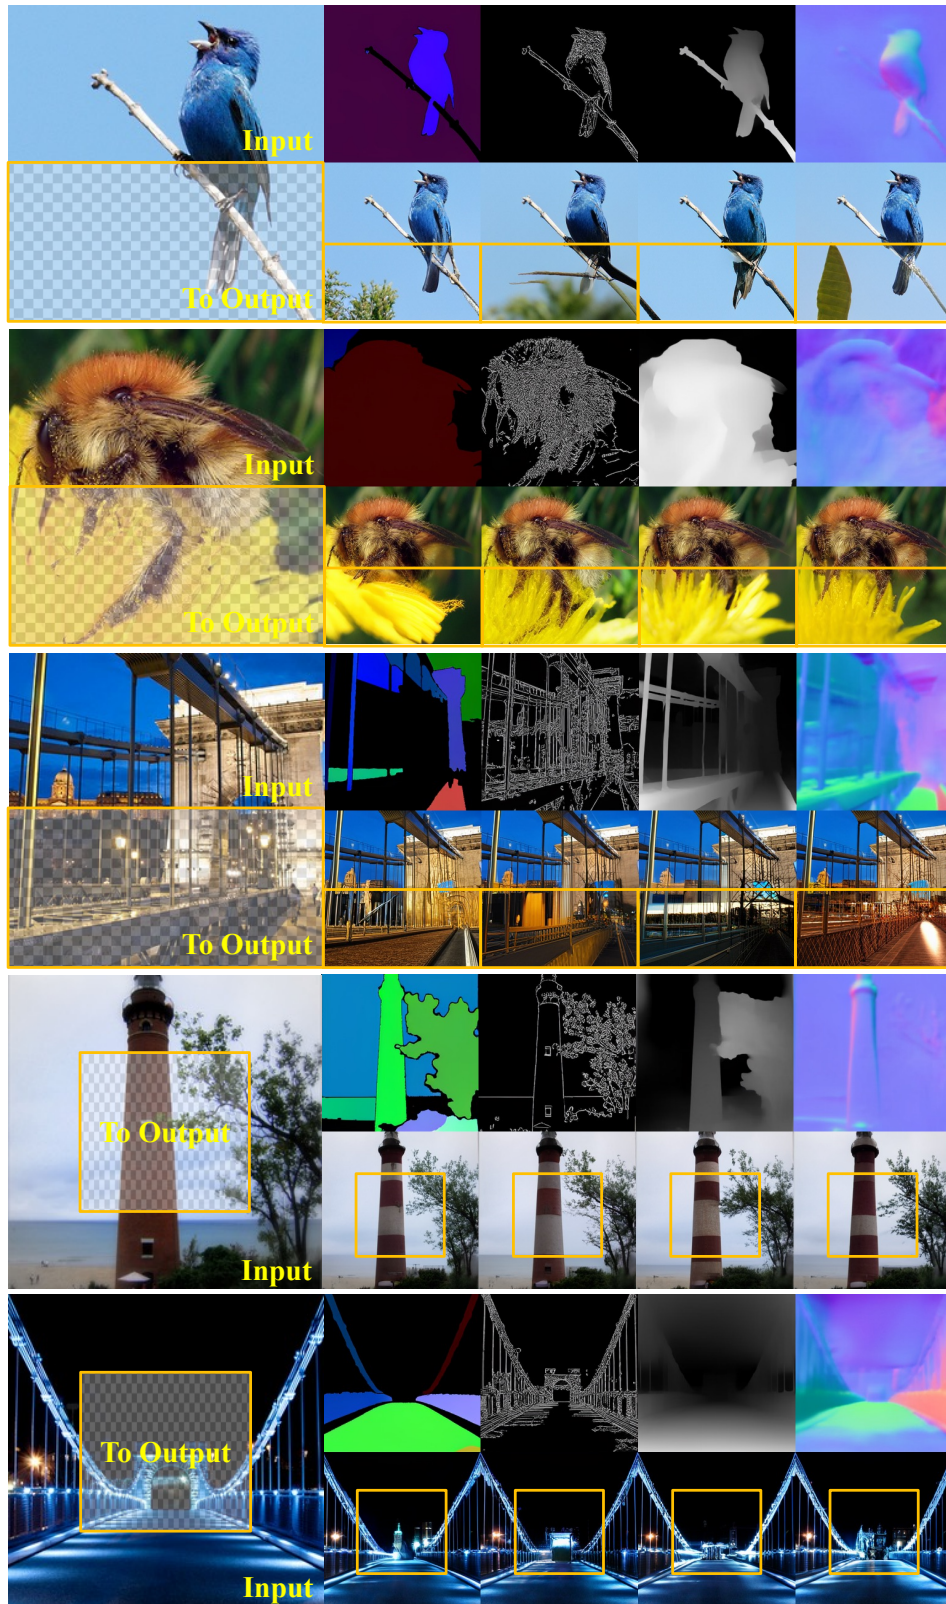


Figure G: Qualitative visualization for image/control inpainting task. The yellow boxes denote the predicted images/controls.



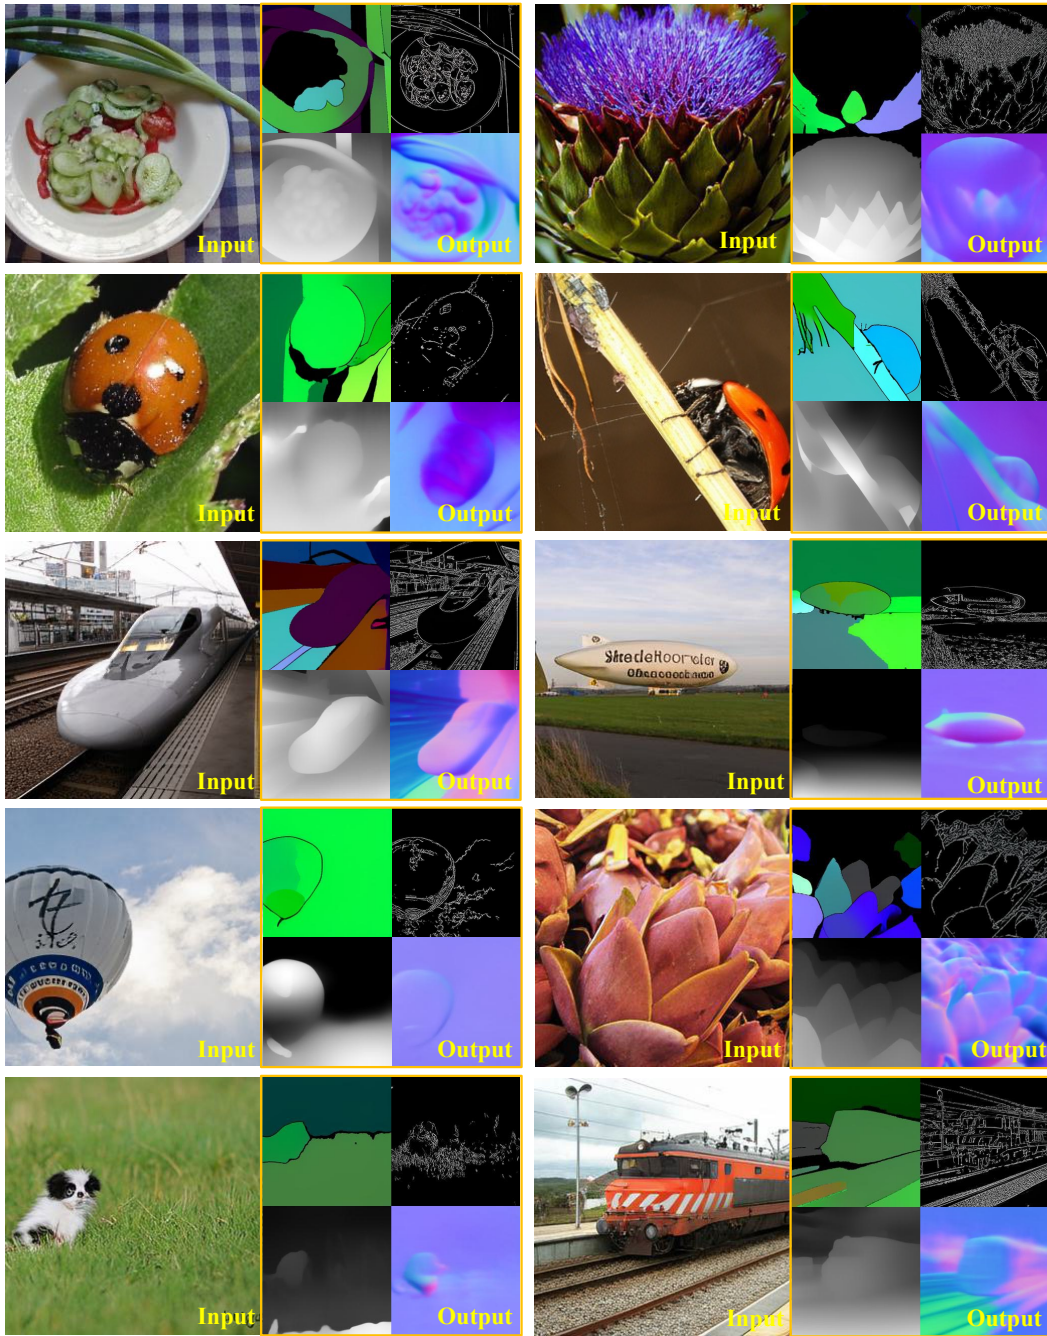


Figure H: Qualitative visualization for image understanding task. The yellow boxes denote the predicted controls.

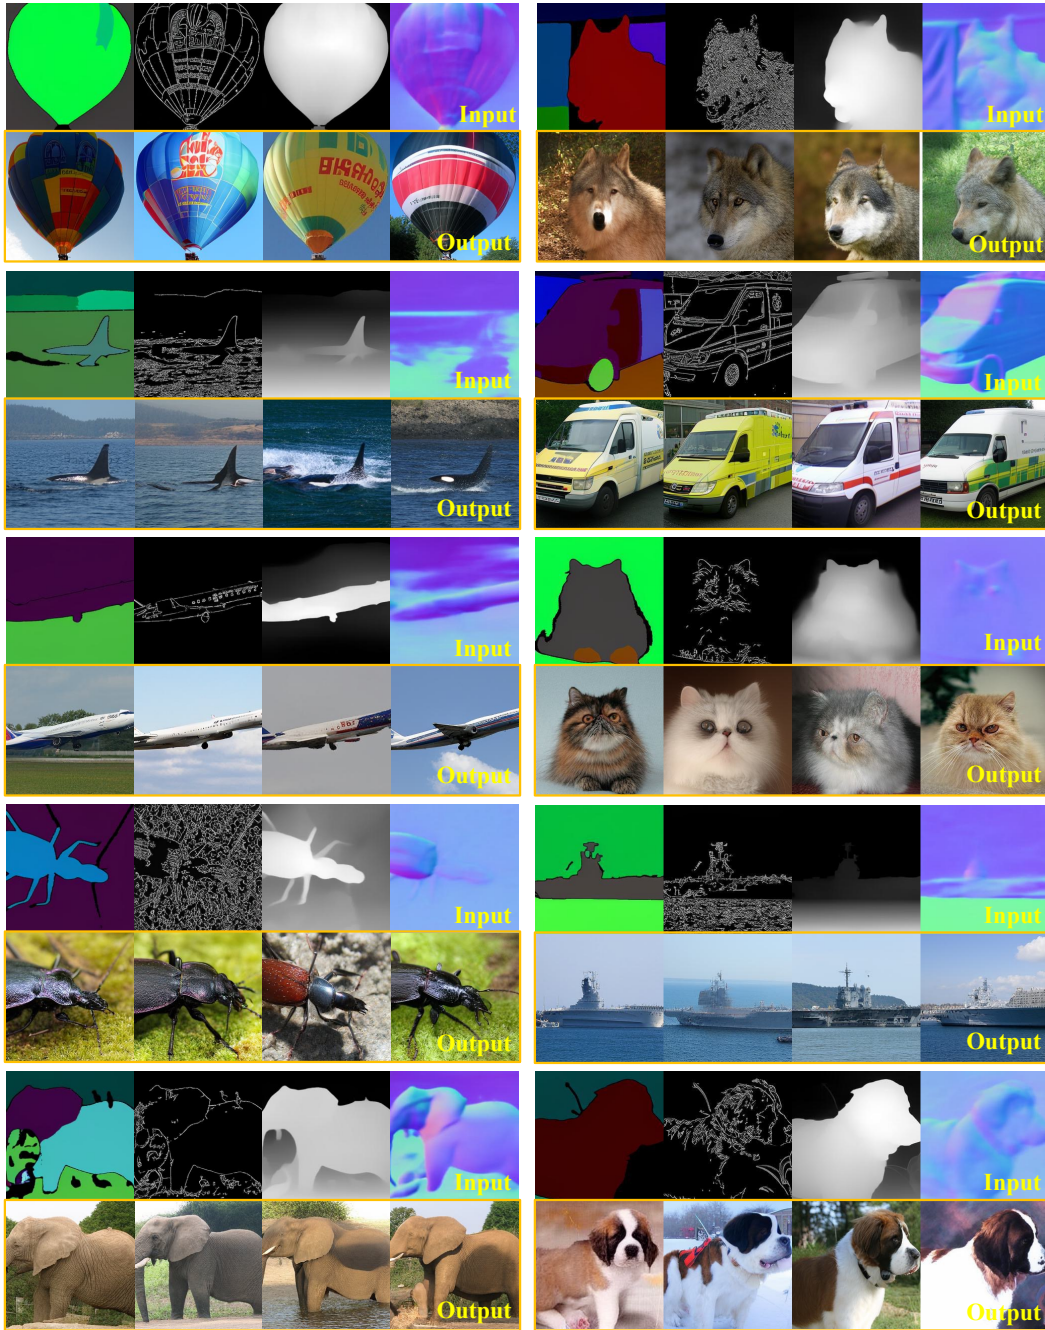


Figure I: Qualitative visualization for conditional image generation task. The yellow boxes denote the predicted images.