
A COMPREHENSIVE SURVEY OF FOUNDATION MODELS IN MEDICINE

Wasif Khan
University of Florida

Seowung Leem
University of Florida

Kyle B. See
University of Florida

Joshua K. Wong
University of Florida

Shaoting Zhang
Shanghai Artificial Intelligence Laboratory

Ruogu Fang *
University of Florida

June 18, 2024

ABSTRACT

Foundation models (FMs) are large-scale deep-learning models trained on extensive datasets using self-supervised techniques. These models serve as a base for various downstream tasks, including healthcare. FMs have been adopted with great success across various domains within healthcare, including natural language processing (NLP), computer vision, graph learning, biology, and omics. Existing healthcare-based surveys have not yet included all of these domains. Therefore, this survey provides a comprehensive overview of FMs in healthcare. We focus on the history, learning strategies, flagship models, applications, and challenges of FMs. We explore how FMs such as the BERT and GPT families are reshaping various healthcare domains, including clinical large language models, medical image analysis, and omics data. Furthermore, we provide a detailed taxonomy of healthcare applications facilitated by FMs, such as clinical NLP, medical computer vision, graph learning, and other biology-related tasks. Despite the promising opportunities FMs provide, they also have several associated challenges, which are explained in detail. We also outline potential future directions to provide researchers and practitioners with insights into the potential and limitations of FMs in healthcare to advance their deployment and mitigate associated risks.

1 Introduction

1.1 History

Artificial intelligence (AI) has achieved remarkable milestones in recent decades. This progress is mainly attributed to the enhanced availability of large-scale data, computational resources, and intelligent algorithm design [1]. AI-based techniques have been used for decades within healthcare [2]. For example, computer-assisted surgery began in the early 1980s, which marked the start of medical AI [3]. In 1989, a small convolutional neural network (CNN) model demonstrated promising performance by using a backpropagation algorithm to recognize handwritten digits [4]. However, the application of AI in medicine was not facilitated until the AI spring, which was initiated by the emergence of the AlexNet model [5]. The significant momentum in the development of AI models was demonstrated after the arrival of the AlexNet model. This was trained on the most prominent training dataset called ImageNet [6]. Subsequently, other state-of-the-art deep learning (DL) models have been developed to surpass AlexNet [5] through the ImageNet Large Scale Visual Recognition Challenge (ILSVRC) [6]. Following the CNN, Recurrent neural networks (RNN) [7] were proposed for sequential data processing that showed promising performance in various domains including time series analysis, natural language processing (NLP), and speech recognition [8]. Another significant contribution came with the introduction of generative adversarial networks (GAN) [9] for generating synthetic data [9, 10].

*Corresponding author: Ruogu Fang (ruogu.fang@bme.ufl.edu)

Transformers, introduced in 2017, formed a crucial foundation of the most powerful deep learning models available today. Transformers introduced a self-attention mechanism to capture sequences in parallel and addressed the limitations of computational and sequential RNNs. Various state-of-the-art models have been developed based on the success of transformers. Transformer models have also played a key role in driving the creation of foundation models (FM) [11]. FMs are large-scale pre-trained neural networks trained on large amounts of data that can be fine-tuned to perform a wide range of downstream tasks. The key enablers of FMs include training data, base model, transfer learning, and scale [11]. FMs adopt a self-supervised learning (SSL) approach, unlike traditional DL models that require a large amount of data. In this approach, the pre-training task is autonomously generated from unlabeled data. SSL evolved from word embeddings that provided context-independent vectors for words [12, 13] to autoregressive language modeling that predicts the next word based on previous words [14, 15].

SSL led to one of the first FMs known as BERT [16]. A powerful transformer architecture characterized by its bidirectional sentence encoders and scalability extending to larger architectures and datasets. BERT became the standard model in 2019. Many subsequent models were developed based on BERT architectures, including RoBERTa [17], BART [18], and T5 [19]. These models have become prevalent in the development of state-of-the-art NLP models. These NLP models are termed large language models (LLM). Despite being available since late 2018, these models gained broader recognition across various domains following the introduction of ChatGPT in late 2022². Furthermore, they were soon generalized to different fields, such as text [20], images [21], videos [21], speech [22], tabular data [23], protein sequences [24], organic molecules [25], and reinforcement learning [26].

Healthcare constitutes a substantial economic sector representing 17% of the United States GDP [11]. Many specialized models have been developed for various healthcare tasks [27]. However, they are based on a limited amount of labeled data and face challenges when generalized to different tasks. It remains challenging to adopt general-purpose FMs in the healthcare domain due to the complex structures and limited publicly available medical data. Therefore, several works have been carried out to define FMs specifically for medical data. These models are task-agnostic and can be generalized across different tasks within the medical domain. For instance, the GatorTronGPT [28] model was built on the GPT-3 [29] architecture and includes 20 billion parameters. It was trained on 277 billion words with 82 billion words of clinical text which were obtained from 2 million patients. GatorTronGPT exhibits strong performance in various medical tasks such as named entity recognition (NER), biomedical question answering (QA), biomedical relation extraction, natural language inference (NLI), and semantic textual similarity. Similarly, models such as MedSAM [30] trained on 1.5 million medical images, are used for medical image segmentation and surpass other models [31, 32]. FMs designed for other tasks within the medical domain are described in detail in Section 5.

1.2 Research Objectives and Outline

This survey paper aims to provide a comprehensive review of FMs in the healthcare domain. We first provide an overview of the historical progression of artificial intelligence (AI) and deep learning (DL) models followed by the development of transformers-based models (shown in Figure 1). The survey is structured to provide a comprehensive study of FMs, with Section 2 explaining the background of FMs, followed by an extensive overview of FMs in Section 3. The flagship FMs such as the BERT family, GPT models, CLIP, stable diffusion, and industrially scaled pre-trained models are explained in Section 4. The core FMs specifically designed for medical applications are presented in Section 5. The applications of FMs in the healthcare domain are presented in Section 6. We present multiple applications including clinical NLP (Section 6.1), medical computer vision (Section 6.2), healthcare graph learning (Section 6.3), biology and omics (Section 6.4), and others (Section 6.5). In Section 7, we explain the available opportunities associated with FMs, including controllability, adaptability, and applicability. The challenges associated with FMs, such as cost, interpretability, validation, and scale, are thoroughly discussed in Section 8. A discussion and potential future work are presented in Section 9 and a conclusion is provided in Section 10.

1.3 Scope

FMs have been widely adopted across multiple domains. However, a detailed taxonomy covering all aspects of FMs within the medical domain is still missing. Existing surveys have concentrated on general-purpose FMs [11, 33, 34, 35, 36], whereas this survey focuses on the healthcare domain. Furthermore, we describe the major flagship models that led to the development of medical-based FMs (Section 4).

²<https://chat.openai.com/>

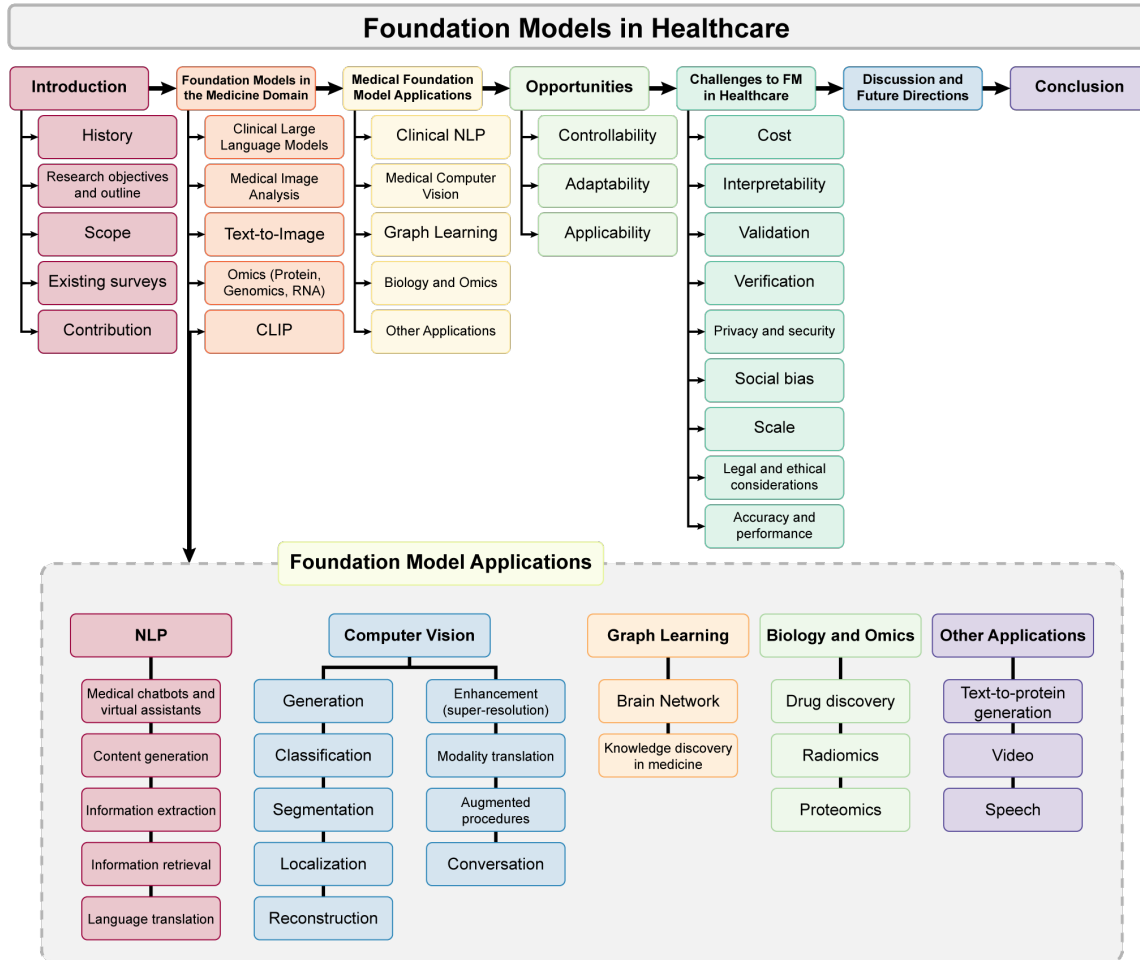


Figure 1: Outline of the proposed work.

1.4 Existing surveys

In 2023, the rapid advances in FMs led to the publication of multiple survey articles (Table 1). However, the majority of these articles do not focus on healthcare. Some of the articles only focus on LLMs on [37], which excluded FMs for other modalities such as diffusion models [38]. Furthermore, existing articles focused on healthcare lack a detailed taxonomy of FMs that includes all of its associated aspects, such as LLMs, vision, protein, audio, and graph FMs.

1.5 Contribution

This survey provides a comprehensive analysis of recent works published until early 2024. It encompasses the evolutionary journey of FMs in the healthcare sector, providing insights into their historical development and categorization. The survey explores the applications of FMs in various healthcare domains including clinical NLP, medical computer vision, biology and omics, and other relevant areas. Furthermore, we highlight the major challenges associated with FMs and outline future directions associated with FMs in healthcare.

2 Background

2.1 Transformer

A Transformer [44] is a neural network architecture initially developed for sequence modeling. It addressed the inefficient computation and poor performance of RNNs caused by the sequential processing of the information. Due to

Table 1: Comparison with existing survey.

Work	Healthcare	LLMs	Vision FMs	Protein	Audio	Graph FMs
Wornow et al. [39]	✓	✓	✗	✗	✗	✗
Zhou et al. [33]	✗	✓	✓	✗	✓	✓
Yang et al. [38]	✗	✓	✓	✗	✗	✗
Yang et al. [34]	✗	✓	✗	✗	✗	✗
Awais et al. [35]	✗	✗	✓	✗	✓	✗
Bommasani et al. [11]	✗	✓	✓	✓	✓	✓
Kolides et al. [36]	✗	✓	✓	✗	✓	✗
Hadi et al. [40]	✗	✓	✓	✗	✓	✗
Azad et al. [41]	✓	✗	✓	✗	✗	✗
Zhou et al. [42]	✓	✓	✗	✗	✗	✗
Zhao et al. [43]	✓	✗	✓	✗	✗	✗
This survey	✓	✓	✓	✓	✓	✓

the attention mechanism in transformers, sequences can be processed in parallel, which is faster and more efficient during training. The attention mechanism in a transformer is computed by taking a weighted sum of the representations of all tokens in a sequence, where the weights are determined by the similarity between the tokens. Since there is no convolution or recurrence, positional encoding is used to represent the relative positions of tokens in a sequence. The positional encoding vectors are added to the embedding vectors for the tokens at the input to the self-attention mechanism. This helps with learning long-range dependencies in a sequence by attending to the positional encoding vectors of the tokens. Transformers have led to the development of state-of-the-art models including BERT [16], GPT [15][45], and other models [35]. Transformers were originally developed for NLP tasks, but they have since been extended to other domains, including computer vision. Vision transformer (ViT), first proposed in 2021 [46] are a type of transformer specifically designed for computer vision tasks. It converts an image into a sequence of patches and then calculates meaningful embedding using a self-attention mechanism. The positions of patch embeddings are retained using positional encoding.

2.2 Attention

Attention mechanism in deep learning originated from the human visual attention that selectively focuses on one or more aspects of information within a vast array of available data [47]. For instance, Itti et al. [48] proposed visual attention, inspired by the primate visual system, to identify salient regions. The attention mechanism has been used mainly with RNNs or CNNs [49] for multiple tasks [47]. However, transformers rely solely on attention, unlike CNNs and RNNs which use attention in part of the model. The attention mechanism in transformers computes the similarity between tokens in a sequence. The attention function maps a query and a set of key-value pairs to an output, where the output is a weighted sum of the values, with the weights determined by the similarity between the query and each key [44]. Multiple attention mechanisms have been proposed recently, including self-attention [44], multi-head attention [44], masked attention [50], and criss-cross attention mechanisms [51]. In self-attention, each element in the input sequence is associated with query, key, and value vectors. The model then computes attention weights by measuring the similarity between the query and key vectors for all elements in the sequence. These weights guide the model in taking a weighted sum of the value vectors for each element, effectively enabling the model to selectively focus on different parts of the input when processing each element. Multi-head attention learns multiple representations of the input sequence, each of which can attend to different aspects of the sequence. This is done by performing multiple self-attention operations in parallel, on different input representations. Cheng et al. [50] proposed Mask2Former which utilizes masked attention in the transformer decoder. Masked attention restricts attention to specific regions of interest, such as the foreground region of a predicted mask, during the calculation of attention scores. Criss-cross attention [51] efficiently captures full-image contextual information for tasks like semantic segmentation and object detection. It utilizes a novel Criss-Cross Network with a criss-cross attention module, allowing each pixel to gather contextual information from its surroundings.

2.3 Self-supervised learning (SSL)

The limitation of supervised learning is that it depends heavily on large amounts of labeled data, which is a time-consuming, expensive, and often infeasible task [52] [53]. Furthermore, since the data are annotated based on the labels due to correlation, it introduces generalization error [52] and is prone to adversarial attacks [53]. In contrast, self-supervised learning (SSL) can be used to train the model on large amounts of data without labels. SLL leverages the

inherent structure or context within the data itself to create meaningful representations. SSL can be divided into three main categories: contrastive, generative, and adversarial learning [53]. Contrastive learning algorithms train models to distinguish between similar and dissimilar data points based on similarity within the representation space. Generative learning algorithms train models to generate realistic data. Adversarial learning is a hybrid generative-contrastive learning approach that improves representations by reconstructing the original data distribution rather than individual data samples, using discriminative loss functions as objectives.

2.4 Human feedback reinforcement learning

Reinforcement learning (RL) is an ML-based algorithm in which an agent interacts with an environment and learns to make a sequence of decisions to maximize a cumulative reward [54]. It can be formulated using a Markov Decision Process (MDP), mathematically, $\langle S, A, T, R, \gamma \rangle$ [54, 55], where S represents multiple states in an environment and selects actions (A). The transition probability (T) specifies how the agent moves from one state (s) to another (s'), and a reward function (R) provides feedback on the actions taken. The discount factor (γ) is a critical parameter that influences the relative importance of future discounted rewards in the decision-making process. The agent’s goal is to find a policy ($\pi : S \rightarrow A$) that specifies how to select actions in each state to maximize the expected reward. Although RL learns complex behavior with predefined reward functions, however, it can be challenging to express some behaviors as rewards [55]. Therefore, human feedback RL (HFRL) in which the agent learns about their action from feedback from a human trainer. The human feedback has resulted in significant performance improvements [56].

2.5 CLIP

Traditional DL algorithms have demonstrated promising performance in multiple computer vision tasks. However, they rely heavily on extensive labeled training data, which is both labor-intensive and expensive to obtain. Additionally, these algorithms struggle to generalize beyond the specific tasks they are trained for [57, 58, 59]. These challenges are addressed by introducing CLIP [57] which is a novel neural network-based architecture that leverages natural language-supervised vision data readily available on the internet, effectively reducing the dependence on expensive labeled datasets while enabling broader generalization.

CLIP is a robust neural network architecture with zero-shot capabilities [60] that achieves various classification benchmarks using natural language instructions, without direct optimization for each specific benchmark [60]. It is a simplified variant of ConVIRT [61] and is trained on a dataset called WebImageText (WIT), comprising 400 million pairs of images and corresponding text collected from the internet. Multiple works such as [61, 62, 63, 64] utilized text-image representations, however, these methods operate under supervised, weakly-supervised, self-supervised, or unsupervised learning paradigms. In contrast, CLIP utilizes natural language as its training signal. The key advantage of leveraging natural language supervision for learning is its scalability, unlike traditional crowd-sourced labeling which requires classic ML-compatible annotations. CLIP can passively learn from the abundant textual data available on the internet, establishing connections between visual representations and language, which enables flexible zero-shot transfer to a wide range of tasks

CLIP employs separate transformer encoders for text and image inputs. The visual encoder is based on the ViT, while the text encoder utilizes the GPT-2 transformer. To enhance efficiency, CLIP employs a contrastive objective, predicting which text corresponds to a given image. It jointly trains an image and a text encoder to maximize the similarity between embeddings of paired (image, text) examples while minimizing similarity with other combinations. This process results in a multi-modal embedding space where images and their associated texts are closely related. The existing variations of CLIP-based models include CRIS [65], CLIPseg [66], FLIP [67], SLIP [68], MaskCLIP [69], and GLIP [70].

Although CLIP is a robust model trained on large amounts of data, medical image-text datasets are of a much smaller scale than general internet data. Therefore, CLIP can be prone to false negatives, such as incorrectly treating images and reports from separate patients as dissimilar, despite their shared semantic content. Furthermore, it relies on image-text pairs while medical images are provided with medical domain labels compared to raw text. Therefore, Wang et al. [71] proposed MedCLIP, which decouples images and texts for contrastive learning, significantly increasing the usable training data and replacing the InfoNCE loss [72] with a semantic matching loss based on medical knowledge (semantic similarity) to eliminate false negatives. BioClinicalBERT [73]³ has been used as the text encoder and Swin Transformer [74] or ResNet-50 [75] have been used as the vision encoder. Detailed experimental results showed that the proposed MedCLIP achieved promising performance compared to CLIP and other methods [76] [61] with 10 times fewer training data. Zhang et al. [77] proposed BiomedCLIP, which outperformed the original CLIP in the biomedical domain. To address the growing need for large-scale datasets in the field of biomedical research, Lin et al. [78] introduced a substantial dataset comprising more than 1.6 million image-text pairs. The dataset was collected from over 2.4 million

³https://huggingface.co/emilyalsentzer/Bio_ClinicalBERT

scientific papers with over 381K medical figure-caption pairs. Additionally, the authors presented a novel CLIP-based model named PMC-CLIP, pre-trained on the proposed dataset, to support various healthcare applications. Liu et al. [79] proposed a CLIP-based framework that uses text embeddings from CLIP to enhance segmentation models for automated organ segmentation and tumor detection which can efficiently segment 25 organs. However, their proposed method relies significantly on one labeled training dataset. Therefore, Liu et al. [79] proposed a CLIP-based universal model that incorporates text embeddings and masked backpropagation.

3 Overview of Foundation Models

FMs revolutionized the way intelligent algorithms work by enabling a single model to perform various downstream tasks after training on large-scale unlabeled datasets [39]. The fundamental architecture of FMs relies on deep neural networks, particularly transformers trained on large-scale data. Below we provide a brief overview and describe the working mechanism of FMs.

3.1 Learning architecture

The underlying architecture of FMs is typically based on transformers capable of capturing long-range dependencies and contextual relationships within data (Section 2.2). The main architectures are encoder-decoder, encoder only, and decoder only are explained below:

3.1.1 Encoder-decoder

The original transformer model [44] is based on encoder-decoder architecture. The encoder maps the input sequence of symbol representations $X = (x_1, x_2, \dots, x_n)$ to an embedding space $z = (z_1, z_2, \dots, z_n)$. Then the decoder works in an auto-regressive manner and generates the output $Y = (y_1, y_2, \dots, y_n)$ one element at a time. This process involves utilizing the previously generated symbols as additional input at each step, allowing the model to factor in context from the ongoing generation [44]. Multiple FMs use encoder-decoder architecture, including BART [18], Segnet [80], and T5 (Text-to-Text Transfer Transformer) [19].

3.1.2 Encoder-only

Encoder-only models encode contextual information from input sequences that extract and encode relevant rich and informative representations of the input sequence that can be used for various downstream tasks. Encoder-only models include BERT [16], ViT [46], and CLIP [57].

3.1.3 Decoder-only

Decoder-only models specialize in the creative generation of coherent sequences. They predict the next token when given a sequence of tokens, which results in the generation of contextually meaningful outputs. Many state-of-the-art models, such as BLOOM [81], PaLM [82], and open pre-trained transformers [83], are based on decoder-only architecture. GPT [15] models, such as GPT-2 [60], GPT-3 [29], and the more recent GPT-4 [84], are decoder-only models pre-trained on large-scale unsupervised text data.

3.2 Learning algorithms

SSL enables FMs to learn rich contextual representations from a large amount of unlabeled data. The learned representations can then be fine-tuned for specific downstream tasks. SSL tackles the challenges associated with expensive, biased annotation and narrowly applicable supervised learning by providing a more robust and efficient approach for generalizing across downstream tasks [85]. SSL methods that require supervised fine-tuning steps with manually labeled data have limited usability, especially for medical datasets, which are difficult to collect and annotate [86]. Therefore, zero-shot learning-based methods are used instead, which do not require explicit manual or annotated labels during training [86]. Zero-shot learning-based methods include the GPT models [15, 60, 29, 84], CLIP [57], PaLM[82], and SLIP [68].

3.3 Human feedback reinforcement learning

FM models that learn from human feedback tend to demonstrate improved performance and can be generalized to other domains, unlike supervised learning [87]. For instance, Stiennon et al. [87] used the GPT-3 model with 6.7 billion parameters to predict human-preferred summaries from large-scale data and used the model as a reward function to

fine-tune a summarization policy through RL. Specifically, for Reddit posts [88], multiple summaries were sampled from various sources including the current policy, initial policy, original reference summaries, and baselines. The summaries were then evaluated by human labelers and a reward model was trained to predict the likelihood that one summary was preferred over the other, based on human judgments.

3.4 Prompting Foundation Models

Prompting FMs are directed to perform a specific task to enhance their effectiveness and relevance [35]. In promoting FMs, users provide a prompt or a series of prompts that guide the model’s response generation process. It aids the model to generate a response that is more aligned with the user’s expectations. Incorporating additional context into the training and evaluation prompting FMs aids in improving the model’s performance by providing relevant information and guiding its decision-making process. For instance, GPT-based application [29, 84] possesses strong language understanding capabilities that can be prompted with specific textual inputs, such as questions. These can be further fine-tuned for tasks like text generation, sentiment analysis, or document summarization. Furthermore, prompts can be used to specify the desired task such as image classification or caption generation that allows the model to focus its attention and resources accordingly. Models such as CLIP [57] which is trained on both image and text encoders using a contrastive pre-training objective rely on textual prompts for supervision. Furthermore, CLIP variants such as MaskCLIP [69] and RegionCLIP [89] are based on object detection and segmentation to align image regions with textual descriptions. We refer readers to [35] for further details about prompting models.

4 Flagship Foundation Models

This section highlights the key foundation models and their variants.

4.1 BERT

BERT [16] is a transformer-based model that was developed for language representation through training on a large corpus of textual data. It is a pre-trained bidirectional transformer model that utilizes contextual information within sequences from unlabeled data through the use of masked language modeling (MLM). The BERT frameworks consist of two main stages: pre-training and fine-tuning. The pretraining stage consists of two tasks: MLM and next sentence prediction (NSP). For MLM, 15% of input tokens are randomly masked, and the model predicts these masked tokens. However, [MASK] tokens are not present during fine-tuning, causing a mismatch between pre-training and fine-tuning phases. To address this, the authors implemented a strategy during pre-training where [MASK] tokens were utilized 80% of the time, and a random token 10% of the time, and the unchanged token was used 10% of the time during pre-training. The authors showed that existing techniques were unable to determine the relationship between multiple sentences and were only focused on individual sentences. Therefore, NSP was used to predict the next sentence that achieved over 97% accuracy for the binary classification task (next sentence vs not next sentence).

During fine-tuning, a self-attention mechanism is used for downstream tasks with a limited amount of labeled data. Originally, there were two BERT variants (BERT_{BASE} and BERT_{LARGE}) distinguished by several transformer blocks, hidden layers, and self-attention heads. BERT_{BASE} had 110M parameters while BERT_{LARGE} consisted of 340M parameters. However, following the success of BERT, multiple variants of BERT models were introduced. For instance, a more efficient and robust model called RoBERTa (robustly optimized BERT pretraining approach) [17] surpassed the BERT model using a few modifications to the original BERT. For example, the RoBERTa is trained for longer (500K steps) on a large dataset of over 160 GB of English-language corpora. Furthermore, the [MASK] token was applied dynamically which creates a new masking pattern each time at the input to the model. In addition, the NSP loss module was removed.

Although BERT has been reasonably successful, its computation complexity and communication overhead are major limitations to adopting such models at scale [90]. Therefore, models inspired by BERT were developed to achieve BERT-level performance while reducing the training time and model size. For instance, Sanh [91] proposed the lightweight DistilBERT, which is a smaller and faster language representation model. DistilBERT is based on the distillation knowledge compression technique [92], which is a smaller model (student) and trained to reproduce a larger model (teacher). The number of layers in DistilBERT is reduced by half and the architecture has been optimized [91]. Furthermore, the triple loss was used during pretraining: masked language modeling loss, cosine embedding loss, and distillation loss. The training objective in distilBERT included the combination of masked language modeling loss, distillation loss, and cosine embedding loss to align student and teacher hidden state vectors. The proposed model was nearly 40% smaller in size and 60% faster than BERT with comparable performance on various downstream tasks.

A Lite BERT (ALBERT) [90] introduced factorized embedding parameterization and cross-layer parameter sharing that incorporated BERT. Furthermore, the NSP module was replaced with a self-supervised loss for sentence order prediction to improve its performance. The proposed model was 1.7 times faster, used 18 times fewer parameters, and achieved better performance than BERT. The use of BERT-based models have been deployed in healthcare for various applications with great success. A model based on a denoising autoencoder known as BART [18] has been developed for sequence-to-sequence modeling and shows promising performance. However, it is computationally expensive, with 10% more parameters than BERT.

4.2 GPT

The ChatGPT we interact with today originated from extensive research trials based on a GPT model. Radford et al. [15] proposed a transformer-based GPT model that utilizes an unsupervised approach during pre-training and supervised fine-tuning for natural language understanding tasks. GPT was trained on the BooksCorpus dataset [93] for unsupervised pre-training. Then, the parameters learned at the pre-training stage were used for a target task with a manually annotated dataset in a supervised manner. A separate work by Radford et al. [60] presented a GPT-2 language model with a zero-shot setting for multiple downstream tasks without the need for any major modifications. GPT-2 was trained on a large amount of data — WebText — that contains over 8 million cleaned documents with more than 40 GB of text. GPT2 performed well on multiple tasks, including reading comprehension, summarization, translation, and question-answering. However, although it performed better than baselines, GPT-2 still could not be applied practically as the performance was still not promising. Therefore, a more robust model, GPT-3, with 175B parameters, was presented and performed well on various downstream tasks. GPT-3 uses the same architectures as GPT-2 except for the implementation of alternating dense and locally banded sparse attention patterns in the transformer layers. It was trained on a large amount of data with 570 GB (300 billion tokens) of plain compressed filtered text. The performance of GPT-3 for various downstream tasks surpasses that of existing techniques when tested using zero-shot, one-shot, and few-shot learning scenarios. One key solution to reduce untruthful or irrelevant outputs is to incorporate human feedback, such as in InstructGPT [94]. InstructGPT uses reinforcement learning from human feedback (RLHF) to fine-tune the GPT-3 model on human data and reduce the number of parameters to only 1.3B. Another more sophisticated language model known as ChatGPT⁴ or GPT3.5 provides more user-friendly, interactive, and context-aware responses and conversational experience. It follows a similar refined architecture to that of InstructGPT [94]. There are a range of healthcare applications that utilize ChatGPT and these will be covered in later sections. ChatGPT is limited to text inputs, but this limitation was addressed in the GPT-4 [84] model, which accepts images in addition to text inputs while producing text outputs. However, the details of GPT4 are not publicly available and a major issue with such language models is hallucinations [84].

4.3 DALL-E

DALL-E [95] is a transformer-based text-to-image generative model that employs a two-stage training procedure. In the first stage, each RGB image is compressed into a 32×32 grid of image tokens using a discrete variational autoencoder (dVAE). It bypasses the direct use of pixels, significantly reducing memory consumption. Furthermore, short-range dependencies between pixels are prioritized during training [96]. Therefore, in the second stage, an autoregressive transformer models the joint distribution over text and image tokens. The training maximizes the evidence lower bound (ELB) on the model’s joint likelihood over images, captions, and tokens. The proposed model was trained on a dataset of 250 million text-image pairs similar to JFT-300M [97] collected from the internet.

An extension of DALL-E known as DALL-E-2 [98] has also been presented, which can generate high-resolution images based on text prompts and existing images. It uses CLIP-based robust representation to enhance its image generation. DALL-E-2 first generates an image embedding induced by the text input using CLIP. Then, this generated image embedding is used as an input of the diffusion model to create an image. The model is trained using an image (x)-caption (y) pair. The proposed generative model comprises a prior ($P(z_i|y)$) producing CLIP image embeddings z_i conditioned on y . Meanwhile, the decoder ($P(x|z_i, y)$) generates images conditioned on CLIP image embeddings. These components are stacked to yield the generative model ($P(x|y)$).

4.4 Llama

LLaMa [99] is trained on publicly available datasets with over 1.4 trillion tokens and is based on existing large pre-trained models with key modifications. For instance, pre-normalization from GPT 3 was adopted to improve its training stability, but unlike in GPT-3, normalization was performed at the input of each transformer sub-layer. The SwiGLU [100] activation function from the PaLM model [82] replaced the ReLU non-linearity activation function.

⁴<https://chat.openai.com/>

The absolute positional embeddings were replaced with rotary positional embeddings (RoPE) [101] from the PaLM model [82] at each layer. The training optimization included the use of the AdamW optimizer [102] and efficient implementation techniques for causal multi-head attention, backward passing, and memory usage reduction. LLaMA has 65B parameters several times more than GPT-3, and performed well in various downstream tasks. A more refined version called LLaMA 2 [103], with 70B parameters in addition to Llama 2-Chat, is designed for dialogue applications and performance surpasses open-source chat models on various benchmarks [103]. LLaMA2 incorporates increased context length and the implementation of grouped-query attention (GQA) to enhance inference scalability for larger models.

4.5 Stable Diffusion

Diffusion models (DMs) [104] can synthesize high-quality images but demand significant computational resources during training. Furthermore, they require costly evaluations in pixel space. Therefore, an efficient model called the stable diffusion model [105] explicitly separates the compressive and generative learning phases. The proposed model employs an autoencoder that generates a lower-dimensional representation space and significantly reduces computational complexity. This enhances the computational efficiency of sampling, leveraging the inductive bias of UNet-based diffusion models for spatially structured data and providing a multipurpose compression model applicable to various generative tasks. The proposed diffusion model demonstrates competitive performance in tasks such as unconditional image synthesis, inpainting, and super-resolution, significantly reducing computational costs compared to pixel-based DMs. An improved version of the stable diffusion model, known as SDXL [106], incorporates a larger UNet backbone (2.6B parameters in the UNet), additional attention blocks, and a broader cross-attention context. Furthermore, it uses a refinement model, enhancing visual fidelity through post-hoc image-to-image techniques.

4.6 Industrial pretrained models

Industrial-scale pre-trained models are extensively employed across a spectrum of industrial applications. Here we briefly mention some state-of-the-art models widely adopted in various industries including healthcare. LaMDA (Language Models for Dialog Applications) [107] is a transformer-based model with 137B parameters tailored for dialog applications. It addresses two challenges faced by language models: safety and factual grounding. The safety enhancements involve filtering responses using a classifier fine-tuned with crowd worker-annotated data, aligning model behavior with human values based on Google AI principles⁵. Factual grounding is achieved by enabling the model to consult external knowledge sources to ensure responses are grounded in verifiable information.

A more robust model than GPT-3 known as GLaM (Generalist Language Model) [108] has been proposed by Google, which has 1.2 trillion parameters. It utilizes sparsely activated mixture-of-experts (MoE) architecture [109] in which every other transformer layer replaces the feed-forward component with an MoE layer. GLaM achieved better performance on 29 NLP tasks in nearly all zero-shot, one-shot, and few-shot learning scenarios, consuming only one-third of the energy of GPT-3. A more refined version, the Pathways Language Model (PaLM) [82], with 540 billion parameters, has also been presented by Google. It is a decoder-only-style transformer model with multiple modifications, such as SwiGLU activations [100] for MLP intermediate layers, parallel formulation for a faster training speed, multi-query attention, and RoPE embeddings [101] for improved performance on long sequences. PaLM has achieved state-of-the-art performance in reasoning tasks and shows proficiency in multilingual tasks and source code generation. A more efficient model, PaLM 2 [110], was recently developed by Google and performs better than PaLM on various downstream tasks, with enhanced multilingual, reasoning, and coding capabilities. It is utilized at various sizes in 25 Google products, including Bard⁶, the health-focused Med-PaLM [111], Med-Plam 2 [112], and the security-focused Sec-PaLM⁷. SenseNova⁸, developed by SenseTime, is a large-scale FM that offers various API interfaces and services specifically designed for enterprise customers. It is widely adopted in various industries, mainly in China, such as in the automotive sector, where SenseNova played a key role in the creation of the BEV (Bird’s-Eye-View) system that can recognize 3,000 types of objects. Furthermore, SenseNova introduced the “SenseChat”⁹ model, which is similar to ChatGPT but specifically designed for use in China.

⁵<https://ai.google/responsibility/principles/>

⁶<https://bard.google.com/>

⁷<https://cloud.google.com/security/ai/>

⁸<https://www.sensetime.com/en/news-detail/51166397?categoryId=1072>

⁹<https://chat.sensetime.com/wb/login>

Table 2: Flagship Foundation Models

Work	Year	Model	Parameter	Training Datasets	Public	Task
[16]	2018	BERT _{BASE}	110M	[93] ¹⁰ , English Wikipedia	✓	NLP
[16]	2018	BERT _{LARGE}	340M	[93], English Wikipedia	✓	NLP
[17]	2019	RoBERTa	355M	[93], English Wikipedia, CC-News, Opne Web Text [113], stories [114]	✓	NLP
[91]	2019	DistilBERT	66M	[93], English Wikipedia	✓	NLP
[90]	2020	ALBERT _{BASE}	12M	[93], English Wikipedia	✓	NLP
[90]	2020	BERT _{LARGE}	18M	[93], English Wikipedia	✓	NLP
[90]	2020	BERT _{xLARGE}	60M	[93], English Wikipedia	✓	NLP
[90]	2020	BERT _{xxLARGE}	235M	[93], English Wikipedia	✓	NLP
[15]	2018	GPT	117M	[93]	✓	NLP
[60]	2019	GPT-2	1.5B	WebText	✓	NLP
[29]	2020	GPT-3	175B	Common Crawl (filtered), WebText2, Books1, Books2, Wikipedia	✗	NLP
[84]	2023	GPT-4	-		✗	NLP and image
[94]	2022	InstructGPT	1.3B	Common Crawl (filtered), WebText2, Books1, Books2, Wikipedia	✗	NLP
[95]	2021	DALL-E	12B	250M image-text pairs from internet	✓	text-to-image synthesis
[98]	2022	DALL-E	3.5B	650M image-text pairs	✓	text-to-image synthesis
[99]	2023	LLaMA	65B	CommonCrawl, C4 [19], Github, Wikipedia, Books, ArXiv, StackExchange	✓	NLP
[103]	2023	LLaMA2	70B	2 trillion tokens public data	✓	NLP
[105]	2022	Stable diffusion	1.45B	LAION [115]	✓	Image synthesis
[106]	2023	SDXL	3.5B	Not reported	✓	Image synthesis
[107]	2022	LaMDA	1.2T	Dialog data, C4	✓	Dialog Application
[108]	2022	GLaM	137B	Filtered Webpages, Wikipedia, Conversations, Forums, Books, News	✗	NLP tasks
[82]	2022	PaLM	540b	780 billion tokens	✗	NLP
[110]	2023	PaLM2	13B		✗	NLP
[116]	2023	SenseNova	-	-	✗	NLP

5 Foundation Models in the Medicine Domain

Multiple FMs have been developed for general purposes that can be adopted across different domains. However, there has been a recent notable trend in the development of FMs, particularly within the healthcare domain [117]. These emerging models have shown to be highly successful (Table 3). This section highlights FMs exclusively designed for healthcare applications that tackle challenges and harness opportunities within the healthcare domain.

5.1 Clinical Large Language Models (CLLM)

BioBERT is one of the earliest domain-specific LLMs [118]. It is a biomedical language processing model that was trained on large-scale biomedical corpora. BioBERT demonstrated impressive performance across 15 datasets addressing three NLP tasks: named entity recognition (NER), relation extraction (RE), and question answering (QA). Another model called BioMegatron [119] employs a BERT-style architecture with up to 1.2 billion parameters. It is trained on a larger domain corpus (PubMed abstracts and PMC full-text) that outperforms previous state-of-the-art models on biomedical NLP benchmarks (NER, RE, QAs). GatorTron [120] is another state-of-the-art large-scale clinical language model developed from scratch and was designed for NLP tasks on EHRs. It has 8.9 billion parameters and is

¹⁰BooksCorpus

trained on a corpus of over 90 billion words. These data included a substantial amount of clinical text from the University of Florida (UF) Health, PubMed, Wikipedia, and MIMIC III [121]. It outperforms existing biomedical and clinical transformers in five clinical NLP tasks: clinical concept extraction, medical RE, semantic textual similarity, natural language inference, and medical QAs. ChatGPT is a general-purpose model trained on various datasets, including a portion of healthcare data. Although, the primary focus is not limited to the healthcare domain. Inspired by ChatGPT, GatorTron [120] was further extended to the GatorTronGPT [28] model. This was built on the GPT-3 architecture with 20 billion parameters. The training corpus included 277 billion words with 195 billion words from the Pile dataset and 82 billion words from de-identified clinical text obtained from UF Health. GatorTronGPT exhibits a remarkable ability to generate synthetic data (GatorTronS) aligned with medical knowledge, as validated through various clinical tasks. Furthermore, the performance on different tasks including NER, QA, RE, natural language inference, and semantic textual similarity achieved promising performance. Moreover, it has been tested on the physicians' Turing test and achieved comparable performance to humans. Singhal et al. [111] proposed Med-PaLM, evaluated on a well-curated MultiMedQA benchmark. The proposed model achieved promising performance compared to existing models and was slightly inferior compared to clinicians. Another model built upon PaLM-2 (termed Med-PaLM-2) was fine-tuned on the MultiMedQA benchmark and achieved 19% better performance than Med-PaLM. The more recent MEDITRON model [122] is a large-scale medical language model with 70 billion parameters trained with 48.1 billion tokens from the medical domain. It has outperformed state-of-the-art models including GPT-3.5 and MedPaLM.

5.2 Medical Image Analysis

FMs are trained on vast numbers of training images that can be fine-tuned for various downstream tasks. However, the patterns and features of medical images differ significantly from those of natural images [123, 124]. Several attempts have been made to develop robust domain-specific models for medical images. For instance, the Segment Anything Model (SAM) [32] was originally developed for general-purpose segmentation and trained on over 11 million images. It has been fine-tuned for medical image applications with great success shown by [125]. A medical-related FM for universal medical image segmentation called MedSAM was proposed by Ma et al. [30] and works as a vision transformer-based (ViT) image encoder for feature extraction and a mask decoder for segmentation results. MedSAM uses multiple online medical datasets with 1,570,263 images and text pairs for training. A detailed evaluation showed promising performance compared to other segmentation models, including SAM [32] and U-Net [31]. Following the success of MedSAM, many models have been developed for medical image segmentation, including 3D medical image segmentation [126, 127, 128, 129]. The details of these segmentation tasks are explained in Section 6.2.3. Taher et al. [130] proposed Autodidactic Dense Anatomical Models (Adam), an SSL FM that learns human anatomy from medical images in a natural hierarchical manner. The proposed model consists of two modules: the anatomy decomposer (AD) and purposive pruner (PP). The AD decomposes anatomy into a hierarchy of anatomical structures, which guides the model to learn hierarchical relationships from the images. The PP ensures effective comprehension of anatomy by preventing semantic collision. This facilitates the learning of a wide range of distinct anatomical structures.

5.3 Text-to-Image

Text-to-image models aim to generate visually realistic images from textual descriptions and have emerged as one of the most impressive applications [131] in the era of FM. GAN-based works are able to generate images from text (see [131]). However, these models tend to suffer from lack of generalization, mode collapse, lack of diversity, and lack of delicacy in text-to-image details [10]. FMs such as DALL-E [95] can generate images for a wide range of textual descriptions. It also exhibits the ability to modify the attributes of objects and control the number of instances present in the generated images. Similarly, another model called Pathways Autoregressive Text-to-Image (Parti) [132] produces high-fidelity photorealistic images with complex compositions and rich content synthesis. However, these models suffer from high computation costs and sequential error accumulation [131]. Diffusion models [104, 105, 106], have emerged as the new state-of-the-art in text-to-image generation as a result. More information can be found in [131]. Text-to-image is also beneficial in healthcare such as work done by Kim et al. [133] who proposed FMs to generate text-conditional magnetic resonance imaging (MRI) scans. Similarly, Ali et al. [134] compared DALL-E 2, Midjourney, and Stable Diffusion to represent demographic disparities in the surgical profession. The authors analyzed images generated by each model using standardized prompts and geographic-based prompting. They compared them to real-world demographic data for attending physicians and trainees across eight surgical specialties. The findings reveal societal biases in Midjourney and Stable Diffusion, with a tendency to predominantly generate images of white male surgeons. DALL-E 2 presents a more balanced depiction of surgeons, although it still falls short of fully capturing diversity.

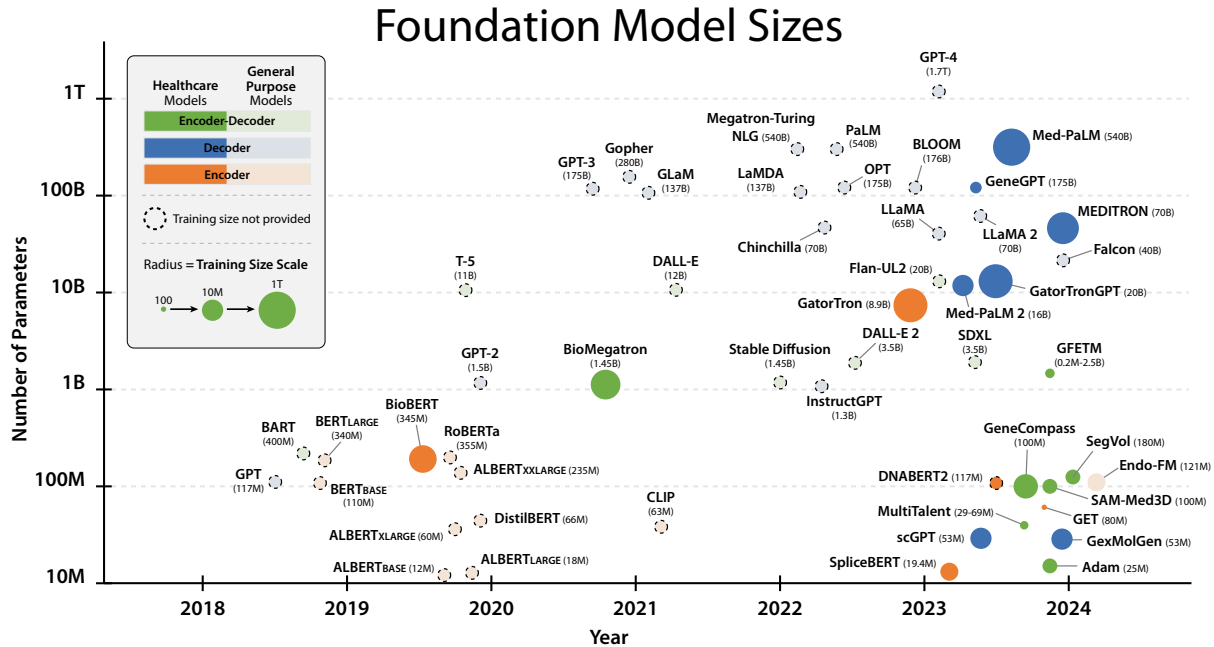


Figure 2: Learning architecture, model size, and training data used by representative foundation models.

5.4 Omics (Protein, Genomics, RNA)

Human cells are basic structural and functional units that contain different entities such as proteins, nucleic acids (DNA, RNA), carbohydrates, and lipids [135]. Multiple ML models have been used to extract useful patterns from the complex data structures associated with various omics domains, which include genomics, proteomics, metabolomics, transcriptomics, Lipidomics, microbiomics, etc. [136]. However, due to lack of models generalizability, FMs are now widely used for omics data. For instance, Yang et al. [137] proposed a BERT-based approach named scBERT for Cell type annotation. The encoder of the BERT model cannot be scaled to more than 512 gene inputs, so it was replaced with a performer [138] that can be scaled to 1600 gene inputs. Thus, scBERT does not depend on dimensionality reduction techniques and is capable of the full gene-level interpretation. scBERT achieved better performance than existing models when evaluated on various tasks from seven scRNA-seq datasets. A BERT-based model for RNA named RNABERT [139] was proposed by Akiyama for ncRNA sequence analysis, focusing on structural alignment and clustering. Subsequently, other models for RNA-based data include 3' untranslated regions [140] and 5' untranslated regions [141]¹¹. Chen et al. [142] showed that most of the existing models rely on annotated RNA sequences which results in small training data (less than 30K samples) [142] and omits large amounts of unannotated data. Therefore, they proposed a BERT-based RNA-FM model that utilizes 23 million unannotated RNA sequences in a self-supervised manner. However, Zhang et al. [143] showed that this approach struggles to capture evolutionary information from less conserved RNA sequences. Therefore, they proposed an RNA-MSM model [143] based on multiple sequence alignment using homologous sequences from the RNACmap pipeline [144] Compared to RNA-MSM, RNA-FM performed worse than one-hot encoding in predicting base pairs and solvent-accessible surface areas. Another context-based deep learning model named Uni-RNA [145] was proposed for RNA sequences. Furthermore, a model named BigRNA [146] also utilizes RNA-seq data obtained from GTEx consortium V6 release [147] that can be applied to various downstream tasks for RNA biology. Chen et al. proposed SpliceBERT [148] for sequence-based RNA splicing prediction. It was trained on pre-mRNA (precursor messenger RNA) sequences from 72 vertebrates, creating a pre-training dataset of approximately 2 million sequences. A more recent model, scHyena, was proposed by Oh et al [149] for scRNA-seq analysis data in the brain. It incorporates a bidirectional Hyena operator [150], linear adaptor layer, and gene-based positional encoding to capture cellular diversity and outperforms existing methods in various tasks such as cell type classification and imputing biologically relevant values in scRNA-seq data.

¹¹3' and 5' denote the ends of RNA or DNA molecules, with "3'" representing the end where the third carbon atom of the sugar is located, and "5'" representing the end where the fifth carbon atom is situated.

Theodoris et al. [151] proposed the transformer-based Geneformer which is a context-aware model to map the gene networks. The Geneformer [151] architecture consists of six encoder units each with self-attention layers and a feedforward neural network, and is trained on 29.9 million single-cell transcriptomes (Genecorpus-30M collected from publicly available datasets). Cui [152] proposed the scGPT model trained on more than 33 million cells (from publicly available datasets) which captures meaningful insights from genes and cells. scGPT has been validated on a range of tasks such as multi-omics, call type annotations, clustering, batch correlation, genetic perturbation prediction, and gene network inference [152]. Yang et al. [153] developed GeneCompass, which is a cross-species transformer foundation model trained on scCompass-126M, which contains 120 million single-cell transcriptomes from humans and mice. Chen et al. [154] showed that although these models [151, 152, 137] achieved better performance, they heavily rely on well-curated datasets and are computationally expensive. Therefore, to address the challenges of content hallucination and answer genomics questions, GeneGPT was proposed, which utilizes ChatGPT embeddings of different genes from the literature. The authors created embeddings using GPT-3.5 from data of 33,000 genes obtained from Geneformer [151] and scGPT [152]. DNABERT [155] was one of the first few BERT-based models to decipher the language of non-coding DNA by capturing a global and transferrable understanding of genomic DNA sequences. An extension, DNABERT2 [156], replaced the k-mer tokenization with Byte Pair Encoding. It is trained on a multispecies dataset of 135 species from seven categories including fungi, protozoa, mammals, other vertebrates, and bacteria. It achieved promising performance with 21 times fewer parameters than DNABERT [155]. Cheng et al. [157] proposed the scGPT-based Gene Expression-based Molecule Generator (GexMolGen) for designing hit-like molecules from gene expression signatures. This model addresses the limitation of traditional similarity searching-based approaches, which search within a limited dataset. GexMolGen generates molecules capable of inducing the required transcriptome profile, exhibiting high similarity to known gene inhibitors. Fu et al. [158] proposed an interpretable foundation model named the General Expression Transformer (GET) for transcription regulation across 213 human fetal and adult cell types. GET achieves experimental-level accuracy in predicting gene expression, even in previously unobserved cell types. Fan et al. proposed a Genome Foundation Embedded Topic Model (GFETM) for the analysis of single-cell ATAC-seq (scATAC-seq) data. The GFETM consists of two components: the Embedded Topic Model (ETM) modeling the scATAC-seq data as a cells-by-peaks matrix, and Genome Foundation Models (GFMs) utilizing pre-trained models such as DNABERT and Nucleotide Transformers to extract peak nucleotide sequence embeddings. Another model, scBERT [137] addresses the challenges in annotating cell types using single-cell RNA-seq data. The scBERT model leverages pretraining on large unlabelled datasets followed by fine-tuning on specific data to achieve robust cell type annotation, novel cell type discovery, and interoperability. Alsabbagh et al. [159] evaluated the performance of scGPT [152], scBERT [137], and Geneformer [151] on an imbalance cell type dataset. The results on Zheng68K and Multiple Sclerosis show that scGPT [152] and scBERT [137] achieved better performance, but the Geneformer [151] performed the worst with 20% lower accuracy. The performance of scGPT and scBERT with logistic regression (LR) was evaluated in another study [160] for fine-tuning tasks in the cell type annotation. The authors show that LR achieved better or comparable performance to large-scale foundation models for RNA sequencing data analysis.

Table 3: Foundation Models in Healthcare domain

Work	Year	Model	Parameter	Dataset	Dataset Size	Public	Task
[118]	2018	BioBERT	345M	English Wikipedia, BooksCorpus, PubMed Abstracts, PMC Full-text articles	4.5B words	✓	Biomedical Text Mining
[119]	2020	BioMegatron	1.2B	PubMed abstract set, CC0-licensed Commercial Use Collection of the PMC full-text corpus	6.1B words	✓	NER, QA, Relation extraction
[120]	2022	GatorTron	8.9B	UF Clinical notes, PubMed articles, Wikipedia	>90B words	✓	NER, QA, Relation extraction, NLI, semantic textual similarity
[28]	2023	GatorTronGPT20B		UF Clinical notes, Pile dataset	277B words	✓	NER, QA, Relation extraction, NLI, semantic textual similarity
[111]	2023	Med-PaLM	540B	MultiMedQA benchmark	780B tokens	✗	Medical QA

Table 3: Foundation Models in Healthcare domain (continued)

Work	Year	Model	Parameter	Dataset	Dataset Size	Public	Task
[112]	2023	Med-PaLM2	-	MultiMedQA benchmark	-	✓	Medical QA
[122]	2023	MEDITRON	70B	Clinical Guidelines, PubMed, Experience Replay	48.1B tokens	✓	
[128]	2023	SAM-Med3D	100M	21K medical images	121K masks	✓	Medical 3d image segmentation
[127]	2023	SegVol	180M	25 CT datasets with 5772 CTs	90K unlabeled CTs	✓	image segmentation
[161]	2023	MultiTalent	69M	13 public abdominal CT datasets	1477 3D images	✓	image segmentation
[130]	2023	Adam	25M	ChestX-ray14 [162] and EyePACS [163]	>108K images	✓	Human organ identification.
[164]	2023	Endo-FM	121M	7 datasets for pre-training	5 million frames	✓	Endoscopy Video Analysis
[137]	2022	scBERT	-	Seven publicly available scRNA-seq datasets	> 1.8M cells	✓	Cell type annotation.
[153]	2023	GeneCompass	100M	scCompass-126M (transcriptomes from human and mice)	120 M single-cell transcriptomes	✓	Cross-species genomics.
[152]	2023	scGPT	53M	8 datasets	> 10M cells	✓	Single-cell biology.
[139]	2022	RNABERT	-	SRNAcentral (human-derived small ncRNAs)	76237 ncRNAs	✓	ncRNA structural alignment and clustering.
[142]	2022	RNA-FM	-	RNAcentral [165]	> 23M sequences	✓	RNA biology.
[143]	2023	RNA-MSM	-	rFam ¹²	4069 RNA families	✓	multiple sequence alignment.
[146]	2023	BigRNA	-	GTEX consortium	-	✓	RNA biology.
[148]	2023	SpliceBERT	19.4M	2 million pre-mRNA sequences	2M	✓	RNA splicing prediction.
[154]	2023	GeneGPT	-	33000 genes	-	✓	genomics and single-cell transcriptomics.
[156]	2023	DNABERT2	117M	32.49 billion nucleotide from 135 species	-	✓	Genome FM.
[157]	2023	GexMolGen	-	L1000 public dataset	-	✓	hit-like molecules, drug discovery.
[158]	2023	GET	80M	single-cell Chromatin accessibility data	213 cell types	✓	Transcription regulation prediction.
[166]	2023	GFETM	2.5B	GTEX consortium	> 10K cells	✓	scATAC-seq Analysis.
[149]	2023	scHyena	-	GTEX consortium	-	✓	scRNA-seq analysis in the brain.

¹²<https://rfam.org/>

6 Medical Foundation Model Applications

6.1 Clinical NLP

6.1.1 Medical Chatbots and virtual assistants

FMs have advanced the use of chatbots in the medical domain. These medical chatbots are mainly based on BERT architecture and GPT-based models. For instance, Hamidi and Roberts [167] evaluated the performance of ChatGPT and Claude for patient-specific question answering (QA) from clinical notes and showed that they provided accurate and relevant answers. Furthermore, a study by Shahsavari and Choudhury [168] showed that the majority (78.4%) of participants (607 in total) were willing to use ChatGPT for self-diagnosis in healthcare. Similarly, medical chatbots can provide recommendations of comparable quality to those of human experts [168]. Huang et al. [169] showed that GPT-4 surpasses both GPT-3.5 and Family Medicine residents on multiple-choice questions from the University of Toronto Department of Family and Community Medicine Progress Test. Sun et al. [170] proposed PathAsst, a generative AI assistant for diagnostic and predictive analytics in pathology. PathAssist was trained on a 195K dataset of pathology image-text pairs and employed a base model architecture with a CLIP vision encoder and Vicuna-13B LLM. A voice-based digital assistance tool for ICU rounding teams was developed by King et al [171], that utilized real-time discussions to prompt evidence-based practices. FM-based chatbots in languages other than English have also been adopted [172, 173]. Incorporating FM-based medical chatbots and virtual assistants can improve healthcare accessibility and help relieve the burden on the healthcare system by facilitating communication between patients and healthcare providers. For instance, providing scalable and personalized patient support, augmenting clinical decision-making processes, and providing expert input to general practitioners when specialists are not available.

6.1.2 Content generation (clinical reports)

FMs have shown promising performance and assistance capability, especially in the generation of radiology reports. For instance, Clinical-BERT [174] can accurately predict disease from radiographs and generate reports. Similarly, RadioBERT [175], proposed by Kaur and Mittal, generates accurate medical reports from CXRs. Similar performance was achieved by Transformer-based Semantic Query (TransSQ). Beyond BERT-based approaches, including [176], GPT-based models have also achieved promising performance. For instance, Nakaura et al. [177] evaluated the performance of GPT models (GPT-2, GPT-3.5, GPT-4) in generating radiology reports based on patient information and imaging findings, and their performance was compared with reports generated by radiologists. Other studies [178, 179] have also shown that GPT-4 models can generate radiology reports with comparable quality to those of radiologists. Luo et al. [180] proposed a GPT-s-based model, BioGPT, that is specifically fine-tuned for various biomedical tasks, including end-to-end relation extraction and question answering. A study by Nicolson et al. [181] demonstrated the challenges associated with the diagnostic accuracy of CXR report generation. Their investigation focused on improving CXR report generation by warm-starting the encoder and decoder with recent ViT and LNP checkpoints. These advancements demonstrate the potential of FMs to improve diagnostic accuracy and assist radiologists in automating the reporting processes.

6.1.3 Information extraction

Xu et al. [182] proposed a BERT-based approach to link text phrases to ontology concepts, which can be employed in various downstream tasks including relation extraction and information retrieval. The proposed BERT-based approach achieved an accuracy of 83.5% in linking phrases to Unified Medical Language System (UMLS) concepts. Pan et al. [183] proposed a BERT-based medical text-to-SQL model (MedTS) to transform medical texts into SQL queries for Electronic Medical Records (EMRs) that achieved promising performance compared to existing techniques. Hanna et al. [184] evaluated the performance of ChatGPT in racial bias. The authors used ChatGPT to generate healthcare-related text for patients with HIV using 100 deidentified electronic health record encounters. The data was processed four times with variations in race/ethnicity while keeping other information constant. The generated text was then evaluated for sentiment, subjectivity, readability, NER, and word frequency. The results show that the differences in sentiment and subjectivity across races/ethnicities were not statistically significant. A BERT-based model was proposed by Kuling et al. [185] to segment breast radiology reports into different sections in the Breast Imaging Reporting and Data System (BI-RADS) lexicon which achieved 98% accuracy. FMs would enhance the efficiency and accuracy of extracting structured information from unstructured medical text data. Furthermore, such robust models offer promising avenues for improving data interoperability and accessibility in healthcare settings.

6.1.4 Information retrieval (bedside decision support)

Clinical decision support (CDS) plays a vital role in delivering information and tailored recommendations to patients and healthcare providers during care delivery. FMs can be adopted to significantly improve healthcare delivery. For example, Liu et al. [186] showed that ChatGPT could be a valuable complement in optimizing CDS alerts and advancing learning health systems. FM applications can facilitate accurate information retrieval to provide the most comprehensive and pertinent historical information to the provider.

6.1.5 Clinical Language translation

Medical language translation aims to transform complex medical texts such as those embedded in EHRs into a clearer format for diverse audiences [187]. This is achieved by simplifying complex medical terminology, abbreviations, and technical language so that they can be more easily understood by patients, caregivers, and individuals lacking specialized medical knowledge. For instance, “peripheral edema” or “hypertension” may be replaced with or tagged as “ankle swelling” or “high blood pressure”, respectively [187]. FMs show high accuracy for contextual medical language translation [187]. By accurately contextualizing medical terminology and simplifying complex language, FMs enable clearer and more accessible communication between healthcare providers, patients, and caregivers.

6.2 Medical Computer Vision

6.2.1 Generation (visual)

FMs have been widely adopted in the computer vision domain for multiple tasks, including content generation. For instance, Khader et al. [188] implemented diffusion probabilistic models to synthesize high-quality 3D MRI and CT images. The authors trained the VQ-GAN model on a dataset to obtain a low-dimensional latent representation suitable for training a 3D diffusion model. The results were validated by radiologists, proving that the model generates 3D volumetric medical imaging data that accurately reflects human anatomy. A stable diffusion-based model, RoentGen, for synthesizing chest X-rays (CXR) conditioned on text prompts was proposed by Delbrouck et al. [189]. The proposed RoentGen model can generate high-fidelity synthetic medical images with controllable features. Another work utilizing stable diffusion was carried out by Kidder [190], in which photorealistic medical images were generated including MRI, chest, and lung X-rays, and contrast-enhanced spectral mammography (CESM) images. Similarly, Moon et al. [191] proposed the Medical Vision Language Learner (MedViLL), which combines textual representations (BERT) and visual representations (with ResNet50 as the visual features extractor) for multiple downstream tasks such as diagnosis classification, medical image-report retrieval, and radiology report generation. Yang et al. [192] used the ImageCLEF 2023 dataset for medical report generation using BLIP-2 [193], with EVA-ViT-g as the encoder [194] and ChatGLM-6B as the decoder [195]. FMs could generate realistic data for training and validating algorithms thus reducing the use of expensive and sensitive real-world datasets. Furthermore, synthetic data can support the development of cutting-edge models without putting any patient information at risk [196].

6.2.2 Classification

DL models enable the prediction of predefined labels or categories associated with input data. The results are promising and often outperform medical experts in terms of accuracy [86]. Since DL-based models rely heavily on annotated datasets, they are not always suitable for generalization. Hence, FMs that utilize SSL or zero-shot classification can be a promising alternative. For instance, Tiu et al. [86] proposed CheXzero which demonstrated the effectiveness of SSL for pathology classification on CXR images without explicit annotations, achieving comparable accuracy to radiologists. Similarly, the efficient Global-Local Representations for Images using the Attention (Gloria) method [76] is an attention-based framework that contrasts image sub-regions and words in paired reports to global and local multimodal representations. Wang et al. [71] showed that decoupling image-text pairs effectively scale the training data and reduces the rate of false positives. However, models such as CheXzero and MedCLIP treat partial positive pairs as entirely negative pairs. Although MedCLIP reduces this issue, it still relies on expert labels for high performance. Therefore, Jang et al. [197] proposed a fine-tuning strategy by producing sentence sampling and positive-pair loss relaxation to achieve significant improvements (over 5%) in zero-shot pathology classification across various CXR datasets. You et al. [198] proposed CXR-CLIP, which utilizes image-text pairs with general prompts and multiple images and report sections. The proposed approach incorporated image and text contrastive losses to learn study-level characteristics of medical images and reports. A diffusion-based model, DiffMIC, was proposed by Yang et al. [199] to eliminate unexpected noise and perturbations in medical images and robustly capture semantic representations. The accuracy generalization of the classification models across various domains can be significantly improved by integrating techniques such as SSL, and attention-based frameworks. Furthermore, the development of diffusion-based models highlights the importance of robust semantic representation in medical imaging.

6.2.3 Segmentation

Medical image segmentation plays a vital role in medical diagnostics and provides sufficient non-invasive information to visualize, analyze, and track anatomical structures for accurate diagnosis and treatment planning [200]. Multiple works have carried out medical image segmentation tasks using deep learning models [200, 201, 202, 203, 204, 205, 206]. However, Recent ViT-based models include Swin UNet Transformers (Swin UNETR), proposed by Hatamizadeh et al. [207], which is a novel semantic segmentation model for brain tumor images that uses a sequence-to-sequence prediction approach. Swin UNETR combines a U-shaped network architecture with a Swin Transformer and has achieved state-of-the-art performance in the BraTS 2021 segmentation challenge. Other transformer-based models include TransUNET [208] and TransFuse [209]. Butoi et al. [210] showed that segmentation can be challenging due to the limited training data and the complex structures of human organs. Furthermore, DL-based models face challenges in generalization [211]. Therefore, they proposed a universal medical image segmentation (UniverSeg) model trained on a large dataset of over 22,000 scans collected from 53 open-access datasets from 16 different modalities. The proposed UniverSeg achieved promising performance compared to state-of-the-art models such as SENet [212], PANet [213], and ALPNet [214]. Kim et al. [215] showed that UniverSeg can be generalized for various tasks with minimal labeled data. Specifically, the authors demonstrated its promising performance for prostate MRI segmentation. Similarly, an application of SAM was evaluated for zero-shot tumor segmentation, tissue segmentation, and cell nuclei segmentation [125]. The performance of the SAM model was better for large connected objects but faced challenges in dense instance object segmentation. Another SAM-based model was also used for interactive medical image segmentation [216].

Xing et al. [217] showed that integrating denoising diffusion models (DDMs) into a U-shaped network architecture can improve the volumetric segmentation for multiple modalities. A DDM-based model was also proposed for dental radiography segmentation [218]. Another denoising diffusion probabilistic models (DDPM)-based [104] model that incorporated contextual discounting for tumor segmentation was used for multi-modality medical images. An improved diffusion model was proposed by Zhao et al. [219] that combines text attention principles with diffusion models for enhanced medical image segmentation precision. Wolleb et al. [220] introduced a novel semantic segmentation method for medical images that generates image-specific segmentation masks and computes pixel-wise uncertainty maps. The authors utilized diffusion models [221] using the BRATS2020 dataset to achieve meaningful segmentation masks that improved brain tumor segmentation performance compared to state-of-the-art models. Rahman et al. [222] proposed a diffusion-based segmentation approach to synthesize multiple variants of segmented masks based on various radiologist annotations. The authors proposed the Ambiguity Modelling Network (AMN) and Ambiguity Controlling Network (ACN) to capture uncertainty in ground truth and predicted masks. Furthermore, the Collective Insight (CI) score, combining sensitivity, the maximum Dice matching score, and the diversity agreement score was proposed. MedSegDiff, based on diffusion probabilistic models (DPMs), was proposed by Wu et al. [223] for segmentation in three modalities, such as optic cup segmentation from fundus images, brain tumor segmentation from MRI images, and thyroid nodule segmentation from ultrasound images. An extended version of MedSegDiff-V2 was proposed by Wu et al [224]. MedSegDiff-V2 integrated ViT into DPM and was evaluated for 20 segmentation tasks. Another diffusion model for vessel segmentation was proposed by Kim et al. [225] by combining the DDPM [104] with adversarial learning to diagnose vascular diseases. The proposed Diffusion Adversarial Representation Learning (DARL) model consists of a diffusion module to estimate latent features, a generation module for vessel segmentation masks and synthetic angiograms, and discriminators to distinguish between real and fake images. The results evaluated on multiple datasets achieved generalized and superior segmentation performance. Fu et al. [226, 227] presented denoising diffusion models that predict segmentation masks using a fully noise-corrupted input rather than relying on conventional ground truth masks during training. Sun et al. [228] proposed a diffusion-model-based method of automatic gland instance segmentation in histology images of the colon. Other interesting models and applications have been provided in [229, 228, 230, 231, 232, 233, 234, 235]. We outlined CLIP-based applications in Section 2.5, but some CLIP-driven applications specifically for image segmentation include those of [236]. These models showed that CLIP-based approaches exhibit reasonable transferability to medical images, especially in zero-shot settings for non-radiology photographic modalities. Similarly, Adhikari et al. [237] demonstrated the performance of CLIPseg and CRIS on synthetic data obtained from diffusion models. FMs can assist by enhancing diagnostic accuracy, surgical planning, disease staging, and medical decision-making for risk stratification. It can help to achieve faster diagnoses, tailored treatment decisions, and improved patient outcomes. Furthermore, incorporating FMs in clinical settings can assist clinicians in further refining segmentation accuracy and efficiency for improving the precision in various medical imaging applications.

6.2.4 Localization

FMs can serve as digital assistants to radiologists by drafting reports from imaging modalities which will substantially reduce their workloads [238]. Such automatically generated detailed reports can be used to identify abnormalities and contextualize findings based on the patient’s medical history [238]. Furthermore, FM-based grounded radiology

reports can assist radiologists in providing more informed interactive conversations. Such as a radiologist might ask the model to identify new multiple sclerosis lesions compared to previous images [238]. Moreover, region-guided radiology report generation models enhance report completeness and consistency by focusing on individual anatomical regions and generating tailored descriptions [239]. Zhu et al. [240] proposed a novel visual grounding framework for multimodal fusion by aligning image-text embedding in a shared semantic space and utilizing a transformer-based deep interactor for accurate reasoning. However, implementation of such generalized models on a large scale may require the integration of data from multiple sources such as patient history, laboratory results, and previous imaging studies to provide contextually relevant insights [238]. Visual grounding from imaging modalities saves time and ensures consistency and completeness in reporting. Moreover, by contextualizing findings based on patient history, FMs facilitate more informed discussions between radiologists and patients.

6.2.5 Reconstruction

High-quality images are essential for clinical diagnosis, but addressing concerns related to cost and patient safety is also important [241]. Various imaging modalities, such as CT, MRI, and PET, require advanced reconstruction techniques to enhance spatial resolution, reduce noise, and improve overall image quality [242]. FMs have been shown to be effective for image reconstruction tasks. For example, Levac et al. [243] proposed deep generative diffusion models to solve the ill-posed inverse problem of accelerated image reconstruction with subject motion during MRI examinations. Similarly, Gungor proposed AdaDiff [244] for adaptive diffusion before MRI reconstruction. AdaDiff utilizes a diffusion process with an adversarial mapper for training and employs a two-phase reconstruction approach. The proposed approach is resilient against domain shifts in multi-contrast brain MRIs and has achieved promising performance for accelerated MRI reconstruction. The results from other works show that diffusion modeling is a promising approach for MRI reconstruction [245, 246]. FMs can improve healthcare accessibility by augmenting or enhancing image quality, particularly in facilities lacking advanced hardware or scanning capabilities and technical expertise.

6.2.6 Enhancement (super-resolution)

Image enhancement methods using super-resolution techniques can improve the quality and clarity of medical images. Super-resolution methods aim to reconstruct high-resolution images from lower-resolution inputs to enhance fine details. In medical imaging, they aim to provide precise visual information to clinicians [247]. Recently, multiple studies have been carried out on super-resolution techniques [247]. For instance, Mao et al. [248] proposed the Disentangled Conditional Diffusion Model (DisC-Diff) that incorporates a disentangled U-Net, forward and reverse diffusion processes, and novel loss functions to enhance the model's effectiveness in capturing complex interactions in multi-contrast MRI. The proposed approach achieved promising performance compared to other works [249, 250]. Another robust latent diffusion-based model proposed in [251] showed promising performance in clinical MRI scans characterized by low resolution, diverse contrast, and spatial resolution variations. FMs significantly improve the quality and clarity of diagnostic images that enable clinicians to make more informed decisions that lead to better patient outcomes. For instance, FMs could allow hospitals with only 1.5T MRIs to synthesize 7T data, which would greatly affect clinical care and diagnostic accuracy.

6.2.7 Modality Translation

Multi-modality imaging such as CT-MRI provides key information for an improved decision-making process. However, obtaining multi-modality images can be expensive and requires acquisition time [252]. Therefore, synthesizing missing or corrupted modalities from available ones can provide a cost-effective medical image-to-image translation approach. Many DL-based models have been employed for this purpose, particularly GANs [253, 254, 255]. However, it has recently been shown that diffusion models are promising alternatives to GANs providing better results [256, 257]. For instance, SynDiff [256] employs a conditional diffusion process that progressively maps noise and source images onto the target image for efficient and high-fidelity translation between source and target modalities. Another diffusion-model-based approach utilizes 2D backbones for volumetric data synthesis [258]. FMs can be a promising approach to synthesizing multi-modality imaging and being able to translate information from one modality to another. This will assist clinicians with enhanced diagnostic capabilities and facilitate more informed treatment decisions.

6.2.8 Augmented procedures

Incorporating augmented reality (AR) into medical interventions and processes provides healthcare professionals with real-time, contextually relevant information to improve decision-making and overall patient care [259]. Augmented procedures can be applied across a spectrum of medical scenarios, including neurosurgery training, robotic neurosurgery, pain management, neuronavigation, rehabilitation, consent taking, and diagnostic tools [260]. By incorporating multi-

modality data, FMs can potentially provide real-time assistance to surgical teams by assisting in various tasks including annotating video streams, alerting to skipped procedural steps, and diagnosing rare anatomical phenomena.

6.2.9 Vision-based conversation

Conversational agents (chatbots) gained significant attention, especially after ChatGPT in various domains including healthcare. Traditional chatbots in healthcare primarily relied on textual inputs from patients to aid and information. However, incorporating vision data can significantly enhance the capabilities of these conversational agents, enabling them to understand and respond to visual cues effectively. For instance, Luo et al. [261] proposed a multi-model FM, Valley (Video Assistant with Large Language model Enhanced ability), capable of understanding video, image, and language simultaneously. Qilin-Med-VL [262] is a Chinese large vision-language model for healthcare to comprehend both textual and visual medical data. Similarly, healthcare-based smart chatbots [263] intelligently respond to user input to detect conditions like viral and bacterial pneumonia in X-ray images and Drusen, Choroidal Neovascularization (CNV), and Diabetic Macular Edema (DME) in Optical Coherence Tomography (OCT) images. Furthermore, models such as VideoChat [264], VAST [265], visualGPT [266], NExT-GPT [267], CLIPSyntel [268] can aid in analyzing images or videos shared by patients to gather valuable insights into their physical condition, environment, symptoms to offer more personalized and context-aware support. FMs offer valuable assistance in analyzing visual information shared by patients to provide enhanced communication and diagnostic capabilities in healthcare settings.

6.3 Graph Learning

LLMs have excelled in natural language tasks, but they face challenges in graph learning due to their limitations in mathematical precision, logic reasoning, spatial perception, and the handling of temporal information. Therefore, work has been carried out to develop a framework specifically for graph data. Significant approaches include the incorporation of the capabilities of ChatGPT and the Toolformer [269] model for efficient graph reasoning [269]. Furthermore, incorporating multi-modality data provides better performance in graph learning models [270]. We refer the reader to [271, 272] for recent surveys on graph foundation models.

6.3.1 Brain network

Brain networks are complex and interconnected neural connections within the human brain [273]. Modern imaging technologies such as functional MRI (fMRI) have provided insight into normal and abnormal brain functions [273]. Graph neural networks (GNNs) show great potential in capturing complex interpretable brain network models for disease prediction [274]. Furthermore, GNN models are more common for investigating the brain connectome and how disruptions or alterations in brain networks are associated with conditions such as Alzheimer’s disease [275], Parkinson’s disease [276], psychiatric disorders [277], rare diseases [278], and autism spectrum disorders [279]. Due to their generalized nature, FMs offer a promising alternative to traditional GNNs for extracting meaningful patterns from brain data. FMs’ ability to capture complex interactions within brain networks makes them well-suited for deciphering neural connections associated with neurological disorders.

6.3.2 Knowledge discovery in medicine

Knowledge discovery in medicine also termed as hueristics is refers to the process of extracting valuable insights, patterns, and knowledge from large and complex medical datasets [280]. FMs are also adopted for knowledge discovery and drug discovery with great success [281]. Utilizing FMs in medical knowledge discovery can reveal novel correlations, biomarkers, and therapeutic targets for drug development, personalized medicine, and healthcare delivery.

6.4 Biology and Omics

FMs focused on biology and omics were outlined in Section 5.4. However, this section briefly explains the details of their applications. Additionally, we refer readers to several articles for detailed works concerned with the biology and omics domain: [282, 283, 284, 285, 286].

6.4.1 Drug discovery

Drug discovery aims to identify and develop new therapeutic compounds for treating various medical conditions. Traditional drug discovery methods have limitations due to small datasets and generalization challenges. However, the authors in[287, 288] demonstrated the potential of generative drug design and molecular foundation models. They achieved improved molecular quality and an enhanced capability for predicting drug properties. FMs could

decrease the cost, time, manpower, and hardware requirements compared to traditional drug discovery and development. Furthermore, it also can impact high-throughput workflows.

6.4.2 Radiomics

Radiomics mainly involves the extraction and analysis of quantitative features from medical images to provide valuable insights into lesion characterization, prognosis, and treatment response [289]. Radiomics enables a more comprehensive and objective assessment of the underlying tissue properties by transforming conventional medical images (CT, MRI, PET) into high-dimensional data sets [290]. A work done by Pai et al. [291] proposed a SimCLR-based model [292] for managing biomarker discovery through self-supervised learning on a dataset comprising 11,467 radiographic lesions. The results show that FMs are efficient in learning imaging biomarkers and are accelerating their translation into clinical settings. Fu et al. [293] show that non-contrast CT-based radiomics can assist in identifying severe atherosclerotic renal artery stenosis (ARAS) patients suitable for percutaneous transluminal renal angioplasty (PTRA). FMs demonstrate remarkable potential in identifying imaging biomarkers and facilitating their translation into clinical practice. These capabilities have significant clinical implications such as better disease characterization, prognosis assessment, and personalized treatment strategies.

6.4.3 Proteomics

In 1995, Marc Wilkins created the term “proteome” for a new type of omics [294]. Proteomics is the study of the interactions, compositions, functions, and structures of proteins and their cellular activity [294, 295]. Many works have been carried out to develop intelligent solutions for proteomics [294, 295]. Some of the relevant FMs include [284, 285, 24, 283]. FMs can unlock new insights into complex cellular activities, paving the way for innovative approaches in drug discovery, personalized medicine, and disease management.

6.5 Other Applications

6.5.1 Text-to-Protein generation

Protein design aims to create customized proteins for various applications to address environmental and biomedical challenges. Leveraging recent advancements in transformer-based architectures has resulted in promising performance. For instance, leveraging contrastive learning and generative models, Liu et al. [296] proposed ProteinDT for text-guided protein generation to property prediction. Trained on a large-scale dataset (SwissProtCLAP, with 441K text and protein pairs), it outperformed state-of-the-art methods in protein property prediction benchmarks [297, 298, 299]. ProtGPT2 [284] was introduced as a language model that generates novel protein sequences following natural principles that exhibit amino acid propensities similar to natural proteins. ProGen [300] generates protein sequences with predictable functions across expansive protein families. Similarly, generalist medical AI (GMAI) [238] is a model capable of generating both amino acid sequences and three-dimensional structures of proteins based on textual prompts. Watson et al. [301] proposed a diffusion-based model for protein backbone design that fine-tunes the RoseTTAFold structure prediction network on protein structure denoising tasks. FMs present an innovative approach to generating protein sequences and structures from textual prompts. By integrating in-context learning capabilities, FMs could dynamically define tasks based on example instructions, such as generating proteins with specific binding properties.

6.5.2 Video

FMs were also successful in extracting insightful information from videos [302, 303, 261, 304]. For instance, Wang et al. [164] proposed the Endo-FM model for endoscopic video analysis based on a video transformer. The work used an SSL pre-training approach that captures spatial and temporal dependencies, pre-trained in a self-supervised manner on a large-scale dataset of 5 million frames obtained from 33K videos. A CLIP-based model, EchoCLIP [305] for echocardiography trained on a dataset of over a million cardiac ultrasound videos and expert interpretations achieved strong zero-shot performance in cardiac function assessment and identification of intracardiac devices. Other models proposed in [306, 307] are also large-scale pre-trained models for echocardiograms. FMs enable comprehensive understanding and analysis of dynamic visual data to enhance decision-making and diagnostic accuracy in healthcare.

6.5.3 Speech (interactive note taking)

Multiple works are done to utilize FMs for speech audio information. For instance, AudioGPT is based on the GPT model that integrates audio foundation models and input/output interfaces for spoken dialogue [308]. Similarly, various works show that FMs can complement the processing of speech data [309, 310, 311]. For instance, a study done by Gerczuk et al. [312] detects smaller temporal variations in depressed mood by introducing a zero-shot personalization

strategy for large speech foundation models. FMs offer valuable capabilities for analyzing speech data and extracting meaningful insights that are not readily perceivable by healthcare providers.

Table 4: Applications of FMs in healthcare. CNLP: Clinical NLP, MCV: Medical computer vision

Work	Domain	Task	Modality	Dataset	Pretrained Model	Keypoints
[167]	CNLP	Evluation of ChatGPT and Claude	EHR	MIMIC III	ChatGPT and Claude	Accurate response
[168]	CNLP	ChatGPT for self-diagnosis	Questionnaire	Questionnaire	ChatGPT	Majority participants were satisfied from ChatGPT
[313]	CNLP	Chatbots evaluation against ophthalmologist	Question-answer pairs	Eye Care Forum (question-answer pairs)	ChatGPT	ChatGPT provide comparable quality advice
[169]	CNLP	Chatbots (chatGPT 3.5, 4) evaluation against Family Medicine residents.	Multiple-choice questions (MCQs)	MCQs	ChatGPT (3.5 and 4)	GPT-4 performed the best.
[170]	CNLP	Diagnostic & Predictive Analytics	Multimodal (image-text pairs)	PathCap and PathInstruct [170]	Vicuna-13B [314], CLIP (PLIP) [315]	improved pathology diagnosis and treatment processes
[171]	CNLP	Digital assistant evaluation.	Audio signals	106 patient audio recordings, PubMed Central manuscripts, and MIMIC III	BioClinicalBERT	FMs aid in reduced prompts per patients.
[182]	CNLP	concept normalization	Text	1000 discharge summaries	BERT	Improved Accuracy
[183]	CNLP	Medical text to SQL queries	EHR	MIMICSQL	BERT	improved text-to-SQL generation
[188]	MCV	3D MRI and CT	Images	MRNet Dataset, ADNI, Breast Cancer MRI Dataset, LIDC, IDRI, MIMIC-CXR dataset	VQ-GAN DDPM	High quality 3D volumetric data synthesis
[189]	MCV	chest X-ray (CXR) synthesis	Multimodal (image-text pairs)		Stable Diffusion	High-fidelity synthetic CXRs conditioned on text.
[191]	MCV	Vision-Language Tasks	Multimodal (image-text)	MIMIC-CXR, VQARAD, and Open-I	BERT, ResNet-50	Multi-modal understanding of text-image pairs
[192]	MCV	Report generation	Multimodal (image-text pairs)	ImageCLEF 2023	BLIP-2, EVA-ViT-g as encoder, ChatGLM-6B as decoder	FMs improved performance.
[190]	MCV	MRI, CXRs, CEM	Multimodal (image-text pairs)	[316, 317, 318, 319]	Stable Diffusion	generate photorealistic medical images
[184]	CNLP	Evaluate FMs for racial bias	Text	100 EHR encounters	ChatGPT	No racial bias
[185]	CNLP	Section segmetation	Text (radiology reports)	155,000 breast radiology reports	BERT	Imporved performance
[210]	MMCV	segmentation	Images	53 datasets, 16 image modalities	CNN	Accurate segmentation
[215]	MCV	prostate MRI segmentation	Images	Prostate-Gland, PROSTATEx-TZ and PROSTATEx-PZ	UniverSeg	Can be generalized well.
[125]	MCV	Segmentation	Images	Tissue, TCGA, and nuclei [320]	SAM [32]	SAM face challenges to segment dense instance objects.
[321]	MCV	Segmentation, classification	Images	Ultrasound images (over 2 million)	universal Ultrasound foundation model	Modality specific.
[79]	MCV	Segmentation (25 organs, 6 tumors)	Images	14 CT scans datasets	CLIP	Promising segmentation
[231]	MCV	Segmentation (organ/tumor segmentation)	Images	BTCV, LiTS [322] and JHH [323]	CLIP	Difficult to segment dense instance object
[220]	MCV	Generating segmentation masks	Images	Brats2020	DDPM	Improved segmentation masks
[222]	MCV	Generating segmentation masks	Images	LIDC-IDRI, MSMRI, Bone surface segmentation	AMN, ACN	Improved segmentation masks
[225]	MCV	Generating segmentation masks	Images	XCAD, XCA, DRIVE, STARE	DDPM, SPADE [324]	Improved segmentation masks
[223]	MCV	Segmentation	Images	REFUGE-2 dataset [325], BraTs-2021 dataset [326] and DDTI dataset [327], AMOS2022, BTCV, REFUGE-2, BraTs-2021 dataset, ISIC 2018 dataset, and TNMIX dataset	DPM, ResUNet	Improved segmentation masks
[224]	MCV	Segmentation	Images		DPM, UNET	segmentation

Table 4: Applications of FMs in healthcare (continued)

Work	Domain	Task	Modality	Dataset	Pretrained Model	Summary
[328]	MCV	Segmentation	Images	LASeg dataset, Synapse dataset, MMWHS, M&Ms	Diff-VNet [217]	Improved segmentation
[227]	MCV	Segmentation	Images	abdominal CT[329], muscle ultrasound [330], Prostate MR [331], Brats2021	DDPM, DDIM	Improved segmentation
[217]	MCV	Segmentation	Images	BraTS2020, MSD Liver, BTCV	DDM, Diff-UNet	Improved segmentation
[219]	MCV	Segmentation	Images	Kvasir-SEG [332], Kvasir-Sessile [333], and the Glas [334]	Diffusion model [104], DTAN	Improved segmentation
[232]	MCV	Classification, Segmentation	Image-text	MS-CXR, MIMIC-CXR	BERT, BioViL	Improved performance
[174]	CNLP	Report generation	Image-text	MIMIC-III	Clinical-BERT	Diagnosis and report generation
[175]	CNLP	Report generation	Image-text	OpenI	BERT, DistilBERT, RadioBERT	Report generation from CXRs
[335]	CNLP	report generation	Image-text	IU X-ray, and MIMIC-CXR	TranSQ	medical report generation
[86]	MCV	X-ray classification	Image-text	MIMIC-CXR, CheXpert, PadChest	CLIP	SLL achieved better classification.
[71]	MCV	X-ray classification	Image-text	MIMIC-CXR, CheXpert.COVID, RSNA	BioClinicalBERT, Swin Transformer	SLL achieved better classification.
[197]	MCV	X-ray classification	Image-text	MIMIC-CXR, CheXpert, PadChest, Open-I, VinDr-CXR	BERTbase, CLIP, SLIP, UniCLIP	Improved pathology classification
[336]	MCV	classification	Images	PatchGastric	CLIP, BioLinkBERT	Better tubular adenocarcinoma classification
[198]	MCV	X-ray classification	Image-text	MIMIC-CXR, CheXpert, ChestX-ray14, RSNA pneumonia, SIIM Pneumothorax, VinDR-CXR, Open-I	BioClinicalBERT, ResNet50, Swin Tiny	Improved pathology classification
[76]	MCV	image-text retrieval, Classification, Segmentation	Image-text	CheXpert, RSNA Pneumonia, SIIM Pneumothorax	BioClinicalBERT, ResNet	Improved performance
[199]	MCV	classification	Images	PMG2000, HAM10000, APTOS2019	DDPM, DCG model	Improved performance
[245]	MCV	MRI reconstruction	Images	fastMRI [337], IXI ¹³	SSDiffRecon	Improved reconstruction results.
[244]	MCV	MRI reconstruction	Images	fastMRI, IXI	AdaDiff	Improved reconstruction results.
[256]	MCV	MRI-CT translation	Images	IXI, BRATS, MRIC-T	SynDiff	Improved results
[258]	MCV	Modality translation	Images	S2M, RIRE,	Make-A-Volume	Improved results
[248]	MCV	MRI Super-Resolution	Images	IXI, in-house clinical brain MRI dataset	DisC-Diff	Improved results
[251]	MCV	MRI Super-Resolution	Images	IXI, UK Biobank.	InverseSR	Improved results

7 Opportunities

FMs present significant opportunities to advance healthcare by addressing key challenges and enhancing various aspects of medical practice. In this section, we explore three crucial challenges associated with FMs in healthcare.

7.1 Controllability

Controllability refers to the ability to guide and influence the outputs of FMs. FMs can be fine-tuned and customized to meet specific clinical requirements and references. Empowering clinicians with tools and interfaces to intervene in the model’s decision-making process will enable personalized and context-aware healthcare solutions. For instance, clinicians can use FM-generated recommendations based on patient-specific factors, clinical guidelines, and individual preferences to enhance the relevance and utility of FM outputs in clinical decision-making. Furthermore, controllability facilitates transparency for clinicians to understand the underlying reasoning of FMs. This will foster trust and confidence in their usage in medical practice.

¹³<https://brain-development.org/ixi-dataset/>

7.2 Adaptability

Flexibility of FMs to adjust to diverse medical data, disease types, and healthcare contexts can be termed as adaptability. FMs are trained on large amounts of diverse medical datasets including medical literature, patient records, and clinical guidelines. FMs can be tailored and fine-tuned to accommodate various data modalities, disease phenotypes, and healthcare contexts. In practice, FMs can also provide real-time assistance through diagnosis, treatment planning, and decision-making. FMs also have the ability to continuously learn and adapt to new information by staying up-to-date with the latest information and practices. Harnessing such models will aid healthcare organizations in developing customized and context-aware solutions that align with specific clinical needs and operational requirements.

7.3 Applicability

Applicability refers to the flexibility of FMs in addressing a wide range of healthcare challenges and use cases. FMs can be applied to diverse tasks such as clinical decision support, medical image analysis, predictive modeling, natural language understanding, drug discovery, and precision medicine. Moreover, the applicability of FMs extends beyond traditional healthcare domains to encompass emerging areas such as digital health, telemedicine, population health management, and patient engagement. FMs are opening up new frontiers for innovation and transformation in healthcare delivery and patient care.

8 Challenges to FM in Healthcare

8.1 Cost

FMs are experiencing rapid growth with training parameters increasing significantly compared to traditional models. The models' increasing size demands computationally expensive hardware requirements. This poses a handful of challenges in terms of the training cost, inference cost, debugging, monitoring, and maintenance in production applications [11].

8.2 Interpretability

FMs such as GPT-4 exhibit unparalleled capabilities for various tasks but execute them in unforeseen ways [11]. They have tremendous predictive capabilities beyond human imagination. However, it further complicates the efforts to understand their behavior. FMs undergo training across vast and diverse datasets of multiple domains and modalities, unlike task-specific models that are trained within specific domains. The extensive training results in the models learning a broad spectrum of behaviors. This makes it complex to distinguish the underlying mechanisms governing their performance across different tasks and domains [11]. Interpretability of FMs is challenging due to their vast training objective, complex structures, and task-agnostic capabilities. However, interpretability is still crucial as it ensures transparency, accountability, and trust for deploying such models in high-stake applications such as healthcare. Several works are now focusing on advancing the interpretability of FMs [338].

8.3 Validation

Validating the performance and efficiency of FMs in healthcare presents a significant challenge due to the complex and dynamic nature of medical data. Traditional validation approaches, such as cross-validation and holdout validation, may not be sufficient to assess the reliability and generalizability of FM outputs in real-world clinical settings. Moreover, the lack of standardized evaluation metrics and benchmarks tailored to healthcare applications complicates the validation process. One of the key challenges in validation is ensuring the robustness and stability of FM across diverse patient populations, disease cohorts, and clinical scenarios. Data quality, disease prevalence, and patient demographics can impact the generalization ability of FMs. This leads to biases, over-fitting, or under performance in specific contexts.

8.4 Verification

Verification of FMs in healthcare involves ensuring the correctness, reliability, and safety of model behavior and predictions. It involves various aspects such as model design, implementation, training, testing, and monitoring, to mitigate risks associated with erroneous or biased decision-making. One of the primary challenges in verification is validating the accuracy and consistency of FM outputs across different stages of the model life cycle. Ensuring reproducibility and consistency in model training, hyperparameter tuning, and optimization processes is essential to verify the reliability of FM-generated predictions. Additionally, verifying the robustness of FMs against adversarial attacks, data perturbations, and distribution shifts is critical to assess their resilience in real-world healthcare scenarios.

Furthermore, verification should address concerns related to data privacy, security, informed consent, and algorithmic fairness to mitigate potential risks associated with FM usage.

8.5 Privacy and Security

Security and privacy considerations include protecting user data confidentiality, ensuring model integrity, and maintaining system availability. The possible threats to FMs include inference attacks, adversarial examples, and data poisoning [11]. Furthermore, since the FMs are adopted for various downstream tasks, they are prone to be compromised as a single point of failure. For instance, injecting malicious data as a training sample could impact all the dependent downstream applications [339].

8.6 Social bias

Social bias involves an uneven preference or bias towards one entity, individual, or group over another [340]. Unfairness arises when individuals are not treated equally in any tasks based on factors such as gender, race, age, and marital status [340, 341]. FMs may result in social bias [340, 342] such as significant social biases in Stable Diffusion [343], particularly in gender and racial stereotypes.

8.7 Scale

The volume of training data for FM development is expanding annually. This trend is expected to persist due to the reliance of models on publicly available datasets [344]. However, publicly available data is relatively smaller compared to industrial models [11]. Therefore, there is a need for models trained in large amount of data that are capable of handling the complexities associated with multi-modal foundation model datasets [345, 346].

8.8 Legal and ethical consideration

Legal and ethical considerations play a vital role in navigating the challenges posed by the deployment of FMs. From a legal perspective, issues arise on data collection methods, copyright laws, and privacy regulations [347]. Furthermore, regulations such as the General Data Protection Regulation (GDPR) influence the acquisition and utilization of training datasets. Another issue arises from the legal responsibility of model creators in cases when a model generates harmful responses, especially in healthcare [348]. Moreover, legal protections for model outputs may result in issues associated with free speech, ownership rights, and copyright laws [349]. In addition to the legal framework, ethical considerations are also important. Major ethical challenges associated with the development of FMs include obtaining informed consent for data usage, ensuring safety and transparency, addressing algorithmic fairness and biases, and safeguarding data privacy.

8.9 Accuracy/Performance

In healthcare, achieving high performance is important for the successful implementation of AI models. FMs present a promising foundation by being pre-trained on extensive and diverse datasets. However, they may not meet the specific accuracy requirements of healthcare especially due to hallucination¹⁴ [350]. Fine-tuning these models with domain-specific training data is a common strategy to improve accuracy. However, this process can be resource-intensive. Striking a balance between accuracy improvement and resource allocation is crucial for effectively leveraging FMs in healthcare settings.

9 Discussion and Future Directions

FMs are powerful tools in various domains including healthcare that revolutionized medical practice and research. In this survey, FMs in medicine and their potential across multiple healthcare applications (Fig 1, Section 6) are explained. Most FMs are designed for general purposes to handle multiple tasks (Section 4). Such FMs exhibit the capacity to generalize across various tasks seamlessly, in a zero-shot manner. However, given the complex nature of healthcare data, applying such models directly may result in inaccurate inference. Therefore, these models are generally fine-tuned with more medical data [71]. Furthermore, FMs are also specifically designed for the healthcare domain (Section 5) including clinical LLMs (Section 5.1), medical image analysis (Section 5.2), and omics data (Section 5.4). Such models surpass the performance of general-purpose FMs when evaluated in medical data.

¹⁴Hallucination refers to the generation of plausible but incorrect or unverified information.

Most of the FMs are based on transformer architecture, which has been widely adopted after the great success since 2017 [44]. BERT was one of the first FMs designed for sequence modeling. FMs got attention after ChatGPT among the general public, leading to the development of similar models such as Bard, Chinese GPT, etc. FMs have revolutionized healthcare to assist clinical decision support, medical image analysis, drug discovery, and personalized medicine. Their ability to process large volumes of heterogeneous data, extract meaningful patterns, and generate insights has empowered healthcare professionals to improve diagnostic precision, personalized treatment strategies, and patient outcomes. For instance, FMs have been instrumental in developing medical chatbots, generating clinical reports, extracting information from medical texts, and facilitating language translation to enhance communication and information exchange in healthcare settings (Section 6.1). FMs also contributed to computer vision to facilitate various tasks including image generation, classification, segmentation, and modality translation (Section 6.2). FMs aid in reconstructing high-resolution medical images, enhancing image quality, and synthesizing missing or corrupted modalities. Moreover, such models have been integrated into augmented reality systems to enable real-time guidance and contextual information during medical interventions, training, and diagnostic procedures. Although FMs have tremendous potential in healthcare, however, several challenges need to be addressed to facilitate their widespread adoption and deployment (Section 7). Such challenges include cost implications, interpretability issues, validation and verification concerns, privacy and security risks, social biases, scalability limitations, and legal and ethical considerations. Although we explained the challenges in Section 7, addressing such challenges requires computational resources to train and deploy FMs. Moreover, the addressed model can be computationally expensive, especially for resource-constrained healthcare settings. Furthermore, ensuring the interpretability of FM outputs is crucial for fostering trust and transparency among clinicians and patients. However, interpreting the complex decision-making processes of FMs remains a challenge.

Fairness and Explainability of FMs: Healthcare is a sensitive domain in which false knowledge or hallucinations could lead to serious harm. For instance, the CLIP model’s sensitivity to red circles highlights how such biases may result in misclassifications [351]. Although researchers are trying to mitigate this issue, however, more research is required to improve the fairness of FMs and mitigate the potential risks of generating misinformation. Furthermore, incorporating the interpretability of FM decision-making processes will foster trust between the AI models and clinicians.

Privacy-preserving Techniques: Since most of the healthcare data is not publicly available, solving privacy issues of patient privacy and implementing federated learning [352] will provide FMs with a large amount of training data. Furthermore, it will enable collaborative model training across multiple institutions while ensuring data security and confidentiality.

Robust FMs: FMs that are susceptible to adversarial attacks may result in wrong information and diagnosis that leads to incorrect treatments or delays in necessary interventions [353]. Moreover, adversarial attacks can compromise patient privacy and may result in severe breaches of confidentiality. This would result in raising ethical and legal concerns. Although robustness has been slightly addressed recently [354, 355], there is still a need to incorporate robust FMs before deploying them into clinical settings.

Multi-purpose FMs: FMs are generally multi-purpose, however, due to the complex nature of healthcare data, general-purpose medical FMs are not yet explored that handle various applications. Designing a universal large-scale FM tailored specifically for healthcare would facilitate the creation of a centralized model that could be adopted across various healthcare domains.

Cost-effective Deployment: Developing efficient training and inference algorithms and exploring cloud-based solutions will facilitate cost-effective deployment in healthcare settings.

10 Conclusion

We conducted a detailed survey to review the recent advances of FMs in the healthcare domain. Our study explained the wide range of potential applications and significant contributions of FMs in revolutionizing various aspects of healthcare delivery. We provided insights into both the key general-purpose FMs and specialized models designed for healthcare applications. Moreover, our survey explored nearly all healthcare applications associated with FMs, ranging from clinical decision support systems to medical image analysis and drug discovery. By explaining the detailed landscape of the medical domain, our survey fills a crucial gap in existing literature and serves as a comprehensive resource for researchers and practitioners in the field.

11 Acknowledgement

This work was supported by the National Science Foundation (1908299, 2123809). A more compact version of this article is under view.

References

- [1] AN Ramesh, Chandra Kambhampati, John RT Monson, and PJ Drew. Artificial intelligence in medicine. *Annals of the Royal College of Surgeons of England*, 86(5):334, 2004.
- [2] Arjun Panesar. *Machine learning and AI for healthcare*. Springer, 2019.
- [3] Yik San Kwok, Joahin Hou, Edmond A Jonckheere, and Samad Hayati. A robot with improved absolute positioning accuracy for ct guided stereotactic brain surgery. *IEEE transactions on biomedical engineering*, 35(2):153–160, 1988.
- [4] Yann LeCun, Bernhard Boser, John S Denker, Donnie Henderson, Richard E Howard, Wayne Hubbard, and Lawrence D Jackel. Backpropagation applied to handwritten zip code recognition. *Neural computation*, 1(4):541–551, 1989.
- [5] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems*, 25, 2012.
- [6] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009.
- [7] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8):1735–1780, 1997.
- [8] Varsha S Lalapura, J Amudha, and Hariramn Selvamuruga Satheesh. Recurrent neural networks for edge intelligence: a survey. *ACM Computing Surveys (CSUR)*, 54(4):1–38, 2021.
- [9] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. *Advances in neural information processing systems*, 27, 2014.
- [10] Divya Saxena and Jiannong Cao. Generative adversarial networks (gans) challenges, solutions, and future directions. *ACM Computing Surveys (CSUR)*, 54(3):1–42, 2021.
- [11] Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*, 2021.
- [12] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781*, 2013.
- [13] Jeffrey Pennington, Richard Socher, and Christopher D Manning. Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, pages 1532–1543, 2014.
- [14] Jeremy Howard and Sebastian Ruder. Universal language model fine-tuning for text classification. *arXiv preprint arXiv:1801.06146*, 2018.
- [15] Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. Improving language understanding by generative pre-training. 2018.
- [16] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [17] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [18] Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv preprint arXiv:1910.13461*, 2019.
- [19] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *The Journal of Machine Learning Research*, 21(1):5485–5551, 2020.

- [20] Jin K Kim, Michael Chua, Mandy Rickard, and Armando Lorenzo. Chatgpt and large language model (llm) chatbots: The current state of acceptability and a proposal for guidelines on utilization in academic medicine. *Journal of Pediatric Urology*, 2023.
- [21] Pengyuan Zhou, Lin Wang, Zhi Liu, Yanbin Hao, Pan Hui, Sasu Tarkoma, and Jussi Kangasharju. A survey on generative ai and llm for video generation, understanding, and streaming. *arXiv preprint arXiv:2404.16038*, 2024.
- [22] Himesh B Zaver and Tushar Patel. Opportunities for the use of large language models in hepatology. *Clinical Liver Disease*, 22(5):171–176, 2023.
- [23] Pengcheng Yin, Graham Neubig, Wen-tau Yih, and Sebastian Riedel. Tabert: Pretraining for joint understanding of textual and tabular data. *arXiv preprint arXiv:2005.08314*, 2020.
- [24] Alexander Rives, Joshua Meier, Tom Sercu, Siddharth Goyal, Zeming Lin, Jason Liu, Demi Guo, Myle Ott, C Lawrence Zitnick, Jerry Ma, et al. Biological structure and function emerge from scaling unsupervised learning to 250 million protein sequences. *Proceedings of the National Academy of Sciences*, 118(15):e2016239118, 2021.
- [25] Daniel Rothchild, Alex Tamkin, Julie Yu, Ujval Misra, and Joseph Gonzalez. C5t5: Controllable generation of organic molecules with transformers. *arXiv preprint arXiv:2108.10307*, 2021.
- [26] Yuji Cao, Huan Zhao, Yuheng Cheng, Ting Shu, Guolong Liu, Gaoqi Liang, Junhua Zhao, and Yun Li. Survey on large language model-enhanced reinforcement learning: Concept, taxonomy, and methods. *arXiv preprint arXiv:2404.00282*, 2024.
- [27] Riccardo Miotto, Fei Wang, Shuang Wang, Xiaoqian Jiang, and Joel T Dudley. Deep learning for healthcare: review, opportunities and challenges. *Briefings in bioinformatics*, 19(6):1236–1246, 2018.
- [28] Cheng Peng, Xi Yang, Aokun Chen, Kaleb E Smith, Nima PourNejatian, Anthony B Costa, Cheryl Martin, Mona G Flores, Ying Zhang, Tanja Magoc, et al. A study of generative large language model for medical research and healthcare. *arXiv preprint arXiv:2305.13523*, 2023.
- [29] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [30] Jun Ma, Yuting He, Feifei Li, Lin Han, Chenyu You, and Bo Wang. Segment anything in medical images. *Nature Communications*, 15(1):654, 2024.
- [31] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *Medical Image Computing and Computer-Assisted Intervention—MICCAI 2015: 18th International Conference, Munich, Germany, October 5-9, 2015, Proceedings, Part III 18*, pages 234–241. Springer, 2015.
- [32] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. *arXiv preprint arXiv:2304.02643*, 2023.
- [33] Ce Zhou, Qian Li, Chen Li, Jun Yu, Yixin Liu, Guangjing Wang, Kai Zhang, Cheng Ji, Qiben Yan, Lifang He, et al. A comprehensive survey on pretrained foundation models: A history from bert to chatgpt. *arXiv preprint arXiv:2302.09419*, 2023.
- [34] Jingfeng Yang, Hongye Jin, Ruixiang Tang, Xiaotian Han, Qizhang Feng, Haoming Jiang, Bing Yin, and Xia Hu. Harnessing the power of llms in practice: A survey on chatgpt and beyond. *arXiv preprint arXiv:2304.13712*, 2023.
- [35] Muhammad Awais, Muzammal Naseer, Salman Khan, Rao Muhammad Anwer, Hisham Cholakkal, Mubarak Shah, Ming-Hsuan Yang, and Fahad Shahbaz Khan. Foundational models defining a new era in vision: A survey and outlook. *arXiv preprint arXiv:2307.13721*, 2023.
- [36] Adam Kolides, Alyna Nawaz, Anshu Rathor, Denzel Beeman, Muzammil Hashmi, Sana Fatima, David Berdik, Mahmoud Al-Ayyoub, and Yaser Jararweh. Artificial intelligence foundation and pre-trained models: Fundamentals, applications, opportunities, and social impacts. *Simulation Modelling Practice and Theory*, 126:102754, 2023.
- [37] Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 2023.
- [38] Ling Yang, Zhilong Zhang, Yang Song, Shenda Hong, Runsheng Xu, Yue Zhao, Wentao Zhang, Bin Cui, and Ming-Hsuan Yang. Diffusion models: A comprehensive survey of methods and applications. *ACM Computing Surveys*, 56(4):1–39, 2023.

- [39] Michael Wornow, Yizhe Xu, Rahul Thapa, Birju Patel, Ethan Steinberg, Scott Fleming, Michael A Pfeffer, Jason Fries, and Nigam H Shah. The shaky foundations of large language models and foundation models for electronic health records. *npj Digital Medicine*, 6(1):135, 2023.
- [40] Muhammad Usman Hadi, Rizwan Qureshi, Abbas Shah, Muhammad Irfan, Anas Zafar, Muhammad Bilal Shaikh, Naveed Akhtar, Jia Wu, Seyedali Mirjalili, et al. Large language models: a comprehensive survey of its applications, challenges, limitations, and future prospects. *Authorea Preprints*, 2023.
- [41] Bobby Azad, Reza Azad, Sania Eskandari, Afshin Bozorgpour, Amirhossein Kazerouni, Islem Rekik, and Dorit Merhof. Foundational models in medical imaging: A comprehensive survey and future vision. *arXiv preprint arXiv:2310.18689*, 2023.
- [42] Hongjian Zhou, Boyang Gu, Xinyu Zou, Yiru Li, Sam S Chen, Peilin Zhou, Junling Liu, Yining Hua, Chengfeng Mao, Xian Wu, et al. A survey of large language models in medicine: Progress, application, and challenge. *arXiv preprint arXiv:2311.05112*, 2023.
- [43] Zihao Zhao, Yuxiao Liu, Han Wu, Yonghao Li, Sheng Wang, Lin Teng, Disheng Liu, Xiang Li, Zhiming Cui, Qian Wang, et al. Clip in medical imaging: A comprehensive survey. *arXiv preprint arXiv:2312.07353*, 2023.
- [44] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [45] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- [46] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [47] Zhaoyang Niu, Guoqiang Zhong, and Hui Yu. A review on the attention mechanism of deep learning. *Neurocomputing*, 452:48–62, 2021.
- [48] Laurent Itti, Christof Koch, and Ernst Niebur. A model of saliency-based visual attention for rapid scene analysis. *IEEE Transactions on pattern analysis and machine intelligence*, 20(11):1254–1259, 1998.
- [49] Ankur P Parikh, Oscar Täckström, Dipanjan Das, and Jakob Uszkoreit. A decomposable attention model for natural language inference. *arXiv preprint arXiv:1606.01933*, 2016.
- [50] Bowen Cheng, Ishan Misra, Alexander G Schwing, Alexander Kirillov, and Rohit Girdhar. Masked-attention mask transformer for universal image segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1290–1299, 2022.
- [51] Zilong Huang, Xinggang Wang, Lichao Huang, Chang Huang, Yunchao Wei, and Wenyu Liu. Ccnet: Criss-cross attention for semantic segmentation. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 603–612, 2019.
- [52] Shih-Cheng Huang, Anuj Pareek, Malte Jensen, Matthew P Lungren, Serena Yeung, and Akshay S Chaudhari. Self-supervised learning for medical image classification: a systematic review and implementation guidelines. *NPJ Digital Medicine*, 6(1):74, 2023.
- [53] Xiao Liu, Fanjin Zhang, Zhenyu Hou, Li Mian, Zhaoyu Wang, Jing Zhang, and Jie Tang. Self-supervised learning: Generative or contrastive. *IEEE transactions on knowledge and data engineering*, 35(1):857–876, 2021.
- [54] James MacGlashan, Mark K Ho, Robert Loftin, Bei Peng, Guan Wang, David L Roberts, Matthew E Taylor, and Michael L Littman. Interactive learning from policy-dependent human feedback. In *International conference on machine learning*, pages 2285–2294. PMLR, 2017.
- [55] Dilip Arumugam, Jun Ki Lee, Sophie Saskin, and Michael L Littman. Deep reinforcement learning from policy-dependent human feedback. *arXiv preprint arXiv:1902.04257*, 2019.
- [56] Reiichiro Nakano, Jacob Hilton, Suchir Balaji, Jeff Wu, Long Ouyang, Christina Kim, Christopher Hesse, Shantanu Jain, Vineet Kosaraju, William Saunders, et al. Webgpt: Browser-assisted question-answering with human feedback. *arXiv preprint arXiv:2112.09332*, 2021.
- [57] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.

- [58] Samuel Dodge and Lina Karam. A study and comparison of human and deep learning recognition performance under visual distortions. In *2017 26th international conference on computer communication and networks (ICCCN)*, pages 1–7. IEEE, 2017.
- [59] Michael A Alcorn, Qi Li, Zhitao Gong, Chengfei Wang, Long Mai, Wei-Shinn Ku, and Anh Nguyen. Strike (with) a pose: Neural networks are easily fooled by strange poses of familiar objects. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4845–4854, 2019.
- [60] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- [61] Yuhao Zhang, Hang Jiang, Yasuhide Miura, Christopher D Manning, and Curtis P Langlotz. Contrastive learning of medical visual representations from paired images and text. In *Machine Learning for Healthcare Conference*, pages 2–25. PMLR, 2022.
- [62] Lluís Gomez, Yash Patel, Marçal Rusinol, Dimosthenis Karatzas, and CV Jawahar. Self-supervised learning of visual features through embedding images into text topic spaces. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4230–4239, 2017.
- [63] Armand Joulin, Laurens Van Der Maaten, Allan Jabri, and Nicolas Vasilache. Learning visual features from large weakly supervised data. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part VII 14*, pages 67–84. Springer, 2016.
- [64] Karan Desai and Justin Johnson. Virtex: Learning visual representations from textual annotations. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11162–11173, 2021.
- [65] Zhaoqing Wang, Yu Lu, Qiang Li, Xunqiang Tao, Yandong Guo, Mingming Gong, and Tongliang Liu. Cris: Clip-driven referring image segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11686–11695, 2022.
- [66] Timo Lüddecke and Alexander Ecker. Image segmentation using text and image prompts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7086–7096, 2022.
- [67] Yanghao Li, Haoqi Fan, Ronghang Hu, Christoph Feichtenhofer, and Kaiming He. Scaling language-image pre-training via masking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 23390–23400, 2023.
- [68] Norman Mu, Alexander Kirillov, David Wagner, and Saining Xie. Slip: Self-supervision meets language-image pre-training. In *European Conference on Computer Vision*, pages 529–544. Springer, 2022.
- [69] Xiaoyi Dong, Jianmin Bao, Yinglin Zheng, Ting Zhang, Dongdong Chen, Hao Yang, Ming Zeng, Weiming Zhang, Lu Yuan, Dong Chen, et al. Maskclip: Masked self-distillation advances contrastive language-image pretraining. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10995–11005, 2023.
- [70] Liunian Harold Li, Pengchuan Zhang, Haotian Zhang, Jianwei Yang, Chunyuan Li, Yiwu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, et al. Grounded language-image pre-training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10965–10975, 2022.
- [71] Zifeng Wang, Zhenbang Wu, Dinesh Agarwal, and Jimeng Sun. Medclip: Contrastive learning from unpaired medical images and text. *arXiv preprint arXiv:2210.10163*, 2022.
- [72] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- [73] Emily Alsentzer, John R Murphy, Willie Boag, Wei-Hung Weng, Di Jin, Tristan Naumann, and Matthew McDermott. Publicly available clinical bert embeddings. *arXiv preprint arXiv:1904.03323*, 2019.
- [74] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10012–10022, 2021.
- [75] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [76] Shih-Cheng Huang, Liyue Shen, Matthew P Lungren, and Serena Yeung. Gloria: A multimodal global-local representation learning framework for label-efficient medical image recognition. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3942–3951, 2021.
- [77] Sheng Zhang, Yanbo Xu, Naoto Usuyama, Hanwen Xu, Jaspreet Bagga, Robert Tinn, Sam Preston, Rajesh Rao, Mu Wei, Naveen Valluri, Cliff Wong, Andrea Tupini, Yu Wang, Matt Mazzola, Swadheen Shukla, Lars

- Liden, Jianfeng Gao, Matthew P. Lungren, Tristan Naumann, Sheng Wang, and Hoifung Poon. Biomedclip: A multimodal biomedical foundation model pretrained from fifteen million scientific image-text pairs. *arXiv preprint arXiv:2303.00915*, January 2024. arXiv:2303.00915v2.
- [78] Weixiong Lin, Ziheng Zhao, Xiaoman Zhang, Chaoyi Wu, Ya Zhang, Yanfeng Wang, and Weidi Xie. Pmc-clip: Contrastive language-image pre-training using biomedical documents. *arXiv preprint arXiv:2303.07240*, 2023.
- [79] Jie Liu, Yixiao Zhang, Jie-Neng Chen, Junfei Xiao, Yongyi Lu, Bennett A Landman, Yixuan Yuan, Alan Yuille, Yucheng Tang, and Zongwei Zhou. Clip-driven universal model for organ segmentation and tumor detection. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21152–21164, 2023.
- [80] Vijay Badrinarayanan, Alex Kendall, and Roberto Cipolla. Segnet: A deep convolutional encoder-decoder architecture for image segmentation. *IEEE transactions on pattern analysis and machine intelligence*, 39(12):2481–2495, 2017.
- [81] BigScience Workshop, Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, et al. Bloom: A 176b-parameter open-access multilingual language model. *arXiv preprint arXiv:2211.05100*, 2022.
- [82] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240):1–113, 2023.
- [83] Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, et al. Opt: Open pre-trained transformer language models, 2022. URL <https://arxiv.org/abs/2205.01068>.
- [84] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [85] Madeline C Schiappa, Yogesh S Rawat, and Mubarak Shah. Self-supervised learning for videos: A survey. *ACM Computing Surveys*, 55(13s):1–37, 2023.
- [86] Ekin Tiu, Ellie Talius, Pujan Patel, Curtis P Langlotz, Andrew Y Ng, and Pranav Rajpurkar. Expert-level detection of pathologies from unannotated chest x-ray images via self-supervised learning. *Nature Biomedical Engineering*, 6(12):1399–1406, 2022.
- [87] Nisan Stiennon, Long Ouyang, Jeffrey Wu, Daniel Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul F Christiano. Learning to summarize with human feedback. *Advances in Neural Information Processing Systems*, 33:3008–3021, 2020.
- [88] Michael Völske, Martin Potthast, Shahbaz Syed, and Benno Stein. Tl; dr: Mining reddit to learn automatic summarization. In *Proceedings of the Workshop on New Frontiers in Summarization*, pages 59–63, 2017.
- [89] Yiwu Zhong, Jianwei Yang, Pengchuan Zhang, Chunyuan Li, Noel Codella, Liunian Harold Li, Luowei Zhou, Xiyang Dai, Lu Yuan, Yin Li, et al. Regionclip: Region-based language-image pretraining. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16793–16803, 2022.
- [90] Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. Albert: A lite bert for self-supervised learning of language representations. *arXiv preprint arXiv:1909.11942*, 2019.
- [91] Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *arXiv preprint arXiv:1910.01108*, 2019.
- [92] Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv preprint arXiv:1503.02531*, 2015.
- [93] Yukun Zhu, Ryan Kiros, Rich Zemel, Ruslan Salakhutdinov, Raquel Urtasun, Antonio Torralba, and Sanja Fidler. Aligning books and movies: Towards story-like visual explanations by watching movies and reading books. In *Proceedings of the IEEE international conference on computer vision*, pages 19–27, 2015.
- [94] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744, 2022.
- [95] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International Conference on Machine Learning*, pages 8821–8831. PMLR, 2021.
- [96] Tim Salimans, Andrej Karpathy, Xi Chen, and Diederik P Kingma. Pixelcnn++: Improving the pixelcnn with discretized logistic mixture likelihood and other modifications. *arXiv preprint arXiv:1701.05517*, 2017.

- [97] Chen Sun, Abhinav Shrivastava, Saurabh Singh, and Abhinav Gupta. Revisiting unreasonable effectiveness of data in deep learning era. In *Proceedings of the IEEE international conference on computer vision*, pages 843–852, 2017.
- [98] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 1(2):3, 2022.
- [99] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- [100] Noam Shazeer. Glu variants improve transformer. *arXiv preprint arXiv:2002.05202*, 2020.
- [101] Jianlin Su, Murtadha Ahmed, Yu Lu, Shengfeng Pan, Wen Bo, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding. *Neurocomputing*, 568:127063, 2024.
- [102] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- [103] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- [104] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- [105] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [106] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. Sdxl: Improving latent diffusion models for high-resolution image synthesis. *arXiv preprint arXiv:2307.01952*, 2023.
- [107] Romal Thoppilan, Daniel De Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulshreshtha, Heng-Tze Cheng, Alicia Jin, Taylor Bos, Leslie Baker, Yu Du, et al. Lamda: Language models for dialog applications. *arXiv preprint arXiv:2201.08239*, 2022.
- [108] Nan Du, Yanping Huang, Andrew M Dai, Simon Tong, Dmitry Lepikhin, Yuanzhong Xu, Maxim Krikun, Yanqi Zhou, Adams Wei Yu, Orhan Firat, et al. Glam: Efficient scaling of language models with mixture-of-experts. In *International Conference on Machine Learning*, pages 5547–5569. PMLR, 2022.
- [109] Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. *arXiv preprint arXiv:1701.06538*, 2017.
- [110] Rohan Anil, Andrew M Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, et al. Palm 2 technical report. *arXiv preprint arXiv:2305.10403*, 2023.
- [111] Karan Singhal, Shekoofeh Azizi, Tao Tu, S Sara Mahdavi, Jason Wei, Hyung Won Chung, Nathan Scales, Ajay Tanwani, Heather Cole-Lewis, Stephen Pfohl, et al. Large language models encode clinical knowledge. *Nature*, 620(7972):172–180, 2023.
- [112] Karan Singhal, Tao Tu, Juraj Gottweis, Rory Sayres, Ellery Wulczyn, Le Hou, Kevin Clark, Stephen Pfohl, Heather Cole-Lewis, Darlene Neal, et al. Towards expert-level medical question answering with large language models. *arXiv preprint arXiv:2305.09617*, 2023.
- [113] Aaron Gokaslan and Vanya Cohen. Openwebtext corpus. <http://SkyLion007.github.io/OpenWebTextCorpus>, 2019.
- [114] Trieu H Trinh and Quoc V Le. A simple method for commonsense reasoning. *arXiv preprint arXiv:1806.02847*, 2018.
- [115] Christoph Schuhmann, Richard Vencu, Romain Beaumont, Robert Kaczmarczyk, Clayton Mullis, Aarush Katta, Theo Coombes, Jenia Jitsev, and Aran Komatsuzaki. Laion-400m: Open dataset of clip-filtered 400 million image-text pairs. *arXiv preprint arXiv:2111.02114*, 2021.
- [116] SenseTime: Press Release. <https://www.sensetime.com/en/news-detail/51166397?categoryId=1072>. Accessed: May 4, 2024.

- [117] Xiaosong Wang, Xiaofan Zhang, Guotai Wang, Junjun He, Zhongyu Li, Wentao Zhu, Yi Guo, Qi Dou, Xiaoxiao Li, Dequan Wang, et al. Openmedlab: An open-source platform for multi-modality foundation models in medicine. *arXiv preprint arXiv:2402.18028*, 2024.
- [118] Jinhyuk Lee, Wonjin Yoon, Sungdong Kim, Donghyeon Kim, Sunkyu Kim, Chan Ho So, and Jaewoo Kang. Biobert: a pre-trained biomedical language representation model for biomedical text mining. *Bioinformatics*, 36(4):1234–1240, 2020.
- [119] Hoo-Chang Shin, Yang Zhang, Evelina Bakhturina, Raul Puri, Mostofa Patwary, Mohammad Shoeybi, and Raghav Mani. Biomegatron: Larger biomedical domain language model. *arXiv preprint arXiv:2010.06060*, 2020.
- [120] Xi Yang, Aokun Chen, Nima PourNejatian, Hoo Chang Shin, Kaleb E Smith, Christopher Parisien, Colin Compas, Cheryl Martin, Anthony B Costa, Mona G Flores, et al. A large language model for electronic health records. *NPJ Digital Medicine*, 5(1):194, 2022.
- [121] Alistair EW Johnson, Tom J Pollard, Lu Shen, Li-wei H Lehman, Mengling Feng, Mohammad Ghassemi, Benjamin Moody, Peter Szolovits, Leo Anthony Celi, and Roger G Mark. MIMIC-III, a freely accessible critical care database. *Scientific data*, 3(1):1–9, 2016.
- [122] Zeming Chen, Alejandro Hernández Cano, Angelika Romanou, Antoine Bonnet, Kyle Matoba, Francesco Salvi, Matteo Pagliardini, Simin Fan, Andreas Köpf, Amirkeivan Mohtashami, et al. Meditron-70b: Scaling medical pretraining for large language models. *arXiv preprint arXiv:2311.16079*, 2023.
- [123] Shaoting Zhang and Dimitris Metaxas. On the challenges and perspectives of foundation models for medical image analysis. *arXiv preprint arXiv:2306.05705*, 2023.
- [124] Dequan Wang, Xiaosong Wang, Lilong Wang, Mengzhang Li, Qian Da, Xiaoqiang Liu, Xiangyu Gao, Jun Shen, Junjun He, Tian Shen, et al. A real-world dataset and benchmark for foundation model adaptation in medical image classification. *Scientific Data*, 10(1):574, 2023.
- [125] Ruining Deng, Can Cui, Quan Liu, Tianyuan Yao, Lucas W Remedios, Shunxing Bao, Bennett A Landman, Lee E Wheless, Lori A Coburn, Keith T Wilson, et al. Segment anything model (sam) for digital pathology: Assess zero-shot segmentation on whole slide imaging. *arXiv preprint arXiv:2304.04155*, 2023.
- [126] Julio Silva-Rodríguez, Jose Dolz, and Ismail Ben Ayed. Towards foundation models and few-shot parameter-efficient fine-tuning for volumetric organ segmentation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 213–224. Springer, 2023.
- [127] Yuxin Du, Fan Bai, Tiejun Huang, and Bo Zhao. Segvol: Universal and interactive volumetric medical image segmentation. *arXiv preprint arXiv:2311.13385*, 2023.
- [128] Haoyu Wang, Sizheng Guo, Jin Ye, Zhongying Deng, Junlong Cheng, Tianbin Li, Jianpin Chen, Yanzhou Su, Ziyang Huang, Yiqing Shen, et al. Sam-med3d. *arXiv preprint arXiv:2310.15161*, 2023.
- [129] Yichi Zhang, Zhenrong Shen, and Rushi Jiao. Segment anything model for medical image segmentation: Current applications and future directions. *arXiv preprint arXiv:2401.03495*, 2024.
- [130] Mohammad Reza Hosseinzadeh Taher, Michael B Gotway, and Jianming Liang. Towards foundation models learned from anatomy in medical imaging via self-supervision. In *MICCAI Workshop on Domain Adaptation and Representation Transfer*, pages 94–104. Springer, 2023.
- [131] Chenshuang Zhang, Chaoning Zhang, Mengchun Zhang, and In So Kweon. Text-to-image diffusion model in generative ai: A survey. *arXiv preprint arXiv:2303.07909*, 2023.
- [132] Jiahui Yu, Yuanzhong Xu, Jing Yu Koh, Thang Luong, Gunjan Baid, Zirui Wang, Vijay Vasudevan, Alexander Ku, Yinfei Yang, Burcu Karagol Ayan, et al. Scaling autoregressive models for content-rich text-to-image generation. *arXiv preprint arXiv:2206.10789*, 2(3):5, 2022.
- [133] Kyuri Kim, Yoonho Na, Sung-Joon Ye, Jimin Lee, Sung Soo Ahn, Ji Eun Park, and Hwiyoung Kim. Controllable text-to-image synthesis for multi-modality mr images. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 7936–7945, 2024.
- [134] Rohaid Ali, Oliver Y Tang, Ian D Connolly, Hael F Abdulrazeq, Fatima N Mirza, Rachel K Lim, Benjamin R Johnston, Michael W Groff, Theresa Williamson, Konstantina Svokos, et al. Demographic representation in 3 leading artificial intelligence text-to-image generators. *JAMA surgery*, 159(1):87–95, 2024.
- [135] Minsheng Hao, Jing Gong, Xin Zeng, Chiming Liu, Yucheng Guo, Xingyi Cheng, Taifeng Wang, Jianzhu Ma, Le Song, and Xuegong Zhang. Large scale foundation model on single-cell transcriptomics. *bioRxiv*, pages 2023–05, 2023.

- [136] Parminder S Reel, Smarti Reel, Ewan Pearson, Emanuele Trucco, and Emily Jefferson. Using machine learning approaches for multi-omics data analysis: A review. *Biotechnology Advances*, 49:107739, 2021.
- [137] Fan Yang, Wenchuan Wang, Fang Wang, Yuan Fang, Duyu Tang, Junzhou Huang, Hui Lu, and Jianhua Yao. scbert as a large-scale pretrained deep language model for cell type annotation of single-cell rna-seq data. *Nature Machine Intelligence*, 4(10):852–866, 2022.
- [138] Krzysztof Choromanski, Valerii Likhoshesterov, David Dohan, Xingyou Song, Andreea Gane, Tamas Sarlos, Peter Hawkins, Jared Davis, Afroz Mohiuddin, Lukasz Kaiser, et al. Rethinking attention with performers. *arXiv preprint arXiv:2009.14794*, 2020.
- [139] Manato Akiyama and Yasubumi Sakakibara. Informative rna base embedding for rna structural alignment and clustering by deep representation learning. *NAR genomics and bioinformatics*, 4(1):lqac012, 2022.
- [140] Yuning Yang, Gen Li, Kuan Pang, Wuxinhao Cao, Xiangtao Li, and Zhaolei Zhang. Deciphering 3'utr mediated gene regulation using interpretable deep representation learning. *bioRxiv*, pages 2023–09, 2023.
- [141] Yanyi Chu, Dan Yu, Yupeng Li, Kaixuan Huang, Yue Shen, Le Cong, Jason Zhang, and Mengdi Wang. A 5'utr language model for decoding untranslated regions of mrna and function predictions. *bioRxiv*, pages 2023–10, 2023.
- [142] Jiayang Chen, Zhihang Hu, Siqi Sun, Qingxiong Tan, Yixuan Wang, Qinze Yu, Licheng Zong, Liang Hong, Jin Xiao, Tao Shen, et al. Interpretable rna foundation model from unannotated data for highly accurate rna structure and function predictions. *bioRxiv*, pages 2022–08, 2022.
- [143] Yikun Zhang, Mei Lang, Jiahong Jiang, Zhiqiang Gao, Fan Xu, Thomas Litfin, Ke Chen, Jaswinder Singh, Xiansong Huang, Guoli Song, et al. Multiple sequence-alignment-based rna language model and its application to structural inference. *bioRxiv*, pages 2023–03, 2023.
- [144] Tongchuan Zhang, Jaswinder Singh, Thomas Litfin, Jian Zhan, Kuldeep Paliwal, and Yaoqi Zhou. Rnacmap: a fully automatic pipeline for predicting contact maps of rnas by evolutionary coupling analysis. *Bioinformatics*, 37(20):3494–3500, 2021.
- [145] Xi Wang, Ruichu Gu, Zhiyuan Chen, Yongge Li, Xiaohong Ji, Guolin Ke, and Han Wen. Uni-rna: universal pre-trained models revolutionize rna research. *bioRxiv*, pages 2023–07, 2023.
- [146] Albi Celaj, Alice Jiexin Gao, Tammy TY Lau, Erle M Holgersen, Alston Lo, Varun Lodaya, Christopher B Cole, Robert E Denroche, Carl Spickett, Omar Wagih, et al. An rna foundation model enables discovery of disease mechanisms and candidate therapeutics. *bioRxiv*, pages 2023–09, 2023.
- [147] GTEx Consortium. The gtex consortium atlas of genetic regulatory effects across human tissues. *Science*, 369(6509):1318–1330, 2020.
- [148] Ken Chen, Yue Zhou, Maolin Ding, Yu Wang, Zhixiang Ren, and Yuedong Yang. Self-supervised learning on millions of pre-mrna sequences improves sequence-based rna splicing prediction. *bioRxiv*, pages 2023–01, 2023.
- [149] Gyutaek Oh, Baekgyu Choi, Inkyung Jung, and Jong Chul Ye. schyena: Foundation model for full-length single-cell rna-seq analysis in brain. *arXiv preprint arXiv:2310.02713*, 2023.
- [150] Michael Poli, Stefano Massaroli, Eric Nguyen, Daniel Y Fu, Tri Dao, Stephen Baccus, Yoshua Bengio, Stefano Ermon, and Christopher Ré. Hyena hierarchy: Towards larger convolutional language models. *arXiv preprint arXiv:2302.10866*, 2023.
- [151] Christina V Theodoris, Ling Xiao, Anant Chopra, Mark D Chaffin, Zeina R Al Sayed, Matthew C Hill, Helene Mantineo, Elizabeth M Brydon, Zexian Zeng, X Shirley Liu, et al. Transfer learning enables predictions in network biology. *Nature*, pages 1–9, 2023.
- [152] Haotian Cui, Chloe Wang, Hassaan Maan, Kuan Pang, Fengning Luo, and Bo Wang. scgpt: towards building a foundation model for single-cell multi-omics using generative ai. *bioRxiv*, pages 2023–04, 2023.
- [153] Xiaodong Yang, Guole Liu, Guihai Feng, Dechao Bu, Pengfei Wang, Jie Jiang, Shubai Chen, Qinmeng Yang, Yiyang Zhang, Zhenpeng Man, et al. Genecompass: Deciphering universal gene regulatory mechanisms with knowledge-informed cross-species foundation model. *bioRxiv*, pages 2023–09, 2023.
- [154] Yiqun T Chen and James Zou. Genept: A simple but hard-to-beat foundation model for genes and cells built from chatgpt. *bioRxiv*, pages 2023–10, 2023.
- [155] Yanrong Ji, Zhihan Zhou, Han Liu, and Ramana V Davuluri. Dnabert: pre-trained bidirectional encoder representations from transformers model for dna-language in genome. *Bioinformatics*, 37(15):2112–2120, 2021.
- [156] Zhihan Zhou, Yanrong Ji, Weijian Li, Pratik Dutta, Ramana Davuluri, and Han Liu. Dnabert-2: Efficient foundation model and benchmark for multi-species genome. *arXiv preprint arXiv:2306.15006*, 2023.

- [157] Jia-Bei Cheng, Xiaoyong Pan, Kaiyuan Yang, Shenghao Cao, Bin Liu, and Ye Yuan. Cross-modal generation of hit-like molecules via foundation model encoding of gene expression signatures. *bioRxiv*, pages 2023–11, 2023.
- [158] Xi Fu, Shentong Mo, Anqi Shao, Anouchka Laurent, Alejandro Buendia, Adolfo A Ferrando, Alberto Ciccia, Yanyan Lan, Teresa Palomero, David M Owens, et al. Get: a foundation model of transcription across human cell types. *bioRxiv*, pages 2023–09, 2023.
- [159] Abdel Rahman Alsabbagh, Albert Maillou Ruiz de Infante, David Gomez-Cabrero, Narsis Kiani, Sumeer Ahmad Khan, and Jesper N Tegner. Foundation models meet imbalanced single-cell data when learning cell type annotations. *bioRxiv*, pages 2023–10, 2023.
- [160] Rebecca Boiarsky, Nalini M Singh, Alejandro Buendia, Gad Getz, and David Sontag. A deep dive into single-cell rna sequencing foundation models. *bioRxiv*, pages 2023–10, 2023.
- [161] Constantin Ulrich, Fabian Isensee, Tassilo Wald, Maximilian Zenk, Michael Baumgartner, and Klaus H Maier-Hein. Multitalent: A multi-dataset approach to medical image segmentation. *arXiv preprint arXiv:2303.14444*, 2023.
- [162] Xiaosong Wang, Yifan Peng, Le Lu, Zhiyong Lu, Mohammadhadi Bagheri, and Ronald M Summers. Chestx-ray8: Hospital-scale chest x-ray database and benchmarks on weakly-supervised classification and localization of common thorax diseases. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2097–2106, 2017.
- [163] Jorge Cuadros and George Bresnick. Eyepacs: an adaptable telemedicine system for diabetic retinopathy screening. *Journal of diabetes science and technology*, 3(3):509–516, 2009.
- [164] Zhao Wang, Chang Liu, Shaoting Zhang, and Qi Dou. Foundation model for endoscopy video analysis via large-scale self-supervised pre-train. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 101–111. Springer, 2023.
- [165] Rnacentral 2021: secondary structure integration, improved sequence search and new member databases. *Nucleic acids research*, 49(D1):D212–D220, 2021.
- [166] Yimin Fan, Yu Li, Jun Ding, and Yue Li. Gftm: Genome foundation-based embedded topic model for scatac-seq modeling. *bioRxiv*, pages 2023–11, 2023.
- [167] Alaleh Hamidi and Kirk Roberts. Evaluation of ai chatbots for patient-specific ehr questions. *arXiv preprint arXiv:2306.02549*, 2023.
- [168] Yeganeh Shahsavari, Avishek Choudhury, et al. User intentions to use chatgpt for self-diagnosis and health-related purposes: Cross-sectional survey study. *JMIR Human Factors*, 10(1):e47564, 2023.
- [169] Ryan ST Huang, Kevin Jia Qi Lu, Christopher Meaney, Joel Kempainen, Angela Punnett, and Fok-Han Leung. Assessment of resident and ai chatbot performance on the university of toronto family medicine residency progress test: comparative study. *JMIR Medical Education*, 9:e50514, 2023.
- [170] Yuxuan Sun, Chenglu Zhu, Sunyi Zheng, Kai Zhang, Zhongyi Shui, Xiaoxuan Yu, Yizhi Zhao, Honglin Li, Yunlong Zhang, Ruojia Zhao, et al. Pathasst: Redefining pathology through generative foundation ai assistant for pathology. *arXiv preprint arXiv:2305.15072*, 2023.
- [171] Andrew J King, Derek C Angus, Gregory F Cooper, Danielle L Mowery, Jennifer B Seaman, Kelly M Potter, Leigh A Bukowski, Ali Al-Khafaji, Scott R Gunn, and Jeremy M Kahn. A voice-based digital assistant for intelligent prompting of evidence-based practices during icu rounds. *Journal of Biomedical Informatics*, 146:104483, 2023.
- [172] Corentin Blanc, Alexandre Bailly, Élie Francis, Thierry Guillotin, Fadi Jamal, Béchara Wakim, and Pascal Roy. Flaubert vs. camembert: Understanding patient’s answers by a french medical chatbot. *Artificial Intelligence in Medicine*, 127:102264, 2022.
- [173] Tasneem Wael, Ahmed Hesham, Mohamed Youssef, Omar Adel, Hamis Hesham, and M Saeed Darweesh. Intelligent arabic-based healthcare assistant. In *2021 3rd novel intelligent and leading emerging sciences conference (NILES)*, pages 216–221. IEEE, 2021.
- [174] Kexin Huang, Jaan Altsaar, and Rajesh Ranganath. Clinicalbert: Modeling clinical notes and predicting hospital readmission. *arXiv preprint arXiv:1904.05342*, 2019.
- [175] Navdeep Kaur and Ajay Mittal. Radiobert: A deep learning-based system for medical report generation from chest x-ray images using contextual embeddings. *Journal of Biomedical Informatics*, 135:104220, 2022.
- [176] Guangyi Liu, Yinghong Liao, Fuyu Wang, Bin Zhang, Lu Zhang, Xiaodan Liang, Xiang Wan, Shaolin Li, Zhen Li, Shuixing Zhang, et al. Medical-vlbart: Medical visual language bert for covid-19 ct report generation with alternate learning. *IEEE Transactions on Neural Networks and Learning Systems*, 32(9):3786–3797, 2021.

- [177] Takeshi Nakaura, Naofumi Yoshida, Naoki Kobayashi, Kaori Shiraishi, Yasunori Nagayama, Hiroyuki Uetani, Masafumi Kidoh, Masamichi Hokamura, Yoshinori Funama, and Toshinori Hirai. Preliminary assessment of automated radiology report generation with generative pre-trained transformers: comparing results to radiologist-generated reports. *Japanese Journal of Radiology*, pages 1–11, 2023.
- [178] Amir M Hasani, Shiva Singh, Aryan Zahergivar, Beth Ryan, Daniel Nethala, Gabriela Bravomontenegro, Neil Mendhiratta, Mark Ball, Faraz Farhadi, and Ashkan Malayeri. Evaluating the performance of generative pre-trained transformer-4 (gpt-4) in standardizing radiology reports. *European Radiology*, pages 1–9, 2023.
- [179] Zhaoyi Sun, Hanley Ong, Patrick Kennedy, Liyan Tang, Shirley Chen, Jonathan Elias, Eugene Lucas, George Shih, and Yifan Peng. Evaluating gpt-4 on impressions generation in radiology reports. *Radiology*, 307(5):e231259, 2023.
- [180] Renqian Luo, Liai Sun, Yingce Xia, Tao Qin, Sheng Zhang, Hoifung Poon, and Tie-Yan Liu. Biogpt: generative pre-trained transformer for biomedical text generation and mining. *Briefings in Bioinformatics*, 23(6):bbac409, 2022.
- [181] Aaron Nicolson, Jason Dowling, and Bevan Koopman. Improving chest x-ray report generation by leveraging warm starting. *Artificial intelligence in medicine*, 144:102633, 2023.
- [182] Dongfang Xu, Manoj Gopale, Jiacheng Zhang, Kris Brown, Edmon Begoli, and Steven Bethard. Unified medical language system resources improve sieve-based generation and bidirectional encoder representations from transformers (bert)-based ranking for concept normalization. *Journal of the American Medical Informatics Association*, 27(10):1510–1519, 2020.
- [183] Youcheng Pan, Chenghao Wang, Baotian Hu, Yang Xiang, Xiaolong Wang, Qingcai Chen, Junjie Chen, Jingcheng Du, et al. A bert-based generation model to transform medical texts to sql queries for electronic medical records: model development and validation. *JMIR Medical Informatics*, 9(12):e32698, 2021.
- [184] John J Hanna, Abdi D Wakene, Christoph U Lehmann, and Richard J Medford. Assessing racial and ethnic bias in text generation for healthcare-related tasks by chatgpt1. *MedRxiv*, 2023.
- [185] Grey Kuling, Belinda Curpen, and Anne L Martel. Bi-rads bert and using section segmentation to understand radiology reports. *Journal of Imaging*, 8(5):131, 2022.
- [186] Siru Liu, Aileen P Wright, Barron L Patterson, Jonathan P Wanderer, Robert W Turer, Scott D Nelson, Allison B McCoy, Dean F Sittig, and Adam Wright. Using ai-generated suggestions from chatgpt to optimize clinical decision support. *Journal of the American Medical Informatics Association*, 30(7):1237–1245, 2023.
- [187] Irene Li, Jessica Pan, Jeremy Goldwasser, Neha Verma, Wai Pan Wong, Muhammed Yavuz Nuzumlali, Benjamin Rosand, Yixin Li, Matthew Zhang, David Chang, et al. Neural natural language processing for unstructured data in electronic health records: A review. *Computer Science Review*, 46:100511, 2022.
- [188] Firas Khader, Gustav Mueller-Franzes, Soroosh Tayebi Arasteh, Tianyu Han, Christoph Haarburger, Maximilian Schulze-Hagen, Philipp Schad, Sandy Engelhardt, Bettina Baessler, Sebastian Foersch, et al. Medical diffusion-denoising diffusion probabilistic models for 3d medical image generation. *arXiv preprint arXiv:2211.03364*, 2022.
- [189] Pierre Chambon, Christian Bluethgen, Jean-Benoit Delbrouck, Rogier Van der Sluijs, Małgorzata Połacin, Juan Manuel Zambrano Chaves, Tanishq Mathew Abraham, Shivanshu Purohit, Curtis P Langlotz, and Akshay Chaudhari. Roentgen: vision-language foundation model for chest x-ray generation. *arXiv preprint arXiv:2211.12737*, 2022.
- [190] Benjamin L Kidder. Advanced image generation for cancer using diffusion models. *bioRxiv*, pages 2023–08, 2023.
- [191] Jong Hak Moon, Hyungyung Lee, Woncheol Shin, Young-Hak Kim, and Edward Choi. Multi-modal understanding and generation for medical images and text via vision-language pre-training. *IEEE Journal of Biomedical and Health Informatics*, 26(12):6070–6080, 2022.
- [192] Bang Yang, Asif Raza, Yuexian Zou, and Tong Zhang. Customizing general-purpose foundation models for medical report generation. *arXiv preprint arXiv:2306.05642*, 2023.
- [193] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv preprint arXiv:2301.12597*, 2023.
- [194] Yuxin Fang, Wen Wang, Binhui Xie, Quan Sun, Ledell Wu, Xinggang Wang, Tiejun Huang, Xinlong Wang, and Yue Cao. Eva: Exploring the limits of masked visual representation learning at scale. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19358–19369, 2023.

- [195] Aohan Zeng, Xiao Liu, Zhengxiao Du, Zihan Wang, Hanyu Lai, Ming Ding, Zhuoyi Yang, Yifan Xu, Wendi Zheng, Xiao Xia, et al. Glm-130b: An open bilingual pre-trained model. *arXiv preprint arXiv:2210.02414*, 2022.
- [196] Kexin Ding, Mu Zhou, He Wang, Olivier Gevaert, Dimitris Metaxas, and Shaoting Zhang. A large-scale synthetic pathological dataset for deep learning-enabled segmentation of breast cancer. *Scientific Data*, 10(1):231, 2023.
- [197] Jongseong Jang, Daeun Kyung, Seung Hwan Kim, Honglak Lee, Kyunghoon Bae, and Edward Choi. Significantly improving zero-shot x-ray pathology classification via fine-tuning pre-trained image-text encoders. *arXiv preprint arXiv:2212.07050*, 2022.
- [198] Kihyun You, Jawook Gu, Jiyeon Ham, Beomhee Park, Jiho Kim, Eun K Hong, Woonhyuk Baek, and Byungseok Roh. Cxr-clip: Toward large scale chest x-ray language-image pre-training. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 101–111. Springer, 2023.
- [199] Yijun Yang, Huazhu Fu, Angelica I Aviles-Rivero, Carola-Bibiane Schönlieb, and Lei Zhu. Diffmic: Dual-guidance diffusion network for medical image classification. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 95–105. Springer, 2023.
- [200] Ahmed Elnakib, Georgy Gimel'farb, Jasjit S Suri, and Ayman El-Baz. Medical image segmentation: a brief survey. *Multi Modality State-of-the-Art Medical Image Segmentation and Registration Methodologies: Volume II*, pages 1–39, 2011.
- [201] Skylar Stolte and Ruogu Fang. A survey on medical image analysis in diabetic retinopathy. *Medical image analysis*, 64:101742, 2020.
- [202] Skylar E Stolte, Kyle Volle, Aprinda Indahlastari, Alejandro Albizu, Adam J Woods, Kevin Brink, Matthew Hale, and Ruogu Fang. Domino: Domain-aware model calibration in medical image segmentation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 454–463. Springer, 2022.
- [203] Skylar E Stolte, Kyle Volle, Aprinda Indahlastari, Alejandro Albizu, Adam J Woods, Kevin Brink, Matthew Hale, and Ruogu Fang. Domino++: Domain-aware loss regularization for deep learning generalizability. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 713–723. Springer, 2023.
- [204] Risheng Wang, Tao Lei, Ruixia Cui, Bingtao Zhang, Hongying Meng, and Asoke K Nandi. Medical image segmentation using deep learning: A survey. *IET Image Processing*, 16(5):1243–1267, 2022.
- [205] Zhongyu Li, Zengyi Shang, Jingyi Liu, Haotian Zhen, Entao Zhu, Shilin Zhong, Robyn N Sturgess, Yitian Zhou, Xuemeng Hu, Xingyue Zhao, et al. D-lmbmap: a fully automated deep-learning pipeline for whole-brain profiling of neural circuitry. *Nature Methods*, pages 1–12, 2023.
- [206] Jiarun Liu, Hao Yang, Hong-Yu Zhou, Yan Xi, Lequan Yu, Yizhou Yu, Yong Liang, Guangming Shi, Shaoting Zhang, Hairong Zheng, et al. Swin-umamba: Mamba-based unet with imagenet-based pretraining. *arXiv preprint arXiv:2402.03302*, 2024.
- [207] Ali Hatamizadeh, Vishwesh Nath, Yucheng Tang, Dong Yang, Holger R Roth, and Daguang Xu. Swin unetr: Swin transformers for semantic segmentation of brain tumors in mri images. In *International MICCAI Brainlesion Workshop*, pages 272–284. Springer, 2021.
- [208] Jieneng Chen, Yongyi Lu, Qihang Yu, Xiangde Luo, Ehsan Adeli, Yan Wang, Le Lu, Alan L Yuille, and Yuyin Zhou. Transunet: Transformers make strong encoders for medical image segmentation. *arXiv preprint arXiv:2102.04306*, 2021.
- [209] Yundong Zhang, Huiye Liu, and Qiang Hu. Transfuse: Fusing transformers and cnns for medical image segmentation. In *Medical Image Computing and Computer Assisted Intervention—MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part I 24*, pages 14–24. Springer, 2021.
- [210] Victor Ion Butoi, Jose Javier Gonzalez Ortiz, Tianyu Ma, Mert R Sabuncu, John Guttag, and Adrian V Dalca. Universeg: Universal medical image segmentation. *arXiv preprint arXiv:2304.06131*, 2023.
- [211] Haoxiang Wang, Pavan Kumar Anasosalu Vasu, Fartash Faghri, Raviteja Vemulapalli, Mehrdad Farajtabar, Sachin Mehta, Mohammad Rastegari, Oncel Tuzel, and Hadi Pouransari. Sam-clip: Merging vision foundation models towards semantic and spatial understanding. *arXiv preprint arXiv:2310.15308*, 2023.
- [212] Abhijit Guha Roy, Shayan Siddiqui, Sebastian Pölsterl, Nassir Navab, and Christian Wachinger. ‘squeeze & excite’ guided few-shot segmentation of volumetric images. *Medical image analysis*, 59:101587, 2020.
- [213] Kaixun Wang, Jun Hao Liew, Yingtian Zou, Daquan Zhou, and Jiashi Feng. Panet: Few-shot image semantic segmentation with prototype alignment. In *proceedings of the IEEE/CVF international conference on computer vision*, pages 9197–9206, 2019.

- [214] Cheng Ouyang, Carlo Biffi, Chen Chen, Turky Kart, Huaqi Qiu, and Daniel Rueckert. Self-supervision with superpixels: Training few-shot medical image segmentation without annotation. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XXIX 16*, pages 762–780. Springer, 2020.
- [215] Heejong Kim, Victor Ion Butoi, Adrian V Dalca, and Mert R Sabuncu. Empirical analysis of a segmentation foundation model in prostate imaging. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 140–150. Springer, 2023.
- [216] Chuyun Shen, Wenhao Li, Ya Zhang, Yanfeng Wang, and Xiangfeng Wang. Temporally-extended prompts optimization for sam in interactive medical image segmentation. In *2023 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*, pages 3550–3557. IEEE, 2023.
- [217] Zhaohu Xing, Liang Wan, Huazhu Fu, Guang Yang, and Lei Zhu. Diff-UNET: A diffusion embedded network for volumetric segmentation. *arXiv preprint arXiv:2303.10326*, 2023.
- [218] Jérémy Rousseau, Christian Alaka, Emma Covili, Hippolyte Mayard, Laura Misrachi, and Willy Au. Pre-training with diffusion models for dental radiography segmentation. *arXiv preprint arXiv:2307.14066*, 2023.
- [219] Yiyang Zhao, Jinjiang Li, Lu Ren, and Zheng Chen. Dtan: Diffusion-based text attention network for medical image segmentation. *Computers in Biology and Medicine*, 168:107728, 2024.
- [220] Julia Wolleb, Robin Sandkühler, Florentin Bieder, Philippe Valmaggia, and Philippe C Cattin. Diffusion models for implicit image segmentation ensembles. In *International Conference on Medical Imaging with Deep Learning*, pages 1336–1348. PMLR, 2022.
- [221] Alexander Quinn Nichol and Prafulla Dhariwal. Improved denoising diffusion probabilistic models. In *International Conference on Machine Learning*, pages 8162–8171. PMLR, 2021.
- [222] Aimon Rahman, Jeya Maria Jose Valanarasu, Ilker Hacihaliloglu, and Vishal M Patel. Ambiguous medical image segmentation using diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11536–11546, 2023.
- [223] Junde Wu, Rao Fu, Huihui Fang, Yu Zhang, Yehui Yang, Haoyi Xiong, Huiying Liu, and Yanwu Xu. Medsegdiff: Medical image segmentation with diffusion probabilistic model. *arXiv preprint arXiv:2211.00611*, 2022.
- [224] Junde Wu, Rao Fu, Huihui Fang, Yu Zhang, and Yanwu Xu. Medsegdiff-v2: Diffusion based medical image segmentation with transformer. *arXiv preprint arXiv:2301.11798*, 2023.
- [225] Boah Kim, Yujin Oh, and Jong Chul Ye. Diffusion adversarial representation learning for self-supervised vessel segmentation. *arXiv preprint arXiv:2209.14566*, 2022.
- [226] Yunguan Fu, Yiwen Li, Shaheer U Saeed, Matthew J Clarkson, and Yipeng Hu. Importance of aligning training strategy with evaluation for diffusion models in 3d multiclass segmentation. *arXiv preprint arXiv:2303.06040*, 2023.
- [227] Yunguan Fu, Yiwen Li, Shaheer U Saeed, Matthew J Clarkson, and Yipeng Hu. A recycling training strategy for medical image segmentation with diffusion denoising models. *arXiv preprint arXiv:2308.16355*, 2023.
- [228] Mengxue Sun, Jiale Wang, Qingtao Gong, and Wenhui Huang. Enhancing gland segmentation in colon histology images using an instance-aware diffusion model. *Computers in biology and medicine*, 166:107527, 2023.
- [229] Junde Wu, Rao Fu, Huihui Fang, Yuanpei Liu, Zhaowei Wang, Yanwu Xu, Yueming Jin, and Tal Arbel. Medical sam adapter: Adapting segment anything model for medical image segmentation. *arXiv preprint arXiv:2304.12620*, 2023.
- [230] Yan Zhuang, Benjamin Hou, Tejas Sudharshan Mathai, Pritam Mukherjee, Boah Kim, and Ronald M Summers. Semantic image synthesis for abdominal ct. *arXiv preprint arXiv:2312.06453*, 2023.
- [231] Yixiao Zhang, Xinyi Li, Huimiao Chen, Alan L Yuille, Yaoyao Liu, and Zongwei Zhou. Continual learning for abdominal multi-organ and tumor segmentation. In *International conference on medical image computing and computer-assisted intervention*, pages 35–45. Springer, 2023.
- [232] Benedikt Boecking, Naoto Usuyama, Shruthi Bannur, Daniel C Castro, Anton Schwaighofer, Stephanie Hyland, Maria Wetscherek, Tristan Naumann, Aditya Nori, Javier Alvarez-Valle, et al. Making the most of text semantics to improve biomedical vision–language processing. In *European conference on computer vision*, pages 1–21. Springer, 2022.
- [233] Yukun Zhou, Mark A Chia, Siegfried K Wagner, Murat S Ayhan, Dominic J Williamson, Robbert R Struyven, Timing Liu, Moucheng Xu, Mateo G Lozano, Peter Woodward-Court, et al. A foundation model for generalizable disease detection from retinal images. *Nature*, 622(7981):156–163, 2023.

- [234] Guotai Wang, Jianghao Wu, Xiangde Luo, Xinglong Liu, Kang Li, and Shaoting Zhang. Mis-fm: 3d medical image segmentation using foundation models pretrained on a large-scale unannotated dataset. *arXiv preprint arXiv:2306.16925*, 2023.
- [235] Wenhui Lei, Xu Wei, Xiaofan Zhang, Kang Li, and Shaoting Zhang. Medlsam: Localize and segment anything model for 3d medical images. *arXiv preprint arXiv:2306.14752*, 2023.
- [236] Kanchan Poudel, Manish Dhakal, Prasiddha Bhandari, Rabin Adhikari, Safal Thapaliya, and Bishesh Khanal. Exploring transfer learning in medical image segmentation using vision-language models. *arXiv preprint arXiv:2308.07706*, 2023.
- [237] Rabin Adhikari, Manish Dhakal, Safal Thapaliya, Kanchan Poudel, Prasiddha Bhandari, and Bishesh Khanal. Synthetic boost: Leveraging synthetic data for enhanced vision-language segmentation in echocardiography. In *International Workshop on Advances in Simplifying Medical Ultrasound*, pages 89–99. Springer, 2023.
- [238] Michael Moor, Oishi Banerjee, Zahra Shakeri Hossein Abad, Harlan M Krumholz, Jure Leskovec, Eric J Topol, and Pranav Rajpurkar. Foundation models for generalist medical artificial intelligence. *Nature*, 616(7956):259–265, 2023.
- [239] Tim Tanida, Philip Müller, Georgios Kaissis, and Daniel Rueckert. Interactive and explainable region-guided radiology report generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7433–7442, 2023.
- [240] Hong Zhu, Qingyang Lu, Lei Xue, Mogen Xue, Guanglin Yuan, and Bineng Zhong. Visual grounding with joint multi-modal representation and interaction. *IEEE Transactions on Instrumentation and Measurement*, 2023.
- [241] Yasin Shokrollahi, Sahar Yarmohammadtoosky, Matthew M Nikahd, Pengfei Dong, Xianqi Li, and Linxia Gu. A comprehensive review of generative ai in healthcare. *arXiv preprint arXiv:2310.00795*, 2023.
- [242] Pengfei Guo, Yiqun Mei, Jinyuan Zhou, Shanshan Jiang, and Vishal M Patel. Reconformer: Accelerated mri reconstruction using recurrent transformer. *IEEE transactions on medical imaging*, 2023.
- [243] Brett Levac, Sidharth Kumar, Ajil Jalal, and Jonathan I Tamir. Accelerated motion correction with deep generative diffusion models. *arXiv preprint arXiv:2211.00199*, 2022.
- [244] Alper Güngör, Salman UH Dar, Şaban Öztürk, Yılmaz Korkmaz, Hasan A Bedel, Gokberk Elmas, Muzaffer Ozbey, and Tolga Çukur. Adaptive diffusion priors for accelerated mri reconstruction. *Medical Image Analysis*, page 102872, 2023.
- [245] Yılmaz Korkmaz, Tolga Cukur, and Vishal M Patel. Self-supervised mri reconstruction with unrolled diffusion models. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 491–501. Springer, 2023.
- [246] Amirhossein Kazerouni, Ehsan Khodapanah Aghdam, Moein Heidari, Reza Azad, Mohsen Fayyaz, Ilker Hacihaliloglu, and Dorit Merhof. Diffusion models in medical imaging: A comprehensive survey. *Medical Image Analysis*, page 102846, 2023.
- [247] Sabina Umirzakova, Shabir Ahmad, Latif U Khan, and Taegkeun Whangbo. Medical image super-resolution for smart healthcare applications: A comprehensive survey. *Information Fusion*, page 102075, 2023.
- [248] Ye Mao, Lan Jiang, Xi Chen, and Chao Li. Disc-diff: Disentangled conditional diffusion model for multi-contrast mri super-resolution. *arXiv preprint arXiv:2303.13933*, 2023.
- [249] Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. *Advances in neural information processing systems*, 34:8780–8794, 2021.
- [250] Jingyun Liang, Jiezhong Cao, Guolei Sun, Kai Zhang, Luc Van Gool, and Radu Timofte. Swinir: Image restoration using swin transformer. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 1833–1844, 2021.
- [251] Jueqi Wang, Jacob Levman, Walter Hugo Lopez Pinaya, Petru-Daniel Tudosiu, M Jorge Cardoso, and Razvan Marinescu. Inverser: 3d brain mri super-resolution using a latent diffusion model. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 438–447. Springer, 2023.
- [252] Shouang Yan, Chengyan Wang, Weibo Chen, and Jun Lyu. Swin transformer-based gan for multi-modal medical image translation. *Frontiers in Oncology*, 12:942511, 2022.
- [253] Shengye Hu, Baiying Lei, Shuqiang Wang, Yong Wang, Zhiguang Feng, and Yanyan Shen. Bidirectional mapping generative adversarial networks for brain mr to pet synthesis. *IEEE Transactions on Medical Imaging*, 41(1):145–157, 2021.

- [254] Shengye Hu, Yanyan Shen, Shuqiang Wang, and Baiying Lei. Brain mr to pet synthesis via bidirectional generative adversarial network. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2020: 23rd International Conference, Lima, Peru, October 4–8, 2020, Proceedings, Part II 23*, pages 698–707. Springer, 2020.
- [255] Yongsheng Pan, Mingxia Liu, Chunfeng Lian, Tao Zhou, Yong Xia, and Dinggang Shen. Synthesizing missing pet from mri with cycle-consistent generative adversarial networks for alzheimer’s disease diagnosis. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2018: 21st International Conference, Granada, Spain, September 16-20, 2018, Proceedings, Part III 11*, pages 455–463. Springer, 2018.
- [256] Muzaffer Özbey, Onat Dalmaz, Salman UH Dar, Hasan A Bedel, Şaban Öztürk, Alper Güngör, and Tolga Çukur. Unsupervised medical image translation with adversarial diffusion models. *IEEE Transactions on Medical Imaging*, 2023.
- [257] Lan Jiang, Ye Mao, Xiangfeng Wang, Xi Chen, and Chao Li. Cola-diff: Conditional latent diffusion model for multi-modal mri synthesis. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 398–408. Springer, 2023.
- [258] Lingting Zhu, Zeyue Xue, Zhenchao Jin, Xian Liu, Jingzhen He, Ziwei Liu, and Lequan Yu. Make-a-volume: Leveraging latent diffusion models for cross-modality 3d brain mri synthesis. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 592–601. Springer, 2023.
- [259] Anna L Roethe, Judith Rösler, Martin Misch, Peter Vajkoczy, and Thomas Picht. Augmented reality visualization in brain lesions: A prospective randomized controlled evaluation of its potential and current limitations in navigated microneurosurgery. *Acta Neurochirurgica*, 164(1):3–14, 2022.
- [260] Hamid Ghaednia, Mitchell S Fourman, Amanda Lans, Kelsey Detels, Hidde Dijkstra, Sophie Lloyd, Allison Sweeney, Jacobien HF Oosterhoff, and Joseph H Schwab. Augmented and virtual reality in spine surgery, current applications and future potentials. *The Spine Journal*, 21(10):1617–1625, 2021.
- [261] Ruipu Luo, Ziwan Zhao, Min Yang, Junwei Dong, Minghui Qiu, Pengcheng Lu, Tao Wang, and Zhongyu Wei. Valley: Video assistant with large language model enhanced ability. *arXiv preprint arXiv:2306.07207*, 2023.
- [262] Junling Liu, Ziming Wang, Qichen Ye, Dading Chong, Peilin Zhou, and Yining Hua. Qilin-med-vl: Towards chinese large vision-language model for general healthcare. *arXiv preprint arXiv:2310.17956*, 2023.
- [263] Jorge Guerra Pires. Robodoc: a conversational-ai based app for medical conversations. *medRxiv*, pages 2023–12, 2024.
- [264] KunChang Li, Yanan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. Videochat: Chat-centric video understanding. *arXiv preprint arXiv:2305.06355*, 2023.
- [265] Sihan Chen, Handong Li, Qunbo Wang, Zijia Zhao, Mingzhen Sun, Xinxin Zhu, and Jing Liu. Vast: A vision-audio-subtitle-text omni-modality foundation model and dataset. *arXiv preprint arXiv:2305.18500*, 2023.
- [266] Chenfei Wu, Shengming Yin, Weizhen Qi, Xiaodong Wang, Zecheng Tang, and Nan Duan. Visual chatgpt: Talking, drawing and editing with visual foundation models. *arXiv preprint arXiv:2303.04671*, 2023.
- [267] Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. Next-gpt: Any-to-any multimodal llm. *arXiv preprint arXiv:2309.05519*, 2023.
- [268] Akash Ghosh, Arkadeep Acharya, Raghav Jain, Sriparna Saha, Aman Chadha, and Setu Sinha. Clipsyntel: Clip and llm synergy for multimodal question summarization in healthcare. *arXiv preprint arXiv:2312.11541*, 2023.
- [269] Jiawei Zhang. Graph-toolformer: To empower llms with graph reasoning ability via prompt augmented by chatgpt. *arXiv preprint arXiv:2304.11116*, 2023.
- [270] Pengfei Liu, Yiming Ren, and Zhixiang Ren. Git-mol: A multi-modal large language model for molecular science with graph, image, and text. *arXiv preprint arXiv:2308.06911*, 2023.
- [271] Jiawei Liu, Cheng Yang, Zhiyuan Lu, Junze Chen, Yibo Li, Mengmei Zhang, Ting Bai, Yuan Fang, Lichao Sun, Philip S Yu, et al. Towards graph foundation models: A survey and beyond. *arXiv preprint arXiv:2310.11829*, 2023.
- [272] Bowen Jin, Gang Liu, Chi Han, Meng Jiang, Heng Ji, and Jiawei Han. Large language models on graphs: A comprehensive survey. *arXiv preprint arXiv:2312.02783*, 2023.
- [273] Gowtham Krishnan Murugesan, Chandan Ganesh, Sahil Nalawade, Elizabeth M Davenport, Ben Wagner, Won Hwa Kim, and Joseph A Maldjian. Brainnet: Inference of brain network topology using machine learning. *Brain connectivity*, 10(8):422–435, 2020.

- [274] Hejie Cui, Wei Dai, Yanqiao Zhu, Xuan Kan, Antonio Aodong Chen Gu, Joshua Lukemire, Liang Zhan, Lifang He, Ying Guo, and Carl Yang. Braingb: A benchmark for brain network analysis with graph neural networks. *IEEE transactions on medical imaging*, 42(2):493–506, 2022.
- [275] Houliang Zhou, Lifang He, Yu Zhang, Li Shen, and Brian Chen. Interpretable graph convolutional network of multi-modality brain imaging for alzheimer’s disease diagnosis. In *2022 IEEE 19th International Symposium on Biomedical Imaging (ISBI)*, pages 1–5. IEEE, 2022.
- [276] Liqin Huang, Xiaofang Ye, Mingjing Yang, Lin Pan, and Shao hua Zheng. Mnc-net: Multi-task graph structure learning based on node clustering for early parkinson’s disease diagnosis. *Computers in Biology and Medicine*, 152:106308, 2023.
- [277] Kaizhong Zheng, Shujian Yu, and Badong Chen. Ci-gnn: A granger causality-inspired graph neural network for interpretable brain network-based psychiatric diagnosis. *Neural Networks*, page 106147, 2024.
- [278] Jaleal Sanjak, Jessica Binder, Arjun Singh Yadaw, Qian Zhu, and Ewy A Mathé. Clustering rare diseases within an ontology-enriched knowledge graph. *Journal of the American Medical Informatics Association*, 31(1):154–164, 2024.
- [279] Gayathri Sivakumar Menon, J Poornima, Aneena T Sojan, PJ Mridhula, and Anuraj Mohan. Asdexplainer: An interpretable graph neural network framework for brain network based autism spectrum disorder analysis. In *2023 14th International Conference on Computing Communication and Networking Technologies (ICCCNT)*, pages 1–7. IEEE, 2023.
- [280] Catrin Hasselgren and Tudor I Oprea. Artificial intelligence for drug discovery: Are we there yet? *Annual Review of Pharmacology and Toxicology*, 64, 2024.
- [281] Carl N Edwards, Aakanksha Naik, Tushar Khot, Martin D Burke, Heng Ji, and Tom Hope. Synergpt: In-context learning for personalized drug synergy prediction and drug design. *bioRxiv*, pages 2023–07, 2023.
- [282] Ali Madani, Ben Krause, Eric R Greene, Subu Subramanian, Benjamin P Mohr, James M Holton, Jose Luis Olmos Jr, Caiming Xiong, Zachary Z Sun, Richard Socher, et al. Large language models generate functional protein sequences across diverse families. *Nature Biotechnology*, pages 1–8, 2023.
- [283] Zeming Lin, Halil Akin, Roshan Rao, Brian Hie, Zhongkai Zhu, Wenting Lu, Nikita Smetanin, Robert Verkuil, Ori Kabeli, Yaniv Shmueli, et al. Evolutionary-scale prediction of atomic-level protein structure with a language model. *Science*, 379(6637):1123–1130, 2023.
- [284] Noelia Ferruz, Steffen Schmidt, and Birte Höcker. Protgpt2 is a deep unsupervised language model for protein design. *Nature communications*, 13(1):4348, 2022.
- [285] Ratul Chowdhury, Nazim Bouatta, Surojit Biswas, Christina Floristean, Anant Kharkar, Koushik Roy, Charlotte Rochereau, Gustaf Ahdritz, Joanna Zhang, George M Church, et al. Single-sequence protein structure prediction using a language model and deep learning. *Nature Biotechnology*, 40(11):1617–1623, 2022.
- [286] Christina V Theodoris, Ling Xiao, Anant Chopra, Mark D Chaffin, Zeina R Al Sayed, Matthew C Hill, Helene Mantineo, Elizabeth M Brydon, Zexian Zeng, X Shirley Liu, et al. Transfer learning enables predictions in network biology. *Nature*, pages 1–9, 2023.
- [287] He Cao, Zijing Liu, Xingyu Lu, Yuan Yao, and Yu Li. Instructmol: Multi-modal integration for building a versatile and reliable molecular assistant in drug discovery. *arXiv preprint arXiv:2311.16208*, 2023.
- [288] Oscar Méndez-Lucio, Christos Nicolaou, and Berton Earnshaw. Mole: a molecular foundation model for drug discovery. *arXiv preprint arXiv:2211.02657*, 2022.
- [289] Marius E Mayerhoefer, Andrzej Materka, Georg Langs, Ida Häggström, Piotr Szczypiński, Peter Gibbs, and Gary Cook. Introduction to radiomics. *Journal of Nuclear Medicine*, 61(4):488–495, 2020.
- [290] Robert J Gillies, Paul E Kinahan, and Hedvig Hricak. Radiomics: images are more than pictures, they are data. *Radiology*, 278(2):563–577, 2016.
- [291] Suraj Pai, Dennis Bontempi, Vasco Prudente, Ibrahim Hadzic, Mateo Sokač, Tafadzwa L Chaunzwa, Simon Bernatz, Ahmed Hosny, Raymond H Mak, Nicolai J Birkbak, et al. Foundation models for quantitative biomarker discovery in cancer imaging. *medRxiv*, 2023.
- [292] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PMLR, 2020.
- [293] Jia Fu, Mengjie Fang, Zhiyong Lin, Jianxing Qiu, Min Yang, Jie Tian, Di Dong, and Yinghua Zou. Ct-based radiomics: predicting early outcomes after percutaneous transluminal renal angioplasty in patients with severe atherosclerotic renal artery stenosis. *Visual Computing for Industry, Biomedicine, and Art*, 7(1):1, 2024.

- [294] Safa Al-Amrani, Zaaïma Al-Jabri, Adhari Al-Zaabi, Jalila Alshekaili, and Murtadha Al-Khabori. Proteomics: Concepts and applications in human medicine. *World Journal of Biological Chemistry*, 12(5):57, 2021.
- [295] Marc R Wilkins, Jean-Charles Sanchez, Andrew A Gooley, Ron D Appel, Ian Humphery-Smith, Denis F Hochstrasser, and Keith L Williams. Progress with proteome projects: why all proteins expressed by a genome should be identified and how to do it. *Biotechnology and genetic engineering reviews*, 13(1):19–50, 1996.
- [296] Shengchao Liu, Yutao Zhu, Jiarui Lu, Zhao Xu, Weili Nie, Anthony Gitter, Chaowei Xiao, Jian Tang, Hongyu Guo, and Anima Anandkumar. A text-guided protein design framework. *arXiv preprint arXiv:2302.04611*, 2023.
- [297] Roshan Rao, Nicholas Bhattacharya, Neil Thomas, Yan Duan, Peter Chen, John Canny, Pieter Abbeel, and Yun Song. Evaluating protein transfer learning with tape. *Advances in neural information processing systems*, 32, 2019.
- [298] Roshan M Rao, Jason Liu, Robert Verkuil, Joshua Meier, John Canny, Pieter Abbeel, Tom Seracu, and Alexander Rives. Msa transformer. In *International Conference on Machine Learning*, pages 8844–8856. PMLR, 2021.
- [299] Ningyu Zhang, Zhen Bi, Xiaozhuan Liang, Siyuan Cheng, Haosen Hong, Shumin Deng, Jiazhang Lian, Qiang Zhang, and Huajun Chen. Ontoprotein: Protein pretraining with gene ontology embedding. *arXiv preprint arXiv:2201.11147*, 2022.
- [300] Ali Madani, Bryan McCann, Nikhil Naik, Nitish Shirish Keskar, Namrata Anand, Raphael R Eguchi, Po-Ssu Huang, and Richard Socher. Progen: Language modeling for protein generation. *arXiv preprint arXiv:2004.03497*, 2020.
- [301] Joseph L Watson, David Juergens, Nathaniel R Bennett, Brian L Trippe, Jason Yim, Helen E Eisenach, Woody Ahern, Andrew J Borst, Robert J Ragotte, Lukas F Milles, et al. Broadly applicable and accurate protein design by integrating structure prediction networks and diffusion generative models. *BioRxiv*, pages 2022–12, 2022.
- [302] Anurag Arnab, Mostafa Dehghani, Georg Heigold, Chen Sun, Mario Lučić, and Cordelia Schmid. Vivit: A video vision transformer. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 6836–6846, 2021.
- [303] Ze Liu, Jia Ning, Yue Cao, Yixuan Wei, Zheng Zhang, Stephen Lin, and Han Hu. Video swin transformer. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 3202–3211, 2022.
- [304] Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models. *arXiv preprint arXiv:2306.05424*, 2023.
- [305] Matthew Christensen, Milos Vukadinovic, Neal Yuan, and David Ouyang. Multimodal foundation models for echocardiogram interpretation. *arXiv preprint arXiv:2308.15670*, 2023.
- [306] Jiewei Lai, Huixin Tan, Jinliang Wang, Lei Ji, Jun Guo, Baoshi Han, Yajun Shi, Qianjin Feng, and Wei Yang. Practical intelligent diagnostic algorithm for wearable 12-lead ecg via self-supervised learning on large-scale dataset. *Nature Communications*, 14(1):3741, 2023.
- [307] Adil Dahlan, Cyril Zakka, Abhinav Kumar, Laura Tang, Rohan Shad, Robyn Fong, and William Hiesinger. Echocardiogram foundation model–application 1: Estimating ejection fraction. *arXiv preprint arXiv:2311.12582*, 2023.
- [308] Rongjie Huang, Mingze Li, Dongchao Yang, Jiatong Shi, Xuankai Chang, Zhenhui Ye, Yuning Wu, Zhiqing Hong, Jiawei Huang, Jinglin Liu, et al. Audiogpt: Understanding and generating speech, music, sound, and talking head. *arXiv preprint arXiv:2304.12995*, 2023.
- [309] Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhota, Ruslan Salakhutdinov, and Abdelrahman Mohamed. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 29:3451–3460, 2021.
- [310] Paul K Rubenstein, Chulayuth Asawaroengchai, Duc Dung Nguyen, Ankur Bapna, Zalán Borsos, Félix de Chaumont Quiry, Peter Chen, Dalia El Badawy, Wei Han, Eugene Kharitonov, et al. Audiopalm: A large language model that can speak and listen. *arXiv preprint arXiv:2306.12925*, 2023.
- [311] Dong Zhang, Shimin Li, Xin Zhang, Jun Zhan, Pengyu Wang, Yaqian Zhou, and Xipeng Qiu. Speechgpt: Empowering large language models with intrinsic cross-modal conversational abilities. *arXiv preprint arXiv:2305.11000*, 2023.
- [312] Maurice Gerczuk, Andreas Triantafyllopoulos, Shahin Amiriparian, Alexander Kathan, Jonathan Bauer, Matthias Berking, and Björn W Schuller. Zero-shot personalization of speech foundation models for depressed mood monitoring. *Patterns*, 4(11), 2023.

- [313] Isaac A Bernstein, Youchen Victor Zhang, Devendra Govil, Iyad Majid, Robert T Chang, Yang Sun, Ann Shue, Jonathan C Chou, Emily Schehlein, Karen L Christopher, et al. Comparison of ophthalmologist and large language model chatbot responses to online patient eye care questions. *JAMA Network Open*, 6(8):e2330320–e2330320, 2023.
- [314] Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng, Siyuan Zhuang, Yonghao Zhuang, Joseph E Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. See <https://vicuna.lmsys.org> (accessed 14 April 2023), 2023.
- [315] Zhi Huang, Federico Bianchi, Mert Yuksekogonul, Thomas Montine, and James Zou. Leveraging medical twitter to build a visual–language foundation model for pathology ai. *bioRxiv*, pages 2023–03, 2023.
- [316] Rana Khaled, Maha Helal, Omar Alfarghaly, Omnia Mokhtar, Abeer Elkorany, Hebatalla El Kassas, and Aly Fahmy. Categorized contrast enhanced mammography dataset for diagnostic and artificial intelligence research. *Scientific Data*, 9(1):122, 2022.
- [317] Mateusz Buda, Ashirbani Saha, and Maciej A Mazurowski. Association of genomic subtypes of lower-grade gliomas with shape features automatically extracted by a deep learning algorithm. *Computers in biology and medicine*, 109:218–225, 2019.
- [318] Jun Cheng, Wei Yang, Meiyang Huang, Wei Huang, Jun Jiang, Yujia Zhou, Ru Yang, Jie Zhao, Yanqiu Feng, Qianjin Feng, et al. Retrieval of brain tumors by adaptive spatial pooling and fisher vector representation. *PLoS one*, 11(6):e0157112, 2016.
- [319] Jun Cheng, Wei Huang, Shuangliang Cao, Ru Yang, Wei Yang, Zhaoqiang Yun, Zhijian Wang, and Qianjin Feng. Enhanced performance of brain tumor classification via tumor region augmentation and partition. *PLoS one*, 10(10):e0140381, 2015.
- [320] Neeraj Kumar, Ruchika Verma, Deepak Anand, Yanning Zhou, Omer Fahri Onder, Efstratios Tsougenis, Hao Chen, Pheng-Ann Heng, Jiahui Li, Zhiqiang Hu, et al. A multi-organ nucleus segmentation challenge. *IEEE transactions on medical imaging*, 39(5):1380–1391, 2019.
- [321] Jing Jiao, Jin Zhou, Xiaokang Li, Menghua Xia, Yi Huang, Lihong Huang, Na Wang, Xiaofan Zhang, Shichong Zhou, Yuanyuan Wang, et al. Usfm: A universal ultrasound foundation model generalized to tasks and organs towards label efficient image analysis. *Medical Image Analysis*, page 103202, 2024.
- [322] Patrick Bilic, Patrick Christ, Hongwei Bran Li, Eugene Vorontsov, Avi Ben-Cohen, Georgios Kaissis, Adi Szeskin, Colin Jacobs, Gabriel Efrain Humpire Mamani, Gabriel Chartrand, et al. The liver tumor segmentation benchmark (lits). *Medical Image Analysis*, 84:102680, 2023.
- [323] Yingda Xia, Qihang Yu, Linda Chu, Satomi Kawamoto, Seyoun Park, Fengze Liu, Jieneng Chen, Zhuotun Zhu, Bowen Li, Zongwei Zhou, et al. The felix project: deep networks to detect pancreatic neoplasms. *medRxiv*, pages 2022–09, 2022.
- [324] Taesung Park, Ming-Yu Liu, Ting-Chun Wang, and Jun-Yan Zhu. Semantic image synthesis with spatially-adaptive normalization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2337–2346, 2019.
- [325] Huihui Fang, Fei Li, Huazhu Fu, Xu Sun, Xingxing Cao, Jaemin Son, Shuang Yu, Menglu Zhang, Chenglang Yuan, Cheng Bian, et al. Refuge2 challenge: Treasure for multi-domain learning in glaucoma assessment. *arXiv preprint arXiv:2202.08994*, 2022.
- [326] Ujjwal Baid, Satyam Ghodasara, Suyash Mohan, Michel Bilello, Evan Calabrese, Errol Colak, Keyvan Farahani, Jayashree Kalpathy-Cramer, Felipe C Kitamura, Sarthak Pati, et al. The rsna-asnr-miccai brats 2021 benchmark on brain tumor segmentation and radiogenomic classification. *arXiv preprint arXiv:2107.02314*, 2021.
- [327] Lina Pedraza, Carlos Vargas, Fabián Narváez, Oscar Durán, Emma Muñoz, and Eduardo Romero. An open access thyroid ultrasound image database. In *10th International symposium on medical information processing and analysis*, volume 9287, pages 188–193. SPIE, 2015.
- [328] Haonan Wang and Xiaomeng Li. Towards generic semi-supervised framework for volumetric medical image segmentation. *arXiv preprint arXiv:2310.11320*, 2023.
- [329] Yuanfeng Ji, Haotian Bai, Chongjian Ge, Jie Yang, Ye Zhu, Ruimao Zhang, Zhen Li, Lingyan Zhanng, Wanling Ma, Xiang Wan, et al. Amos: A large-scale abdominal multi-organ benchmark for versatile medical image segmentation. *Advances in Neural Information Processing Systems*, 35:36722–36732, 2022.
- [330] Francesco Marzola, Nens Van Alfen, Jonne Doorduyn, and Kristen M Meiburger. Deep learning segmentation of transverse musculoskeletal ultrasound images for neuromuscular disease assessment. *Computers in Biology and Medicine*, 135:104623, 2021.

- [331] Yiwen Li, Yunguan Fu, Iani JMB Gayo, Qianye Yang, Zhe Min, Shaheer U Saeed, Wen Yan, Yipei Wang, J Alison Noble, Mark Emberton, et al. Prototypical few-shot segmentation for cross-institution male pelvic structures with spatial registration. *Medical Image Analysis*, 90:102935, 2023.
- [332] Debesh Jha, Pia H Smedsrud, Michael A Riegler, Pål Halvorsen, Thomas de Lange, Dag Johansen, and Håvard D Johansen. Kvasir-seg: A segmented polyp dataset. In *MultiMedia Modeling: 26th International Conference, MMM 2020, Daejeon, South Korea, January 5–8, 2020, Proceedings, Part II 26*, pages 451–462. Springer, 2020.
- [333] Debesh Jha, Pia H Smedsrud, Dag Johansen, Thomas de Lange, Håvard D Johansen, Pål Halvorsen, and Michael A Riegler. A comprehensive study on colorectal polyp segmentation with resunet++, conditional random field and test-time augmentation. *IEEE journal of biomedical and health informatics*, 25(6):2029–2040, 2021.
- [334] Korsuk Sirinukunwattana, Josien PW Pluim, Hao Chen, Xiaojuan Qi, Pheng-Ann Heng, Yun Bo Guo, Li Yang Wang, Bogdan J Matuszewski, Elia Bruni, Urko Sanchez, et al. Gland segmentation in colon histology images: The glas challenge contest. *Medical image analysis*, 35:489–502, 2017.
- [335] Ming Kong, Zhengxing Huang, Kun Kuang, Qiang Zhu, and Fei Wu. Transq: Transformer-based semantic query for medical report generation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 610–620. Springer, 2022.
- [336] Yunkun Zhang, Jin Gao, Mu Zhou, Xiaosong Wang, Yu Qiao, Shaoting Zhang, and Dequan Wang. Text-guided foundation model adaptation for pathological image classification. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 272–282. Springer, 2023.
- [337] Florian Knoll, Jure Zbontar, Anuroop Sriram, Matthew J Muckley, Mary Bruno, Aaron Defazio, Marc Parente, Krzysztof J Geras, Joe Katsnelson, Hersh Chandarana, et al. fastmri: A publicly available raw k-space and dicom dataset of knee images for accelerated mr image reconstruction using machine learning. *Radiology: Artificial Intelligence*, 2(1):e190007, 2020.
- [338] Haoning Wu, Erli Zhang, Liang Liao, Chaofeng Chen, Jingwen Hou, Annan Wang, Wenxiu Sun, Qiong Yan, and Weisi Lin. Towards explainable in-the-wild video quality assessment: a database and a language-prompted approach. *arXiv preprint arXiv:2305.12726*, 2023.
- [339] Eric Wallace, Shi Feng, Nikhil Kandpal, Matt Gardner, and Sameer Singh. Universal adversarial triggers for attacking and analyzing nlp. *arXiv preprint arXiv:1908.07125*, 2019.
- [340] Nayeon Lee, Yejin Bang, Holy Lovenia, Samuel Cahyawijaya, Wenliang Dai, and Pascale Fung. Survey of social bias in vision-language models. *arXiv preprint arXiv:2309.14381*, 2023.
- [341] Reuben Binns. On the apparent conflict between individual and group fairness. In *Proceedings of the 2020 conference on fairness, accountability, and transparency*, pages 514–524, 2020.
- [342] Isabel O Gallegos, Ryan A Rossi, Joe Barrow, Md Mehrab Tanjim, Sungchul Kim, Franck Dernoncourt, Tong Yu, Ruiyi Zhang, and Nesreen K Ahmed. Bias and fairness in large language models: A survey. *arXiv preprint arXiv:2309.00770*, 2023.
- [343] Adhithya Prakash Saravanan, Rafal Kocielnik, Roy Jiang, Pengrui Han, and Anima Anandkumar. Exploring social bias in downstream applications of text-to-image foundation models. *arXiv preprint arXiv:2312.10065*, 2023.
- [344] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- [345] Weiming Zhuang, Chen Chen, and Lingjuan Lyu. When foundation model meets federated learning: Motivations, challenges, and future directions. *arXiv preprint arXiv:2306.15546*, 2023.
- [346] Yunkun Zhang, Jin Gao, Zheling Tan, Lingfeng Zhou, Kexin Ding, Mu Zhou, Shaoting Zhang, and Dequan Wang. Data-centric foundation models in computational healthcare: A survey. *arXiv preprint arXiv:2401.02458*, 2024.
- [347] Eduard Fosch Villaronga, Peter Kieseberg, and Tiffany Li. Humans forget, machines remember: Artificial intelligence and the right to be forgotten. *Computer Law & Security Review*, 34(2):304–313, 2018.
- [348] Laleh Seyyed-Kalantari, Haoran Zhang, Matthew BA McDermott, Irene Y Chen, and Marzyeh Ghassemi. Underdiagnosis bias of artificial intelligence algorithms applied to chest radiographs in under-served patient populations. *Nature medicine*, 27(12):2176–2182, 2021.
- [349] Hilda Kajbaf. The first amendment and modern technology: The free speech clause and chatbot speech. *Hastings Const. LQ*, 47:337, 2019.

- [350] Logesh Kumar Umapathi, Ankit Pal, and Malaikannan Sankarasubbu. Med-halt: Medical domain hallucination test for large language models. *arXiv preprint arXiv:2307.15343*, 2023.
- [351] Aleksandar Shtedritski, Christian Rupprecht, and Andrea Vedaldi. What does clip know about a red circle? visual prompt engineering for vlms. *arXiv preprint arXiv:2304.06712*, 2023.
- [352] Chen Zhang, Yu Xie, Hang Bai, Bin Yu, Weihong Li, and Yuan Gao. A survey on federated learning. *Knowledge-Based Systems*, 216:106775, 2021.
- [353] Ruinan Jin, Chun-Yin Huang, Chenyu You, and Xiaoxiao Li. Backdoor attack on unpaired medical image-text foundation models: A pilot study on medclip. *arXiv preprint arXiv:2401.01911*, 2024.
- [354] Narmin Ghaffari Laleh, Daniel Truhn, Gregory Patrick Veldhuizen, Tianyu Han, Marko van Treeck, Roman D Buelow, Rupert Langer, Bastian Dislich, Peter Boor, Volkmar Schulz, et al. Adversarial attacks and adversarial robustness in computational pathology. *Nature communications*, 13(1):5711, 2022.
- [355] Faris Almalik, Mohammad Yaqub, and Karthik Nandakumar. Self-ensembling vision transformer (sevit) for robust medical image classification. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 376–386. Springer, 2022.