

---

# EXPLOITING DIFFUSION PRIOR FOR OUT-OF-DISTRIBUTION DETECTION

---

**Armando Zhu**  
Carnegie Mellon University  
USA

**Jiabei Liu**  
North Eastern University  
USA

**Keqin Li**  
AMA University  
Philippines

**Shuying Dai**  
Indian Institute of Technology Guwahati  
India

**Bo Hong**  
Northern Arizona University  
USA

**Peng Zhao**  
Microsoft  
China

**Changsong Wei**  
Digital Financial Information Technology Co.LTD  
China

## ABSTRACT

Out-of-distribution (OOD) detection is crucial for deploying robust machine learning models, especially in areas where security is critical. However, traditional OOD detection methods often fail to capture complex data distributions from large scale data. In this paper, we present a novel approach for OOD detection that leverages the generative ability of diffusion models and the powerful feature extraction capabilities of CLIP. By using these features as conditional inputs to a diffusion model, we can reconstruct the images after encoding them with CLIP. The difference between the original and reconstructed images is used as a signal for OOD identification. The practicality and scalability of our method is increased by the fact that it does not require class-specific labeled ID data, as is the case with many other methods. Extensive experiments on several benchmark datasets demonstrates the robustness and effectiveness of our method, which have significantly improved the detection accuracy.

**Keywords** Out of distribution detection · CLIP · Diffusion Model

## 1 Introduction

The ability to identify out-of-distribution (OOD) data is a critical component in deploying robust machine learning models in real-world applications [1–9]. OOD detection aims to identify instances that deviate significantly from the training distribution, ensuring the reliability of model predictions and minimizing the risk of erroneous outputs. This capability is particularly crucial in safety-critical domains such as autonomous driving [10–16], healthcare [17–22], and security systems, where the presence of unfamiliar data can lead to catastrophic failures.

Various approaches have been proposed to address the problem of OOD detection, ranging from statistical techniques to deep learning-based methods. Traditional methods often rely on simple feature extraction and anomaly detection algorithms, which may be inadequate for capturing complex data distributions.

Recently, the Contrastive Language–Image Pretraining (CLIP) model has emerged as a powerful backbone for feature extraction. CLIP leverages extensive internet data to learn rich, multimodal representations of images and text, demonstrating impressive zero-shot learning capabilities and effectiveness in various tasks without the need for task-specific fine-tuning.

Similarly, diffusion models have gained attention for their ability to generate high-quality images through a denoising process. These models learn the data distribution by progressively removing noise from a corrupted version of the

image, effectively capturing the underlying data manifold. The prior knowledge embedded in diffusion models can be instrumental in reconstructing images and identifying anomalies. It can be beneficial for 3D vision tasks [23–27] and scene understanding [28–33].

In this paper, we propose a novel approach to OOD detection by exploiting the diffusion prior. The core insight of our approach is that a model capable of accurately reconstructing an image indicates that the image is likely part of the distribution the model has learned. Conversely, poor reconstruction suggests that the image is out-of-distribution.

Our method involves utilizing the CLIP model to encode the image and using its features as conditional input for the diffusion model. By comparing the discrepancy between the reconstructed image and the original input, we can effectively determine if an image is OOD. This approach is based on the assumption that the model can only accurately reconstruct images of classes it has encountered during training, leveraging both the image input and its feature representation.

Additionally, for classification purposes, we utilize the zero-shot classification capability of CLIP, allowing us to classify images without fine-tuning the model. This is particularly advantageous as it enables the use of large amounts of in-distribution data without requiring labeled OOD data.

Our main contributions can be summarized as follows:

- We propose a novel OOD detection method based on the integration of CLIP and diffusion models.
- We conduct extensive experiments on multiple benchmarks, demonstrating the robustness and efficacy of our method in OOD detection.

## 2 Related Works

### 2.1 Out-of-Distribution Detection

Several methods have been introduced to address the complex problem of OOD detection [34–41]. A common strategy involves leveraging uncertainty estimation techniques, such as Bayesian modeling [42], to assess prediction uncertainty and identify OOD samples. Prominent techniques in this domain include Maximum Softmax Probabilities (MSP), which uses the maximum softmax output as a confidence measure [43], Mahalanobis distance [44], and Monte Carlo Markov Chain methods that facilitate sampling from high-dimensional distributions [45]. Ensemble models are also widely acknowledged for enhancing the robustness and performance of machine learning systems, including OOD detection [46]. In OOD detection, ensemble methods integrate multiple base models for predictions, fitting into both probabilistic and uncertainty-based frameworks.

Supervised methods have shown some efficacy in reducing the incidence of erroneously high-confidence predictions on OOD inputs [47]; however, they are constrained by the necessity of labeled OOD data for training. Common unsupervised approaches include density estimation techniques [48]. Recent research indicates that augmentation and adversarial perturbation can improve OOD detection performance [49]. A key strength of our proposed OOD detection method is that it does not require specific class labels for training the diffusion model. Instead, it only requires in-distribution samples to learn the distribution, enabling it to determine whether a sample is in-distribution or OOD during testing.

### 2.2 Pre-trained Vision-Language Models

Interpreting the semantic information within images remains a significant challenge in computer vision [50–60]. The emergence of Transformers [61] has made a great impact on not only natural language processing field [62–74], but also vision-related tasks [75], paving the way for the introduction of CLIP [76], a powerful pre-trained vision-language model. By utilizing contrastive learning along with extensive models and datasets [77], CLIP employs image-text pairs for self-supervised training. This strategy has effectively trained the model to align visual and textual representations within a latent space, facilitating robust feature extraction and zero-shot learning capabilities.

### 2.3 Diffusion models

Diffusion denoising probabilistic models, commonly known as diffusion models [78], have gained popularity as a notable class of generative models, recognized for their exceptional synthesis quality and controllability. The fundamental principle of these models involves training a denoising autoencoder to approximate the reverse of a Markovian diffusion process [79]. By leveraging generative training on large-scale datasets with image-text pairs, such as LAION5B [77], diffusion models develop the ability to produce high-quality images featuring diverse content and

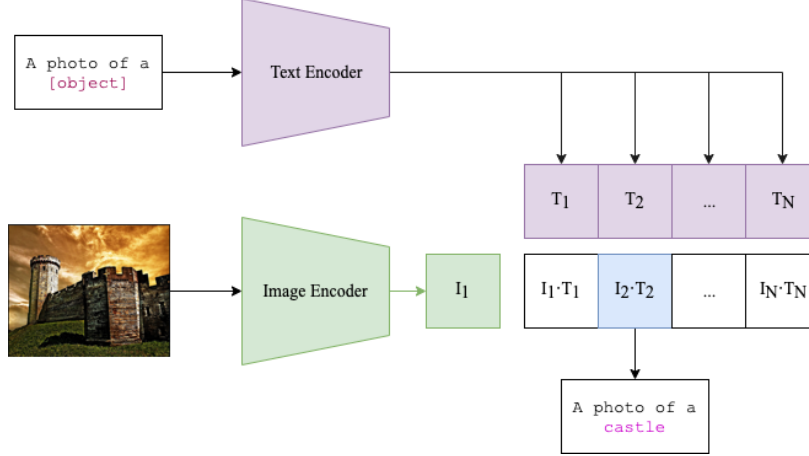


Figure 1: Architecture of CLIP model.

coherent structures. Recently, a controllable architecture called ControlNet [80] has been introduced, enabling the addition of spatial controls, such as depth maps and human poses, to pre-trained diffusion models, thereby expanding their applicability to controlled image generation.

### 3 Method

#### 3.1 CLIP Model

CLIP is a multi-modal vision and language model that has demonstrated impressive results in image-text similarity and zero-shot image classification, leveraging extensive training data and large-scale models. CLIP consists of an image encoder, such as CNN-based or Transformer-like models, and a causal language model to obtain text features. During the pre-training phase, CLIP uses large-scale image-text pairs for self-supervised contrastive learning, aligning images and texts into the same latent space.

In zero-shot image classification tasks, given  $M$  class labels for classification (e.g., "cat", "dog"), CLIP incorporates these class labels into pre-designed hard/unlearnable text prompts, such as "a photo of a [class]", forming a prompt set like "a photo of a cat", "a photo of a dog", etc. These prompts are then fed into the text encoder to obtain  $M$  text features  $T_i$ , where  $i \in \{1, 2, \dots, M\}$ . The testing image is input into the image encoder to obtain an image feature  $I_f$ . The cosine similarity is calculated between the normalized image feature and all text features, formally,  $Sim(T_i, I_f) = T_f \cdot I_f$ , and the text feature  $T_i$  with the highest similarity to  $I_f$  is considered the image's category.

#### 3.2 Diffusion U-Net

Diffusion Models are generative models used to generate data similar to the training data. Fundamentally, Diffusion Models work by progressively adding Gaussian noise to training data and then learning to recover the data by reversing this noising process.

Diffusion models achieve high controllability through effective cross-attention layers in the denoising U-Net, facilitating interactions between image features and various conditions. ControlNet, a neural network that enhances image generation in Stable Diffusion by adding extra conditions, allows users to control the images generated more precisely. ControlNet enhances the fine-grained spatial control on latent diffusion models (LDM) by leveraging a trainable copy of the encoding layers in the denoising U-Net as a strong backbone for learning diverse conditional controls.

During the training of the ControlNet framework, images are first projected to latent representations  $z_0$  by a trained VQGAN consisting of the encoder (EEE) and the decoder (DDD). Denoting  $z_s$  as the noisy image at the  $s$ -th timestep, it is produced by:

$$z_s = \sqrt{\bar{a}_t} z_0 + \sqrt{1 - \bar{a}_t} \epsilon \quad (1)$$

where  $\bar{a}_t = \prod_{i=1}^s a_i$ , and  $\epsilon \sim N(0, I)$ . By utilizing fine-grained conditions, ControlNet achieves controllable human image generation with various conditions based on the semantic information of the input.

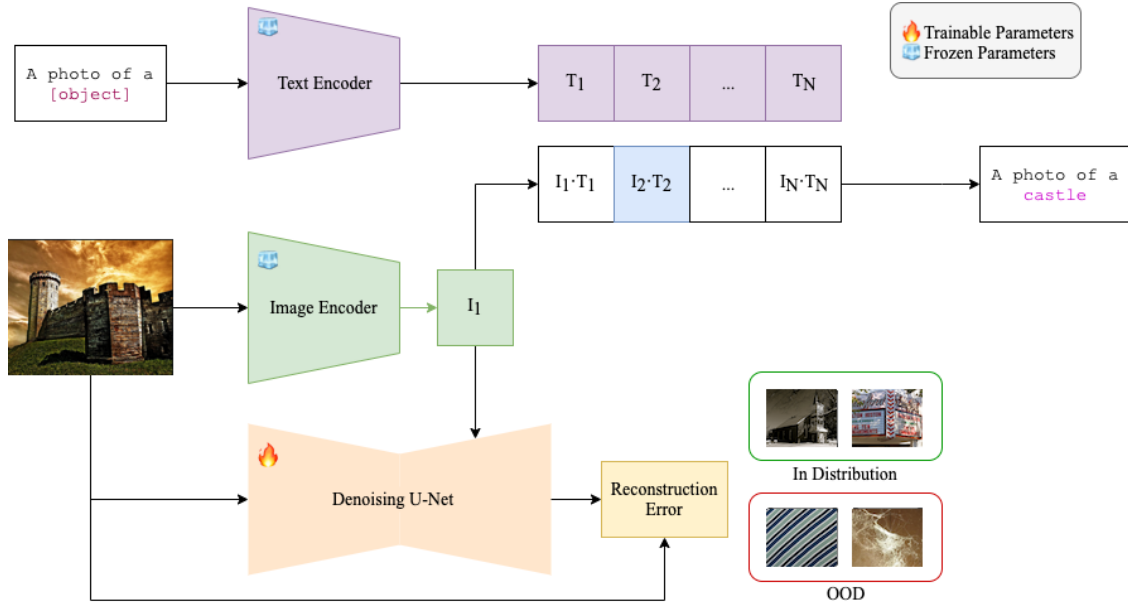


Figure 2: Architecture of the proposed method.

### 3.3 Proposed Out-of-Distribution Detection Method

The features extracted from the CLIP model can be highly beneficial for classifying input images and distinguishing between in-distribution (ID) and out-of-distribution (OOD) samples.

We fine-tune a pre-trained denoising U-Net, guided effectively by the condition injection from features extracted by CLIP. The denoising U-Net is designed to reconstruct input images, and we use the reconstruction error to generate precision-recall curves for OOD detection. To prepare the input images, we convert the cropped image  $I$  from pixel space to obtain the latent representation from the image encoder as part of the CLIP model. We then feed the image into the U-Net with guidance extracted from CLIP. The encoder takes grayscale input images of size  $128 \times 128 \times 1$  and progressively reduces the spatial dimensions while increasing the number of channels, culminating in a bottleneck layer. The decoder then upscales and reconstructs the original input image through transposed convolutions and activations.

During training, the model is optimized to minimize the Mean Squared Error (MSE) loss between the reconstructed heatmaps and the original input. During inference, the threshold for distinguishing between in-distribution and out-of-distribution samples is set as the maximum reconstruction error of the in-distribution samples. With this approach, any sample with a reconstruction error above the threshold is classified as OOD, while samples below the threshold are considered in-distribution.

## 4 Experiments

### 4.1 Experimental Details

#### 4.1.1 Datasets

To evaluate the efficacy of our proposed OOD detection method, we conducted extensive experiments using established benchmarks. We utilized the ImageNet-1K [81] dataset with 1,000 classes as the in-distribution (ID) dataset. For out-of-distribution (OOD) datasets, we selected subsets from Texture [82], iNaturalist [83], Places [84], and SUN [85], ensuring that the concepts in these datasets do not overlap with ImageNet-1K. Specifically, the entire Texture dataset was used for evaluation. Additionally, 110 plant classes not present in ImageNet-1K were selected from iNaturalist, 50 categories not present in ImageNet-1K were selected from Places, and 50 unique nature-related concepts were selected from SUN.

### 4.1.2 Implementation Details

We employed the CLIP model based on CLIP-B/16, pre-trained from OpenCLIP [86]. For the denoising U-Net, we used Stable Diffusion V1-5 with ControlNet, pre-trained for image generation. The model was fine-tuned using ImageNet-1K samples for 10 epochs. During fine-tuning, the Mean Squared Error (MSE) loss was minimized between the reconstructed images and the original inputs to enhance the model’s reconstruction capabilities.

### 4.2 Comparison with Existing Models

The results of OOD detection on the benchmark datasets are summarized in Table 1. Our proposed method consistently achieves superior or comparable performance across individual OOD datasets and in the averaged results. Compared with zero-shot methods, our approach surpasses the best competing method, CLIPN [87], by approximately 1.5% in FPR95, despite CLIPN requiring an additional large external dataset to train an additional negative text encoder. Although our method is significantly more lightweight than CLIPN in model size, it consistently outperforms CLIPN in both metrics across all OOD datasets. Adapted post-hoc methods generally do not leverage CLIP’s capabilities well and thus perform less effectively.

Our method also substantially surpasses prompt learning-based methods, reducing the FPR95 by about 23%. This indicates that the learned diffusion model provides informed knowledge about OOD data, which is lacking in the competing methods, significantly reducing detection errors.

Table 1: Performance metrics across various datasets

Dataset	iNaturalist		SUN		Places		Texture		Average	
	FPR95	AUROC	FPR95	AUROC	FPR95	AUROC	FPR95	AUROC	FPR95	AUROC
<i>Zero-shot methods</i>										
MCM [88]	30.94	94.61	37.67	92.56	44.76	89.76	57.91	86.1	42.82	90.76
GL-MCM [89]	15.18	<b>96.71</b>	30.42	93.09	38.85	89.9	57.93	83.63	35.47	90.83
CLIPN [87]	23.94	95.27	26.17	93.92	33.45	<b>92.28</b>	<b>40.83</b>	90.93	31.1	93.1
<i>CLIP-based posthoc methods</i>										
MSP [43]	74.57	77.74	76.95	73.97	79.12	72.18	73.66	74.84	76.22	74.98
MaxLogit [90]	60.88	88.03	44.83	91.16	55.54	87.45	48.72	88.63	52.49	88.82
ODIN [91]	30.22	94.65	54.04	87.17	55.06	85.54	51.67	87.85	47.75	88.8
ViM [92]	32.19	93.16	54.01	87.19	60.67	83.75	53.94	87.18	50.2	87.82
KNN [93]	29.17	94.52	35.62	92.67	39.61	91.02	64.35	85.67	42.19	90.97
<i>Prompt Learning Methods</i>										
CoOp [94]	29.81	93.77	40.83	93.29	40.11	90.58	45	89.47	51.68	91.78
Ours	<b>15.03</b>	96.45	<b>24.95</b>	<b>94.59</b>	<b>33.17</b>	90.83	41.85	<b>91.02</b>	<b>28.75</b>	<b>93.25</b>

## 5 Conclusion

In this paper, we introduced a novel approach to out-of-distribution (OOD) detection by combining the feature extraction capabilities of CLIP with the generative power of diffusion models. Our method involves encoding images with CLIP and using these features as conditional inputs for a diffusion model to reconstruct the images. The discrepancy between the original and reconstructed images serves as a robust indicator for OOD detection.

Our approach offers several advantages over existing methods. Firstly, it does not require labeled OOD data, making it more practical and scalable for real-world applications. By leveraging only in-distribution samples for training, our method effectively discerns between in-distribution and OOD samples during testing. Secondly, the integration of CLIP’s zero-shot classification capability enhances the versatility of our method, allowing for effective image classification without the need for model fine-tuning.

We conducted extensive experiments on multiple benchmark datasets, including ImageNet-1K, Texture, iNaturalist, Places, and SUN. The results demonstrate that our method achieves significant improvements in detection accuracy, with substantial reductions in false positive rates and enhanced detection metrics across diverse datasets. These findings underscore the potential of integrating pre-trained models to enhance the reliability of OOD detection, paving the way for the deployment of more dependable machine learning systems.

Future work could explore further enhancements to our method, such as incorporating additional types of pre-trained models or refining the reconstruction process to improve detection accuracy further. Additionally, applying our approach to other domains beyond image data, such as natural language processing or audio data, could provide valuable insights and broaden the applicability of our technique.

## References

- [1] Yafeng Yan, Shuyao He, Zhou Yu, Jiajie Yuan, Ziang Liu, and Yan Chen. Investigation of customized medical decision algorithms utilizing graph neural networks. *arXiv preprint arXiv:2405.17460*, 2024.
- [2] Qikai Yang, Panfeng Li, Zhicheng Ding, Wenjing Zhou, Yi Nian, and Xinhe Xu. A comparative study on enhancing prediction in social network advertisement through data augmentation. *arXiv preprint arXiv:2404.13812*, 2024.
- [3] Zhenglin Li, Hanyi Yu, Jinxin Xu, Jihang Liu, and Yuhong Mo. Stock market analysis and prediction using lstm: A case study on technology stocks. *Innovations in Applied Engineering and Technology*, pages 1–6, 2023.
- [4] Jingyu Ru, Han Yu, Hao Liu, Jiayuan Liu, Xiangyue Zhang, and Hongli Xu. A bounded near-bottom cruise trajectory planning algorithm for underwater vehicles. *Journal of Marine Science and Engineering*, 11(1), 2023. ISSN 2077-1312. doi: 10.3390/jmse11010007. URL <https://www.mdpi.com/2077-1312/11/1/7>.
- [5] Xiaosong Wang, Yuxin Qiao, Jize Xiong, Zhiming Zhao, Ning Zhang, Mingyang Feng, and Chufeng Jiang. Advanced network intrusion detection with tabtransformer. *Journal of Theory and Practice of Engineering Science*, 4(03):191–198, 2024.
- [6] Tianrui Liu, Qi Cai, Changxin Xu, Zhanxin Zhou, Fanghao Ni, Yuxin Qiao, and Tsungwei Yang. Rumor detection with a novel graph neural network approach. *arXiv preprint arXiv:2403.16206*, 2024.
- [7] Ao Xiang, Jingyu Zhang, Qin Yang, Liyang Wang, and Yu Cheng. Research on splicing image detection algorithms based on natural image statistical characteristics. *arXiv preprint arXiv:2404.16296*, 2024.
- [8] Yu Cheng, Qin Yang, Liyang Wang, Ao Xiang, and Jingyu Zhang. Research on credit risk early warning model of commercial banks based on neural network algorithm. *arXiv preprint arXiv:2405.10762*, 2024.
- [9] Jingyu Zhang, Ao Xiang, Yu Cheng, Qin Yang, and Liyang Wang. Research on detection of floating objects in river and lake based on ai intelligent image recognition. *arXiv preprint arXiv:2404.06883*, 2024.
- [10] Zhicheng Ding, Zhixin Lai, Siyang Li, Panfeng Li, Qikai Yang, and Edward Wong. Confidence trigger detection: Accelerating real-time tracking-by-detection systems. *arXiv preprint arXiv:1902.00615*, 2024.
- [11] Chang Zhou, Yang Zhao, Shaobo Liu, Yi Zhao, Xingchen Li, and Chiyu Cheng. Research on driver facial fatigue detection based on yolov8 model, 05 2024.
- [12] Yucheng Zhou and Guodong Long. Multimodal event transformer for image-guided story ending generation. *arXiv preprint arXiv:2301.11357*, 2023.
- [13] Yucheng Zhou and Guodong Long. Style-aware contrastive learning for multi-style image captioning. *arXiv preprint arXiv:2301.11367*, 2023.
- [14] Shuyao He, Yue Zhu, Yushan Dong, Hao Qin, and Yuhong Mo. Lidar and monocular sensor fusion depth estimation. *Applied Science and Engineering Journal for Advanced Research*, 3(3):20–26, 2024.
- [15] Yuhong Mo, Chaoyi Tan, Chenghao Wang, Hao Qin, and Yushan Dong. Make scale invariant feature transform “fly” with cuda. *International Journal of Engineering and Management Research*, 14(3):38–45, 2024.
- [16] Shuying Dai, Jiajing Dai, Yuqiang Zhong, Taiyu Zuo, and Yuhong Mo. The cloud-based design of unmanned constant temperature food delivery trolley in the context of artificial intelligence. *Journal of Computer Technology and Applied Mathematics*, 1(1):6–12, 2024.
- [17] Jiajie Yuan, Linxiao Wu, Yulu Gong, Zhou Yu, Ziang Liu, and Shuyao He. Research on intelligent aided diagnosis system of medical image based on computer deep learning. *arXiv preprint arXiv:2404.18419*, 2024.
- [18] Sheng Chai, Xinghui Fei, Yulu Wang, Lu Dai, and Mingxiu Sui. Deep learning-based lung medical image recognition. *International Journal of Innovative Research in Computer Science & Technology*, 12(3):100–105, 2024.
- [19] Ziyang Yao, Fei Lin, Sheng Chai, Weijie He, Lu Dai, and Xinghui Fei. Integrating medical imaging and clinical reports using multimodal deep learning for advanced disease analysis. *arXiv preprint arXiv:2405.17459*, 2024.
- [20] Jason Smucny, Ge Shi, and Ian Davidson. Deep learning in neuroimaging: Overcoming challenges with emerging approaches. *Frontiers in Psychiatry*, 13:912600, 2022.

- [21] Shaojie Li, Yuhong Mo, and Zhenglin Li. Automated pneumonia detection in chest x-ray images using deep learning model. *Innovations in Applied Engineering and Technology*, pages 1–6, 2022.
- [22] Yuhong Mo, Shaojie Li, Yushan Dong, Ziyi Zhu, and Zhenglin Li. Password complexity prediction based on roberta algorithm. *Applied Science and Engineering Journal for Advanced Research*, 3(3):1–5, 2024.
- [23] Zhimin Chen, Longlong Jing, Liang Yang, Yingwei Li, and Bing Li. Class-level confidence based 3d semi-supervised learning. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 633–642, 2023.
- [24] Zhimin Chen, Longlong Jing, Yang Liang, YingLi Tian, and Bing Li. Multimodal semi-supervised learning for 3d objects. *arXiv preprint arXiv:2110.11601*, 2021.
- [25] Zhimin Chen, Longlong Jing, Yingwei Li, and Bing Li. Bridging the domain gap: Self-supervised 3d scene understanding with foundation models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [26] Zhimin Chen, Yingwei Li, Longlong Jing, Liang Yang, and Bing Li. Point cloud self-supervised learning via 3d to multi-view masked autoencoder. *arXiv preprint arXiv:2311.10887*, 2023.
- [27] Yijie Weng and Jianhao Wu. Fortifying the global data fortress: a multidimensional examination of cyber security indexes and data protection measures across 193 nations. *International Journal of Frontiers in Engineering Technology*, 6(2), 2024. ISSN 2706-655X. doi: 10.25236/ijfet.2024.060206.
- [28] Yi Xin, Junlong Du, Qiang Wang, Zhiwen Lin, and Ke Yan. Vmt-adapter: Parameter-efficient transfer learning for multi-task dense scene understanding. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 16085–16093, 2024.
- [29] Tianchen Deng, Yaohui Chen, Leyan Zhang, Jianfei Yang, Shenghai Yuan, Danwei Wang, and Weidong Chen. Compact 3d gaussian splatting for dense visual slam. *arXiv preprint arXiv:2403.11247*, 2024.
- [30] Tianchen Deng, Guole Shen, Tong Qin, Jianyu Wang, Wentao Zhao, Jingchuan Wang, Danwei Wang, and Weidong Chen. Plgslam: Progressive neural scene representation with local to global bundle adjustment. *arXiv preprint arXiv:2312.09866*, 2023.
- [31] Yi Shen, Hao Liu, Xinxin Liu, Wenjing Zhou, Chang Zhou, and Yizhou Chen. Localization through particle filter powered neural network estimated monocular camera poses. *arXiv preprint arXiv:2404.17685*, 2024.
- [32] Hao Liu, Yi Shen, Wenjing Zhou, Yuelin Zou, Chang Zhou, and Shuyao He. Adaptive speed planning for unmanned vehicle based on deep reinforcement learning. *arXiv preprint arXiv:2404.17379*, 2024.
- [33] Tianchen Deng, Hongle Xie, Jingchuan Wang, and Weidong Chen. Long-term visual simultaneous localization and mapping: Using a bayesian persistence filter-based global map prediction. *IEEE Robotics & Automation Magazine*, 30(1):36–49, 2023.
- [34] Jinggang Yang, Kaiyang Zhou, Yixuan Li, and Ziwei Liu. Generalized out-of-distribution detection: A survey. *arXiv preprint arXiv:2110.11334*, 2021.
- [35] Chang Zhou, Yang Zhao, Jin Cao, Yi Shen, Xiaoling Cui, and Chiyu Cheng. Optimizing search advertising strategies: Integrating reinforcement learning with generalized second-price auctions for enhanced ad ranking and bidding, 2024.
- [36] Chang Zhou, Yang Zhao, Yuelin Zou, Jin Cao, Wenhan Fan, Yi Zhao, and Cheng Chiyu. Predict click-through rates with deep interest network model in e-commerce advertising, 05 2024.
- [37] Ge Shi, Jason Smucny, and Ian Davidson. Deep learning for prognosis using task-fMRI: A novel architecture and training scheme. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 1589–1597, 2022.
- [38] Wendong Yang, Yun Jiang, Yulin Chi, Zhengjia Xu, and Wenbin Wei. Long-term network structure evolution investigation for sustainability improvement: An empirical analysis on global top full-service carriers. *Aerospace*, 11(2):128, 2024.
- [39] Zhengjia Xu, Ivan Petrunin, Antonios Tsoyros, Raphael Grech, Pekka Peltola, and Smita Tiwari. Combination and selection of machine learning algorithms in gnss architecture design for concurrent executions with hil testing. In *2023 IEEE/AIAA 42nd Digital Avionics Systems Conference (DASC)*, pages 1–9. IEEE, 2023.
- [40] Yuelyu Ji, Yuhe Gao, Runxue Bao, Qi Li, Disheng Liu, Yiming Sun, and Ye Ye. Prediction of covid-19 patients' emergency room revisit using multi-source transfer learning. In *2023 IEEE 11th International Conference on Healthcare Informatics (ICHI)*, pages 138–144. IEEE, 2023.
- [41] Yuelyu Ji, Zhuochun Li, Rui Meng, Sonish Sivarajkumar, Yanshan Wang, Zeshui Yu, Hui Ji, Yushui Han, Hanyu Zeng, and Daqing He. Rag-rlrc-laysum at biolaysum: Integrating retrieval-augmented generation and readability control for layman summarization of biomedical texts. *arXiv preprint arXiv:2405.13179*, 2024.

- [42] David JC MacKay. A practical bayesian framework for backpropagation networks. *Neural computation*, 4(3): 448–472, 1992.
- [43] Dan Hendrycks and Kevin Gimpel. A baseline for detecting misclassified and out-of-distribution examples in neural networks. *arXiv preprint arXiv:1610.02136*, 2016.
- [44] Kimin Lee, Kibok Lee, Honglak Lee, and Jinwoo Shin. A simple unified framework for detecting out-of-distribution samples and adversarial attacks. *Advances in neural information processing systems*, 31, 2018.
- [45] Christophe Andrieu, Nando De Freitas, Arnaud Doucet, and Michael I Jordan. An introduction to mcmc for machine learning. *Machine learning*, 50:5–43, 2003.
- [46] Balaji Lakshminarayanan, Alexander Pritzel, and Charles Blundell. Simple and scalable predictive uncertainty estimation using deep ensembles. *Advances in neural information processing systems*, 30, 2017.
- [47] Terrance DeVries and Graham W Taylor. Learning confidence for out-of-distribution detection in neural networks. *arXiv preprint arXiv:1802.04865*, 2018.
- [48] Durk P Kingma and Prafulla Dhariwal. Glow: Generative flow with invertible 1x1 convolutions. *Advances in neural information processing systems*, 31, 2018.
- [49] Sungik Choi and Sae-Young Chung. Novelty detection via blurring. *arXiv preprint arXiv:1911.11943*, 2019.
- [50] Yi Xin, Siqi Luo, Haodi Zhou, Junlong Du, Xiaohong Liu, Yue Fan, Qing Li, and Yuntao Du. Parameter-efficient fine-tuning for pre-trained vision models: A survey. *arXiv preprint arXiv:2402.02242*, 2024.
- [51] Yi Xin, Junlong Du, Qiang Wang, Ke Yan, and Shouhong Ding. Mmap: Multi-modal alignment prompt for cross-domain multi-task learning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 16076–16084, 2024.
- [52] Yi Xin, Siqi Luo, Pengsheng Jin, Yuntao Du, and Chongjun Wang. Self-training with label-feature-consistency for domain adaptation. In *International Conference on Database Systems for Advanced Applications*, pages 84–99. Springer, 2023.
- [53] Tianchen Deng, Nailin Wang, Chongdi Wang, Shenghai Yuan, Jingchuan Wang, Danwei Wang, and Weidong Chen. Incremental joint learning of depth, pose and implicit scene representation on monocular camera in large-scale scenes. *arXiv preprint arXiv:2404.06050*, 2024.
- [54] Huajun Zhang, Su Diao, Yining Yang, Jiachen Zhong, and Yafeng Yan. Multi-scale image recognition strategy based on convolutional neural network. *Journal of Computing and Electronic Information Management*, 12(3): 107–113, 2024.
- [55] Zijun Gao, Qi Wang, Taiyuan Mei, Xiaohan Cheng, Yun Zi, and Haowei Yang. An enhanced encoder-decoder network architecture for reducing information loss in image semantic segmentation. *arXiv preprint arXiv:2406.01605*, 2024.
- [56] Qishi Zhan, Yuhan Ma, Erdi Gao, Dan Sun, and Haowei Yang. Innovations in time related expression recognition using lstm networks. *International Journal of Innovative Research in Computer Science & Technology*, 12(3): 120–125, 2024.
- [57] Yutian Yang, Zexi Chen, Yafeng Yan, Muqing Li, and Tana Gegen. A new method of image recognition based on deep learning generates adversarial networks and integrates traditional algorithms. *Journal of Computing and Electronic Information Management*, 13(1):57–61, 2024.
- [58] Panfeng Li, Youzuo Lin, and Emily Schultz-Fellenz. Contextual hourglass network for semantic segmentation of high resolution aerial imagery. *arXiv preprint arXiv:1810.12813*, 2019.
- [59] Zhicheng Ding, Panfeng Li, Qikai Yang, Siyang Li, and Qingtian Gong. Regional style and color transfer. *arXiv preprint arXiv:2404.13880*, 2024.
- [60] Yuelyu Ji, Yuheng Song, Wei Wang, Ruoyi Xu, Zhongqian Xie, and Huiyun Liu. Improving emotional expression and cohesion in image-based playlist description and music topics: A continuous parameterization approach. *arXiv preprint arXiv:2310.01248*, 2023.
- [61] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- [62] Yuelyu Ji, Zeshui Yu, and Yanshan Wang. Assertion detection large language model in-context learning lora fine-tuning. *arXiv preprint arXiv:2401.17602*, 2024.
- [63] Taiyuan Mei, Yun Zi, Xiaohan Cheng, Zijun Gao, Qi Wang, and Haowei Yang. Efficiency optimization of large-scale language models based on deep learning in natural language processing tasks. *arXiv preprint arXiv:2405.11704*, 2024.



- [64] Lingxi Xiao, Muqing Li, Yinqiu Feng, Meiqi Wang, Ziyi Zhu, and Zexi Chen. Exploration of attention mechanism-enhanced deep learning models in the mining of medical textual data. *arXiv preprint arXiv:2406.00016*, 2024.
- [65] Ke Xu, Yu Cheng, Shiqing Long, Junjie Guo, Jue Xiao, and Mengfang Sun. Advancing financial risk prediction through optimized lstm model performance and comparative analysis. *arXiv preprint arXiv:2405.20603*, 2024.
- [66] Panfeng Li, Qikai Yang, Xieming Geng, Wenjing Zhou, Zhicheng Ding, and Yi Nian. Exploring diverse methods in visual question answering. *arXiv preprint arXiv:2404.13565*, 2024.
- [67] Panfeng Li, Mohamed Abouelenien, and Rada Mihalcea. Deception detection from linguistic and physiological data streams using bimodal convolutional neural networks. *arXiv preprint arXiv:2311.10944*, 2023.
- [68] Zhenglin Li, Yangchen Huang, Mengran Zhu, Jingyu Zhang, Jinghao Chang, and Houze Liu. Feature manipulation for ddpn based change detection. *arXiv preprint arXiv:2403.15943*, 2024.
- [69] Yucheng Zhou, Tao Shen, Xiubo Geng, Chongyang Tao, Can Xu, Guodong Long, Binxing Jiao, and Daxin Jiang. Towards robust ranker for text retrieval. *arXiv preprint arXiv:2206.08063*, 2022.
- [70] Yucheng Zhou, Xiubo Geng, Tao Shen, Chongyang Tao, Guodong Long, Jian-Guang Lou, and Jianbing Shen. Thread of thought unraveling chaotic contexts. *arXiv preprint arXiv:2311.08734*, 2023.
- [71] Yucheng Zhou, Tao Shen, Xiubo Geng, Chongyang Tao, Jianbing Shen, Guodong Long, Can Xu, and Daxin Jiang. Fine-grained distillation for long document retrieval. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pages 19732–19740, 2024.
- [72] Yuhong Mo, Hao Qin, Yushan Dong, Ziyi Zhu, and Zhenglin Li. Large language model (llm) ai text generation detection based on transformer deep learning algorithm. *arXiv preprint arXiv:2405.06652*, 2024.
- [73] Yucheng Zhou and Guodong Long. Improving cross-modal alignment for text-guided image inpainting. *arXiv preprint arXiv:2301.11362*, 2023.
- [74] Tianrui Liu, Shaojie Li, Yushan Dong, Yuhong Mo, and Shuyao He. Spam detection and classification based on distilbert deep learning algorithm. *Applied Science and Engineering Journal for Advanced Research*, 3(3):6–10, 2024.
- [75] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- [76] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [77] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35:25278–25294, 2022.
- [78] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- [79] Jascha Sohl-Dickstein, Eric Weiss, Niru Maheswaranathan, and Surya Ganguli. Deep unsupervised learning using nonequilibrium thermodynamics. In *International conference on machine learning*, pages 2256–2265. PMLR, 2015.
- [80] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023.
- [81] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009.
- [82] Mircea Cimpoi, Subhransu Maji, Iasonas Kokkinos, Sammy Mohamed, and Andrea Vedaldi. Describing textures in the wild. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3606–3613, 2014.
- [83] Grant Van Horn, Oisin Mac Aodha, Yang Song, Yin Cui, Chen Sun, Alex Shepard, Hartwig Adam, Pietro Perona, and Serge Belongie. The inaturalist species classification and detection dataset. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 8769–8778, 2018.
- [84] Bolei Zhou, Agata Lapedriza, Aditya Khosla, Aude Oliva, and Antonio Torralba. Places: A 10 million image database for scene recognition. *IEEE transactions on pattern analysis and machine intelligence*, 40(6):1452–1464, 2017.

- [85] Jianxiong Xiao, James Hays, Krista A Ehinger, Aude Oliva, and Antonio Torralba. Sun database: Large-scale scene recognition from abbey to zoo. In *2010 IEEE computer society conference on computer vision and pattern recognition*, pages 3485–3492. IEEE, 2010.
- [86] Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. Reproducible scaling laws for contrastive language-image learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2818–2829, 2023.
- [87] Hualiang Wang, Yi Li, Huifeng Yao, and Xiaomeng Li. Clipn for zero-shot ood detection: Teaching clip to say no. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1802–1812, 2023.
- [88] Yifei Ming, Ziyang Cai, Jiuxiang Gu, Yiyu Sun, Wei Li, and Yixuan Li. Delving into out-of-distribution detection with vision-language representations. *Advances in neural information processing systems*, 35:35087–35102, 2022.
- [89] Atsuyuki Miyai, Qing Yu, Go Irie, and Kiyoharu Aizawa. Zero-shot in-distribution detection in multi-object settings using vision-language foundation models. *arXiv preprint arXiv:2304.04521*, 2023.
- [90] Dan Hendrycks, Steven Basart, Mantas Mazeika, Andy Zou, Joe Kwon, Mohammadreza Mostajabi, Jacob Steinhardt, and Dawn Song. Scaling out-of-distribution detection for real-world settings. *arXiv preprint arXiv:1911.11132*, 2019.
- [91] Shiyu Liang, Yixuan Li, and Rayadurgam Srikant. Enhancing the reliability of out-of-distribution image detection in neural networks. *arXiv preprint arXiv:1706.02690*, 2017.
- [92] Haoqi Wang, Zhizhong Li, Litong Feng, and Wayne Zhang. Vim: Out-of-distribution with virtual-logit matching. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 4921–4930, 2022.
- [93] Yiyu Sun, Yifei Ming, Xiaojin Zhu, and Yixuan Li. Out-of-distribution detection with deep nearest neighbors. In *International Conference on Machine Learning*, pages 20827–20840. PMLR, 2022.
- [94] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Conditional prompt learning for vision-language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16816–16825, 2022.