

# QOG: Question and Options Generation based on Language Model

**Jincheng Zhou**

ZHOIJINCHENG@GMAIL.COM

*Zhuoshi Technology, University of Electronic Science and Technology of China*

**Yue Hu**

*Zhuoshi Technology*

**Ya Wang**

*Zhuoshi Technology*

**Editors:** Vu Nguyen and Hsuan-Tien Lin

## Abstract

Question-Options Generation (QOG) is a task that involves generating a set of question-options pairs within a given input. This task has various applications, including fine-tuning large models, information retrieval, and automated multiple-choice question generation for education. In this paper, we develop QOG models using three different methods based on fine-tuning sequence-to-sequence language models (LMs). Experiments demonstrate that the end-to-end QOG model is computationally efficient and stable during both training and inference, outperforming other methods. Furthermore, our analysis indicates that our QOG models are competitive on the QOG task compared to the large language model Llama 3-8B.

**Keywords:** Question-Options Generation (QOG); Information retrieval; sequence-to-sequence language models

## 1. Introduction

Question-Options (QO) is derived from Question-Answering (QA), extending question-answer pairs by adding three text-related distractors. Compared to QA, QO provides more information by combining the correct answer with several specially designed incorrect answers. This information enables the model to incorporate more knowledge and improve its ability to identify potential errors. When used for fine-tuning large language model (Hu et al., 2021; Liu et al., 2021, 2023), the goal is to identify the correct answer from four candidate answers, which improves the model's understanding of the question and its ability to distinguish the differences between different options, making the model understand the text better. When used for model evaluation, whether the model can select the correct answer becomes a key indicator of its text learning and processing capabilities (Hendrycks et al., 2020; Huang et al., 2024; Cobbe et al., 2021).

Question and Options Generation (QOG) refers to the task of generating a set of question-options pairs given an input context (e.g. a paragraph). QOG can be used to develop unsupervised question answering and as a data augmentation tool (Alberti et al., 2019; Yu et al., 2018; Riabi et al., 2020; Singh et al., 2019; Longpre et al., 2019) to enhance the text understanding capabilities of large language models. QOG can also be used as an educational aid (Agarwal et al., 2019; Cai et al., 2023; Wang et al., 2023), to enhance information retrieval models (Nogueira et al., 2019; Pyatkin et al., 2021), and as a way to explain models.

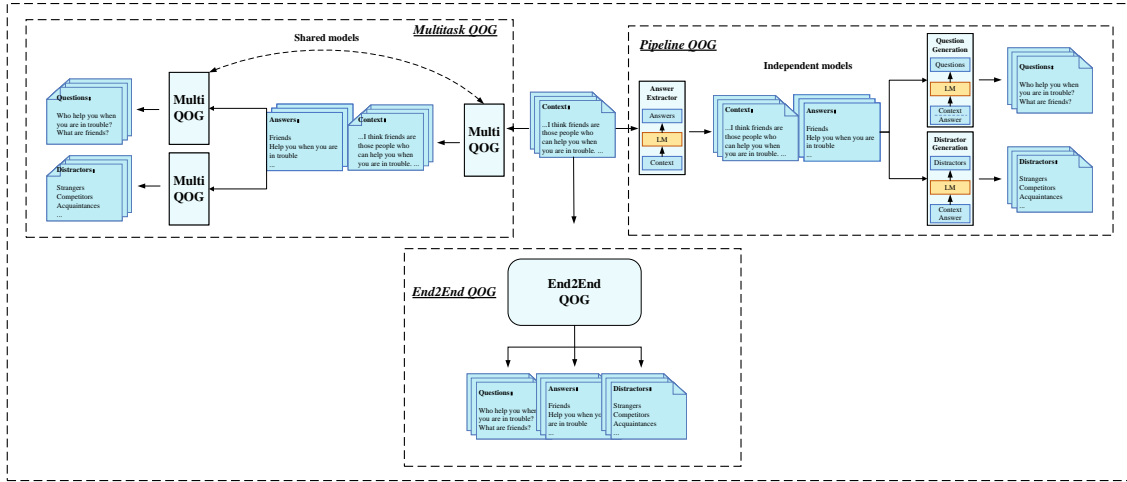


Figure 1: Overview of the considered QOG approaches.

QOG originates from Question Generation (QG)(Duan et al., 2017; Du et al., 2017; Ali et al., 2010), which involves generating a question for an answer given an input context. Compared to QG and QAG, QOG presents a more intricate challenge, as the correct answer and distractors must be constructed rather than assumed as part of the input. Currently, it is unknown which models are effective for the QOG task because no comprehensive comparative study has been established to date.

In this paper, we consider the QOG as a task of generating questions and options given a context, and compare three simple QOG methods based on fine-tuning encoder-decoder language models such as T5(Raffel et al., 2020). The three methods are common methods for fine-tuning language models now: (1) Pipeline QOG, which decomposes the task into three parts: answer extraction, question generation and distractor generation, and learns a separate model for each subtask; (2) Multi-task QOG, which uses a shared single model to train the three subtasks simultaneously instead of separate models; and (3) End-to-end QOG, which directly generates questions-options using end-to-end sequence-to-sequence learning. Finally, we introduce GPT-4 as a referee based on traditional evaluation methods and compare the three methods in multiple domains to objectively evaluate the cross-domain generalization ability of the models.

## 2. Related Work

There is no work using pre-trained LM for QOG, but there are related works on QG and QAG.

### 2.1. Question Generation

Question generation (QG) aims to generate questions given documents and answers. This approach has been applied in a variety of scenarios, including data augmentation(Alberti et al., 2019; Pellicer et al., 2023) and document retrieval(Nogueira et al., 2019; Hofstätter et al., 2020; Ram et al., 2023). Puri et al. (2020) fine-tuned QG’s autoregressive LM to generate related questions. These works focus on generating large-scale data at once without paying much attention to data quality. Xiong

and Wu (2020) followed the idea of adversarial generation and used question-answering agents and QG models to train adversarial models. This work used semantic similarity as an evaluation indicator to improve the quality of generated data, but did not focus on the generalization ability of the model in other fields. To this end, our work will focus on improving data quality while testing the generalization ability of the model with data sets from different fields.

## 2.2. Question-Answer Generation

Question-Answer Generation (QAG) generates question-answer pairs based on a given document. QAG can be used to develop QA models without human supervision and as an auxiliary tool for data augmentation of large language models. Bartolo et al. (2021) used QAG model to generate adversarial examples for QA, Lewis et al. (2021) improved extractive QA by generating millions of question-answer pairs through QAG, In both examples, the fine-tuned model is BART. In order to improve the recall rate of QA, Fang et al. (2020) regarded answer extraction as a classification problem and used RoBERTa(Liu et al., 2019) to implement it. Han et al. (2023) generated QA iteratively and improved the data quality of each iteration by modifying the seed set. Ushio et al. (2023) made a comparison of several QAG methods and established a complete system. These works can generate high-quality QA pairs, however they are limited to machine metrics and do not evaluate QA quality according to human standards.

## 2.3. QG & QAG Evaluation

In terms of evaluating the quality of QG, Zhang and Bansal (2019) believed that the traditional evaluation criteria were not accurate enough, they proposed using the QG model to generate questions for each answer in the data set, and then using the synthetic QA pairs to train the QA model. The performance of these QA models will indirectly measure the ability of the QG model. Sultan et al. (2020) also emphasized the limitations of traditional QG evaluation methods and introduced new indicators for evaluating diversity to better evaluate the quality of QG. These studies enrich the evaluation system by introducing new evaluation criteria. However, these criteria still have certain deviations from human evaluation criteria. Shortly after the release of GPT-4, Moore et al. (2023) proposed a method for evaluating the quality of multiple-choice questions based on GPT-4, with a correlation of more than 80% with human evaluation. In this paper, we also choose to introduce GPT-4 as part of the evaluation system to make the generated QO more in line with human evaluation standards.

## 3. Question & Options Generation

Given a context  $c$  (e.g. a paragraph), the goal of QOG is to generate question-options pairs that are relevant to the information in  $c$ :  $QO_c = \{(q^1, o^1), (q^2, o^2), \dots\}$ . In the following, we will introduce three different QOG methods based on fine-tuned language models.

### 3.1. Pipeline QOG

This approach decomposes the QOG task into three simpler subtasks: answer extraction (AE), question generation (QG) and distractor generation (DG). The AE, QG and DG models are designed to learn from each sample containing context, sentences, answers and corresponding questions,

thereby optimizing their abilities to generate relevant questions, distractors, and extract correct answers.

The AE model  $P_{ae}$  first generates an answer  $a$  in a given context  $c$ , and then the QG model  $P_{qg}$  generates a question  $q$  based on the context  $c$  and the answer  $a$ , which can be answered by the answer  $a$ . Finally, the DG model  $P_{dg}$  generates distractors  $d$  based on the context  $c$  and the answer  $a$ . The AE, QG, and DG models can be trained independently on any dataset consisting of triples  $(c, a, q)$  by maximizing the conditional log-likelihood iteration:

$$\tilde{a} = \operatorname{argmax}_a P_{ae}(a|c, s) \tag{1}$$

$$\tilde{q} = \operatorname{argmax}_q P_{qg}(q|c, s, a) \tag{2}$$

$$\tilde{d} = \operatorname{argmax}_d P_{dg}(d|c, s, a) \tag{3}$$

Similar to other sequence-to-sequence learning, the log-likelihood here is based on token-level predictions. When learning, the input to the AE model is in the form of:

$$[c_1, c_2, \dots, c_{|c|}]$$

where  $c_i$  is the  $i$ -th token in context  $c$ , and  $|n|$  represents the number of tokens in the text. When input to the QG model, the answer  $a$  is considered and the position of the answer  $a$  in the context is marked with  $\langle h1 \rangle$ . The form is:

$$[c_1, \dots, \langle h1 \rangle, a_1, \dots, a_{|a|}, \langle h1 \rangle, \dots, c_{|c|}]$$

where  $a_i$  is the  $i$ -th token in the answer  $a$ . The model will learn the pattern of generating a question from the highlighted answer. Finally, the answer and context are input into the model  $P_{dg}$ :

$$[c_1, \dots, \langle h1 \rangle, a_1, \dots, a_{|a|}, \langle h1 \rangle, \dots, c_{|c|}]$$

At inference time, we replace the input answer  $a$  to the QG(2) and DG(3) models during training with the prediction result  $\tilde{a}$  of the AE model(1), and then predict the context  $c$  to obtain the generated question-options. Since the result  $\tilde{a}$  is used as the input of  $P_{qg}$  and  $P_{dg}$ , the effect of this method almost depends on  $P_{ae}$ .

### 3.2. Multitask QOG

The method mentioned in 3.1 trains an independent model for each subtask. Instead of this, Multitask QOG adopts a multi-task learning approach to fine-tune a shared model for AE, QG, and DG at the same time. To be precise, we mix the training data of AE, QG and DG together, and a random batch is extracted at each fine-tuning iteration. Each subtask is distinguished by adding a task prefix at the beginning of the input text: “extract answer” (AE), “question generation” (QG), and “distractor generation” (DG). The loss function will combine the loss functions of AE, QG, and DG, and the total loss is the weighted sum of the three:

$$L = \alpha L_{AE} + \beta L_{QG} + \gamma L_{DG} \tag{4}$$

where  $\alpha$ ,  $\beta$ , and  $\gamma$  are hyperparameters. This design enables the model to jointly learn three different but related task modes at once, thereby improving the overall generalization ability and efficiency.

### 3.3. End2end QOG

This method directly inputs the context  $c$  and outputs the text containing all question-options pairs. We can model this by converting the question-options pairs in the dataset into a flattened sentence  $y$ , and fine-tuning a sequence-to-sequence model to generate  $y$  based on the context  $c$ . The format of  $y$  is as follows:

$$\mathcal{T}(\mathcal{Q}_c) = \text{“question:}q_1\text{, options:}o_1\text{|question:}q_2\text{, options:}o_2\text{|...”} \quad (5)$$

where each pair of question-options is converted to the format of  $y$  and connected by the separator '|'. The end-to-end QOG model  $P_{\text{qog}}$  is optimized by maximizing the following conditional log-likelihood:

$$\tilde{y} = \textit{argmax}_y P_{\text{qog}}(y|c) \quad (6)$$

## 4. Evaluation

### 4.1. Experimental Setting

**Data.** The data for training QOG is a multiple-choice question dataset generated based on SQuAD. We send each pair of QA in SQuAD to a large language model (such as GPT-4) to generate distractors to form the dataset SQuAD-QO. For SQuADShifts and FinQA, we generated the test sets SQuADShifts-QO and FinQA-QO in the same way. The relevant datasets have been publicly released on [HuggingFace](#).

Approach	Aver	Amazon	Wiki	NYT	Reddit	Fin	
<i>Llama 3-8B</i>	49.79	51.34	47.26	<u>59.02</u>	49.92	41.43	
T5 <sup>SMALL</sup>	Pipeline	42.99	42.74	40.47	42.76	41.12	<b>51.90</b>
	Multitask	46.03	<b>50.40</b>	41.92	43.68	46.11	48.03
	End2end	<b>47.98</b>	48.41	<b>44.72</b>	<b>48.47</b>	<b>47.48</b>	50.84
T5 <sup>BASE</sup>	Pipeline	46.45	48.52	43.46	44.43	45.53	<b>55.29</b>
	Multitask	47.05	47.84	45.84	51.08	44.56	45.93
	End2end	<b>50.78</b>	<b>49.90</b>	<b>47.94</b>	<b>52.14</b>	<b>51.14</b>	52.77
T5 <sup>LARGE</sup>	Pipeline	51.45	50.73	48.42	46.27	49.82	<u>62.01</u>
	Multitask	51.61	48.95	49.22	49.19	52.65	58.04
	End2end	<u>54.66</u>	<u>54.58</u>	<u>51.28</u>	<b>55.56</b>	<u>52.16</u>	59.71

Table 1: QO evaluation results( $F_1$ ) of different QOG models on the test set. For comparison, we introduced Llama 3-8B. The best score of QOG methods in each LM is shown in bold, and the best result in each domain across all models is underlined.

**Evaluation.** Since QOG’s output involves a variety of questions and options, traditional natural language generation metrics are not applicable to it. In order to evaluate the quality of generated questions and options (QO) comprehensively, we adopted the following two methods: 1) We randomly select 100 questions in the generated QO dataset and call GPT-4 to answer them, the more

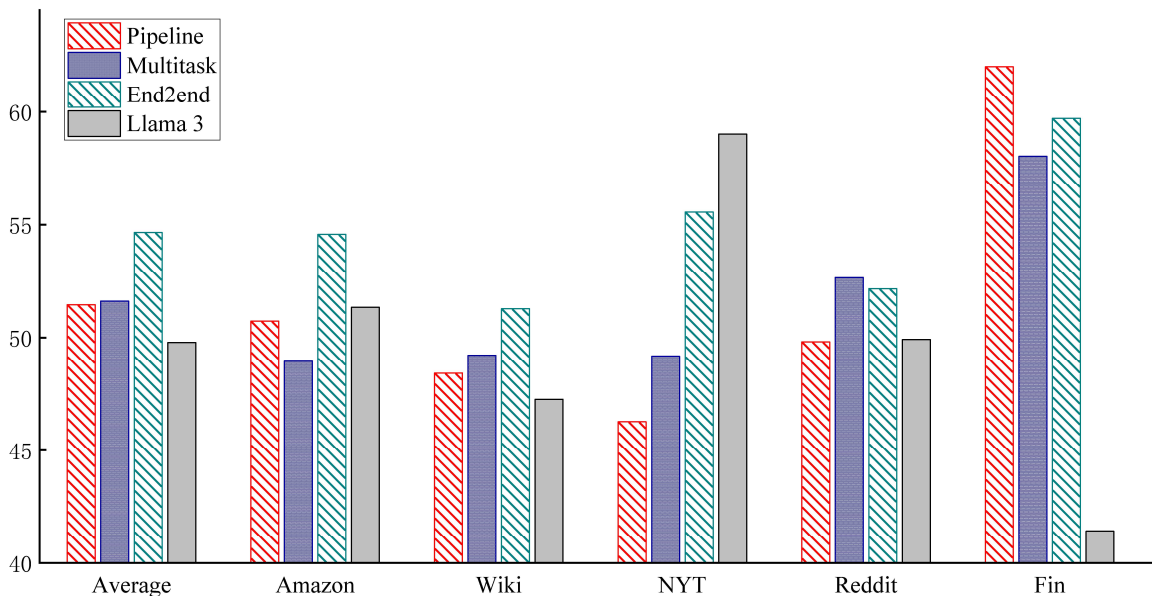


Figure 2: QO quality assessment results ( $F_1$  scores, 95% confidence intervals) generated by T5<sub>LARGE</sub> multitask/pipeline/end2end on different domain datasets, compared with Llama 3-8B.

questions answered correctly indicates the higher quality of the generated QOs, where high quality only indicates answerability, as we noticed that the model sometimes generates questions with unclear meanings or fails to generate them properly. 2) We generate a test set with a different dataset than SQuAD and use the F1 scores to assess the generalisation ability of the QOG model to other domains. For this purpose, we choose two datasets, SQuADShifts, which covers English reading comprehension tasks in four domains (Amazon/Wiki/Nyt/Reddit), and FinQA, which is a Q&A dataset in the financial domain. They cover Q&A in different domains and can effectively judge the applicability and flexibility of the model within each domain.

**T5 & Llama 3.** For the three approaches mentioned above (i.e., pipelined, multitasking, and end-to-end), we use T5 as the base language model for our experiments. The model weights used include T5<sub>-small,base,large</sub>, which are all open source on the HuggingFace platform. In addition, we report the results of the latest open-source large model Llama 3-8B as a QOG model and compare it with T5.

Dataset	Size
SQuAD-QO	87,399
SQuADShifts-QO	37,691
FinQA-QO	8,281

Table 2: Size of Datasets

## 4.2. Results

Table 1 shows the evaluation results for the three methods considered. From T5<sub>SMALL</sub> to T5<sub>LARGE</sub>, the scores are improving for either method, showing that the model size has a significant positive impact on the performance. Best model among all models T5<sub>LARGE</sub>(End2end) achieves the best results in three of the five domains and outperforms Llama 3-8B on average. Even smaller models, such as T5<sub>SMALL</sub>, generate QO pairs of decent quality.

Given the results, the End2end approach achieved the best results on the vast majority of domains, with the highest average scores on T5 models of all sizes. Our analysis is that the effect of the

Pipeline method depends on the first AE model, which passes its inputs backwards, and the overall effect is actually decreasing. The Multitask method shares the same neural network, so the output of the three tasks is more stable. The problem with it is that only one third of the parameters are available for each task on average, which makes the model’s performance degrade. The advantage of End2end is that it treats the QOG as a single task, all parameters are updated during training to optimise this task, which gives the model the best generalisation and performance of the three.

We also notice that the Pipeline method performs optimally on FinQA, because the answers of FinQA are mainly numbers of short length (e.g. 236), and the AE model focuses on this while learning and obtains the most efficient extraction pattern. This brings us some inspirations: If the data of QOG has some regularity, we can use the Pipeline method to train the model to get better performance.

#### 4.3. Assessing the quality of QO pairs using GPT-4

GPT-4 is currently the best large language model and the one that best meets human evaluation criteria. In order to comprehensively evaluate the quality of the QO pairs generated by each QOG model, we use GPT-4 as the judging model. The specific method is to have each QOG model generate 100 QO pairs in different fields, and then GPT-4 answers these QO pairs. If GPT-4 answers correctly, it means that the question-options are logical and answerable, which indicates that these QO pairs are qualified. In this way, we performed a comprehensive evaluation of the quality of the QOs generated by each model, and the results are shown in Table 3.

We found that Llama 3-8B, which previously performed mediocly in  $F_1$  scores, achieved the best results in all areas under the judgement of GPT-4, indicating that the QO generated by Llama 3 is superior to other models in terms of logic. One possible explanation is that Llama 3 does not have a fixed way of generating QO, while T5, which we have fine-tuned, has a fixed way of generating QO, resulting in a higher score when calculating similarity. This result shows that it is not enough to evaluate only from the  $F_1$  score, the method we introduced GPT-4 to evaluate will provide a valuable quality indicator for the QO generated by the QOG model.

Although the proposed model did not outperform the Llama 3-8B, there is one positive outcome: the fine-tuned best model, T5<sub>LARGE</sub>, remains competitive under this evaluation and can accurately generate QOs that meet human requirements.

#### 4.4. QOG Model Comparison

In this paper, we have compared the performance of three QOG methods. However, performance is not the only criterion to be considered when choosing a QOG

Approach	GPT-4
Llama 3-8B	<b>94</b>
T5 <sub>SMALL</sub> (pipeline)	64
T5 <sub>SMALL</sub> (multitask)	53
T5 <sub>SMALL</sub> (end2end)	61
T5 <sub>BASE</sub> (pipeline)	79
T5 <sub>BASE</sub> (multitask)	68
T5 <sub>BASE</sub> (end2end)	76
T5 <sub>LARGE</sub> (pipeline)	85
T5 <sub>LARGE</sub> (multitask)	77
T5 <sub>LARGE</sub> (end2end)	83

Table 3: Mean scores for each QOG model under the GPT-4 judgement

Approach	Compute(ms)	Memory(MB)
T5 <sub>SMALL</sub>	Pipeline	363.62
	Multitask	105.94
	End2end	142.14
T5 <sub>BASE</sub>	Pipeline	909.23
	Multitask	217.75
	End2end	301.83
T5 <sub>LARGE</sub>	Pipeline	1480.73
	Multitask	1597.59
	End2end	724.96

Table 4: Inference time and memory usage of each QOG model (CPU environment, results are averaged over 100 experiments)

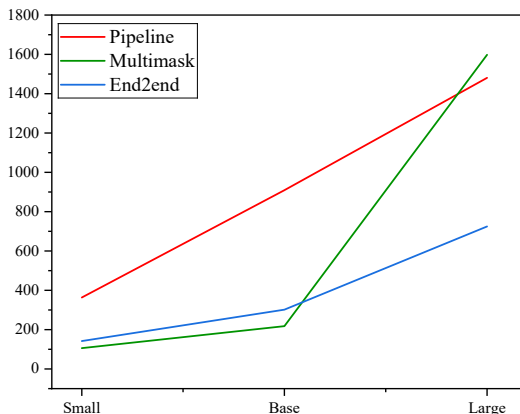


Figure 3: Inference time

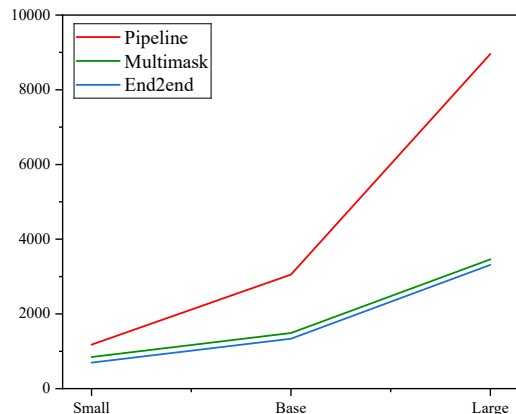


Figure 4: Memory usage

model, as each method has its own advantages and limitations in terms of computational cost and usability. We conducted experiments on each QOG model in the same environment to verify their inference time and memory usage, and the results are shown in Table 4.

In terms of computational resources consumed, the End2end method outperforms the other two methods because it can generate QO pairs in a single inference process. In contrast, both the Pipeline and Multimask methods require a total of three inference sessions to generate QO pairs. The computational cost of all three methods is proportional to the number of tokens in the input text. From the perspective of memory usage, both Multimask and End2end methods use only one model to complete the task, while the Pipeline method consists of three models, which is three times as much as the other two in terms of memory.

Finally, the performance of the Pipeline method depends on the ability of answer extraction and is limited by the fact that the three models are independent of each other in terms of their consistency with respect to the objective, although it performs very well on datasets with regular answers. The Multimask method shares a single model, which allows consistency between the three tasks to be improved, however each task gets only one third of the parameters on average, which is a limitation of its performance. The End2end method treats the QOG as a whole task and therefore it performs better than the other methods in generating QO pairs.

## 5. Conclusion

In this paper, we take QOG as a task for generating questions and options given an input context, and train QOG models using three different approaches. To evaluate them, we propose two approaches: First, we use the QOG models to generate QO pairs on different domains and use  $F_1$  scores to assess the generalisation ability of the QOG models to other domains; Second, GPT-4 is utilised to select the correct options in the QOs, with higher GPT-4 scores mean better question quality. The evaluation shows that the End2end QOG model is not only the fastest to generate, but also the most effective. The findings of this study are encouraging, as the quality of the QO datasets generated by the QOG model is close to that generated by Llama 3, and they consume much less resources than the large language model.



## Limitations

For our research, the input to our QOG models is limited to 1024 tokens, for longer texts it will not work. The options used for training are short and the logic for answering questions is simple, as a result, our models cannot be used to generate longer and more complex options as well. The models are only applicable to English scenarios, if we want to apply them to other languages, we need a multilingual QO dataset for training and evaluation. We will try our best to solve these limitations in the future.

## References

- Abhishek Agarwal, Nikhil Sachdeva, Raj Kamal Yadav, Vishaal Udandarao, Vrinda Mittal, Anubha Gupta, and Abhinav Mathur. Eduqa: Educational domain question answering system using conceptual network mapping. In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 8137–8141. IEEE, 2019.
- Chris Alberti, Daniel Andor, Emily Pitler, Jacob Devlin, and Michael Collins. Synthetic qa corpora generation with roundtrip consistency. *arXiv preprint arXiv:1906.05416*, 2019.
- Husam Ali, Yllias Chali, and Sadid A Hasan. Automatic question generation from sentences. In *Actes de la 17e conférence sur le Traitement Automatique des Langues Naturelles. Articles courts*, pages 213–218, 2010.
- Max Bartolo, Tristan Thrush, Robin Jia, Sebastian Riedel, Pontus Stenetorp, and Douwe Kiela. Improving question answering model robustness with synthetic adversarial data generation. *arXiv preprint arXiv:2104.08678*, 2021.
- Pengshan Cai, Zonghai Yao, Fei Liu, Dakuo Wang, Meghan Reilly, Huixue Zhou, Lingxi Li, Yi Cao, Alok Kapoor, Adarsha Bajracharya, et al. Paniniqa: Enhancing patient education through interactive question answering. *Transactions of the Association for Computational Linguistics*, 11: 1518–1536, 2023.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Xinya Du, Junru Shao, and Claire Cardie. Learning to ask: Neural question generation for reading comprehension. *arXiv preprint arXiv:1705.00106*, 2017.
- Nan Duan, Duyu Tang, Peng Chen, and Ming Zhou. Question generation for question answering. In *Proceedings of the 2017 conference on empirical methods in natural language processing*, pages 866–874, 2017.
- Yuwei Fang, Shuohang Wang, Zhe Gan, Siqi Sun, Jingjing Liu, and Chenguang Zhu. Accelerating real-time question answering via question generation. *arXiv preprint arXiv:2009.05167*, 2020.
- Xu Han, Kunlun Zhu, Shihao Liang, Zhi Zheng, Guoyang Zeng, Zhiyuan Liu, and Maosong Sun. Qasnowball: An iterative bootstrapping framework for high-quality question-answering data generation. *arXiv preprint arXiv:2309.10326*, 2023.

- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- Sebastian Hofstätter, Hamed Zamani, Bhaskar Mitra, Nick Craswell, and Allan Hanbury. Local self-attention over long text for efficient document retrieval. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2021–2024, 2020.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu, Chuancheng Lv, Yikai Zhang, Yao Fu, et al. C-eval: A multi-level multi-discipline chinese evaluation suite for foundation models. *Advances in Neural Information Processing Systems*, 36, 2024.
- Patrick Lewis, Yuxiang Wu, Linqing Liu, Pasquale Minervini, Heinrich Küttler, Aleksandra Piktus, Pontus Stenetorp, and Sebastian Riedel. Paq: 65 million probably-asked questions and what you can do with them. *Transactions of the Association for Computational Linguistics*, 9:1098–1115, 2021.
- Xiao Liu, Kaixuan Ji, Yicheng Fu, Weng Lam Tam, Zhengxiao Du, Zhilin Yang, and Jie Tang. P-tuning v2: Prompt tuning can be comparable to fine-tuning universally across scales and tasks. *arXiv preprint arXiv:2110.07602*, 2021.
- Xiao Liu, Yanan Zheng, Zhengxiao Du, Ming Ding, Yujie Qian, Zhilin Yang, and Jie Tang. Gpt understands, too. *AI Open*, 2023.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- Shayne Longpre, Yi Lu, Zhucheng Tu, and Chris DuBois. An exploration of data augmentation and sampling techniques for domain-agnostic question answering. *arXiv preprint arXiv:1912.02145*, 2019.
- Steven Moore, Huy A Nguyen, Tianying Chen, and John Stamper. Assessing the quality of multiple-choice questions using gpt-4 and rule-based methods. In *European Conference on Technology Enhanced Learning*, pages 229–245. Springer, 2023.
- Rodrigo Nogueira, Wei Yang, Jimmy Lin, and Kyunghyun Cho. Document expansion by query prediction. *arXiv preprint arXiv:1904.08375*, 2019.
- Lucas Francisco Amaral Orosco Pellicer, Taynan Maier Ferreira, and Anna Helena Reali Costa. Data augmentation techniques in natural language processing. *Applied Soft Computing*, 132: 109803, 2023.

- Raul Puri, Ryan Spring, Mostofa Patwary, Mohammad Shoeybi, and Bryan Catanzaro. Training question answering models from synthetic data. *arXiv preprint arXiv:2002.09599*, 2020.
- Valentina Pyatkin, Paul Roit, Julian Michael, Reut Tsarfaty, Yoav Goldberg, and Ido Dagan. Asking it all: Generating contextualized questions for any semantic role. *arXiv preprint arXiv:2109.04832*, 2021.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21:1–67, 2020.
- Ori Ram, Yoav Levine, Itay Dalmedigos, Dor Muhlgay, Amnon Shashua, Kevin Leyton-Brown, and Yoav Shoham. In-context retrieval-augmented language models. *Transactions of the Association for Computational Linguistics*, 11:1316–1331, 2023.
- Arij Riabi, Thomas Scialom, Rachel Keraron, Benoît Sagot, Djamé Seddah, and Jacopo Staiano. Synthetic data augmentation for zero-shot cross-lingual question answering. *arXiv preprint arXiv:2010.12643*, 2020.
- Jasdeep Singh, Bryan McCann, Nitish Shirish Keskar, Caiming Xiong, and Richard Socher. Xlda: Cross-lingual data augmentation for natural language inference and question answering. *arXiv preprint arXiv:1905.11471*, 2019.
- Md Arafat Sultan, Shubham Chandel, Ramón Fernandez Astudillo, and Vittorio Castelli. On the importance of diversity in question generation for qa. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 5651–5656, 2020.
- Asahi Ushio, Fernando Alva-Manchego, and Jose Camacho-Collados. An empirical comparison of lm-based question and answer generation methods. *arXiv preprint arXiv:2305.17002*, 2023.
- Yi Wang, Jinsheng Deng, Xi Yang, Jianyu Yi, and Zhaohui Ye. Mcqa: A responsive question-answering system for online education. *Sensors & Materials*, 35, 2023.
- Peixi Xiong and Ying Wu. Ta-student vqa: Multi-agents training by self-questioning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10065–10075, 2020.
- Adams Wei Yu, David Dohan, Quoc Le, Thang Luong, Rui Zhao, and Kai Chen. Fast and accurate reading comprehension by combining self-attention and convolution. In *International conference on learning representations*, volume 2, 2018.
- Shiyue Zhang and Mohit Bansal. Addressing semantic drift in question generation for semi-supervised question answering. *arXiv preprint arXiv:1909.06356*, 2019.

## Appendix A. Hyper Parameters

In fine-tuning each QOG model, we searched for the optimal hyperparameters, and [Table 5](#) shows the best hyperparameters. The maximum input length is fixed as 512, and the maximum output length is 256.

Approach	Model	Epoch	LR	Batch
Pipeline(AE)	T5 <sub>SMALL</sub>	6	0.0001	256
Pipeline(QG)	T5 <sub>SMALL</sub>	9	0.0001	64
Pipeline(DG)	T5 <sub>SMALL</sub>	13	0.00005	64
Multitask	T5 <sub>SMALL</sub>	7	0.0001	128
End2end	T5 <sub>SMALL</sub>	16	0.0001	128
Pipeline(AE)	T5 <sub>BASE</sub>	8	0.0001	64
Pipeline(QG)	T5 <sub>BASE</sub>	5	0.0001	32
Pipeline(DG)	T5 <sub>BASE</sub>	13	0.00005	32
Multitask	T5 <sub>BASE</sub>	7	0.0001	64
End2end	T5 <sub>BASE</sub>	17	0.0001	64
Pipeline(AE)	T5 <sub>LARGE</sub>	9	0.0001	32
Pipeline(QG)	T5 <sub>LARGE</sub>	6	0.00005	32
Pipeline(DG)	T5 <sub>LARGE</sub>	8	0.00001	32
Multitask	T5 <sub>LARGE</sub>	5	0.0001	32
End2end	T5 <sub>LARGE</sub>	12	0.0001	32

Table 5: Optimal hyperparameters for each QOG model.

## Appendix B. Additional Results of LLM QO evaluation

[Table 6](#) shows the QO evaluation results of some large language models with small parameters. Qwen2-7B has the highest score among all models. Phi-3, as a smaller parameter model, also performs well in the QO evaluation.

## Appendix C. Additional Results of GPT-4 evaluation

We also use the GPT evaluation method to evaluate the QO generation quality of each llm. The result is shown in [Table 7](#).

Model	Aver	Amazon	Wiki	NYT	Reddit	Fin
Qwen2-7B	57.98	47.37	58.72	55.29	52.51	76.03
Qwen1.5-MoE-A2.7B	48.73	34.16	55.29	43.56	35.91	74.72
Deepseek-7B	54.32	51.58	37.78	61.20	62.09	58.95
GLM-4-9B	42.00	51.56	43.06	8.61	36.24	70.55
Baichuan2-7B	43.64	48.82	33.07	39.01	18.35	78.97
Mistral-7B	38.68	42.86	34.23	37.32	44.45	34.54
Gemma-7B	43.38	48.59	46.67	57.45	10.93	53.26
Phi-3-3.8B	52.98	48.25	52.01	70.48	51.07	43.09

Table 6: QO evaluation results( $F_1$ ) of LLM on the test set.

Model	GPT-4
Qwen2-7B	98
Qwen1.5-MoE-A2.7B	88
Deepseek-7B	95
GLM-4-9B	81
Baichuan2-7B	85
Mistral-7B	83
Gemma-7B	93
Phi-3-3.8B	87

Table 7: Mean scores for each LLM under the GPT-4 judgement