

GroPrompt: Efficient Grounded Prompting and Adaptation for Referring Video Object Segmentation

Ci-Siang Lin^{1,2*†} I-Jieh Liu^{1*} Min-Hung Chen² Chien-Yi Wang² Sifei Liu²
Yu-Chiang Frank Wang^{1,2}

¹Graduate Institute of Communication Engineering, National Taiwan University, Taiwan

²NVIDIA

{d08942011, r11942087, ycwang}@ntu.edu.tw, {minghungc, chienyiw, sifeil}@nvidia.com

Abstract

*Referring Video Object Segmentation (RVOS) aims to segment the object referred to by the query sentence throughout the entire video. Most existing methods require end-to-end training with dense mask annotations, which could be computation-consuming and less scalable. In this work, we aim to efficiently adapt foundation segmentation models for addressing RVOS from weak supervision with the proposed **Grounded Prompting (GroPrompt)** framework. More specifically, we propose **Text-Aware Prompt Contrastive Learning (TAP-CL)** to enhance the association between the position prompts and the referring sentences with only box supervisions, including **Text-Contrastive Prompt Learning (TextCon)** and **Modality-Contrastive Prompt Learning (ModalCon)** at frame level and video level, respectively. With the proposed TAP-CL, our GroPrompt framework can generate temporal-consistent yet text-aware position prompts describing locations and movements for the referred object from the video. The experimental results in the standard RVOS benchmarks (Ref-YouTube-VOS, Ref-DAVIS17, A2D-Sentences, and JHMDB-Sentences) demonstrate the competitive performance of our proposed GroPrompt framework given only bounding box weak supervisions.*

1. Introduction

Referring Video Object Segmentation (RVOS), aims to segment the object referred to by a sentence query throughout the entire video. In contrast to RIS, RVOS is particularly faced with dynamic visual challenges, such as position and size variation, pose deformation, object occlusion or exit, and scene variation. Moreover, the referring sentence may contain long-term motions or actions (e.g., “a gold fish on

the left swimming towards the top right”), which could not be easily recognized from a single frame. To address this challenging task, many works [15, 21, 27, 30, 37, 38, 41, 42, 44] have been proposed. URVOS [37] is pioneering as a unified framework for referring video segmentation, which introduces memory attention modules to retrieve relevant information from the previous frame and encourage temporal consistency. With the rapid development of Transformer, ReferFormer [42] adopts encoder and decoder layers in the Transformer model and views language as queries to attend to the referred object, and an instance matching strategy is utilized to achieve object tracking. Recent works like FS-RVOS [21] and OnlineRefer [41] further extend RVOS into the few-shot setting and online pipeline to handle limited samples and ongoing videos in real-world scenarios, respectively. Nevertheless, most existing methods require end-to-end training for vision-language models, which could be computationally expensive and time-consuming. Moreover, the requirement of dense mask annotations for training impedes the scalability of those approaches.

Recently, foundation segmentation models [20, 40, 58] has been proposed. By leveraging numerous training data and employing large-scale model architectures, they can produce high-quality object masks according to various prompts such as points or boxes, and have shown overwhelming generalizability on various datasets, setting superior benchmarks for segmentation tasks. However, there are still challenges in the RVOS problem not addressed by those foundation models. For example, SAM [20] is trained solely with images and their associated masks, not tailored to handle natural language descriptions and video data in RVOS. While it is possible to adapt SAM to the task of RVOS by incorporating grounding models (e.g., [25]) to generate text-associated position prompts and tracking models (e.g., [10]) to capture object motions across video frames, such naive combination of off-the-shelf models has shown to be suboptimal [23], as they are individually

*Equal contribution.

†Work done during an internship at NVIDIA.

trained for different tasks. Therefore, a question arises: “How can we effectively exploit foundation segmentation models to address RVOS?” We argue that the RVOS problem can be decomposed into *referring*, *video*, and *segmentation* factors, and leave the segmentation problem to foundation segmentation models. We only focus on addressing the referring and video factors as current foundation models can already tackle to segmentation problem effectively.

In this paper, we aim to efficiently adapt image-based foundation segmentation models for addressing referring video object segmentation from weak supervision. To achieve this goal, we propose a novel ***Grounded Prompting (GroPrompt)*** framework, which advances vision-language learning to produce temporal-consistent yet text-aware position prompts for segmentation purposes. More specifically, we propose ***Text-Aware Prompt Contrastive Learning (TAP-CL)*** to enhance the association between the position prompts and the referring sentences with only box supervisions, including ***Text-Contrastive Prompt Learning (TextCon)*** and ***Modality-Contrastive Prompt Learning (ModalCon)*** at frame level and video level, respectively. For TextCon, we enforce our GroPrompt framework to generate distinct position prompts for different referring sentences within each video frame. As for the ModalCon, given that the sentence description may contain long-term motions or actions spanning across different moments, we propose to align the whole sequence of position prompts and the corresponding object with the input text for each video clip. With the proposed TAP-CL, our GroPrompt framework can generate temporal-consistent yet text-aware position prompts describing locations and movements for the referred object from the video. More importantly, our derived position prompts would be utilized to instruct image-based foundation segmentation models to produce object masks, enabling efficient adaptation to referring video object segmentation without requiring dense mask annotations. The experimental results in the standard RVOS benchmarks (Ref-YouTube-VOS, Ref-DAVIS17, A2D-Sentences, and JHMDB-Sentences) demonstrate the competitive performance of our proposed GroPrompt framework given only bounding box weak supervisions.

We highlight the contributions of this paper as follows:

- We propose a novel ***Grounded Prompting (GroPrompt)*** framework, which performs efficient prompting and adapts image-based segmentation models to address referring video object segmentation without additional finetuning.
- To generate temporal-consistent yet text-aware position prompts for segmentation purposes, we propose to jointly perform ***Text-Contrastive Prompt Learning*** and ***Modality-Contrastive Prompt Learning*** at frame-level

and video-level, respectively.

- The derived position prompts would be utilized to instruct image-based foundation segmentation models to produce object masks, enabling efficient adaptation to referring video object segmentation with $7\times$ fewer trainable parameters compared with SOTAs.

2. Related Work

2.1. Referring Video Object Segmentation

Referring Video Object Segmentation (RVOS) [15, 27, 30, 38, 41, 42, 44] strives to segment the object described by a free-form sentence query across the entire video duration. Recently, ReferFormer [42] views language as queries to pay attention to the referred object by adopting an encoder-decoder style in the transformer. However, this work only supports offline training and inference, limiting its usage in real-world scenarios. More recently, OnlineRefer [41] further proposes an online RVOS setting to deal with the issues about offline limits, which makes it more possible to adapt to real-world scenarios. Nevertheless, most existing methods require end-to-end training for vision-language models, which could be computationally expensive and time-consuming. Moreover, the requirement of dense mask annotations for training impedes the scalability of those approaches. Instead, we propose to exploit foundation segmentation models without text- and temporal-aware prompting, which is trained without mask annotations and supports online settings.

2.2. Foundation Segmentation Models

In recent years, foundation vision models have gained massive attention given their remarkable generalization capabilities on various downstream tasks. More recently, SAM [20] has introduced a foundation model specifically tailored for segmentation tasks. SAM allows specific position prompts (*e.g.*, points, boxes, *etc.*) to demonstrate the zero-shot ability on the open vocabulary segmentation tasks with novel image distributions. Several works have studied the versatility of SAM, including remote sensing images [5, 39], medical image analysis [6, 9, 28, 43], and adaptation to video-based tracking task [10, 35, 49], *etc.*

For adaptation to tracking tasks with SAM, SAM-PT [35] designs a point-based prompt enhancement for the original SAM point prompt to support classic video object segmentation tasks, while neglecting the importance of text prompt for advanced referring video object segmentation. Another example SAM-Track [10] attempts to utilize SAM for segmentation and detection of objects while the DeAOT [51] module captures the motion across frames for tracking the objects. Though it is possible to combine text-grounding detection models (*e.g.*, Ground-

ing DINO [25]) with SAM-Track to tackle RVOS, RefSAM [23] has studied the possible concerns and indicates the unsatisfactory performance compared with current SOTAs in RVOS tasks. Different from the above, we propose temporal-aware prompting with foundation segmentation models (e.g., SAM) to tackle RVOS problems.

3. Proposed Method

3.1. Overview

Problem Definition. For the sake of completeness, we first define the problem setting and notations used in this paper. In Referring Video Object Segmentation (RVOS), we assume that the training data contain a set of N videos, where each video $V = \{I_t\}_{t=1}^T$ is a sequence of T frames and is associated with a set of referring sentences $S = \{S^i\}_{i=1}^M$ describing M distinct objects. The goal of RVOS is to produce segmentation masks for the referred objects. Different from previous works [30, 41, 42] which require dense mask annotations for training, we assume that we only have access to box-level annotations $\hat{B}^i = \{\hat{B}_t^i\}_{t=1}^T$ for the T frames corresponding to the i th referring sentence S^i , where each bounding box $\hat{B}_t^i = (\hat{x}_t^i, \hat{y}_t^i, \hat{h}_t^i, \hat{w}_t^i)$ is represented by the coordinate of the center point and the height and width.

Framework Overview. Under the above setting, our goal is to efficiently adapt image-based foundation segmentation models for addressing referring video object segmentation from such weak supervision. To achieve efficient model adaptation, we propose a novel **Grounded Prompting (Gro-Prompt)** framework, which advances vision-language learning to produce temporal-consistent yet text-aware position prompts for segmentation purposes. As shown in Figure 1, our proposed GroPrompt framework is designed to generate the bounding box proposal by taking object queries to perform cross-modal attention at each frame. Such proposals then serve as position prompts to instruct foundation segmentation models to segment the referred object. To facilitate the position prompts to be text- and temporal-aware, we propose **Text-Aware Prompt Contrastive Learning (TAP-CL)**, including: 1) **Text-Contrastive Prompt Learning (TextCon)** at the frame level, which encourages the output proposals to be distinct when taking different referring sentences as input; 2) **Modality-Contrastive Prompt Learning (ModalCon)**, which aims to align the output proposal sequence and its corresponding object with the input text for each video clip. With the proposed TAP-CL, our GroPrompt framework would produce temporal-consistent yet text-aware position prompts for the referred object, enabling efficient adaptation from weak supervision without additional finetuning for foundation models.

3.2. Efficient Grounded Prompting and Adaptation

Recent foundation segmentation models [20, 40, 58] have presented overwhelming performance on various segmentation tasks. When prompted by points or bounding boxes indicating the positions, these foundation models would produce high-quality object masks as desired. However, existing foundation segmentation models are mainly trained from general image data and therefore have limited ability to comprehend video content or complex text descriptions. To adapt image-based foundation segmentation models to address referring video object segmentation, our proposed GroPrompt framework is designed to learn and generate position prompts for the target object from the input video frames and the referring sentences. In this way, our GroPrompt framework enables efficient model adaptation without additional finetuning for foundation models, avoiding possible overfitting issues while reducing computational cost and time. We now detail our learning scheme below.

3.2.1 Weakly-Supervised Position Prompts

To produce precise position prompts for segmentation, we advance vision-language learning to generate bounding box proposals for the referred object. As illustrated in Figure 1, our GroPrompt framework first employs a Transformer-based image-text encoder to extract visual features and linguistic features for each frame I_t and the referring sentence S^i , respectively. Inspired by [25], we adopt the query generation mechanism to obtain a set of object queries Q_t^i . By taking visual features and linguistic features as keys and values, the derived object queries Q_t^i would perform cross-attention through the cross-modality decoder to generate the box proposal B_t^i . With the ground-truth bounding box \hat{B}_t^i , the standard box loss L_{box} is formulated by the regression loss and generalized IoU loss L_g [36]:

$$L_{box} = \mathbb{E}_{V, S^i} \left[\sum_{i=1}^T \lambda_r \|B_t^i - \hat{B}_t^i\|_1 + \lambda_g L_g(B_t^i, \hat{B}_t^i) \right] \quad (1)$$

where λ_r and λ_g are hyper-parameters for the two loss terms, respectively. Here, since there is typically only one target object in referring segmentation tasks, we simply select the output proposal B_t^i with the highest confidence score at each frame instead of using the Hungarian loss [3] for matching. It is worth noting that we do not need mask loss for training like most existing RVOS works [15, 27, 30, 38, 41, 42, 44].

3.2.2 Text-Aware Prompt Contrastive Learning

In referring segmentation tasks, the sentence descriptions could be ambiguous. For example, the sentence ‘‘A person surfing’’ in Figure 1 refers to the person alone rather than

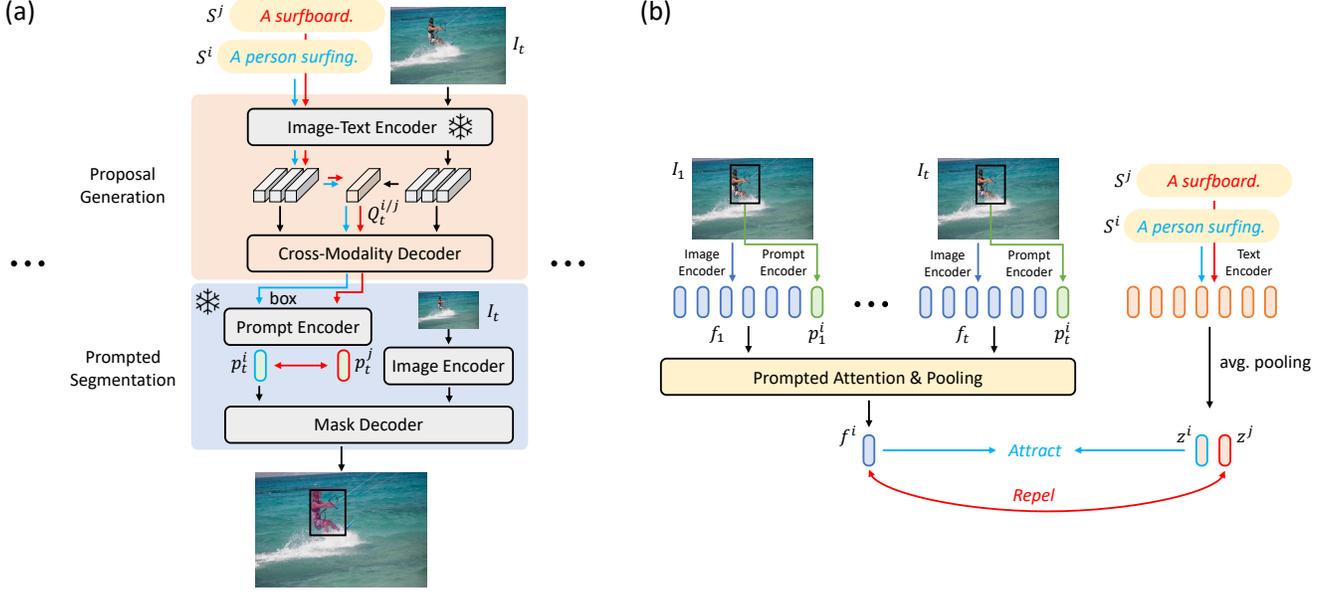


Figure 1. Overview of our proposed GroPrompt framework. In (a), our proposal generation takes each frame I_t and the referring sentence S^i to derive object queries Q_t^i and produce the prompt embedding p_t^i for segmentation, with another sentence S^j as input for performing *Text-Contrastive Prompt Learning*. In (b), to handle sentence descriptions containing long-term motions or actions in referring video object segmentation, we uniquely present *Modality-Contrastive Prompt Learning* to align the text with the referred object at the video level.

both the person and the surfboard. To mitigate such text ambiguity in natural language, we propose to perform *Text-Contrastive Prompt Learning (TextCon)* at the frame level to generate distinct proposals for different referring sentences. Apart from the text ambiguity, the sentence descriptions in referring video object segmentation often contain long-term motions or actions. Sentences like “a gold fish on the left swimming towards the top right” require considering all the frames as a whole to perform video segmentation. To align the text with the referred object at the video level, we uniquely present *Modality-Contrastive Prompt Learning (ModalCon)*. The learning scheme is detailed below.

Text-Contrastive Prompt Learning. Formally, in addition to the input sentence S_i , we forward another sentence S^j through our GroPrompt framework to obtain the output proposal B_t^j for another object at each frame. To perform contrastive learning, we leverage the prompt encoder from the foundation segmentation models to extract the prompt embeddings p_t^i , p_t^j , and \hat{p}_t^i for the proposals B_t^i and B_t^j and the ground-truth bounding box \hat{B}_t^i , respectively. By taking p_t^i , \hat{p}_t^i , and p_t^j as the anchor, positive, and negative sample, the frame-level triplet contrastive loss L_{contra}^f would be computed as follows:

$$L_{contra}^f = \mathbb{E}_{V, S^i, S^j} \left[\sum_{t=1}^T \max(0, d_t^p - d_t^n) \right], \quad (2)$$

$$\text{where } d_t^p = \|p_t^i - \hat{p}_t^i\|_2 \quad \text{and} \quad d_t^n = \|p_t^i - p_t^j\|_2.$$

We note that to preserve the latent space learned by foundation models for segmentation, we choose to freeze the prompt encoder during training. Under the guidance of the prompt encoder, our proposed *TextCon* enforces the distinctness of the proposals while enhancing the position prompts to be text-aware.

Modality-Contrastive Prompt Learning. In addition to the prompt embedding p_t^i derived in *Text-Contrastive Prompt Learning*, we also utilize the image encoder to extract the visual features f_t . With the cross-attention performed at each frame by taking the prompt embedding p_t^i as the query and visual features f_t as keys and values, followed by an average pooling layer for temporal aggregation, the video-level content feature f^i would be encoded for the referred object. As for the referring sentences S^i and S^j , we derive the sentence-level linguistic features z^i and z^j from the text encoder. Then, the video-level triplet contrastive loss L_{contra}^v would be computed as follows:

$$L_{contra}^v = \mathbb{E}_{V, S^i, S^j} [\max(0, d^p - d^n)], \quad (3)$$

$$\text{where } d^p = \|f^i - z^i\|_2 \quad \text{and} \quad d^n = \|f^i - z^j\|_2.$$

Note that the prompt, image, and text encoders are all frozen during training to preserve their pretrained semantic spaces while avoiding overfitting.

Finally, we define the total loss function L_{total} as:

$$L_{total} = L_{box} + L_{contra}, \quad (4)$$

Method	Publication	Referring & Video Training Data	Ref-YouTube-VOS			Ref-DAVIS17		
			$\mathcal{J}\&\mathcal{F}$	\mathcal{J}	\mathcal{F}	$\mathcal{J}\&\mathcal{F}$	\mathcal{J}	\mathcal{F}
URVOS [37]	ECCV'20	RefYT	47.2	45.3	49.2	51.5	47.3	56.0
MTTR [1]	CVPR'22	RefYT	55.3	54.0	56.6	-	-	-
ReferFormer [42]	CVPR'22	RefC, RefYT	62.9	61.3	64.6	61.1	58.1	64.1
MANet [7]	ACM MM'22	RefYT	55.6	54.8	56.5	-	-	-
LOCATER [24]	TPAMI'23	RefYT	56.5	54.8	58.1	-	-	-
VLT [12]	TPAMI'23	RefC, RefYT	63.8	61.9	65.6	61.6	58.9	64.3
R ² -VOS [22]	ICCV'23	RefC, RefYT	61.3	59.6	63.1	-	-	-
HTML [15]	ICCV'23	RefC, RefYT	63.4	61.5	65.2	62.1	59.2	65.1
OnlineRefer [41]	ICCV'23	RefC, RefYT	63.5	61.6	65.5	64.8	61.6	67.7
SgMg [30]	ICCV'23	RefC, RefYT	65.7	63.9	67.4	63.3	60.6	66.0
TempCD [38]	ICCV'23	RefC, RefYT	65.8	63.6	68.0	64.6	61.6	67.6
SOC [27]	NeurIPS'23	RefC, RefYT	67.3	65.3	69.3	65.8	62.5	69.1
LoSh [55]	arXiv'23	RefC, RefYT	64.2	62.5	66.0	62.5	59.5	65.4
RefSAM [23]	arXiv'23	RefC, RefYT	62.1	60.9	63.3	69.5	65.9	73.2
EPCFormer [4]	arXiv'23	RefYT, AVOS	65.0	62.9	67.2	-	-	-
UniNEXT [47]	CVPR'23	RefC, RefYT, G, La, T, YT, B, V, O	66.2	64.0	68.4	66.7	62.3	71.1
DEVA [8]	ICCV'23	RefC, RefYT, YT, D, O	66.0	-	-	66.3	-	-
UniRef [44]	ICCV'23	RefC, RefYT, RefD, YT, O, LV	67.4	65.5	69.2	66.3	62.9	69.7
MUTR [48]	arXiv'23	RefC, RefYT, AVSB	68.4	66.4	70.4	68.0	64.8	71.3
WRVOS [56]	arXiv'23	RefYT (box + 1st-frame mask)	46.6	45.6	47.6	47.3	44.6	50.0
Grounded-SAM [25]	arXiv'23	RefC (box)	62.3	61.0	63.6	65.2	62.3	68.0
GroPrompt (Ours)	-	RefC (box), RefYT (box)	65.5	64.1	66.9	70.6	67.8	73.3

Table 1. Quantitative comparison to state-of-the-art methods on the validation split of Ref-YouTube-VOS and Ref-DAVIS17. RefYT: Ref-YouTube-VOS, RefD: Ref-DAVIS, RefC: RefCOCO [29, 54], AVOS: Audio-VOS [32], AVSB: AVSBench [57], YT: YouTube-VOS 2019 [46], D: DAVIS17 [33], O: Occluded VIS [34], LV: Long-term VOS [16], G: GOT-10K [17], La: LaSOT [13], T: TrackingNet [31], B: BDD100K [53], V: VIS19 [50].

where $L_{contra} = \lambda_f L_{contra}^f + \lambda_v L_{contra}^v$, and λ_f and λ_v are hyper-parameters for the two contrastive loss, respectively. With the proposed TAP-CL, our GroPrompt framework would produce temporal-consistent yet text-aware bounding box proposals, allowing video segmentation by taking the learned proposals to prompt image-based foundation segmentation models. It is worth repeating that, the above learning scheme does not require any dense mask annotations. Furthermore, our proposed GroPrompt framework learns to prompt instead of finetuning foundation models, enabling efficient adaptation to referring video object segmentation from weak supervision.

4. Experiments

4.1. Datasets and Evaluation Metrics

Datasets. We conduct experiments on four RVOS benchmark datasets: Refer-YouTube-VOS [37], Refer-DAVIS₁₇ [19], A2D Sentences [14], and J-HMDB Sentences [14]. Refer-YouTube-VOS is a large-scale dataset for RVOS, with 3,975 videos, 7,451 objects, and 27,899 expressions. Refer-DAVIS₁₇ is augmented from the popular video object segmentation dataset, DAVIS₁₇ [2]. It contains 90 videos (60 for training and 30 for testing) with

more than 1,500 expressions. A2D Sentences [14] and J-HMDB Sentences [14] are extended from the A2D [45] and J-HMDB [18] datasets with sentences describing the actors and actions appearing in the video content. A2D Sentences contains 3,036 training videos and 746 testing videos with a total of 6,656 sentences, while J-HMDB Sentences contains 928 video clips of 21 different actions and 928 sentences.

Evaluation Metrics. For the Ref-YouTube-VOS and Ref-DAVIS₁₇ datasets, we follow the standard protocol and adopt the following evaluation metrics: region similarity \mathcal{J} (average IoU), contour accuracy \mathcal{F} (average boundary similarity), and their mean value $\mathcal{J}\&\mathcal{F}$. Since the annotations of the Ref-YouTube-VOS validation set are not publicly released, we evaluate the results on the official server. As for Ref-DAVIS₁₇, we use the official code for evaluation. For A2D Sentences and J-HMDB Sentences, we adopt Precision@K, Overall IoU, and Mean IoU for evaluation. Overall IoU is the ratio between the total intersection and the union area over all the testing data, and Mean IoU is the averaged IoU over the testing data. Precision@K measures the percentage of testing data with IoU score higher than a threshold K, where $K \in [0.5, 0.6, 0.7, 0.8, 0.9]$.

Method	Publication	P@0.5	P@0.6	P@0.7	P@0.8	P@0.9	Overall IoU	Mean IoU
CMSA + CFSA [52]	TPAMI'21	48.7	43.1	35.8	23.1	5.2	61.8	43.2
MTTR [1]	CVPR'22	75.4	71.2	63.8	48.5	16.9	72.0	64.0
ReferFormer [42]	CVPR'22	83.1	80.4	74.1	57.9	21.2	78.6	70.3
LOCATER [24]	TPAMI'23	70.9	64.0	52.5	35.1	10.1	69.0	59.7
TempCD [38]	ICCV'23	-	-	-	-	-	76.6	68.6
HTML [15]	ICCV'23	84.0	81.5	75.8	59.2	22.8	79.5	71.2
OnlineRefer [41]	ICCV'23	83.1	80.2	73.4	56.8	21.7	79.6	70.5
LoSh [55]	arXiv'23	85.3	80.7	74.3	57.7	21.1	78.9	71.3
WRVOS [56]	arXiv'23	62.9	58.0	49.8	35.0	11.0	66.3	53.9
Grounded-SAM [25]	arXiv'23	80.8	78.7	73.9	59.8	23.8	71.0	68.9
GroPrompt (Ours)	-	83.9	81.5	75.9	60.5	23.4	77.3	71.3

Table 2. The quantitative evaluation on A2D-Sentences, with Precision@K, Overall IoU and Mean IoU.

Method	Publication	P@0.5	P@0.6	P@0.7	P@0.8	P@0.9	Overall IoU	Mean IoU
CMSA + CFSA [52]	TPAMI'21	76.4	62.5	38.9	9.0	0.1	62.8	58.1
MTTR [1]	CVPR'22	93.9	85.2	61.6	16.6	0.1	70.1	69.8
ReferFormer [42]	CVPR'22	96.2	90.2	70.2	21.0	0.3	73.0	71.8
LOCATER[24]	TPAMI'23	89.3	77.2	50.8	10.6	0.2	67.3	66.3
TempCD[38]	ICCV'23	-	-	-	-	-	70.6	69.6
OnlineRefer [41]	ICCV'23	96.1	90.4	71.0	21.9	0.2	73.5	71.9
SgMg [30]	ICCV'23	-	-	-	-	-	73.7	72.5
SOC [27]	NeurIPS'23	96.9	91.4	71.1	21.3	0.1	73.6	72.3
LoSh [55]	arXiv'23	96.3	90.1	70.4	20.5	0.2	73.2	72.5
EPCFormer [4]	arXiv'23	97.6	93.1	72.6	23.0	0.0	74.0	73.1
WRVOS [56]	arXiv'23	82.0	67.3	41.4	8.9	0.1	63.2	62.7
Grounded-SAM [25]	arXiv'23	95.3	89.4	70.0	23.1	0.3	71.9	71.7
GroPrompt (Ours)	-	96.8	90.8	71.0	23.2	0.3	73.3	72.4

Table 3. The quantitative evaluation on JHMDB-Sentences, with Precision@K, Overall IoU and Mean IoU.

4.2. Implementation Details

We follow from [41, 42] to train our model on the Ref-YouTube-VOS dataset, and directly evaluate by the validation set provided by Ref-YouTube-VOS and Ref-DAVIS₁₇. For our detailed model architecture, our image-text encoder comprises Swin-Transformer [26] for the image features and BERT [11] for the text features. Besides, we set up our cross-modality decoder with 6 cross-attention transformer layers. For the segmentation part, we take SAM as our main segmentor to take our special text-aware position prompt as input. Thus, the prompt encoder, image encoder, and mask decoder are followed by SAM in our setting. We set the learning rate to 0.0001 and train our framework for 12 epochs. Following [25], we set λ_r and λ_g as 5 and 2 respectively. As for λ_f and λ_v , we use 0.01 and 0.1 on Ref-YouTube-VOS and 0.0001 and 0.001 on A2D Sentences, respectively. We implement our framework in PyTorch and train the model on 8 NVIDIA V100 GPUs.

4.3. Quantitative and Qualitative Comparisons

To evaluate our proposed GroPrompt framework, we first provide quantitative comparisons with state-of-the-

art methods on Refer-YouTube-VOS [37] and Refer-DAVIS₁₇ [19]. As shown in Table 1, we see that our GroPrompt framework achieves 65.5% and 70.6% in $\mathcal{J}\&\mathcal{F}$ on Refer-YouTube-VOS and Refer-DAVIS₁₇, respectively. Compared with RefSAM [4], our GroPrompt framework is 3.4% and 1.1% higher on the two datasets. This validates that our learned position prompts would properly instruct foundation segmentation models to perform referring video object segmentation. While UniRef [44] and MUTR [48] achieve competitive performance on Refer-YouTube-VOS, these methods require large-scale referring or video data for training. Compared to WRVOS [56], which observes box-level supervision plus the mask annotation for the first frame, our GroPrompt framework is over 20% higher with box-level supervision only. Similar results are observed on A2D Sentences [14] and J-HMDB Sentences [14]. In Table 2, our method reports 71.3% in Mean IoU. As for J-HMDB Sentences, we achieve 72.4% in Table 3.

In Figure 2 and 3, we also provide qualitative comparisons with ReferFormer [42] and OnlineRefer [41] on Refer-DAVIS₁₇ and Refer-YouTube-VOS [37]. We observe

Expression: A man in the middle wearing a blue belt teaching judo

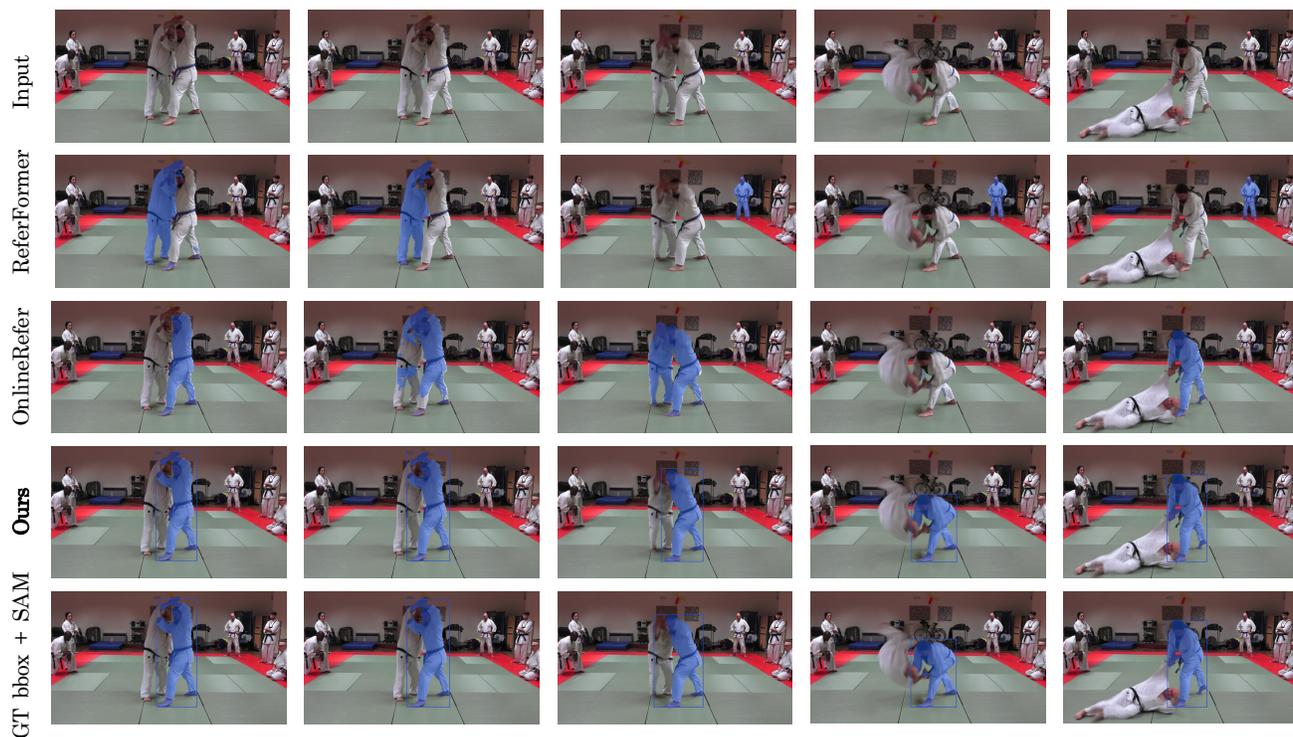


Figure 2. Qualitative comparisons of the state-of-the-art methods on Refer-DAVIS₁₇, where “GT-bbox + SAM” represents the result by taking ground-truth bounding boxes to prompt SAM.

Expression: the eyeglasses are being worn by a person wearing a yellow shirt and tan coat



Figure 3. Qualitative comparisons of the state-of-the-art methods on Refer-YouTube-VOS.

that, our method outperforms OnlineRefer and the produced bounding box proposals are close to the ground-truth

bounding boxes. From the above experiments, we validate that our proposed GroPrompt framework would produce

Method	Weak sup.	Online	Decoupled	Addi. Training Videos
ReferFormer [42]				No Need
WRVOS [56]	✓			No Need
OnlineRefer [41]		✓		No Need
DEVA [8]			✓	YT, D, O
GroPrompt (Ours)	✓	✓	✓	No Need

Table 4. Setting comparisons with recent RVOS methods. “Weak sup.”: Trained mainly with box-level weak supervisions, “Online”: Online method rather than offline method, “Decoupled”: Decoupled segmentation instead of end-to-end training, “Addi. Training Videos”: Additional video datasets for training. YT: YouTube-VOS 2019 [46], D: DAVIS17 [33], O: Occluded VIS [34].

Method	# of trainable parameters	Ref-YTVOS	Ref-DAVIS
ReferFormer [42]	~112M	62.9	61.1
OnlineRefer [41]	~221M	63.5	64.8
DEVA [8]	~112M	66.0	66.3
GroPrompt (Ours)	~15M	65.5	70.6

Table 5. Efficiency comparisons with recent RVOS methods, along with the $\mathcal{J}\&\mathcal{F}$ scores on Ref-YouTube-VOS and Ref-DAVIS17.

position prompts from weak supervision, enabling efficient adaptation of image-based foundation segmentation models for addressing referring video object segmentation.

4.4. Setting and Efficiency Comparisons

In Table 4, we compare the setting of our proposed GroPrompt framework with recent RVOS methods. From this table, we see that WRVOS [56] attempts to address RVOS from box-level weak supervision plus the ground-truth mask for the first frame, while OnlineRefer [41] extends ReferFormer [42] with query propagation to handle ongoing videos under the online setting. However, these methods require end-to-end training for vision-language models, which could be computationally expensive and time-consuming. On the other hand, assuming that additional video data are accessible, DEVA [8] decouples RVOS into image segmentation and temporal propagation to increase the scalability. Compared to these works, our proposed GroPrompt framework decouples RVOS into proposal generation and prompted segmentation with no need for additional video data for training. In this decoupled manner, our framework can learn proper prompts from weak supervision for foundation segmentation models and could also be applied to online settings.

In Table 5, we also provide efficiency comparisons with recent works. We see that the number of trainable parameters of our method is over 7 times fewer than DEVA. This is because that our proposed GroPrompt framework learns to prompt foundation models for efficient adaptation instead of training a vision-language model end-to-end. Together with the quantitative comparisons in Table 1, we validate that our proposed GroPrompt framework is preferable in terms of performance, setting, and efficiency.

Method	Box	$\mathcal{J}\&\mathcal{F}$	\mathcal{J}	\mathcal{F}
Grounded-SAM [25]	69.9	65.2	62.3	68.0
GroPrompt (L_{box} only)	73.2	69.8	67.0	72.7
GroPrompt ($L_{box} + L_{contra}$)	74.4	70.6	67.8	73.3
GT Box + SAM (upper bound)	100.0	83.6	80.1	87.2

Table 6. Ablation studies of the loss functions on Ref-DAVIS17. “Box”: IoU scores of the bounding boxes (position prompts).

4.5. Ablation Studies

To verify the effectiveness of our proposed loss functions, we conduct ablation studies by taking the ground-truth bounding boxes to compute the IoU scores of the predicted box proposals on Ref-DAVIS17. From Table 6, we see that when only L_{box} is considered, the box and segmentation score $\mathcal{J}\&\mathcal{F}$ would improve 3.3% and 4.6% compared to Grounded-SAM [25]. If we further apply our proposed L_{contra} to perform contrastive learning at frame level and video level, the box and segmentation score would improve to 74.4% and 70.6%, which are 1.2% and 0.8% higher. Finally, if we directly take the ground-truth boxes to prompt SAM, the superior performance of 83.6% in $\mathcal{J}\&\mathcal{F}$ would be observed. This demonstrates that image segmentation could be mostly solved by SAM, and therefore how to generate proper prompts to instruct foundation segmentation models for referring segmentation tasks would now be of interest. From the above experiments, we confirm that our proposed loss functions would learn precise position prompts (box proposals) from the referring sentence and the input video, allowing efficient adaptation of foundation models for addressing RVOS.

5. Conclusion

In this work, we propose the **Grounded Prompting (GroPrompt)** framework to efficiently adapt foundation segmentation models for addressing RVOS from weak supervision. More specifically, we propose *Text-Aware Prompt Contrastive Learning (TAP-CL)* to enhance the association between the position prompts and the referring sentences with only box supervisions, including *Text-Contrastive Prompt Learning (TextCon)* and *Modality-Contrastive Prompt Learning (ModalCon)* at frame level and video level, respectively. With the proposed TAP-CL, our GroPrompt framework can generate temporal-consistent yet text-aware position prompts describing locations and movements for the referred object from the video. With no need of additional finetuning for foundation segmentation models, we are able to produce precise masks for the referred object in the video. The experimental results in the standard RVOS benchmarks (Ref-YouTube-VOS, Ref-DAVIS17, A2D-Sentences, and JHMDB-Sentences) demonstrate the competitive performance of our proposed GroPrompt framework given only bounding box weak supervision.

References

- [1] Adam Botach, Evgenii Zheltonozhskii, and Chaim Baskin. End-to-end referring video object segmentation with multi-modal transformers. In *CVPR*, pages 4985–4995, 2022. 5, 6
- [2] Sergi Caelles, Alberto Montes, Kevis-Kokitsi Maninis, Yuhua Chen, Luc Van Gool, Federico Perazzi, and Jordi Pont-Tuset. The 2018 davis challenge on video object segmentation. *arXiv preprint arXiv:1803.00557*, 2018. 5
- [3] Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and Sergey Zagoruyko. End-to-end object detection with transformers. In *European conference on computer vision*, pages 213–229. Springer, 2020. 3
- [4] Jiajun Chen, Jiacheng Lin, Zhiqiang Xiao, Haolong Fu, Ke Nai, Kailun Yang, and Zhiyong Li. Epcformer: expression prompt collaboration transformer for universal referring video object segmentation. *arXiv preprint arXiv:2308.04162*, 2023. 5, 6
- [5] Keyan Chen, Chenyang Liu, Hao Chen, Haotian Zhang, Wenyuan Li, Zhengxia Zou, and Zhenwei Shi. Rsprompter: Learning to prompt for remote sensing instance segmentation based on visual foundation model, 2023. 2
- [6] Tianrun Chen, Lanyun Zhu, Chaotao Ding, Runlong Cao, Shangzhan Zhang, Yan Wang, Zejian Li, Lingyun Sun, Papa Mao, and Ying Zang. Sam fails to segment anything? – sam-adapter: Adapting sam in underperformed scenes: Camouflage, shadow, and more, 2023. 2
- [7] Weidong Chen, Dexiang Hong, Yuankai Qi, Zhenjun Han, Shuhui Wang, Laiyun Qing, Qingming Huang, and Guorong Li. Multi-attention network for compressed video referring object segmentation. In *Proceedings of the 30th ACM International Conference on Multimedia*, pages 4416–4425, 2022. 5
- [8] Ho Kei Cheng, Seoung Wug Oh, Brian Price, Alexander Schwing, and Joon-Young Lee. Tracking anything with decoupled video segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1316–1326, 2023. 5, 8
- [9] Junlong Cheng, Jin Ye, Zhongying Deng, Jianpin Chen, Tianbin Li, Haoyu Wang, Yanzhou Su, Ziyang Huang, Jilong Chen, Lei Jiangand Hui Sun, Junjun He, Shaoting Zhang, Min Zhu, and Yu Qiao. Sam-med2d, 2023. 2
- [10] Yangming Cheng, Liulei Li, Yuanyou Xu, Xiaodi Li, Zongxin Yang, Wenguan Wang, and Yi Yang. Segment and track anything. *arXiv preprint arXiv:2305.06558*, 2023. 1, 2
- [11] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018. 6
- [12] Henghui Ding, Chang Liu, Suchen Wang, and Xudong Jiang. Vlt: Vision-language transformer and query generation for referring segmentation. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2022. 5
- [13] Heng Fan, Liting Lin, Fan Yang, Peng Chu, Ge Deng, Sijia Yu, Hexin Bai, Yong Xu, Chunyuan Liao, and Haibin Ling. Lasot: A high-quality benchmark for large-scale single object tracking. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5374–5383, 2019. 5
- [14] Kirill Gavriluk, Amir Ghodrati, Zhenyang Li, and Cees GM Snoek. Actor and action video segmentation from a sentence. In *CVPR*, 2018. 5, 6
- [15] Mingfei Han, Yali Wang, Zhihui Li, Lina Yao, Xiaojun Chang, and Yu Qiao. Htm: Hybrid temporal-scale multimodal learning framework for referring video object segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 13414–13423, 2023. 1, 2, 3, 5, 6
- [16] Lingyi Hong, Wenchao Chen, Zhongying Liu, Wei Zhang, Pinxue Guo, Zhaoyu Chen, and Wenqiang Zhang. Lvos: A benchmark for long-term video object segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 13480–13492, 2023. 5
- [17] Lianghua Huang, Xin Zhao, and Kaiqi Huang. Got-10k: A large high-diversity benchmark for generic object tracking in the wild. *IEEE transactions on pattern analysis and machine intelligence*, 43(5):1562–1577, 2019. 5
- [18] Hueihan Jhuang, Juergen Gall, Silvia Zuffi, Cordelia Schmid, and Michael J Black. Towards understanding action recognition. In *Proceedings of the IEEE international conference on computer vision*, pages 3192–3199, 2013. 5
- [19] Anna Khoreva, Anna Rohrbach, and Brent Schiele. Video object segmentation with referring expressions. In *Proceedings of the European Conference on Computer Vision (ECCV) Workshops*, pages 0–0, 2018. 5, 6
- [20] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. *arXiv preprint arXiv:2304.02643*, 2023. 1, 2, 3
- [21] Guanghui Li, Mingqi Gao, Heng Liu, Xiantong Zhen, and Feng Zheng. Learning cross-modal affinity for referring video object segmentation targeting limited samples. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2684–2693, 2023. 1
- [22] Xiang Li, Jinglu Wang, Xiaohao Xu, Xiao Li, Bhiksha Raj, and Yan Lu. Robust referring video object segmentation with cyclic structural consensus. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22236–22245, 2023. 5
- [23] Yonglin Li, Jing Zhang, Xiao Teng, and Long Lan. Refsam: Efficiently adapting segmenting anything model for referring video object segmentation. *arXiv preprint arXiv:2307.00997*, 2023. 1, 3, 5
- [24] Chen Liang, Wenguan Wang, Tianfei Zhou, Jiaxu Miao, Yawei Luo, and Yi Yang. Local-global context aware transformer for language-guided video segmentation. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2023. 5, 6
- [25] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, et al. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. *arXiv preprint arXiv:2303.05499*, 2023. 1, 3, 5, 6, 8
- [26] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer:

- Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10012–10022, 2021. 6
- [27] Zhuoyan Luo, Yicheng Xiao, Yong Liu, Shuyan Li, Yitong Wang, Yansong Tang, Xiu Li, and Yujiu Yang. Soc: Semantic-assisted object cluster for referring video object segmentation. *arXiv preprint arXiv:2305.17011*, 2023. 1, 2, 3, 5, 6
- [28] Jun Ma, Yuting He, Feifei Li, Lin Han, Chenyu You, and Bo Wang. Segment anything in medical images. *arXiv preprint arXiv:2304.12306*, 2023. 2
- [29] Junhua Mao, Jonathan Huang, Alexander Toshev, Oana Camburu, Alan L Yuille, and Kevin Murphy. Generation and comprehension of unambiguous object descriptions. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 11–20, 2016. 5
- [30] Bo Miao, Mohammed Bennamoun, Yongsheng Gao, and Ajmal Mian. Spectrum-guided multi-granularity referring video object segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 920–930, 2023. 1, 2, 3, 5, 6
- [31] Matthias Muller, Adel Bibi, Silvio Giancola, Salman Alsubaihi, and Bernard Ghanem. Trackingnet: A large-scale dataset and benchmark for object tracking in the wild. In *Proceedings of the European conference on computer vision (ECCV)*, pages 300–317, 2018. 5
- [32] Wenwen Pan, Haonan Shi, Zhou Zhao, Jieming Zhu, Xiquiang He, Zhigeng Pan, Lianli Gao, Jun Yu, Fei Wu, and Qi Tian. Wnet: Audio-guided video object segmentation via wavelet-based cross-modal denoising networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1320–1331, 2022. 5
- [33] Federico Perazzi, Jordi Pont-Tuset, Brian McWilliams, Luc Van Gool, Markus Gross, and Alexander Sorkine-Hornung. A benchmark dataset and evaluation methodology for video object segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 724–732, 2016. 5, 8
- [34] Jiyang Qi, Yan Gao, Yao Hu, Xinggang Wang, Xiaoyu Liu, Xiang Bai, Serge Belongie, Alan Yuille, Philip HS Torr, and Song Bai. Occluded video instance segmentation: A benchmark. *International Journal of Computer Vision*, 130(8): 2022–2039, 2022. 5, 8
- [35] Frano Rajiĉ, Lei Ke, Yu-Wing Tai, Chi-Keung Tang, Martin Danelljan, and Fisher Yu. Segment anything meets point tracking. *arXiv:2307.01197*, 2023. 2
- [36] Hamid Rezaatoughi, Nathan Tsoi, JunYoung Gwak, Amir Sadeghian, Ian Reid, and Silvio Savarese. Generalized intersection over union: A metric and a loss for bounding box regression. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 658–666, 2019. 3
- [37] Seonguk Seo, Joon-Young Lee, and Bohyung Han. Urvos: Unified referring video object segmentation network with a large-scale benchmark. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XV 16*, pages 208–223. Springer, 2020. 1, 5, 6
- [38] Jiajin Tang, Ge Zheng, and Sibe Yang. Temporal collection and distribution for referring video object segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 15466–15476, 2023. 1, 2, 3, 5, 6
- [39] Di Wang, Jing Zhang, Bo Du, Minqiang Xu, Lin Liu, Dacheng Tao, and Liangpei Zhang. SAMRS: Scaling-up remote sensing segmentation dataset with segment anything model. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2023. 2
- [40] Xinlong Wang, Xiaosong Zhang, Yue Cao, Wen Wang, Chunhua Shen, and Tiejun Huang. Seggpt: Towards segmenting everything in context. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023. 1, 3
- [41] Dongming Wu, Tiancai Wang, Yuang Zhang, Xiangyu Zhang, and Jianbing Shen. Onlinerefer: A simple online baseline for referring video object segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2761–2770, 2023. 1, 2, 3, 5, 6, 8
- [42] Jiannan Wu, Yi Jiang, Peize Sun, Zehuan Yuan, and Ping Luo. Language as queries for referring video object segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4974–4984, 2022. 1, 2, 3, 5, 6, 8
- [43] Junde Wu, Rao Fu, Huihui Fang, Yuanpei Liu, Zhaowei Wang, Yanwu Xu, Yueming Jin, and Tal Arbel. Medical sam adapter: Adapting segment anything model for medical image segmentation. *arXiv preprint arXiv:2304.12620*, 2023. 2
- [44] Jiannan Wu, Yi Jiang, Bin Yan, Huchuan Lu, Zehuan Yuan, and Ping Luo. Segment every reference object in spatial and temporal spaces. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2538–2550, 2023. 1, 2, 3, 5, 6
- [45] Chenliang Xu, Shao-Hang Hsieh, Caiming Xiong, and Jason J Corso. Can humans fly? action understanding with multiple classes of actors. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2264–2273, 2015. 5
- [46] Ning Xu, Linjie Yang, Yuchen Fan, Dingcheng Yue, Yuchen Liang, Jianchao Yang, and Thomas Huang. Youtube-vos: A large-scale video object segmentation benchmark. *arXiv preprint arXiv:1809.03327*, 2018. 5, 8
- [47] Bin Yan, Yi Jiang, Jiannan Wu, Dong Wang, Ping Luo, Zehuan Yuan, and Huchuan Lu. Universal instance perception as object discovery and retrieval. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15325–15336, 2023. 5
- [48] Shilin Yan, Renrui Zhang, Ziyu Guo, Wenchao Chen, Wei Zhang, Hongyang Li, Yu Qiao, Zhongjiang He, and Peng Gao. Referred by multi-modality: A unified temporal transformer for video object segmentation. *arXiv preprint arXiv:2305.16318*, 2023. 5, 6
- [49] Jinyu Yang, Mingqi Gao, Zhe Li, Shang Gao, Fangjing Wang, and Feng Zheng. Track anything: Segment anything meets videos, 2023. 2

- [50] Linjie Yang, Yuchen Fan, and Ning Xu. Video instance segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5188–5197, 2019. 5
- [51] Zongxin Yang and Yi Yang. Decoupling features in hierarchical propagation for video object segmentation. *Advances in Neural Information Processing Systems*, 35:36324–36336, 2022. 2
- [52] Linwei Ye, Mrigank Rochan, Zhi Liu, Xiaoqin Zhang, and Yang Wang. Referring segmentation in images and videos with cross-modal self-attention network. *TPAMI*, 2021. 6
- [53] Fisher Yu, Haofeng Chen, Xin Wang, Wenqi Xian, Yingying Chen, Fangchen Liu, Vashisht Madhavan, and Trevor Darrell. Bdd100k: A diverse driving dataset for heterogeneous multitask learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2636–2645, 2020. 5
- [54] Licheng Yu, Patrick Poirson, Shan Yang, Alexander C Berg, and Tamara L Berg. Modeling context in referring expressions. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part II 14*, pages 69–85. Springer, 2016. 5
- [55] Linfeng Yuan, Miaoqing Shi, and Zijie Yue. Losh: Long-short text joint prediction network for referring video object segmentation. *arXiv preprint arXiv:2306.08736*, 2023. 5, 6
- [56] Wangbo Zhao, Kepan Nan, Songyang Zhang, Kai Chen, Dahua Lin, and Yang You. Learning referring video object segmentation from weak annotation. *arXiv preprint arXiv:2308.02162*, 2023. 5, 6, 8
- [57] Jinxing Zhou, Jianyuan Wang, Jiayi Zhang, Weixuan Sun, Jing Zhang, Stan Birchfield, Dan Guo, Lingpeng Kong, Meng Wang, and Yiran Zhong. Audio–visual segmentation. In *European Conference on Computer Vision*, pages 386–403. Springer, 2022. 5
- [58] Xueyan Zou, Jianwei Yang, Hao Zhang, Feng Li, Linjie Li, Jianfeng Gao, and Yong Jae Lee. Segment everything everywhere all at once. *arXiv preprint arXiv:2304.06718*, 2023. 1, 3