

RITA: A Reat-time Interactive Talking Avatars Framework

Wuxinlin Cheng*
Stevens Institute of Technology
wcheng7@stevens.edu

Cheng Wan*
Georgia Institute of Technology
cwan38@gatech.edu

Yupeng Cao*
Stevens Institute of Technology
ycao33@stevens.edu

Sihan Chen*
University of Illinois Urbana-Champaign
sihan6@illinois.edu

Abstract

RITA presents a high-quality real-time interactive framework built upon generative models, designed with practical applications in mind. Our framework enables the transformation of user-uploaded photos into digital avatars that can engage in real-time dialogue interactions. By leveraging the latest advancements in generative modeling, we have developed a versatile platform that not only enhances the user experience through dynamic conversational avatars but also opens new avenues for applications in virtual reality, online education, and interactive gaming. This work showcases the potential of integrating computer vision and natural language processing technologies to create immersive and interactive digital personas, pushing the boundaries of how we interact with digital content.

1. Introduction

Animating a single image to create dynamic speech-driven facial animations lies at the intersection of artificial intelligence, computer vision, and multimedia technology. The advent of generative models has significantly advanced the creation of talking head videos, where a static image is animated to match spoken audio, transforming a once stationary depiction into a lively representation of speech. However, this field faces challenges due to the inherent delay in video generation, as transforming an image and audio into a seamless video sequence requires significant computational resources and time, often making real-time applications challenging to achieve.

Drawing inspiration from state-of-the-art models such as SadTalker and MakeItTalk [25, 28], which pioneered in generating lip-sync videos through sophisticated facial modeling and motion synthesis. Our Real-time Interactive

Talking Avatar (RITA) framework transcends the limitations of its former generation speed and unsustainable interactions. While SadTalker and similar models excel in their domain, they are primarily tethered to offline processing, owing to the intricate computations required to ensure synchronicity between audio cues and facial movements, including lip motion, head pose, and eye blinks. These models, despite their efficacy, fall short in applications demanding real-time interaction, thus limiting their utility in dynamic, user-centric scenarios.

RITA emerges as a groundbreaking framework, engineered to bridge this gap by facilitating an end-to-end real-time dialogue solution. At its core, RITA leverages a novel architecture that combines the immediacy of real-time processing with the depth of generative models to animate static portraits. By integrating a live-feed mechanism, users can interact with avatars in a seamless, responsive environment, where avatars not only lip-sync but also exhibit natural head movements and expressions, closely mimicking human interactions. This leap in technological innovation is made possible through the strategic application of lightweight models, optimized for speed without compromising the richness of the avatar’s responsiveness.

Moreover, RITA introduces an innovative application of Large Language Models (LLMs) for content generation, allowing avatars to engage in coherent, contextually relevant dialogues. This integration not only enhances the interactive experience but also expands the potential applications of talking avatars, ranging from virtual customer service agents to personalized digital companions.

In RITA, we refined the generative process to ensure high-definition output and fluency in avatar-user interactions, setting a new benchmark for real-time performance in talking avatar technology. Our contributions are manifold, addressing both the technical challenges in achieving real-time interactivity and the practical implications of deploying such technology in user-centric applications.

*These authors contributed equally to this work.

The following sections will delineate the architecture of RITA, the innovations in real-time processing, and the synergistic use of LLMs for dynamic content generation. Through comparative analysis and empirical validation, we will demonstrate RITA’s superiority over existing models in terms of latency, quality, and applicability, thereby heralding a new era in interactive digital avatars. In summary, our contributions include:

- The development of RITA, an end-to-end framework for generating real-time interactive talking avatars from static images, leveraging advancements in generative models and LLMs for naturalistic avatar-user dialogues.
- A novel real-time processing pipeline that significantly reduces the latency observed in previous talking head models, enabling seamless, high-fidelity interactions.
- The integration of LLMs for content generation, providing a versatile platform for avatars to engage in context-aware conversations with users.
- Empirical evidence showcasing the enhanced performance of RITA over existing methods, highlighting improvements in speed, interaction quality, and user engagement.

2. Related Work

2.1. Audio-driven Talking Head Generation

The first batch of Audio-driven Talking Head Generation work focused on building videos by generating lip movements from audio inputs, such as Synthesizing Obama [18], LMGG [4], Wav2Lip [15], and TalkLip [20]. While these methods effectively synchronized lip movements with audio, they often overlooked other facial and head movement details, limiting the realism of the generated heads.

To address these limitations, Audio-Visual Mapping approaches emerged, focusing on a more comprehensive representation of facial details. AD-AVR [27] employed an adversarial learning framework to separate audio and visual representations, allowing independent control over facial expressions and lip movements. The separated representations can independently control facial expressions and lip movements. ATVGNet [5] introduced a hierarchical cross-modal learning framework, enhancing facial expressions and lip motion through integrated audio-visual information. MakeItTalk [28] addressed speaker-specific characteristics by separately handling speaker and lip motion generation, while Audio2Head [21] utilized a motion-aware recurrent neural network for predicting head movements. Despite these advancements, challenges such as producing vivid head movements and maintaining accurate facial identities persisted.

The field then shifted towards methods inspired by video editing, particularly those using 3DMM information for face reconstruction and animation. AD-NeRF [8] and sub-

sequent works like [24] and [11] demonstrated significant improvements in mouth shape editing, head movement, and emotional expressiveness. However, these methods faced limitations in generalizing to arbitrary photos and audio input. Addressing this, SadTalker [25] introduced a novel approach by modulating 3D perceptual face rendering with 3D motion coefficients derived from audio. SadTalker showed promise but did not fully cater to real-time applications in diverse real-world scenarios.

2.2. Large Language Model for Vision Applications

The emergence of powerful LLMs like ChatGPT [14] and Llama [19] has revolutionized natural language understanding and dialogue generation with human-like responsiveness and sophisticated context-generation capabilities [3, 16, 22]. Benefiting from LLM development, the trend of using autoregressive language models as decoders in vision-language tasks has gained significant traction [6, 9, 12, 13]. A substantial body of work demonstrates the efficacy of merging visual features with language models to enhance reasoning capabilities in complex vision-language tasks. For instance, LENS [2] employs a synergy of raw visual data and a frozen LLM for image captioning tasks. By combining LLM with the underlying vision model, the door can be opened to open-world understanding, reasoning, and a small amount of learning that is lacking in current autonomous driving systems [23]. However, the application of LLMs in talking head generation, a field requiring nuanced integration of audio-visual and linguistic elements, remains a largely unexplored frontier.

Inspired by this gap and the recent strides in Talking Head Generation, we use LLMs to build a dialog system in the RITA framework, aiming to optimize real-time performance while improving the user experience.

3. RITA Design

Figure 1 is the overview of the RITA framework. RITA is a framework that introduces a transformative approach to generating talking avatars in real-time from a single image. This section explores the intricacies of RITA, detailing the innovative components and processes that enable this advanced capability.

3.1. Phase 1: Foundational Frames Generation

User-entered conversations are first fed into LLMs to generate personalized responses, which are then converted to audio format by text-to-speech (TTS) model. RITA will perform video generation based on the converted audio and the selected audio.

The initial phase of RITA commences with the generation of foundational frames (videos). This process utilizes a flexible approach, allowing for the incorporation of many open-source audio-driven talking-head model [7, 17,

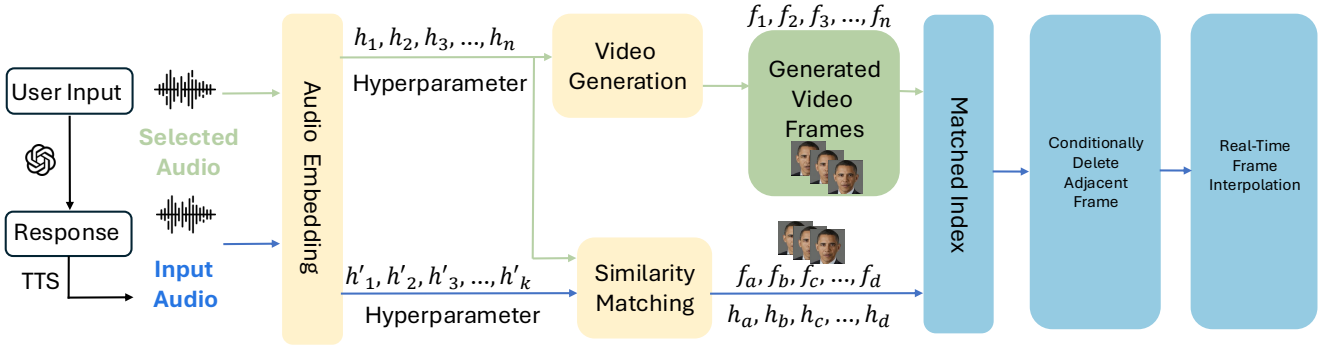


Figure 1. The overview of RITA. Notice green arrows indicate foundational frame generation, which is not required in real-time inference. The real-time inference only requires the bottom blue arrows.

21, 26]. These audio-driven models can be bifurcated into two sequential components: the first segment is responsible for the embedding of auditory signals into a set of hyperparameters $H \in \mathbb{R}^{|K| \times |N|}$, effectively capturing the essence of the speech in a structured form; the subsequent segment leverages these hyperparameters to generate the corresponding visual frames $F \in \mathbb{R}^{|K|}$. The primary objective of this phase is to synchronize generated frames with their respective hyperparameters, a process pivotal for the seamless progression to subsequent phases. To generate the desired frames, we strategically employ a collection of a few audio samples, meticulously selected to encompass a wide spectrum of lip movements. This selection aims to augment the avatar’s expressive capacity, ensuring a diverse and naturalistic simulation of speech articulation.

To balance the dual imperatives of quality and efficiency, each frame generated during this preliminary phase is saved in a high-quality compressed image format, such as JPEG. This approach not only preserves the fidelity of the visual output but also optimizes storage. At the same time, the generated frames form a comprehensive library of lip movements that RITA will also utilize in the subsequent phase.

3.2. Phase 2: Dynamic Frame Matching

Building upon the initial generation from the last phase, each frame F of the foundational video is precisely annotated with hyperparameters H .

When RITA is presented with new audio inputs, it employs the first segment of the talking-head model, as mentioned in the preceding phase. This critical operation transforms the new audio into a set of hyperparameters, denoted as $H' \in \mathbb{R}^{|X| \times |N|}$, where X represents the dimensionality of the input space and N signifies the number of hyperparameters. This enables RITA to swiftly adapt to new audio stimuli, circumventing the computationally intensive task of generating entirely new frames. The subsequent step involves a meticulous matching process, where each newly

embedded hyperparameter H' is compared against the pre-generated set of hyperparameters H . The goal of this comparison is to identify the most congruent pair, thereby selecting the initially generated frame F that best matches the new audio input. To facilitate real-time comparison of a vast array of frames, a high-performance algorithm can be deployed, such as the approximate nearest neighbor [1]. Thereby, RITA circumvents the need for continuous video regeneration.

Moreover, the regenerated video can be further refined through an intelligent frame reduction strategy. By methodically comparing hyperparameter similarity distances between sequential frames.

Definition 3.1. For predicted hyperparameter $H'_i \in \mathbb{R}^{|N|}$ and its matching hyperparameter $H_j \in \mathbb{R}^{|N|}$. The similarity distance is defined as $SD_i = \sum_{n=1}^{|N|} \frac{|H_{in} - H'_{jn}|}{\max(H_{in}, H'_{jn})}$

For every two sequential frames f_t and f_{t+1} and their corresponding SD_t and SD_{t+1} . RITA identifies and eliminates the frame with the larger similarity distances. This selective reduction process effectively maintains the frame’s visual coherence.

3.3. Phase 3: Real-Time Video Interpolation

Despite the strategic frame reduction in the preceding phase, which effectively halved the video’s frame rate, a notable challenge arises: the resulting video still lacks the desired smoothness, exhibiting noticeable jumps and transitions between frames. To address this and restore the natural fluidity of the avatar’s movements, RITA employs advanced Real-Time Video Frame Interpolation techniques at this crucial juncture, such as RIFE [10]

The essence of this phase lies in its ability to intricately fill the gaps left by the frame reduction strategy. By interpolating new frames between the existing ones, this technique not only increases the frame rate back to its original or even

a higher level but also significantly smooths out the transitions, ensuring that the avatar’s expressions and movements regain their lifelike flow. This process is pivotal for enhancing the overall realism of the generated video, making the talking avatar’s movements appear seamless and naturally aligned with the audio input.

4. Application and Performance Evaluation

This section presents a comprehensive evaluation of the RITA framework, showcasing its versatility and efficiency across different operational scenarios. We detail the results stemming from varying numbers of foundational frames, the impact of diverse image inputs on the final avatar animations, the runtime of each critical phase within the framework, and the specifications of the hardware platform utilized for our experiments.

4.1. Foundational Frame Generation and File Size

We initiated our analysis by generating foundational videos with the RITA framework. Various distinct audio samples are utilized to cover a wide spectrum of lip movements. To balance the trade-off between animation smoothness and storage, we explore varying numbers of foundational videos as Figure 2. All videos are saved in JPEG format to save storage space and RITA performs all generation in real-time.

- **Example Video 1:** RITA generated video 1 with a 24 seconds foundational video (around 30MB).
- **Example Video 2:** RITA generated video 2 with a 72 seconds foundational video (around 90MB).
- **Example Video 3:** RITA generated video 3 with a 240 seconds foundational video (around 300MB).

These variations demonstrate the scalable nature of RITA, allowing for customization based on the desired balance between visual fidelity and file size.

4.2. Impact of Different Image Inputs

The framework’s adaptability was further tested with different image inputs, ranging from stylized 2D animations to photorealistic images of real humans. The goal was to evaluate RITA’s robustness and the quality of the final talking avatar across varied input conditions.

The framework has shown an exceptional capability in handling various avatars with remarkable lip synchronization and fluid facial animations, notably in eye movements.

- **2D Animation Characters:** The framework adeptly handled the stylized features and exaggerated expressions typical of 2D animations, producing engaging and expressive talking avatars that retained the charm and characteristics of the original artwork.
- **Real Human Images:** When applied to photorealistic images of real humans, RITA demonstrated remarkable pre-













Figure 2. Frame comparison between non-realtime avatar generative model and RITA. Keyframe times are 2, 4, 6, and 8 seconds.

Table 1. Visual progression of avatars

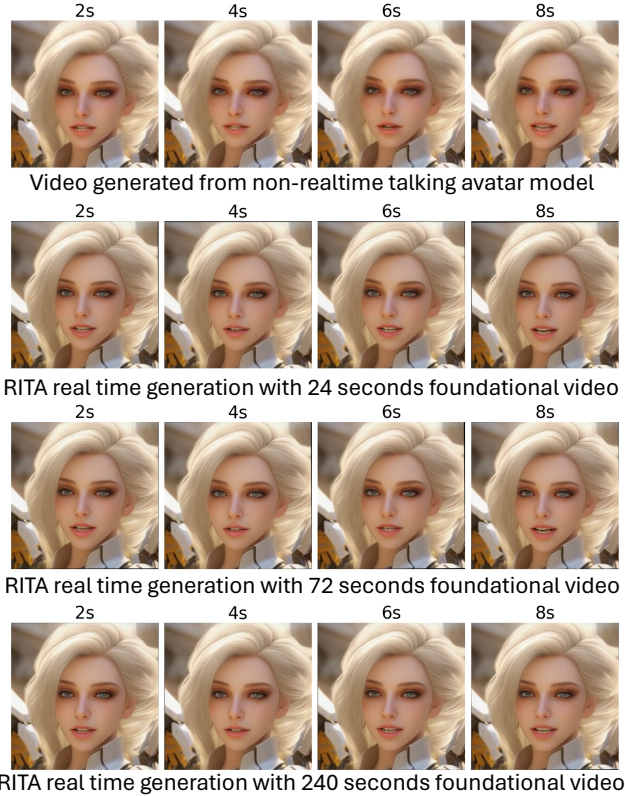Avatars	Initial	Midway	Final
Real Humans			
Anime Avatars			
Portrait Painting			

cision in lip synchronization and facial animation, creating lifelike avatars that closely mimicked the nuances of human speech and expressions.

- **Portrait Painting:** The adaptation of classic artworks like the Mona Lisa into talking avatars presented best facial movement. The framework managed to animate these paintings with a surprising degree of liveliness, particularly in the eye movements, which are crucial for conveying emotion and intent.

These findings underscore the framework’s flexibility

and its capacity to maintain performance across different types of image inputs, achieving a high level of realism and engagement, particularly in the subtle but crucial area of eye and lip movements.

4.3. Runtime Analysis

The efficiency of RITA was quantitatively assessed by measuring the runtime of each phase on a standard hardware setup. The analysis highlighted the real-time capability of the framework, crucial for interactive applications.

- **Hyperparameter Embedding and Frame Matching:** After the input audio is embedded into parameters, the similarity is matched with the parameters of the generated audios corresponding frames, and a series of frames that best match the input audio are output. Therefore, the audio is embedded as a parameter matrix and then matched with the generated existing parameter library to have a sequence of initial video frames. In this stage, we performed 10 average calculations and obtained the average running and calculation time required to be **0.09** seconds which is the average result of 10 runs.
- **Real-Time Video Frame Interpolation:** To ensure a smooth visual output, the frame interpolation process operated within **3.97** seconds in average result of 10 runs as well, effectively reducing motion jitter and enhancing the fluidity of the avatar’s movements.

Figure 3 shows the total running time of RITA and SadTalker, which indicates that RITA allows avatar generation in realtime.

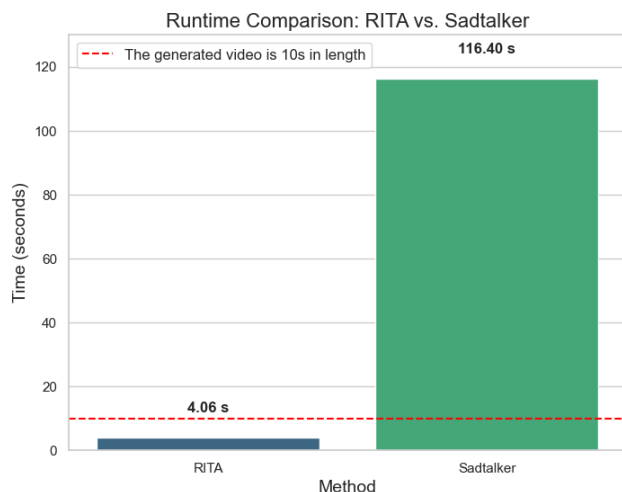


Figure 3. Runtime comparison between RITA and Sadtalker. Note that generated frames by RITA can be accessed during the generation, so there is nearly no waiting time for users.

5. Conclusion

In this study, we introduce RITA, a state-of-the-art framework for generating real-time interactive talking avatars. RITA employs Dynamic Frame Matching and Video Interpolation techniques to significantly reduce the number of frames needed during video generation, thereby enhancing the generation speed. Additionally, RITA incorporates large language models (LLMs) to build naturalistic avatar-user dialogues that elevate the interactive experience for users. Empirical results demonstrate RITA’s superior performance compared to existing methods, showcasing notable improvements in generation speed, interaction quality, and user engagement.

References

- [1] Sunil Arya, David M Mount, Nathan S Netanyahu, Ruth Silverman, and Angela Y Wu. An optimal algorithm for approximate nearest neighbor searching fixed dimensions. *Journal of the ACM (JACM)*, 45(6):891–923, 1998. 3
- [2] William Berrios, Gautam Mittal, Tristan Thrush, Douwe Kiela, and Amanpreet Singh. Towards language models that can see: Computer vision through the lens of natural language. *arXiv preprint arXiv:2306.16410*, 2023. 2
- [3] Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. A survey on evaluation of large language models. *ACM Transactions on Intelligent Systems and Technology*, 2023. 2
- [4] Lele Chen, Zhiheng Li, Ross K Maddox, Zhiyao Duan, and Chenliang Xu. Lip movements generation at a glance. In *Proceedings of the European conference on computer vision (ECCV)*, pages 520–535, 2018. 2
- [5] Lele Chen, Ross K Maddox, Zhiyao Duan, and Chenliang Xu. Hierarchical cross-modal talking face generation with dynamic pixel-wise loss. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 7832–7841, 2019. 2
- [6] Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, et al. Palme: An embodied multimodal language model. *arXiv preprint arXiv:2303.03378*, 2023. 2
- [7] Yuan Gan, Zongxin Yang, Xihang Yue, Lingyun Sun, and Yi Yang. Efficient emotional adaptation for audio-driven talking-head generation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22634–22645, 2023. 2
- [8] Yudong Guo, Keyu Chen, Sen Liang, Yong-Jin Liu, Hujun Bao, and Juyong Zhang. Ad-nerf: Audio driven neural radiance fields for talking head synthesis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5784–5794, 2021. 2
- [9] Shaohan Huang, Li Dong, Wenhui Wang, Yaru Hao, Saksham Singhal, Shuming Ma, Tengchao Lv, Lei Cui, Owais Khan Mohammed, Barun Patra, et al. Language is not all you need: Aligning perception with language mod-

- els. *Advances in Neural Information Processing Systems*, 36, 2024. 2
- [10] Zhewei Huang, Tianyuan Zhang, Wen Heng, Boxin Shi, and Shuchang Zhou. Real-time intermediate flow estimation for video frame interpolation. In *European Conference on Computer Vision*, pages 624–642. Springer, 2022. 3
- [11] Xinya Ji, Hang Zhou, Kaisiyuan Wang, Wayne Wu, Chen Change Loy, Xun Cao, and Feng Xu. Audio-driven emotional video portraits. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 14080–14089, 2021. 2
- [12] Qinjin Jia, Yang Liu, Daoping Wu, Shaoyuan Xu, Huidong Liu, Jinmiao Fu, Roland Vollgraf, and Bryan Wang. Kg-flip: Knowledge-guided fashion-domain language-image pre-training for e-commerce. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 5: Industry Track)*, pages 81–88, 2023. 2
- [13] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. *arXiv preprint arXiv:2301.12597*, 2023. 2
- [14] OpenAI. Introducing chatgpt, 2022. <https://openai.com/blog/chatgpt>. 2
- [15] KR Prajwal, Rudrabha Mukhopadhyay, Vinay P Namboodiri, and CV Jawahar. A lip sync expert is all you need for speech to lip generation in the wild. In *Proceedings of the 28th ACM international conference on multimedia*, pages 484–492, 2020. 2
- [16] Mustafa Safdari, Greg Serapio-García, Clément Crepy, Stephen Fitz, Peter Romero, Luning Sun, Marwa Abdulhai, Aleksandra Faust, and Maja Mataric. Personality traits in large language models. *arXiv preprint arXiv:2307.00184*, 2023. 2
- [17] Xusen Sun, Longhao Zhang, Hao Zhu, Peng Zhang, Bang Zhang, Xinya Ji, Kangneng Zhou, Daiheng Gao, Liefeng Bo, and Xun Cao. Vividtalk: One-shot audio-driven talking head generation based on 3d hybrid prior. *arXiv preprint arXiv:2312.01841*, 2023. 2
- [18] Supasorn Suwajanakorn, Steven M Seitz, and Ira Kemelmacher-Shlizerman. Synthesizing obama: learning lip sync from audio. *ACM Transactions on Graphics (TOG)*, 36(4):1–13, 2017. 2
- [19] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023. 2
- [20] Jiadong Wang, Xinyuan Qian, Malu Zhang, Robby T Tan, and Haizhou Li. Seeing what you said: Talking face generation guided by a lip reading expert. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14653–14662, 2023. 2
- [21] Suzhen Wang, Lincheng Li, Yu Ding, Changjie Fan, and Xin Yu. Audio2head: Audio-driven one-shot talking-head generation with natural head motion. *arXiv preprint arXiv:2107.09293*, 2021. 2, 3
- [22] Yuzhuang Xu, Shuo Wang, Peng Li, Fuwen Luo, Xiaolong Wang, Weidong Liu, and Yang Liu. Exploring large language models for communication games: An empirical study on werewolf. *arXiv preprint arXiv:2309.04658*, 2023. 2
- [23] Zhenjie Yang, Xiaosong Jia, Hongyang Li, and Junchi Yan. A survey of large language models for autonomous driving. *arXiv preprint arXiv:2311.01043*, 2023. 2
- [24] Chenxu Zhang, Yifan Zhao, Yifei Huang, Ming Zeng, Saifeng Ni, Madhukar Budagavi, and Xiaohu Guo. Facial: Synthesizing dynamic talking face with implicit attribute learning. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 3867–3876, 2021. 2
- [25] Wenxuan Zhang, Xiaodong Cun, Xuan Wang, Yong Zhang, Xi Shen, Yu Guo, Ying Shan, and Fei Wang. Sadtalker: Learning realistic 3d motion coefficients for stylized audio-driven single image talking face animation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8652–8661, 2023. 1, 2
- [26] Wenxuan Zhang, Xiaodong Cun, Xuan Wang, Yong Zhang, Xi Shen, Yu Guo, Ying Shan, and Fei Wang. Sadtalker: Learning realistic 3d motion coefficients for stylized audio-driven single image talking face animation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8652–8661, 2023. 3
- [27] Hang Zhou, Yu Liu, Ziwei Liu, Ping Luo, and Xiaogang Wang. Talking face generation by adversarially disentangled audio-visual representation. In *Proceedings of the AAAI conference on artificial intelligence*, pages 9299–9306, 2019. 2
- [28] Yang Zhou, Xintong Han, Eli Shechtman, Jose Echevarria, Evangelos Kalogerakis, and Dingzeyu Li. Makeltalk: speaker-aware talking-head animation. *ACM Transactions On Graphics (TOG)*, 39(6):1–15, 2020. 1, 2