A Deterministic Information Bottleneck Method for Clustering Mixed-Type Data

Efthymios Costa, Ioanna Papatsouma and Angelos Markos

Abstract In this paper, we present an information-theoretic method for clustering mixed-type data, that is, data consisting of both continuous and categorical variables. The method is a variant of the Deterministic Information Bottleneck algorithm which optimally compresses the data while retaining relevant information about the underlying structure. We compare the performance of the proposed method to that of three well-established clustering methods (KAMILA, K-Prototypes, and Partitioning Around Medoids with Gower's dissimilarity) on simulated and real-world datasets. The results demonstrate that the proposed approach represents a competitive alternative to conventional clustering techniques under specific conditions.

Keywords: Deterministic Information Bottleneck, Clustering, Mixed-type Data, Mutual Information

1 Introduction

The quest for effective data reduction approaches has led to the development of numerous algorithms designed to organize data into meaningful groups based on inherent similarities. Among these, the Information Bottleneck (IB) method, introduced by [1], has emerged as a powerful framework for capturing the essence of data by maximizing the mutual information between input variables and the desired output. Building upon this foundation, the Deterministic Information Bottleneck (DIB)

Efthymios Costa

Imperial College London, United Kingdom, e-mail: efthymios.costa17@imperial.ac.uk

Ioanna Papatsouma

Imperial College London, United Kingdom, e-mail: i.papatsouma@imperial.ac.uk

Angelos Markos

Democritus University of Thrace, Alexandroupoli, Greece, e-mail: amarkos@eled.duth.gr

1

method, presented in [2], offers an appealing variant for clustering applications, emphasizing the deterministic assignment of data points to clusters.

This paper seeks to advance the application of the DIB method by tailoring it for the clustering of mixed-type data. Mixed-type data sets, composed of both continuous and categorical variables, present unique challenges that standard clustering algorithms struggle to address effectively (refer to [3, 4] for comprehensive reviews of clustering methods for mixed-type data). Our work is motivated by the need for a robust, theoretically grounded approach capable of handling this complexity.

The rest of the paper is organised as follows: Section 2 presents the Deterministic Information Bottleneck method tailored for mixed-type data (DIBmix), detailing the theoretical framework, its algorithmic implementation and briefly outlining the selection process of hyperparameter values. Section 3 discusses the simulations performed on artificial data to benchmark the proposed method against other established clustering techniques. In Section 4, we apply the DIBmix method to real-world datasets and analyze its performance. The conclusion in Section 5 wraps up the study, summarizing the findings and suggesting avenues for future research.

2 Methodology

The Information Bottleneck (IB) method was first introduced in [1]. The use of IB and of its deterministic version (see [2]) in cluster analysis was then described in detail in [5]. In this paper, we extend the Deterministic Information Bottleneck (DIB) for clustering mixed-type data.

We start by defining our data set \mathcal{D} to consist of both continuous and unordered categorical variables. Given three signal sources X, Y and T, the (D)IB method seeks to find a mapping (or 'encoder') $q(t \mid x)$ such that T contains all the information that is needed for predicting Y. Notice that we impose a Markov constraint of the form $T \leftrightarrow X \leftrightarrow Y$, which implies that T can only get information about Y through X and vice-versa. In the context of cluster analysis T is the 'compressed' representation of \mathcal{D} into clusters, Y is the location of each point in the p-dimensional mixed-attribute space and finally X is the observation index i ranging from 1 up to the number of observations n. The Markov constraint therefore tells us that if we are given a cluster assignment of any point in \mathcal{D} , we may not deduce its location unless we are also equipped with the observation index.

Given the above assumptions, we define the 'optimal DIB clustering' $q^*(t \mid x)$ as:

$$q^*(t \mid x) = \arg\min_{q(t \mid x)} H(T) - \beta I(T, Y). \tag{1}$$

The terms H(T) and I(T,Y) refer to the entropy of T and the mutual information of T and Y, respectively. Expression (1) can be seen as a tradeoff between compression and relevance; a low value of H(T) means that the clusters are very dense, while a high value of I(T,Y) implies that given the cluster assignment of an observation, we can deduce a lot of information about its location (and vice versa). Finally, β

is a non-negative term that the solution is a function of, controlling the amount of emphasis we put on relevance over compression; see [5] for a discussion on how this can be chosen.

We now describe how the DIBmix algorithm is implemented. We start by considering the joint density of X and Y, denoted by p(x, y). We notice that $p(x, y) = p(y \mid x)p(x)$ and since X only represents the observation index, we set p(x) = 1/n to ensure all points have an equal weight. This can be modified if there is a reason for certain observations to be more influential in the clustering process, as long as $\sum_{x} p(x) = 1$. Determining $p(y \mid x)$ requires knowledge about the data generating process, which is often unavailable. Therefore, we resort to estimating $p(y \mid x)$ using Kernel Density Estimation (KDE). Since our data consists of both continuous and categorical features, the kernel density estimator of the joint density is computed using a generalized product kernel, as suggested in [6]. For instance, for one categorical and one continuous variable (denoted as x^d and x^c , respectively), the estimated joint probability density function at a point $x^* = (x^d, x^c)^{\mathsf{T}}$ is given by:

$$\hat{f}\left(\boldsymbol{x}^*\right) = \frac{1}{ns} \sum_{i=1}^{n} K_d \left(X_i^d = x^d\right) K_c \left(\frac{X_i^c - x^c}{s}\right),\tag{2}$$

where K_d and K_c are kernel functions for categorical and continuous data, respectively. The continuous kernel function is taken to be the Gaussian kernel, while the categorical kernel is that of Aitchison & Aitken [7]. These are summarised in Expression (3) below:

$$K_c\left(\frac{X_i^c - x^c}{s}\right) = \frac{1}{\sqrt{2\pi}} \exp\left\{-\frac{\left(X_i^c - x^c\right)^2}{2s^2}\right\}, \quad K_d\left(X_i^d = x_d\right) = \begin{cases}1 - \lambda & \text{if } X_i^d = x^d\\ \frac{\lambda}{\ell - 1} & \text{otherwise}\end{cases}$$
(3)

The parameters λ and s are referred to as 'bandwidths' or 'smoothing parameters' in the density estimation literature. For the purpose of density estimation, cross validation can be used to choose their values (see [6,8] for a more involved discussion), but in the context of clustering these can be set by the user based on domain knowledge or any other intution that is available. In fact, $K_c\left((X_i^c-x^c)/s\right)$ is the density value of a Gaussian random variable centered at X_i^c with a variance of s^2 (the multivariate extension follows naturally), while $K_d(X_i^d=x_d)$ is a generalised indicator function which boils down to the binary indicator for $\lambda=0$. Notice that $\lambda\in[0,(\ell-1)/\ell]$, where ℓ is the number of levels that the categorical variable of interest takes. Finally, there also exist kernel functions that can deal with ordinal data (see [9], for example) but we exclude these from our study and focus solely on unordered categorical variables.

Once p(x, y) and $p(y \mid x)$ have been evaluated, we choose a random initialisation for the cluster assignment, denoted by $q^0(t \mid x)$ and we further define the mth updates for the negative loss function, the cluster masses, the clustering output and the cluster conditional density of points (denoted by $\mathcal{L}^{(m)}(x)$, $q^{(m)}(t)$, $q^{(m)}(t \mid x)$ and $q^{(m)}(y \mid t)$, respectively) as follows:

$$\mathcal{L}^{(m)}(x) = \log q^{(m-1)}(t) - \beta D_{\text{KL}} \left(p(y \mid x) || q^{(m-1)}(y \mid t) \right),$$

$$q^{(m)}(t) = \sum_{x} q^{(m)}(t \mid x) p(x),$$

$$q^{(m)}(t \mid x) = \mathbb{I} \left\{ t - \arg \max_{t} \mathcal{L}^{(m)}(x) \right\},$$

$$q^{(m)}(y \mid t) = \frac{1}{q^{(m)}(t)} \sum_{x} q^{(m)}(t \mid x) p(x, y).$$

In the above, $\mathbb{I}(\cdot)$ refers to the indicator function, while $D_{\mathrm{KL}}(\cdot||\cdot)$ denotes the Kullback-Leibler (KL) Divergence. The rationale behind this formulation is described in detail in [2], where it also shown that minimisation of Expression (1) is equivalent to maximising $\mathcal{L}(x)$. The clustering process involves updating the aforementioned quantities until $q(t \mid x)$ remains unchanged. Multiple initial cluster assignments $q^0(t \mid x)$ can be used and the solution with the lowest value for Expression (1) (or equivalently the maximum $\mathcal{L}(x)$) is chosen.

The proposed algorithm involves three key hyperparameters: β , s, and λ . The regularization parameter $\beta \geq 0$ balances relevance and compression. A higher β emphasizes relevance, while lower values encourage compression. The optimal β is typically determined by plotting H(T) and I(T,Y) against a range of β values and selecting the point of largest curvature, a process detailed in [5].

Regarding bandwidth parameters s and λ , they influence the trade-off between bias and variance in density estimation [10]. Lower values can lead to limited dispersion of $p(y \mid x)$ across the unit interval, hence imposing the risk of any random initial cluster assignment being returned as the solution with no exploration of the space of possible partitions (this is analogous to the algorithm being trapped in local minima). To mitigate this, we use a selection process that enables users to specify the relative importance of variable types without directly setting bandwidth values. The resulting density estimator should strike a balance between smoothness and preserving information of high-density regions.

Lastly, λ is chosen to equalize the importance of continuous and categorical variables in $p(y \mid x)$. Evaluating kernel density estimators for both variable types allows for the determination of λ such that their mean variances match. By default, equal weight is assigned to both variable types; users can adjust this weighting if necessary. Our method ensures a balanced consideration of variable types in the clustering process.

3 Simulations on artificial data

We conducted a simulation study to evaluate the performance of our proposed method, referred to as DIBmix, in comparison with three leading methods for clustering mixed-type data, based on previous benchmarking studies [3, 11]. These methods include KAy-means for MIxed LArge data (KAMILA) [12], K-Prototypes

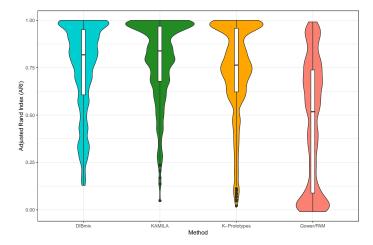


Fig. 1 Violin/box plots of Adjusted Rand Index values by method.

[13], and Partitioning Around Medoids (PAM) using Gower's dissimilarity [14, 15]. It is important to note that all these methods are centroid-based, with KAMILA being semi-parametric; our study did not include any model-based clustering algorithms.

Following recent recommendations for conducting benchmarking studies in cluster analysis [16], we compare the four methods in a full factorial experiment. More precisely, we generate artificial data sets with varying sample size (200, 500 and 1000), number of continuous and categorical features (2 and 6, each), number of categorical levels (2, 4 and 6), overlap between clusters on the continuous and categorical variables (moderate and high) and cluster sizes (equal and imbalanced with one cluster three times larger than the other). We use the genMixedData function from the kamila package to replicate each scenario a hundred times. Continuous variables follow a normal mixture model, and categorical variables follow a multinomial mixture model. Overlap between clusters (i.e., how clear the cluster structure is) corresponds to the area of the overlapping region defined by their densities (or, for categorical variables, the summed height of overlapping segments defined by their point masses). The overlap levels were set to 0.3 for moderate and 0.6 for high overlap, respectively. The number of clusters was fixed to 2, due to limitations imposed by genMixedData. The total number of data sets generated was therefore 28, 800. For each data set, cluster recovery was measured using the Adjusted Rand Index (ARI) [17].

The DIBmix method was implemented with the kernel functions in Expression (3) (other kernel choices are also available) and parameter values were chosen according to the process outlined in Section 2. The value of β was chosen to be equal to a hundred, so that relevance is encouraged much more than compression, while the relative importance of categorical to continuous features was set to its default value of a unit. All four clustering methods were run with a hundred random starts, allowing for a maximum of a hundred iterations until convergence.

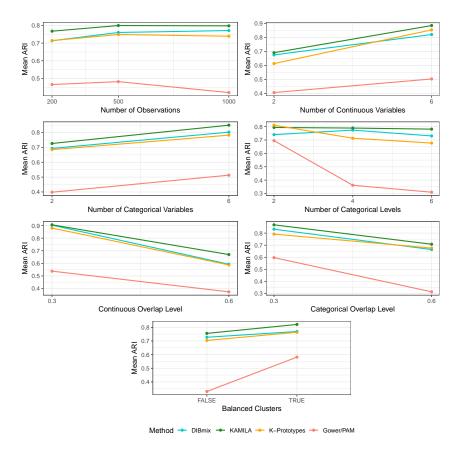


Fig. 2 Mean cluster recovery in terms of ARI of the four methods under comparison across different experimental conditions

The violin plots in Figure 1 show the distributions of the ARI values for the four clustering methods under comparison. The central tendency, represented by the median, is highest for KAMILA, followed by DIBmix and K-Prototypes, suggesting that these methods are more likely to yield optimal clustering partitions. Notably, Gower/PAM exhibits a wide range of ARI values, including some significantly lower scores, which highlights inconsistent clustering outcomes.

Figure 2 displays a comparative analysis of the mean ARI across various experimental conditions. Overall, DIBmix tends to perform well in scenarios with balanced clusters and many variables (continuous or categorical), but shows a steep decline in performance when there is overlap in continuous and categorical variables and for smaller sample sizes. KAMILA appears to be more robust to changes in categorical levels and overlap. K-Prototypes and Gower/PAM perform moderately across different conditions but tend to be outperformed by DIBmix and KAMILA under the majority of scenarios presented.

4 Applications to real data

We assessed the performance of the four clustering methods across six real-world datasets from the UCI repository [18]. It is important to outline that these datasets were originally created for classification purposes. The ARI values, comparing the cluster partition obtained to the 'true' cluster partition, are presented in Table 1; the highest value for each dataset is shown in bold. DIBmix exhibited consistent performance across a range of datasets, outperforming KAMILA, K-prototypes, and Gower/PAM in most scenarios. In real-world data, the relative importance of categorical to continuous variables, as well as the effect of the regularisation parameter β to the clustering output are hard to know in advance. Thus, we present the hyperparameter values which have led to these results for completeness. The terms λ and ℓ refer to the vectors of categorical bandwidths and of the number of categorical levels, respectively, while \emptyset denotes the Hadamard division.

Table 1 Performance of four clustering methods on six mixed-type datasets from the UCI repository (values are ARIs). Hyperparameter values for DIBmix are reported below each dataset.

Dataset	DIBmix	KAMILA	K-prototypes	Gower/PAM
Dermatology (6 clusters, 1 cont, 33 categ)	0.7093	0.4629	0.5483	0.6143
$(\beta = 100, s = 2.5, \lambda = (\ell - 1) \oslash \ell - 0.05 \times 1)$				
Heart disease (2 clusters, 6 cont, 7 categ)	0.4470	0.3626	0.0273	0.4037
$(\beta = 10, s = 3, \lambda = (\ell - 1) \otimes \ell - 0.1 \times 1)$		0.46=0	0.0125	0.0000
Adult (2 clusters, 6 cont, 8 categ)	0.2252	0.1670	-0.0127	0.0389
$(\beta = 100, s = 1, \lambda = (\ell - 1) \oslash \ell - 0.15 \times 1)$ Condition remaind (2) electron (6) and (9) and (9)	0.4065	0.4675	0.1011	0.2575
Credit approval (2 clusters, 6 cont, 9 categ) $(\beta = 10, s = 1.6, \lambda = (\ell - 1) \oslash \ell - 0.18 \times 1)$	0.4065	0.4075	0.1811	0.3575
Australian (2 clusters, 6 cont, 8 categ)	0.4511	0.4747	0.1632	0.3487
$(\beta = 100, s = 1.5, \lambda = (\ell - 1) \otimes \ell - 0.2 \times 1)$	0.1511	0.17.17	0.1032	0.5 107
Contraceptive method (3 clusters, 2 cont, 7 categ)	0.0345	0.0305	0.0130	0.0249
$(\beta = 7.5, s = 1.5, \lambda = (\ell - 1) \otimes \ell)$				

5 Conclusion

In this paper, we introduced the Deterministic Information Bottleneck algorithm and employed it to devise a new method for clustering mixed-type data. The method has demonstrated promising results in a series of simulations in comparison to three state-of-the-art clustering algorithms for heterogeneous features. Additionally, the algorithm's application to real-world datasets yielded reasonably good results. Future investigations might explore the algorithm's properties further, particularly the impact of hyperparameters on the clustering process, and the development of schemes for hyperparameter tuning. It is worth noting that 'tuning' in this context might lead to varying 'optimal' clustering results. Additional simulations could be

conducted to include more than two clusters and test the algorithm's ability to deal with more complex partitions. The introduction of the DIB algorithm for mixed-type data could pave the way for the development of a new generation of information-based clustering techniques for heterogeneous data, introducing a new class of effective and reliable clustering methods.

References

- Naftali Tishby, Fernando C. Pereira, and William Bialek. The Information Bottleneck Method. In *Proceedings of the 37th Annual Allerton Conference on Communication, Control and Computing*, pages 368–377, 1999.
- Daniel J Strouse and David J Schwab. The deterministic information bottleneck. Neural Computation, 29(6):1611–1630, 2017.
- 3. Amir Ahmad and Shehroz S Khan. Survey of state-of-the-art mixed data clustering algorithms. *IEEE Access*, 7:31883–31902, 2019.
- Michel Van de Velden, Alfonso Iodice D'Enza, and Angelos Markos. Distance-based clustering of mixed data. Wiley Interdisciplinary Reviews: Computational Statistics, 11(3):e1456, 2019.
- Daniel J Strouse and David J Schwab. The information bottleneck and geometric clustering. Neural Computation, 31(3):596–612, 2019.
- Qi Li and Jeff Racine. Nonparametric estimation of distributions with categorical and continuous data. *Journal of Multivariate Analysis*, 86(2):266–292, 2003.
- John Aitchison and Colin GG Aitken. Multivariate binary discrimination by the kernel method. Biometrika, 63(3):413–420, 1976.
- Desheng Ouyang, Qi Li, and Jeffrey Racine. Cross-validation and the estimation of probability distributions with categorical data. *Journal of Nonparametric Statistics*, 18(1):69–100, 2006.
- 9. Min-Chiang Wang and John Van Ryzin. A class of smooth estimators for discrete distributions. *Biometrika*, 68(1):301–309, 1981.
- Bernard. W. Silverman. Density Estimation for Statistics and Data Analysis. Routledge, 1st edition, 1998.
- Efthymios Costa, Ioanna Papatsouma, and Angelos Markos. Benchmarking distance-based partitioning methods for mixed-type data. Advances in Data Analysis and Classification, 17(3):701–724, 2023.
- 12. Alex Foss, Marianthi Markatou, Bonnie Ray, and Aliza Heching. A semiparametric method for clustering mixed data. *Machine Learning*, 105:419–458, 2016.
- 13. Zhexue Huang. Clustering large data sets with mixed numeric and categorical values. In *Proceedings of the 1st Pacific-Asia Conference on Knowledge Discovery and Data Mining (PAKDD)*, pages 21–34. Citeseer, 1997.
- 14. Leonard Kaufman and Peter J Rousseeuw. *Finding Groups in Data: An Introduction to Cluster Analysis*, chapter 2, pages 68–125. John Wiley & Sons, 1990.
- 15. John C Gower. A general coefficient of similarity and some of its properties. *Biometrics*, 27:857–871, 1971.
- 16. Iven Van Mechelen, Anne-Laure Boulesteix, Rainer Dangl, Nema Dean, Christian Hennig, Friedrich Leisch, Douglas Steinley, and Matthijs J Warrens. A white paper on good research practices in benchmarking: The case of cluster analysis. Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery, 13(6):e1511, 2023.
- 17. Lawrence Hubert and Phipps Arabie. Comparing partitions. *Journal of Classification*, 2(2):193–218, 1985.
- Dheeru Dua and Casey Graff. UCI Machine Learning Repository, 2019. University of California, Irvine, School of Information and Computer Sciences.