

---

# MULTI-GROUP PROPORTIONAL REPRESENTATION

---

A PREPRINT

**Alex Oesterling\***  
Harvard University

**Claudio Mayrink Verdun\***  
Harvard University

**Carol Xuan Long**  
Harvard University

**Alex Glynn**  
Harvard University

**Lucas Monteiro Paes**  
Harvard University

**Sajani Vithana**  
Harvard University

**Martina Cardone**  
University of Minnesota

**Flavio P. Calmon**  
Harvard University

## ABSTRACT

Image search and retrieval tasks can perpetuate harmful stereotypes, erase cultural identities, and amplify social disparities. Current approaches to mitigate these representational harms balance the number of retrieved items across population groups defined by a small number of (often binary) attributes. However, most existing methods overlook intersectional groups determined by combinations of group attributes, such as gender, race, and ethnicity. We introduce Multi-Group Proportional Representation (MPR), a novel metric that measures representation across intersectional groups. We develop practical methods for estimating MPR, provide theoretical guarantees, and propose optimization algorithms to ensure MPR in retrieval. We demonstrate that existing methods optimizing for equal and proportional representation metrics may fail to promote MPR. Crucially, our work shows that optimizing MPR yields more proportional representation across multiple intersectional groups specified by a rich function class, often with minimal compromise in retrieval accuracy.

## 1 Introduction

A recognized objective in fair machine learning (ML) is discovering, reporting, and mitigating *representational harms* [1–3]. Representational harms arise when systems reinforce and perpetuate the marginalization of population groups based on characteristics such as race, socioeconomic status, cultural background, and gender [1, 4–6]. These harms often manifest through the biased portrayal or misrepresentation of these groups, stereotype reinforcement, and erasure of cultural identities [7, 8]. Representational harms have been widely documented in ML systems. For instance, many freely available datasets used in ML are not geo-diverse [9], and generative models can output images that under-represent demographic minorities across gender and racial identities [10–12].

We focus on representation in retrieval tasks. Representational harms in retrieval and ranking tasks arise when retrieved items do not accurately reflect the true diversity and proportions present in reality, perpetuating harmful stereotypes and biases [13]. For instance, Kay et al. [2] demonstrated that, in 2015, only 10% of the top 100 results for CEO in Google Image Search were women, despite 28% of CEOs in the US being women, and recent studies [14, 15] have demonstrated that this bias is still present in modern image search engines. Later, Otterbacher et al. [16] showed that the search engine Bing usually produced twice as many men as compared to women when queried with the word “person”. Finally, [17] systematically studied gender biases in image representations by auditing the four most important image search engines: Google, Bing, Baidu, and Yandex. In particular, among other findings, this study showed that when a qualifier such as “intelligent” is added to the query “person”, the engines still exhibit a huge gender discrepancy; see also [1, Chapter 7]. When retrieval is based on a search over vector embeddings of images and text, biases in embedding models can propagate to retrieved results, leading to disparate representation of people by demographic groups such as gender or race [18–20], as well as propagating spurious correlations from the dataset more broadly [21] or distorting results due to stereotypes present in the representation [22]. Though correlations between unrelated semantic concepts do not necessarily constitute representational harms, a wealth of research charts undesirable bias in embedding models, including publicly available joint vision-language foundational embedding models such as CLIP [23] used for retrieval.

---

\*: Equal contribution. Correspondence to aoesterling@g.harvard.edu.

Bias in embeddings can lead to bias in retrieval [24–26]. In fact, recent work by Srinivasan et al. [27] argues that many image retrieval systems lack “social diversity” as perceived by humans.

Several interventions aim to control gross statistical deviations in group representations in retrieval. A common approach is ensuring equal representation of pre-defined population groups in retrieved items [28, 29]. An alternative goal is proportional representation (PR) [20, 30], where the representation of different groups is approximately equal to reference population statistics. Various interventions have been proposed to achieve equal or proportional representation, including optimizing for diversity in addition to the similarity in retrieval [27, 31], directly selecting the objects retrieved based on balancing known or predicted sensitive attributes [29] and, for vector databases, modifying embeddings directly to remove information about group-defining attributes [18, 20].

Achieving proportional representation across multiple intersectional groups is challenging, as existing fairness interventions typically consider only a small number of pre-defined groups. Ensuring representation across individual groups (e.g., given by gender **or** race) does not guarantee representation across *intersectional* groups (e.g., given by gender **and** race), as demonstrated in Tables 1 and 3. The study of intersectionality and its consequences is rooted in work in law and the social sciences [32–34] and has been a well-discussed problem for several decades. In machine learning systems, lack of intersectional representation can contribute to the invisibility of historically marginalized groups determined by multiple axes of identity [35], or their mistreatment through “fairness gerrymandering,” where interventions on fairness for specific groups may harm fairness on intersectional subgroups [36]. However, as the number of group-denoting attributes increases, the number of intersectional groups grows exponentially, quickly surpassing the number of retrieved items and limiting the achievable proportional representation.

We propose a metric called *Multi-group Proportional Representation* (MPR) to quantify the representation of intersectional groups in retrieval tasks. MPR measures the worst-case deviation between the average values of a collection of *representation statistics* computed over retrieved items relative to a reference population whose representation we aim to match. The set of representation statistics is given by a function class  $\mathcal{C}$ , where each function  $c \in \mathcal{C}$  maps a retrieved item  $x$  to a Real number. For instance,  $c(x) \in \{-1, 1\}$  may denote binary group membership. In theory,  $\mathcal{C}$  can be given by bounded complexity function classes, such as linear functions or shallow decision trees. In practice,  $\mathcal{C}$  are functions defined over item attributes, such as vector embeddings or group-denoting labels, enabling MPR to measure proportional representation across complex, intersectional subgroups. Compared to naively counting the number of retrieved items across a (potentially exponential) number of pre-defined groups, MPR offers a more flexible, scalable, and theoretically grounded metric for multi-group representation in retrieval.

In addition to **introducing and carefully motivating the MPR metric** (Section 2), we make three contributions. **First**, we show how to compute MPR for several function classes in Section 3. Computing MPR relies on a curated dataset that represents the desired population whose proportional representation we aim to reflect in retrieved items. We derive sample complexity bounds for the size of this curated dataset based on the complexity of the function class  $\mathcal{C}$ . We also demonstrate that MPR can be computed in closed form for certain function classes or with a regression oracle. **Second**, we propose MAPR, an algorithm that retrieves items from a vector database to maximize their average similarity to a query embedding while satisfying an MPR constraint relative to the curated dataset (Section 4). MAPR achieves this by iteratively calling an oracle that computes MPR violations, yielding both relevant and representative retrieved items. **Third**, we evaluate MAPR on retrieval tasks using datasets such as CelebA [37], the Occupations dataset [31], Fairface [38], and UTKFace [39]. Our results (Section 5) show that MAPR Pareto-dominates competing approaches in balancing retrieval similarity and MPR.

**Related Work.** Broadly speaking, existing work on fair and diverse retrieval with pretrained embeddings either: 1) modifies the embedding space to prioritize downstream fairness, or 2) provides retrieval algorithms optimizing for diversity or fairness.

*Mitigating Bias in Embedding Space.* Various approaches have been proposed to produce vector embeddings of text and images that target diversity or mitigate bias. These include modifying loss functions to encourage group fairness [40], adversarial training [41, 42], disentangling representations [43], and in-processing fair sampling methods for gender imbalance [18]. Many foundational embeddings models are not trained with such approaches, so post-processing methods for fairness have also been developed for multimodal models like CLIP [23], such as CLIP-clip [18], CLIP-debias [20], and FairCLIP [19]. The recent work PATHS [27], built upon the pretrained image-text model CoCa, leverages text-guided projections to extract an embedding that captures complex notions of diversity in people, enabling effective diverse retrieval methods. In our experiments, we report the MPR achieved by CLIP-clip and CLIP-debias in retrieval tasks. PATHS [27] is the recent work most similar to ours in that it also aims to promote intersectional representation in retrieval. Code for implementing and reproducing [27] was not available at the time of submission. We approximate its retrieval algorithm with vanilla CLIP embeddings. Unlike the aforementioned methods, MAPR is not based on modifying embeddings.

*Retrieval Algorithms with Diversity or Fairness.* Instead of modifying embeddings, several methods aim to promote diversity, given possibly biased embeddings. For a fixed query, the baseline method for retrieval is  $k$ -Nearest-Neighbors ( $k$ -NN), where the  $k$  most similar items are retrieved [44]. Given an additional diversity constraint, a popular approach is Maximal Marginal Relevance (MMR) [45], where items are greedily retrieved in order to maximize a linear combination of similarity and diversity metrics. Celis et al. [30], Celis and Keswani [31] focus on diversity and fairness in image retrieval, using a reweighing method that combines similarity and MMR to select diverse yet relevant images. Alternatively, the Post-Hoc Bias Mitigation [29] method aims to achieve equal representation over a pre-defined attribute (such as gender) through calls to an oracle classifier and selecting a balanced group of images. **We extend this prior work in two key ways:** (i) we aim to achieve proportional representation across intersectional groups, going beyond the representation of two groups defined by binary attributes; (ii) MAPR explicitly balances MPR and retrieval similarity via an optimization that controls for both, offering a principled alternative to greedy MMR-based methods.

*Diversity Metrics.* A traditional measure of diversity for a set is the pairwise similarity of the retrieved items [46]. However, the general visual (dis)similarity metric is insufficient in optimizing for people-related diversity such as skin tone or gender [30]. When the attribute (e.g., race) along which diversity is optimized is known, fairness definition-derived metrics such as proportional representation are used ([47], see also next section). For more complex notions of diversity that aim to capture intersectional or subtle sociocultural identities (e.g., cultural backgrounds, lifestyles, nationalities, religions), human annotators are employed to determine if the selected set of images is more diverse than the baseline (retrieval based on similarity to query only) [27]. MPR complements existing metrics by providing a rigorous approach to measuring representation across complex, intersectional groups defined by a rich class of functions. However, as with any fairness metric, MPR has limitations (see Section 6) and may not always align with human perceptions of representation. We underscore the importance of involving stakeholders in defining representation goals and auditing retrieval systems.

*Multi-Group Fairness.* Our work is directly informed by the burgeoning literature on multi-group fairness in classification, particularly the work of Hébert-Johnson et al. [48], Kim et al. [49, 50] who proposed rigorous frameworks of multi-group fairness auditing and post-processing to ensure fair predictions across identifiable subgroups. Recent efforts in this field include [51–53], which analyze sample complexity aspects of measuring and reporting multi-group representation, and [54, 55] who develop stronger variants of multi-group fairness notions. Unlike prior work, we focus on multi-group representation in retrieval rather than multi-group fairness in classification and regression. Lastly, proportional representation strategies arose in the political sciences literature [56–60] – we address this body of work in Appendix C.

## 2 A Multi-Group Proportional Representation Metric

**Preliminaries.** Consider a *retrieval dataset* of items from which we aim to retrieve relevant entries, denoted by  $\mathcal{D}_R = \{\mathbf{x}_1^r, \dots, \mathbf{x}_n^r\}$ . We assume that  $\mathbf{x}_i^r \in \mathbb{R}^d \times \mathcal{G}$ , where  $\mathcal{G}$  is a set of additional labels for each item. For example, items  $\mathbf{x}_i^r$  can be  $d$ -dimensional embeddings of images, videos, or textual content, in which case  $\mathcal{G} = \emptyset$ . Alternatively,  $\mathbf{x}_i^r = (\mathbf{e}_i, \mathbf{g}_i)$ , where  $\mathbf{e}_i \in \mathbb{R}^d$  is an embedding and  $\mathbf{g}_i$  is a vector of labels indicating group membership (e.g., gender, race, ethnicity).

Given a query embedding  $\mathbf{q} \in \mathbb{R}^d$ , the goal of retrieval is to search and return the top- $k$  most similar items to  $\mathbf{q}$  in  $\mathcal{D}_R$ . The similarity between an embedding of  $\mathbf{q}$  and items in  $\mathcal{D}_R$  is measured according to a metric  $\kappa : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}$ . Throughout the paper, we assume that  $\mathcal{D}_R$  is a vector database and  $\kappa$  is cosine similarity between embeddings, though this formulation can be generalized. To retrieve items from  $\mathcal{D}_R$ , users prompt a query  $q$  (e.g., "Fortune 500 CEOs") which is then embedded  $\mathbb{R}^d$ . Ideally, the user receives  $k$  retrieved items  $\mathcal{R}(\mathbf{q}) = \{\mathbf{x}_1^r, \dots, \mathbf{x}_k^r\} \subset \mathcal{D}_R$  such that  $\kappa(\mathbf{q}, \mathbf{x}_i^r) \geq \kappa(\mathbf{q}, \mathbf{x})$  for all  $\mathbf{x} \notin \mathcal{R}(\mathbf{q})$  and  $i \in [k]$ .

The simplest setting for measuring representation is to consider only two population groups denoted by a binary variable – a setting commonly found in the fair retrieval and generation literature [18, 19]. In this case, group membership is determined by a *group-denoting function*  $c : \mathbb{R}^d \times \mathcal{G} \rightarrow \{-1, 1\}$ . For an item  $\mathbf{x}_i^r$ ,  $c(\mathbf{x}_i^r)$  indicates membership to group  $-1$  or  $1$  (e.g., male/female) based on its embedding  $\mathbf{e}_i$  and associated labels  $\mathbf{g}_i$ . If the retrieval dataset  $\mathcal{D}_R$  contains annotations for group membership,  $c(\mathbf{x}_i^r)$  can simply return the relevant feature from  $\mathbf{g}_i$ . However, when group labels are not present (i.e.,  $\mathcal{G} = \emptyset$ ),  $c(\mathbf{x}_i^r)$  can be implemented as a classifier that predicts group membership based on the item’s embedding  $\mathbf{e}_i$ .

With a group-denoting function  $c(\mathbf{x}^r)$  in hand, we can measure the representation of each group in a set of retrieved items  $\mathcal{R}(\mathbf{q})$ . One popular constraint for representation is *equal representation* [2, 28], which aims to ensure that the number of retrieved items in each group is approximately the same, i.e.,  $\frac{1}{k} \sum_{\mathbf{x}^r \in \mathcal{R}(\mathbf{q})} c(\mathbf{x}^r) \approx 0$ . An alternative metric is *proportional representation* [20, 61], which quantifies the deviation of group membership from a *reference distribution*  $Q$ . Methods that promote proportional representation aim to ensure  $\frac{1}{k} \sum_{\mathbf{x}^r \in \mathcal{R}(\mathbf{q})} c(\mathbf{x}^r) \approx \mathbb{E}_Q[c(X)]$ .

Here, the measure  $Q$  captures the distribution of a reference population whose representation statistics we aim to match. For example, if  $Q$  were the distribution of individuals in the United States,  $\mathbb{E}_Q[c(X)]$  could measure the proportion of men vs. women in the US and be approximated using Census data.

Proportional representation generalizes equal representation since different groups are rarely uniformly distributed over a given population. Naturally, the choice of distribution  $Q$  is application and context-dependent – we revisit the choice of  $Q$  below. Importantly, **if  $Q$  is biased, then biases will be propagated to the retrieved items.**

**Multi-Group Proportional Representation.** We aim to ensure that retrieved items represent individuals from diverse and intersectional population groups. Instead of measuring proportional representation in terms of the average of a single group-denoting function  $c(\mathbf{x}^r)$ , we consider a class of  $Q$ -measurable functions, the *representation statistics class*,  $\mathcal{C} \subset \{c : \mathbb{R}^d \times \mathcal{G} \rightarrow \mathbb{R}\}$ . This set  $\mathcal{C}$  may represent multiple, potentially uncountable overlapping groups. We formally define multi-group proportional representation next.

**Definition 1.** For a reference *representation distribution*  $Q$ , a set of  $Q$ -measurable set of *representation statistics*  $\mathcal{C}$ , and a set of  $k$  retrieved items  $\mathcal{R}$ , we define the multi-group Proportional Representation (MPR) metric as

$$\text{MPR}(\mathcal{C}, \mathcal{R}, Q) \triangleq \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{\mathbf{x}^r \in \mathcal{R}} c(\mathbf{x}^r) - \mathbb{E}_Q[c(X)] \right|. \quad (1)$$

A set of items  $\mathcal{R}$  is  $(\mathcal{C}, \rho)$ -multi-group proportional representative of  $Q$  if  $\text{MPR}(\mathcal{C}, \mathcal{R}, Q) \leq \rho$ .

The MPR metric quantifies the “representativeness” of a rich class of statistics, denoted by functions in  $\mathcal{C}$ , within a set of retrieved items  $\mathcal{R}$ . This generalization is crucial for capturing intersectional groups. For example,  $\mathcal{C}$  could contain functions that map items to demographic groups based on race, gender, age, or combinations thereof. Alternatively, when labels in  $\mathcal{G}$  contain such group-denoting attributes,  $\mathcal{C}$  can represent decision trees of a given depth over features (e.g., all combinations of pairs of race, gender, and age). The MPR metric compares the empirical average of each  $c \in \mathcal{C}$  over the retrieved set  $\mathcal{R}$  to its expectation under the reference distribution  $Q$ . By defining  $Q$  appropriately, we can flexibly specify different statistical representation goals, such as equal representation ( $\mathbb{E}_Q[c(X)] = 1/2$  for binary  $c$ ) or proportional representation w.r.t. a target population. However, as  $\mathcal{C}$  grows in complexity, pre-specifying  $\mathbb{E}_Q[c(X)]$  for all  $c \in \mathcal{C}$  becomes infeasible. Instead, MPR can be estimated using a carefully curated dataset, which we define in the next subsection.

**Remark 1.** MPR is equivalent to the maximum mean discrepancy (MMD) of representation statistics in  $\mathcal{C}$  between the empirical distribution over retrieved items  $\mathcal{R}$  and the reference distribution  $Q$ . MMD-based metrics have a long history [62, 63] and are used in hypothesis testing for comparing distributions. MMD is a particular case of the Integral Probability Metric (IPM) [64, 65], allowing us to borrow from the rich literature on IPMs to measure and ensure MPR in practice.

**Remark 2.** MPR can be viewed as the “representation in retrieval” counterpart of multi-group fairness metrics found in classification, such as multiaccuracy [49] and multicalibration [48]. Whereas multiaccuracy and multicalibration measure if classification error residuals are correlated with any group represented within a class  $\mathcal{C}$ , MPR captures *proportional representation* of groups in  $\mathcal{C}$  within a set of retrieved items – a fundamentally different problem. The idea of representing groups in terms of a “computationally identifiable” class of functions  $\mathcal{C}$  is directly inspired by the multi-group fairness in classification literature, and we adopt similar notation (i.e.,  $c$  and  $\mathcal{C}$ ).

**Curated Datasets for Proportional Representation.** A key challenge in computing MPR is selecting the reference representation distribution  $Q$  and measuring the expectation of functions in  $\mathcal{C}$  against this distribution. In the simple case where  $\mathcal{C}$  consists of a small number of functions indicating membership in individual groups, we could potentially set the proportional representation targets  $\mathbb{E}_Q[c(X)]$  for each group  $c \in \mathcal{C}$  manually, e.g., by defining a target fraction of men/women or individuals from different ethnic backgrounds. This quickly becomes infeasible when there are many intersectional groups – and impossible if  $\mathcal{C}$  is uncountable. Moreover, in most practical settings,  $Q$  will very likely *not* have a simple closed-form analytical expression.

In practice, i.i.d. samples drawn for  $Q$  may be available. For instance, the retrieval dataset  $\mathcal{D}_R$  itself may be drawn from the target population for which we aim to preserve proportional representation in retrieved items. Alternatively, we may have access to a dataset that was carefully curated to be representative of a diverse population. Examples include the FairFace dataset [38], which was designed to be balanced across race, gender, and age groups, and the AVFS dataset [66]. More generally, we refer to datasets with samples drawn from the target population  $Q$  as a *curated dataset*.

**Definition 2 (Curated Dataset).** Let  $Q$  be a probability distribution over  $\mathbb{R}^d \times \mathcal{G}$  tailored to account for diversity and representation of stakeholders who query the retrieval dataset. The *curated dataset* with  $m$  samples drawn from the distribution  $Q$  is denoted as  $\mathcal{D}_C \triangleq \{\mathbf{x}_1^c, \dots, \mathbf{x}_m^c\}$ . We denote the MPR of a set of retrieved items  $\mathcal{R}$  relative to the *empirical distribution over  $\mathcal{D}_C$*  as  $\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C)$ .

The exact nature of the curated dataset  $\mathcal{D}_C$  is context-dependent and may vary based on the specific application and desired representation goals. We can also condition the curated dataset on a given query. Specifically, for a query  $\mathbf{q}$ , we can retrieve relevant samples from both the curated dataset  $\mathcal{D}_C$  and the retrieval dataset  $\mathcal{D}_R$ . The samples retrieved from  $\mathcal{D}_C$  can then serve as a “conditional” curated dataset, denoted as  $\mathcal{D}_{C|\mathbf{q}}$ , which captures the desired representation target specific to the query  $\mathbf{q}$ . This approach allows for a more granular and context-aware proportional representation.

In the next two sections, we introduce theoretical guarantees and algorithms that are agnostic to the specific choice of  $\mathcal{D}_C$ . In other words, our proposed methods for measuring and promoting MPR in retrieval are general and can be applied regardless of how the curated dataset is constructed. In our numerical experiments (Section 5), we use FairFace [38] as the curated dataset.

### 3 Computing Multi-Group Proportional Representation

Computing MPR in Definition 1 requires approximating two quantities: the representation distribution  $Q$  and the supremum  $\sup_{c \in \mathcal{C}}$ . We first establish generalization bounds for approximating  $Q$  using i.i.d. samples. We then show how to compute  $\sup_{c \in \mathcal{C}}$  for several classes of representation statistics  $\mathcal{C}$ .

**Error in approximation  $Q$  via a curated dataset.** Proposition 1, proved in Appendix A, bounds the deviation between the empirical MPR computed over the curated dataset  $\mathcal{D}_C$  drawn i.i.d. from reference distribution  $Q$  and the true MPR measured over  $Q$ .

**Proposition 1** (Generalization Gap of MPR). *Let  $\mathcal{R}(q) = \{\mathbf{x}_i^r\}_{i=1}^k$  be a set of  $k$  retrieved samples,  $\mathcal{D}_C = \{\mathbf{x}_i^c\}_{i=1}^m$  be a curated dataset comprised of  $m$  i.i.d. samples from a target representation distribution  $Q$ , and  $\delta > 0$ . If  $\mathcal{C} = \{c : \mathcal{R}^d \times \mathcal{G} \rightarrow \{-1, 1\}\}$  with Rademacher complexity  $\mathcal{R}_m(\mathcal{C})$  then, with probability at least  $1 - \delta$ ,*

$$|\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q)| \leq \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log(2/\delta)}{8m}}. \quad (2)$$

We can extend Proposition 1 to any set of bounded functions  $\mathcal{C}$  (see, e.g., bounds on empirical MMD estimates in [63]). Note that the guarantee in (2) only holds for a single set of retrieved items  $\mathcal{R}$  in response to a query. Proposition 2 provides a bound on the size  $m$  of an i.i.d. curated dataset  $\mathcal{D}_C$  that ensures an  $\epsilon$ -accurate estimate of MPR for a set of  $M$  queries.

**Proposition 2** (Query Budget Guarantee). *Consider any set of  $M$  queries  $\mathcal{Q} = \{\mathbf{q}_1, \dots, \mathbf{q}_M\}$  where  $M \in \mathbb{N}$ . Let  $\text{VC}(\mathcal{C})$  denote the VC-dimension of the class  $\mathcal{C}$  with range in  $\{-1, 1\}$ . For  $\epsilon > 0$ , if  $\mathcal{D}_C$  consists of  $m$  i.i.d. samples drawn from  $Q$  where  $m$  satisfies*

$$m \geq \frac{32\text{VC}(\mathcal{C})}{\epsilon^2} + \frac{2 \log\left(\frac{2M}{\delta}\right)}{2\epsilon^2}, \quad (3)$$

*then, with probability at least  $1 - \delta$ ,  $|\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q)| \leq \epsilon$ .*

The above results provide guidelines on the size of the curated dataset required to accurately estimate MPR relative to a true target representation distribution  $Q$ . If the class of representation statistics  $\mathcal{C}$  is very complex (in the VC-dimension sense), then the size  $m$  of the curated dataset  $\mathcal{D}_C$  must be proportionally large to represent  $Q$  accurately. Hence, the curation dataset should be designed having in mind (i) the number of diverse queries being asked and (ii) the complexity of the function class  $\mathcal{C}$ . While Proposition 2 provides a conservative bound, as generalization bounds are often not tight [67], these results nevertheless offer insight into the relationship between the complexity of  $\mathcal{C}$  and the accuracy of MPR estimation.

In the remainder of the paper, we assume that MPR is computed against a fixed curated dataset  $\mathcal{D}_C$  of size  $m$ . We consider four specific instantiations of the set of representation statistics  $\mathcal{C}$ : (i)  $\mathcal{C}$  is closed under scalar multiplication, i.e., if  $c \in \mathcal{C}$ , then  $\lambda c \in \mathcal{C}$  for any  $\lambda \in \mathbb{R}$ , (ii)  $\mathcal{C}$  is a set of functions taking values in  $\{-1, 1\}$ ; (iii)  $\mathcal{C}$  consists of linear functions; and (iv)  $\mathcal{C}$  consists of functions in a Reproducing Kernel Hilbert Space (RKHS). Next, we show that for cases (i) and (ii) MPR can be computed using calls to an oracle that performs regression over  $\mathcal{C}$  and, for linear functions (iii), MPR has a simple closed-form expression. Due to its technical nature, we defer the calculation of MPR for functions in an RKHS to Appendix B.2.

**Computing MPR via Mean Square Error (MSE) Minimization.** When  $\mathcal{C}$  is closed under multiplication or consists of binary functions with values  $-1, 1$ , MPR can be expressed as an MSE minimization. This enables us to compute MPR by leveraging existing black-box oracles that perform regression under quadratic loss, such as regressors/classifiers implemented in ML libraries like scikit-learn [68].

The key observation for expressing MPR as an MSE minimization is that MPR can be formulated as a maximum correlation problem. Consider the (row-wise) concatenation of the retrieval dataset  $\mathcal{D}_R$  and the curated dataset  $\mathcal{D}_C$ , given by  $\mathbf{X} \triangleq [\mathbf{x}_1^r, \dots, \mathbf{x}_n^r, \mathbf{x}_1^c, \dots, \mathbf{x}_m^c]$ , where  $\mathbf{x}_i$  is the  $i$ -th entry of  $\mathbf{X}$ . For the remainder of this section, we consider a fixed set of retrieved items  $\mathcal{R}$ . Let  $\mathbf{a} \in \{0, 1\}^n$  be a vector indicating items that are retrieved from  $\mathcal{D}_R$  for a given query, i.e.,  $a_i = 1 \Leftrightarrow \mathbf{x}_i^r \in \mathcal{R}$ . Under this notation, where retrieved items are indicated by the vector  $\mathbf{a}$ , MPR can be reformulated as

$$\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) = \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) \right| = \sup_{c \in \mathcal{C}} \left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right|, \quad (4)$$

where  $\tilde{\mathbf{a}} \in \mathbb{R}^{n+m}$  has  $i$ -th entry given by  $\tilde{a}_i \triangleq \mathbb{1}_{i \leq n} \frac{a_i}{k} - \mathbb{1}_{i > n} \frac{1}{m}$ . This reformulation will be useful for explicitly casting MPR-constrained retrieval as an optimization problem.

When  $\mathcal{C}$  consists of binary functions in range  $\{-1, 1\}$ , MPR is equivalent to regression over  $\mathcal{C}$  of  $\tilde{\mathbf{a}}$  under quadratic loss, since

$$\inf_{c \in \mathcal{C}} \sum_{i=1}^{n+m} (c(\mathbf{x}_i) - \tilde{a}_i)^2 = n + m + \tilde{\mathbf{a}}^\top \tilde{\mathbf{a}} + 2 \sup_{c \in \mathcal{C}} \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i. \quad (5)$$

The absolute value in (4) can be recovered by regressing  $-\tilde{\mathbf{a}}$  instead of  $\tilde{\mathbf{a}}$ .

Most classes of regression functions in  $\mathbb{R}$  are closed under scalar multiplication (e.g., multiplying the output of a decision tree regressor by a constant still yields a decision tree regressor). However, in this case, it follows from (4) that MPR is unbounded. Even for bounded  $\mathcal{C}$ , without proper normalization MPR can scale with dataset size, which is undesirable for a representational measure. We constrain  $\mathcal{C}$  to a set of normalized functions for MPR to be bounded and independent of dataset size. This constraint also allows us to cast MPR as an MSE minimization over  $\mathcal{C}$ . We formally state this result next, proven in Appendix A, which will be applied in Section 4 to develop a cutting-plane-based algorithm for ensuring MPR in retrieval called MAPR.

**Proposition 3.** *Let  $\mathcal{C}' \triangleq \{c \in \mathcal{C} \mid \sum_{i=1}^{m+n} c(\mathbf{x}_i)^2 = \frac{mk}{m+k}\}$  where  $\mathcal{C}$  is closed under scalar multiplication. Let  $c(\mathbf{X}) = [c(\mathbf{x}_1), \dots, c(\mathbf{x}_{n+m})]$ . Then*

$$0 \leq \text{MPR}(\mathcal{C}', \mathcal{R}, \mathcal{D}_C) \leq 1, \quad (6)$$

and for any

$$c^* \in \arg \inf_{c \in \mathcal{C}} \sum_{i=1}^{n+m} (c(\mathbf{x}_i) - \tilde{a}_i)^2, \quad (7)$$

let  $\hat{c} : \mathcal{X} \rightarrow \mathbb{R}$  be defined as  $\hat{c}(\mathbf{x}) = \frac{\sqrt{C}}{\|c^*(\mathbf{X})\|_2} c^*(\mathbf{x})$ . Then, we have that

$$\hat{c} \in \arg \sup_{c \in \mathcal{C}'} \left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right|. \quad (8)$$

**Computing MPR for Bounded-Norm Linear Regression.** Recall that each item in the retrieval or curated datasets is of the form  $x_i = (e_i, g_i)$ , where  $e_i$  is an embedding and  $g_i$  are labels. When  $x_i \in \mathbb{R}^l$  (i.e., the labels have numerical values), we can consider  $\mathcal{C}$  as a linear set of functions over retrieved items. In this case, MPR enjoys a closed-form expression, as stated in the next proposition.

**Proposition 4.** *Let items in the retrieval and curated datasets be vectors in  $\mathbb{R}^l$  for  $l < m + n$  and  $\mathcal{C} = \{x \mapsto w^\top x \mid w \in \mathbb{R}^k\}$ . Moreover, let  $\mathbf{X} \in \mathbb{R}^{(m+n) \times l}$  be the matrix formed by concatenating items in the retrieval and curated dataset  $\mathcal{D}_R$  and  $\mathcal{D}_C$ , respectively. For  $\mathcal{C}'$  in Proposition 3, we have*

$$\text{MPR}(\mathcal{C}', \mathcal{R}, \mathcal{D}_C) = \sqrt{\frac{mk}{m+k}} \|\mathbf{U}_l^\top \tilde{\mathbf{a}}\|_2, \quad (9)$$

where  $\mathbf{X} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\top$  is the SVD of  $\mathbf{X}$  and  $\mathbf{U}_l \in \mathbb{R}^{(m+n) \times l}$  are the left singular vectors in  $\mathbf{U}$  corresponding to the top- $l$  largest singular values.<sup>1</sup>

The above proposition can be directly adapted to linear functions defined only over embeddings or a subset of features of retrieved items. The closed-form expression for MPR in (9) also allows MPR-constrained retrieval to be computed by a quadratic program, as discussed in Appendix B.1.

<sup>1</sup>For analysis of functions in an RKHS, see Appendix B.2

**Algorithm 1** MAPR (Multi-group Aware Proportional Retrieval)

---

**Input:**  $\mathcal{D}_R$ , query  $\mathbf{q}$ , number of iterations  $T$ , number of items to retrieve  $k$ , MPR constraint  $\rho$ ,  $\text{Oracle}(\mathbf{a})$  that computes solves (4) and returns  $c \in \mathcal{C}$  that approximates the sup.

```

1:  $\tilde{\mathcal{C}} \leftarrow \emptyset, s_i = \kappa(\mathbf{x}_i^r, \mathbf{q})$ 
2: for iter  $\in \{1, 2, \dots, T\}$  do
3:    $\mathbf{a} \leftarrow \arg \max_{\mathbf{a} \in [0,1]^m} \mathbf{a}^\top \mathbf{s}$  subject to  $|\frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c)| \leq \rho$  for  $c \in \tilde{\mathcal{C}}$ 
4:    $(\text{mpr\_violation}, c) \leftarrow \text{Oracle}(\mathbf{a})$  ▷ Solve (4)
5:   if mpr_violation  $\leq \rho$  or iter =  $T$  then
6:     return  $\mathcal{R} \leftarrow \{\mathbf{x}_i^r \in \mathcal{D}_R \text{ corresponding to } k \text{ largest entries of } a_i\}$ 
7:   else
8:      $\tilde{\mathcal{C}} \leftarrow \tilde{\mathcal{C}} \cup \{c\}$ 
9:   end if
10: end for

```

---

## 4 Promoting Multi-Group Proportional Representation in Retrieval Tasks

Next, we develop an optimization framework for retrieving the  $k$  most similar items in a vector database to a given query  $\mathbf{q}$  while satisfying a target MPR threshold of  $\rho$ . We formulate the retrieval goal as maximizing the average similarity between a query and retrieved items, given by  $s_i = \kappa(\mathbf{x}_i^r, \mathbf{q})$  (recall Section 2 for notation), where  $\kappa(\mathbf{x}_i^r, \mathbf{q})$  is given by cosine similarity in our experiments. The problem of maximizing utility in retrieval while satisfying an MPR constraint (expressed as Eq. (4)) can be formulated as the integer program:

$$\max_{\mathbf{a} \in \{0,1\}^n} \mathbf{a}^\top \mathbf{s} \quad \text{subject to} \quad \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) \right| \leq \rho, \quad \sum_{i=1}^k a_i = k. \quad (10)$$

When  $\mathcal{C}$  is given by normalized linear functions as in Proposition 4, the integer constraints can be relaxed to  $\mathbf{a} \in [0, 1]^n$  and the optimization can be approximated via standard quadratic solvers; see Appendix B.1.

**Multi-Group Aware Retrieval.** We approximate (10) via the Multi-Group Aware Proportional Retrieval Algorithm (MAPR), described in Algorithm 1. MAPR is essentially a cutting-plane method that aims to find a set of  $k$  items that maximize utility while approximately satisfying an MPR constraint of  $\rho$ . The algorithm iterates between (i) a call to an oracle that computes MPR and returns a function  $c \in \mathcal{C}$  that achieves the supremum in (4) and (ii) a call to a linear program (LP) solver that approximates the top- $k$  most similar items to a query subject to linear constraints on the violation measured by  $c$ . Each oracle call adds an additional constraint to the LP solver which, in turn, approximates the top- $k$  items under an increasing set of constraints. The solution of the LP is rounded to satisfy the integer constraint  $\mathbf{a} \in \{0, 1\}^n$ . In our implementation, we assume that MPR can be computed via MSE minimization (cf. Section 3) – in which case we consider the normalized class  $\mathcal{C}'$ . The oracle call consists of running a black-box quadratic loss minimization over  $\mathcal{C}$ .

Interestingly, we observe that, despite relaxing the integer constraints in each LP call, the solution to the relaxed problem is very sparse and (after rounding) approximates well the solution of the ideal integer program (10) for moderate values of  $\rho$ . However, the method can fail to accurately approximate the IP solution when  $\rho$  is small. We present a more detailed analysis of MAPR in Appendix B, which discusses potential convergence issues with the cutting plane method as well as stopping conditions.

## 5 Numerical Experiments

In this section, we show that MAPR is effective in promoting more proportional representation across intersectional groups while preserving similarity between retrieved items and a given query. Notably, MAPR Pareto-dominates competing benchmarks in terms of achieved MPR gap and utility.

**Datasets.** We conduct retrieval over three image datasets of faces: **CelebA** [37], which includes labels for gender, age, and various other attributes, **UTKFace** [39], which contains gender, age, and race attributes, and **Occupations** [2], which contains gender attributes. We compute MPR using **FairFace** [38] as the curated dataset  $\mathcal{D}_C$ , since it is a carefully designed dataset of faces with subgroup attributes for race, gender, and age. In all cases, each dataset entry consists of an image (CLIP) embedding  $\mathbf{e}_i$  and a set of labels  $\mathbf{g}_i$ .

**Benchmarks.** We compare our method with four baselines. **DebiasClip** [20] modifies text queries with a prepended learned embedding for debiased retrieval but does not allow for tunable control of the representation-similarity trade-off,

**Table 1:** Retrieval averaged over 10 queries with 50 retrievals on UTKFace dataset [39] for MAPR,  $k$ -NN, and MMR [27]. Entries indicate average percentage representation in retrieved items. MAPR is able to balance representation across classes, whereas  $k$ -NN and MMR miss intersectional groups (highlighted in red).

		White	Black	Asian	Indian	Others	Sum
<b>Top-K</b>	Male	21.2 ± 11.84	13.2 ± 7.70	10.8 ± 7.54	21.2 ± 20.70	1.4 ± 1.56	<b>67.8 ± 23.72</b>
	Female	17.2 ± 21.04	6.6 ± 6.14	4.0 ± 2.82	2.8 ± 2.56	1.6 ± 1.50	<b>32.2 ± 23.72</b>
	Sum	<b>38.4 ± 17.18</b>	<b>19.8 ± 12.56</b>	<b>14.8 ± 7.38</b>	<b>24 ± 19.38</b>	<b>3.0 ± 2.04</b>	
<b>MMR</b>	Male	28.8 ± 8.96	11.0 ± 4.58	10.2 ± 4.04	10.8 ± 2.40	3.8 ± 1.06	<b>64.6 ± 7.74</b>
	Female	16.2 ± 9.06	7.6 ± 3.66	5.0 ± 3.00	4.0 ± 1.26	2.6 ± 1.56	<b>35.4 ± 7.74</b>
	Sum	<b>45.0 ± 7.76</b>	<b>18.6 ± 5.38</b>	<b>15.2 ± 5.82</b>	<b>14.8 ± 3.12</b>	<b>6.4 ± 1.96</b>	
<b>MAPR (Ours)</b>	Male	7.8 ± 3.74	10.2 ± 2.90	13.0 ± 2.56	11.8 ± 2.44	7.2 ± 3.70	<b>50 ± 0</b>
	Female	12.2 ± 3.74	9.8 ± 2.90	7.0 ± 2.56	8.2 ± 2.44	12.8 ± 3.70	<b>50 ± 0</b>
	Sum	<b>20 ± 0</b>	<b>20 ± 0</b>	<b>20 ± 0</b>	<b>20 ± 0</b>	<b>20 ± 0</b>	

so it only results in a single retrieval set over which we compute similarity and MPR. ClipClip [18] trims features from CLIP embeddings that have high “mutual information” with gender, allowing for control of how many features are clipped from the embedding. PBM [29] post-processes CLIP embeddings to mitigate bias by predicting gender attributes and subsampling from each gender equally. PBM also allows tuning the representation-similarity tradeoff by controlling the likelihood of sampling at random or in a balanced manner from the retrieval dataset. Finally, the state-of-the-art for fair retrieval is the PATHS algorithm [27], which uses a set of adjective-noun keywords to capture a broad set of identity vectors in vision-language models, and then greedily samples using the MMR [45] algorithm to navigate the representation-similarity tradeoff. However, the authors’ method of computing PATHS embeddings is not public, so we used CLIP embeddings to replicate their algorithm. We refer to this method as MMR. For a detailed discussion of these algorithms and their approaches to representation, see Appendix C.


**Experimental Setup.** We consider two classes of representation statistics  $\mathcal{C}$ : linear regression and decision trees. In both cases, we compute MPR over  $\mathcal{C}'$ , i.e.,  $\mathcal{C}$  normalized over the retrieval and curated datasets (see Prop. 3). To accelerate retrieval, we query each of our retrieval datasets for the top 10k items according to the prompt “A photo of a {query}” in terms of raw similarity using FAISS [69]. We similarly retrieve the top 10k items from FairFace as the query-conditioned curated dataset  $\mathcal{D}_C$ . One reason we first filter for the top 10k items is the runtime of MMR, which is a greedy algorithm that traverses the full dataset for each retrieval  $k$  (even for 10k entries and  $k = 50$  retrieved items, MMR takes hours to run for 10 queries). We aggregate results over 10 queries for occupations suggested by ChatGPT 3.5 (Appendix E).

In order to evaluate representation over interpretable population groups, we consider that representation statistics  $\mathcal{C}$  are computed only over labels  $g_i$  given in FairFace. These labels are not present in all retrieval datasets. Thus, for CelebA and Occupations, we train linear probes on FairFace’s CLIP embeddings to predict their race and age attributes, and when using UTKFace, we map from FairFace’s race labels to UTKFace’s race labels by mapping Southeast Asian and East Asian to Asian and Middle Eastern and Latino\_Hispanic to Other. While the fair ML community should engage in broader discussions addressing the ethics of predicting sensitive attributes from CLIP embeddings and the issues surrounding the grouping and re-grouping of diverse racial identities, we acknowledge that these are larger-scale issues that our work does not presume to address. Instead, our experiments aim to demonstrate the flexibility and scalability of the MPR metric in handling complex intersectional groups as datasets become more representative.


We retrieve  $k = 50$  items for each of the above queries. For a given function class and query, we compute the baseline MPR and average cosine similarity for the top 50 most similar items. Then, we conduct a parameter sweep over  $\rho$  starting from this max-MPR value, inputting each value to MAPR in Algorithm 1.

**Results.** We include plots for three datasets for linear regression models in Fig. 1 with additional results for decision trees and MLPs in Appendix D. We observe that MAPR Pareto-dominates benchmark methods, and is able to preserve similarity while reaching lower levels of MPR. Interestingly, methods based on directly modifying embeddings or queries for a single group attribute such as ClipClip and DeBiasClip only partially reduce MPR at a high utility cost. The most competitive method to ours is MMR, which is our attempt to replicate PATHS. Though MMR is competitive to ours for large MPR, it fails to achieve small values of MPR relative to MAPR. It is also notable that MAPR can drive MPR to near zero for UTKFace, yet gaps remain in CelebA and Occupations, indicating biases in these datasets relative to FairFace.


In Fig. 2, we evaluate the quality of MAPR in terms of the precision of the retrieved images on the Occupations dataset, which has ground truth occupation labels we can query for. We observe that MAPR retains similar precision values

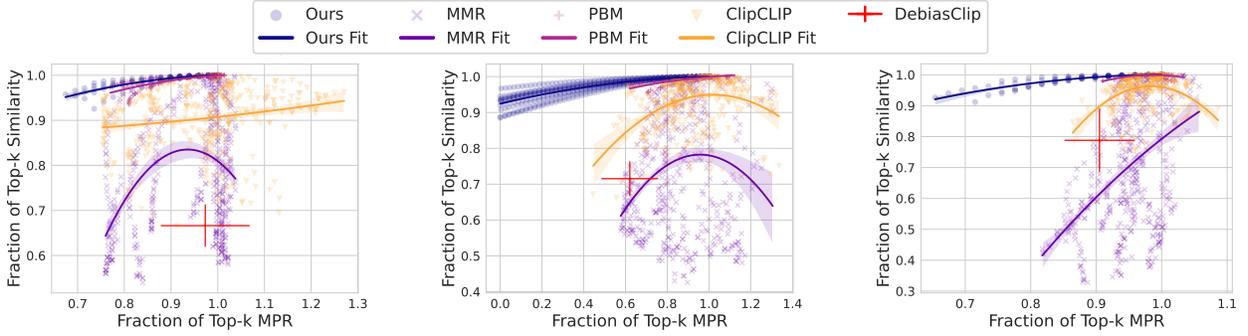

**Figure 1:** Fraction of Top- $k$  cosine similarity vs Fraction of Top- $k$  MPR averaged over 10 queries for  $k = 50$  images retrieved. From Left-to-Right: CelebA, UTKFaces, Occupations. Values are normalized so  $k$ -NN achieves point (1,1) in each case. MAPR Pareto-dominates baselines and significantly closes the MPR gap.

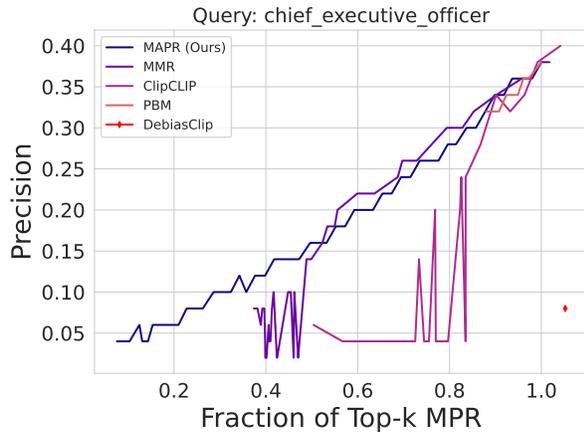

**Figure 2:** Precision of MAPR on the Occupations dataset for occupation “Chief Executive Officer”. Our method maintains similar precision-representation performance when compared with baselines.

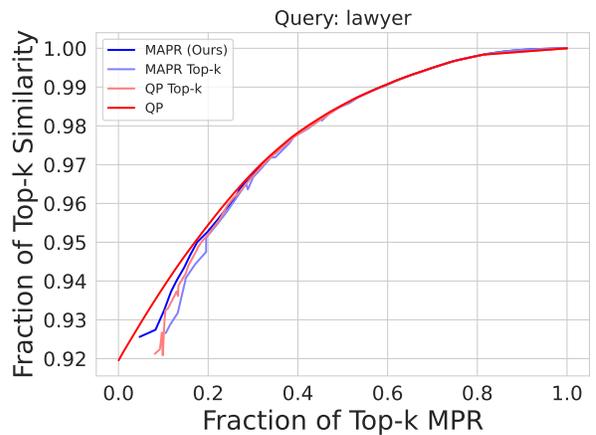

**Figure 3:** Comparison of MAPR (iterative linear program) to quadratic program optimization of closed form MPR for linear regression. For most values of  $\rho$ , MAPR is near-optimal to the QP. In addition, selecting the top- $k$  entries to conduct retrieval from the LP does not incur significant cost in terms of similarity.

across levels of representation with existing methods and more fully explores the precision-representation trade-off curve. In Fig. 2, we show results for the query “A photo of a chief executive officer” with results for additional queries in Appendix D.

In the case where  $\mathcal{C}$  consists of linear models, Proposition 3 provides a closed-form solution to MPR. We evaluate MAPR against a quadratic program directly optimizing for Prop 3 as demonstrated in Appendix B.1 and also compare results when rounding the relaxed problem to actually retrieve  $k$  items (Top- $k$ ). Fig 3 demonstrates that with fifty iterations, MAPR is near-optimal at all levels of representation to a direct optimization of the closed form of MPR.

In Table 1, we construct a synthetic curation set of perfectly balanced group attributes. This represents a stylized world where proportional representation is equal representation across all groups. Our results demonstrate that MAPR can exactly achieve our equal representation goals when provided with an idealized curation dataset, whereas prior baselines – see DebiasCLIP, ClipCLIP, and PBM in Appendix Table 3) – underrepresent several intersectional groups.

## 6 Concluding Remarks and Limitations

In this work, we introduced a novel retrieval metric called Multi-group Proportional Representation (MPR) and developed algorithms to ensure MPR in retrieval tasks. By measuring deviations in a set of representation statistics, MPR provides a scalable approach to quantifying and enforcing proportional representation for complex, intersectional groups. We analyzed the generalization properties and realizable regimes of MPR and, through experiments in image retrieval, demonstrated its favorable utility-fairness trade-off compared to existing fair retrieval algorithms.

Our work has limitations that offer opportunities for future research. First, while MPR is designed to handle a large number of groups, the computational complexity of the proposed cutting-plane algorithm in the case of a general function class  $\mathcal{C}$  can be a concern for high-dimensional feature spaces. Developing more efficient algorithms or approximation techniques could help address this issue. Second, while we focused on retrieval tasks, adapting MPR to other domains, such as ranking, recommendation systems, and image generation, could broaden its impact and applicability. Future research could also investigate the long-term societal impact of enforcing MPR in real-world retrieval systems to understand its potential benefits and risks. Finally, MPR is inherently limited by the curated dataset. If this dataset is biased against a given group, this bias will be propagated by MAPR. The creation and selection of curated datasets must carefully account for stakeholder interest and target representation statistics.

## 7 Acknowledgements

The authors would like to thank the discussions with Filipe Goulart Cabral. This material is based upon work supported by the National Science Foundation under awards CAREER-1845852, CIF-1900750, CIF-2231707, and CIF-2312667, FAI-2040880, and also by the National Science Foundation Graduate Research Fellowship under Grant No. DGE-2140743. The views expressed here are those of the authors and do not reflect the official policy or position of the funding agencies.

## References

- [1] Solon Barocas, Moritz Hardt, and Arvind Narayanan. *Fairness and machine learning: Limitations and opportunities*. MIT Press, 2023.
- [2] Matthew Kay, Cynthia Matuszek, and Sean A Munson. Unequal representation and gender stereotypes in image search results for occupations. In *Proceedings of the 33rd annual acm conference on human factors in computing systems*, pages 3819–3828, 2015.
- [3] Kate Crawford. The trouble with bias, 2017. Accessed May 1, 2024. [https://www.youtube.com/watch?v=fMym\\_BKWQzk](https://www.youtube.com/watch?v=fMym_BKWQzk).
- [4] Sarah Myers West, Meredith Whittaker, and Kate Crawford. Discriminating systems. *AI Now*, pages 1–33, 2019.
- [5] Solon Barocas, Kate Crawford, Aaron Shapiro, and Hanna Wallach. The problem with bias: Allocative versus representational harms in machine learning. In *9th Annual conference of the special interest group for computing, information and society*, page 1. Philadelphia, PA, USA, 2017.
- [6] Sanjana Gautam, Pranav Narayanan Venkit, and Sourojit Ghosh. From melting pots to misrepresentations: Exploring harms in generative ai. *arXiv preprint arXiv:2403.10776*, 2024.
- [7] Harini Suresh and John Gutttag. A framework for understanding sources of harm throughout the machine learning life cycle. In *Proceedings of the 1st ACM Conference on Equity and Access in Algorithms, Mechanisms, and Optimization*, pages 1–9, 2021.
- [8] Jared Katzman, Angelina Wang, Morgan Scheuerman, Su Lin Blodgett, Kristen Laird, Hanna Wallach, and Solon Barocas. Taxonomizing and measuring representational harms: A look at image tagging. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 37, pages 14277–14285, 2023.
- [9] Shreya Shankar, Yoni Halpern, Eric Breck, James Atwood, Jimbo Wilson, and D Sculley. No classification without representation: Assessing geodiversity issues in open data sets for the developing world. *arXiv preprint arXiv:1711.08536*, 2017.
- [10] Sasha Luccioni, Christopher Akiki, Margaret Mitchell, and Yacine Jernite. Stable bias: Evaluating societal representations in diffusion models. *Advances in Neural Information Processing Systems*, 36, 2024.
- [11] Federico Bianchi, Pratyusha Kalluri, Esin Durmus, Faisal Ladhak, Myra Cheng, Debora Nozza, Tatsunori Hashimoto, Dan Jurafsky, James Zou, and Aylin Caliskan. Easily accessible text-to-image generation amplifies demographic stereotypes at large scale. In *Proceedings of the 2023 ACM Conference on Fairness, Accountability, and Transparency*, pages 1493–1504, 2023.
- [12] Alexander Lin, Lucas Monteiro Paes, Sree Harsha Tanneru, Suraj Srinivas, and Himabindu Lakkaraju. Word-level explanations for analyzing bias in text-to-image models. *arXiv preprint arXiv:2306.05500*, 2023.
- [13] Latanya Sweeney. Discrimination in online ad delivery. *Communications of the ACM*, 56(5):44–54, 2013.
- [14] Danaë Metaxa, Michelle A Gan, Su Goh, Jeff Hancock, and James A Landay. An image of society: Gender and racial representation and impact in image search results for occupations. *Proceedings of the ACM on Human-Computer Interaction*, 5(CSCW1):1–23, 2021.

- [15] Yunhe Feng and Chirag Shah. Has CEO Gender Bias Really Been Fixed? Adversarial Attacking and Improving Gender Fairness in Image Search. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 11882–11890, 2022.
- [16] Jahna Otterbacher, Jo Bates, and Paul Clough. Competent men and warm women: Gender stereotypes and backlash in image search results. In *Proceedings of the 2017 chi conference on human factors in computing systems*, pages 6620–6631, 2017.
- [17] Roberto Ulloa, Ana Carolina Richter, Mykola Makhortykh, Aleksandra Urman, and Celina Sylwia Kacperski. Representativeness and face-ism: Gender bias in image search. *new media & society*, 26(6):3541–3567, 2024.
- [18] Jialu Wang, Yang Liu, and Xin Wang. Are gender-neutral queries really gender-neutral? mitigating gender bias in image search. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 1995–2008, 2021.
- [19] Junyang Wang, Yi Zhang, and Jitao Sang. Fairclip: Social bias elimination based on attribute prototype learning and representation neutralization. *arXiv preprint arXiv:2210.14562*, 2022.
- [20] Hugo Berg, Siobhan Hall, Yash Bhalgat, Hannah Kirk, Aleksandar Shtedritski, and Max Bain. A prompt array keeps the bias away: Debiasing vision-language models with adversarial learning. In *Proceedings of the 2nd Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 12th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 806–822, 2022.
- [21] Jae Myung Kim, A. Sophia Koepke, Cordelia Schmid, and Zeynep Akata. Exposing and mitigating spurious correlations for cross-modal retrieval. *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 2585–2595, 2023.
- [22] Mohsen Abbasi, Sorelle A Friedler, Carlos Scheidegger, and Suresh Venkatasubramanian. Fairness in representation: quantifying stereotyping as a representational harm. In *Proceedings of the 2019 SIAM International Conference on Data Mining*, pages 801–809. SIAM, 2019.
- [23] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [24] Siobhan Mackenzie Hall, Fernanda Gonçalves Abrantes, Hanwen Zhu, Grace Sodunke, Aleksandar Shtedritski, and Hannah Rose Kirk. Visogender: A dataset for benchmarking gender bias in image-text pronoun resolution. *Advances in Neural Information Processing Systems*, 36, 2024.
- [25] Robert Wolfe and Aylin Caliskan. Markedness in visual semantic ai. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 1269–1279, 2022.
- [26] Tolga Bolukbasi, Kai-Wei Chang, James Y Zou, Venkatesh Saligrama, and Adam T Kalai. Man is to computer programmer as woman is to homemaker? debiasing word embeddings. *Advances in neural information processing systems*, 29, 2016.
- [27] Hansa Srinivasan, Candice Schumann, Aradhana Sinha, David Madras, Gbolahan Oluwafemi Olanubi, Alex Beutel, Susanna Ricco, and Jilin Chen. Generalized people diversity: Learning a human perception-aligned diversity representation for people images. *arXiv preprint arXiv:2401.14322*, 2024.
- [28] Anay Mehrotra and Elisa Celis. Mitigating bias in set selection with noisy protected attributes. *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, 2020.
- [29] Fanjie Kong, Shuai Yuan, Weituo Hao, and Ricardo Henao. Mitigating test-time bias for fair image retrieval. *Advances in Neural Information Processing Systems*, 36, 2024.
- [30] Elisa Celis, Vijay Keswani, Damian Straszak, Amit Deshpande, Tarun Kathuria, and Nisheeth Vishnoi. Fair and diverse dpp-based data summarization. In *International conference on machine learning*, pages 716–725. PMLR, 2018.
- [31] L Elisa Celis and Vijay Keswani. Implicit diversity in image summarization. *Proceedings of the ACM on Human-Computer Interaction*, 4(CSCW2):1–28, 2020.
- [32] Kimberle Crenshaw. Demarginalizing the intersection of race and sex: A black feminist critique of antidiscrimination doctrine, feminist theory and antiracist politics. In *University of Chicago Legal Forum*, volume 1989, page 8, 1989.
- [33] Kimberlé Williams Crenshaw. Mapping the margins: Intersectionality, identity politics, and violence against women of color. In *The public nature of private violence*, pages 93–118. Routledge, 2013.
- [34] Sumi Cho, Kimberlé Williams Crenshaw, and Leslie McCall. Toward a field of intersectionality studies: Theory, applications, and praxis. *Signs: Journal of women in culture and society*, 38(4):785–810, 2013.

- [35] Joy Buolamwini and Timnit Gebru. Gender shades: Intersectional accuracy disparities in commercial gender classification. In *Conference on fairness, accountability and transparency*, pages 77–91. PMLR, 2018.
- [36] Michael Kearns, Seth Neel, Aaron Roth, and Zhiwei Steven Wu. Preventing fairness gerrymandering: Auditing and learning for subgroup fairness. In *International conference on machine learning*, pages 2564–2572. PMLR, 2018.
- [37] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep learning face attributes in the wild. In *Proceedings of International Conference on Computer Vision (ICCV)*, December 2015.
- [38] Kimmo Karkkainen and Jungseock Joo. Fairface: Face attribute dataset for balanced race, gender, and age for bias measurement and mitigation. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 1548–1558, 2021.
- [39] Zhifei Zhang, Yang Song, and Hairong Qi. Age progression/regression by conditional adversarial autoencoder. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2017.
- [40] Rich Zemel, Yu Wu, Kevin Swersky, Toni Pitassi, and Cynthia Dwork. Learning fair representations. In Sanjoy Dasgupta and David McAllester, editors, *Proceedings of the 30th International Conference on Machine Learning*, volume 28 of *Proceedings of Machine Learning Research*, pages 325–333, Atlanta, Georgia, USA, 17–19 Jun 2013. PMLR.
- [41] Harrison Edwards and Amos Storkey. Censoring representations with an adversary. In *4th International Conference on Learning Representations*, pages 1–14, 2016.
- [42] David Madras, Elliot Creager, Toniann Pitassi, and Richard Zemel. Learning adversarially fair and transferable representations. In Jennifer Dy and Andreas Krause, editors, *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 3384–3393. PMLR, 10–15 Jul 2018.
- [43] Elliot Creager, David Madras, Jörn-Henrik Jacobsen, Marissa Weis, Kevin Swersky, Toniann Pitassi, and Richard Zemel. Flexibly fair representation learning by disentanglement. In *International conference on machine learning*, pages 1436–1445. PMLR, 2019.
- [44] Xiubo Geng, Tie-Yan Liu, Tao Qin, Andrew Arnold, Hang Li, and Heung-Yeung Shum. Query dependent ranking using k-nearest neighbor. In *Proceedings of the 31st annual international ACM SIGIR conference on Research and development in information retrieval*, pages 115–122, 2008.
- [45] Jaime Carbonell and Jade Goldstein. The use of mmr, diversity-based reranking for reordering documents and producing summaries. In *Proceedings of the 21st annual international ACM SIGIR conference on Research and development in information retrieval*, pages 335–336, 1998.
- [46] Barry Smyth and Paul McClave. Similarity vs. diversity. In *International conference on case-based reasoning*, pages 347–361. Springer, 2001.
- [47] Evaggelia Pitoura, Kostas Stefanidis, and Georgia Koutrika. Fairness in rankings and recommendations: an overview. *The VLDB Journal*, pages 1–28, 2022.
- [48] Ursula Hébert-Johnson, Michael Kim, Omer Reingold, and Guy Rothblum. Multicalibration: Calibration for the (computationally-identifiable) masses. In *International Conference on Machine Learning*, pages 1939–1948. PMLR, 2018.
- [49] Michael P Kim, Amirata Ghorbani, and James Zou. Multiaccuracy: Black-box post-processing for fairness in classification. In *Proceedings of the 2019 AAAI/ACM Conference on AI, Ethics, and Society*, pages 247–254, 2019.
- [50] Michael P Kim, Christoph Kern, Shafi Goldwasser, Frauke Kreuter, and Omer Reingold. Universal adaptability: Target-independent inference that competes with propensity scoring. *Proceedings of the National Academy of Sciences*, 119(4):e2108097119, 2022.
- [51] Eliran Shabat, Lee Cohen, and Yishay Mansour. Sample complexity of uniform convergence for multicalibration. *Advances in Neural Information Processing Systems*, 33:13331–13340, 2020.
- [52] Lucas Monteiro Paes, Ananda Theertha Suresh, Alex Beutel, Flavio Calmon, and Ahmad Beirami. Multi-group fairness evaluation via conditional value-at-risk testing. *arXiv preprint arXiv:2312.03867*, 2023.
- [53] Parikshit Gopalan, Lunjia Hu, and Guy N Rothblum. On computationally efficient multi-class calibration. *arXiv preprint arXiv:2402.07821*, 2024.
- [54] Parikshit Gopalan, Michael P Kim, Mihir A Singhal, and Shengjia Zhao. Low-degree multicalibration. In *Conference on Learning Theory*, pages 3193–3234. PMLR, 2022.

- [55] Zhun Deng, Cynthia Dwork, and Linjun Zhang. Happymap: A generalized multicalibration method. In *14th Innovations in Theoretical Computer Science Conference, ITCS 2023*, page 41. Schloss Dagstuhl-Leibniz-Zentrum für Informatik GmbH, Dagstuhl Publishing, 2023.
- [56] Duncan Black. *Theory Committees and Elections*. Cambridge University Press, 1958.
- [57] John R Chamberlin and Paul N Courant. Representative deliberations and representative decisions: Proportional representation and the borda rule. *American Political Science Review*, 77(3):718–733, 1983.
- [58] Burt L Monroe. Fully proportional representation. *American Political Science Review*, 89(4):925–940, 1995.
- [59] Friedrich Pukelsheim. *Proportional representation*. Springer, 2017.
- [60] Jonathan K Hodge and Richard E Klima. *The mathematics of voting and elections: a hands-on approach*, volume 30. American Mathematical Soc., 2018.
- [61] Ajil Jalal, Sushrut Karmalkar, Jessica Hoffmann, Alex Dimakis, and Eric Price. Fairness for image generation with uncertain sensitive attributes. In *International Conference on Machine Learning*, pages 4721–4732. PMLR, 2021.
- [62] Karsten M Borgwardt, Arthur Gretton, Malte J Rasch, Hans-Peter Kriegel, Bernhard Schölkopf, and Alex J Smola. Integrating structured biological data by kernel maximum mean discrepancy. *Bioinformatics*, 22(14):e49–e57, 2006.
- [63] Arthur Gretton, Karsten M Borgwardt, Malte J Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *The Journal of Machine Learning Research*, 13(1):723–773, 2012.
- [64] Alfred Müller. Integral probability metrics and their generating classes of functions. *Advances in applied probability*, 29(2):429–443, 1997.
- [65] Bharath K Sriperumbudur, Kenji Fukumizu, Arthur Gretton, Bernhard Schölkopf, and Gert RG Lanckriet. On the empirical estimation of integral probability metrics. *Electronic Journal of Statistics*, 6:1550–1599, 2012.
- [66] Jerone Theodore Alexander Andrews, Przemyslaw Joniak, and Alice Xiang. A view from somewhere: Human-centric face representations. In *The Eleventh International Conference on Learning Representations*, 2022.
- [67] Yiding Jiang, Behnam Neyshabur, Hossein Mobahi, Dilip Krishnan, and Samy Bengio. Fantastic generalization measures and where to find them. In *International Conference on Learning Representations*, 2019.
- [68] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- [69] Jeff Johnson, Matthijs Douze, and Hervé Jégou. Billion-scale similarity search with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547, 2019.
- [70] Peter L. Bartlett and Shahar Mendelson. Rademacher and gaussian complexities: Risk bounds and structural results. *Journal of Machine Learning Research*, (1), 2002.
- [71] Martin J Wainwright. *High-dimensional statistics: A non-asymptotic viewpoint*, volume 48. Cambridge university press, 2019.
- [72] Jun Yang, Shengyang Sun, and Daniel M Roy. Fast-rate pac-bayes generalization bounds via shifted rademacher processes. *Advances in Neural Information Processing Systems*, 32, 2019.
- [73] Yuheng Bu, Shaofeng Zou, and Venugopal V Veeravalli. Tightening mutual information-based bounds on generalization error. *IEEE Journal on Selected Areas in Information Theory*, 1(1):121–130, 2020.
- [74] Amir Asadi, Emmanuel Abbe, and Sergio Verdú. Chaining mutual information and tightening generalization bounds. *Advances in Neural Information Processing Systems*, 31, 2018.
- [75] Ron Amit, Baruch Epstein, Shay Moran, and Ron Meir. Integral probability metrics pac-bayes bounds. *Advances in Neural Information Processing Systems*, 35:3123–3136, 2022.
- [76] James E Kelley, Jr. The cutting-plane method for solving convex programs. *Journal of the society for Industrial and Applied Mathematics*, 8(4):703–712, 1960.
- [77] Elliot Ward Cheney and Allen A Goldstein. Newton’s method for convex programming and tchebycheff approximation. *Numerische Mathematik*, 1(1):253–268, 1959.
- [78] B Curtis Eaves and WI Zangwill. Generalized cutting plane algorithms. *SIAM Journal on Control*, 9(4):529–542, 1971.
- [79] Dimitri Bertsekas. *Convex optimization algorithms*. Athena Scientific, 2015.

- 
- [80] Donald M Topkis. Cutting-plane methods without nested constraint sets. *Operations Research*, 18(3):404–413, 1970.
- [81] Jean-Louis Goffin and Jean-Philippe Vial. Convex nondifferentiable optimization: A survey focused on the analytic center cutting plane method. *Optimization methods and software*, 17(5):805–867, 2002.
- [82] Laurence A Wolsey and George L Nemhauser. *Integer and combinatorial optimization*. John Wiley & Sons, 2014.
- [83] Bernhard Schölkopf and Alexander J Smola. *Learning with kernels: support vector machines, regularization, optimization, and beyond*. MIT press, 2002.
- [84] T Hofmann, B Schölkopf, and AJ Smola. Kernel methods in machine learning. *The Annals of Statistics*, 36(3): 1171–1220, 2008.
- [85] Weihao Gao, Sreeram Kannan, Sewoong Oh, and Pramod Viswanath. Estimating mutual information for discrete-continuous mixtures, 2018.
- [86] Thomas Hare. *A Treatise on the Election of Representatives, Parliamentary and Municipal*. Longman, Green, Longman, & Roberts, 1861.
- [87] Michel Balinski. Fair majority voting (or how to eliminate gerrymandering). *The American Mathematical Monthly*, 115(2):97–113, 2008.
- [88] Ariel D Procaccia, Jeffrey S Rosenschein, and Aviv Zohar. On the complexity of achieving proportional representation. *Social Choice and Welfare*, 30(3):353–362, 2008.
- [89] Nadja Betzler, Arkadii Slinko, and Johannes Uhlmann. On the computation of fully proportional representation. *Journal of Artificial Intelligence Research*, 47:475–519, 2013.
- [90] Gurobi Optimization, LLC. Gurobi Optimizer Reference Manual, 2024. URL <https://www.gurobi.com>.
- [91] Steven Diamond and Stephen Boyd. CVXPY: A Python-embedded modeling language for convex optimization. *Journal of Machine Learning Research*, 17(83):1–5, 2016.
- [92] Akshay Agrawal, Robin Verschueren, Steven Diamond, and Stephen Boyd. A rewriting system for convex optimization problems. *Journal of Control and Decision*, 5(1):42–60, 2018.

### Supplementary material to the paper *Multi-Group Proportional Representation*

In this supplement to the paper, we present the proofs in Appendix A. In particular, we prove Proposition 1, Proposition 2, and Proposition 4. In Appendix B, we discuss the MPR-aware retrieval algorithm, its convergence aspects, and the MPR-aware retrieval for linear functions and functions belonging to an RKHS. In Appendix C, we describe the algorithms, provide further retrieval statistics, and a brief discussion about proportional Representation in political sciences. In particular, after describing the algorithms CLIP-clip Wang et al. [18], CLIP-debias Berg et al. [20], Post-Hoc Bias Mitigation ([29] and PATHS (Srinivasan et al. [27]), we include additional plots for three datasets for decision tree models in Fig. 10 for multilayer perceptron in Fig. 11. In Appendix E, we provide experiment Setting and details. Finally, in Appendix D, discuss additional experimental results and compare MAPR against  $k$ -NN, MMR, ClipClip, PBM, and DebaisCLIP. In particular, we include full tables of intersectional retrieval performance on UTKFace.

## A Proofs from Section 3

We start by proving Proposition 1 from Section 3 which bounds the error in MPR estimates when  $Q$  is approximated via a curated dataset  $\mathcal{D}_C$ . We do so by using tools from standard Rademacher complexity results in statistical learning theory, e.g., [70]. See also [71, Chapter 4]. We restate the theorems here to facilitate readability. We start with a lemma about the difference of suprema.

**Lemma 1.** *Let  $P$  and  $P'$  be two distributions over  $\mathcal{X}$  and  $\mathcal{C} = \{c : \mathcal{X} \rightarrow [0, 1]\}$ . Then*

$$\sup_{c \in \mathcal{C}} \mathbb{E}_P[c(X)] - \sup_{c \in \mathcal{C}} \mathbb{E}_{P'}[c(X)] \leq \sup_{c \in \mathcal{C}} \{\mathbb{E}_P[c(X)] - \mathbb{E}_{P'}[c(X)]\}. \quad (11)$$

*Proof.*

$$\begin{aligned} & \sup_{c \in \mathcal{C}} \mathbb{E}_P[c(X)] - \sup_{c \in \mathcal{C}} \mathbb{E}_{P'}[c(X)] \\ &= \sup_{c \in \mathcal{C}} \{\mathbb{E}_P[c(X)] - \mathbb{E}_{P'}[c(X)] + \mathbb{E}_{P'}[c(X)]\} - \sup_{c \in \mathcal{C}} \mathbb{E}_{P'}[c(X)] \\ &\leq \sup_{c \in \mathcal{C}} \{\mathbb{E}_P[c(X)] - \mathbb{E}_{P'}[c(X)]\} + \sup_{c \in \mathcal{C}} \mathbb{E}_{P'}[c(X)] - \sup_{c \in \mathcal{C}} \mathbb{E}_{P'}[c(X)] \\ &\leq \sup_{c \in \mathcal{C}} \{\mathbb{E}_P[c(X)] - \mathbb{E}_{P'}[c(X)]\}. \end{aligned}$$

□

**Proposition 5** (Generalization Gap of MPR). *Let  $\{\mathbf{x}_i^r\}_{i=1}^k$  be retrieved samples  $\mathcal{R}$  and  $\{\mathbf{x}_i^c\}_{i=1}^m$  be i.i.d. samples from a curated distribution  $Q$  used to generate a curation dataset  $\mathcal{D}_C$ . If  $\mathcal{C} = \{c : \mathcal{X} \rightarrow \{-1, 1\}\}$  and  $\mathcal{R}_m(\mathcal{C})$  is the Rademacher complexity of  $\mathcal{C}$  then, for all  $\delta > 0$*

$$|\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q)| \leq \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log(\frac{2}{\delta})}{8m}} \quad (12)$$

with probability at least  $1 - \delta$ .

*Proof.* First, note that

$$\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q) \quad (13)$$

$$= \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) \right| - \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right| \quad (14)$$

$$\leq \sup_{c \in \mathcal{C}} \left\{ \left| \frac{1}{k} \sum_{i=1}^k c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) \right| - \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right| \right\} \quad (15)$$

$$\leq \sup_{c \in \mathcal{C}} \left\| \left| \frac{1}{k} \sum_{i=1}^k c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) \right| - \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right| \right\| \quad (16)$$

$$\leq \sup_{c \in \mathcal{C}} \left| \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) - \mathbb{E}_Q[c(X)] \right| \quad (17)$$

Where (15) comes from Lemma 1 and (17) comes from the triangular inequality.

Additionally, by switching  $\text{MPR}(\mathcal{C}, \mathcal{R}, Q)$  by  $\sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right|$  in (13) and repeating the previous argument, we conclude that:

$$\left| \text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right| \right| \leq \sup_{c \in \mathcal{C}} \left| \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) - \mathbb{E}_Q[c(X)] \right|. \quad (18)$$

Therefore, from (18) we show

$$\Pr \left[ \left| \text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right| \right| \geq 2\mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2}{\delta}\right)}{2m}} \right] \quad (19)$$

$$\leq \Pr \left[ \sup_{c \in \mathcal{C}} \left| \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) - \mathbb{E}_Q[c(X)] \right| \geq 2\mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2}{\delta}\right)}{2m}} \right] \quad (20)$$

$$\leq \Pr \left[ \sup_{c \in \mathcal{C}} \left| \frac{1}{m} \sum_{i=1}^m \frac{c(\mathbf{x}_i^c)}{2} - \mathbb{E}_Q \left[ \frac{c(X)}{2} \right] \right| \geq \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2}{\delta}\right)}{8m}} \right] \leq \delta, \quad (21)$$

here (21) comes from the generalization bound using Rademacher complexity from [70] and the fact that  $\frac{c(x)}{2} \in [-\frac{1}{2}, \frac{1}{2}]$  hence the image of  $\frac{c}{2}$  is in an interval of size 1.  $\square$

We now prove Proposition 2, which provides a bound on the size  $m$  of an i.i.d. curated dataset  $\mathcal{D}_C$  that ensures an  $\epsilon$ -accurate estimate of MPR for a set of  $M$  queries.

**Proposition 6** (Query Budget Guarantee). *Denote queries to retrieve samples by  $\mathcal{Q} = \{q_1, \dots, q_M\}$  where  $M \in \mathbb{N}$  is the number of queries. Let  $\text{VC}(\mathcal{C})$  denote the VC-dimension of the class  $\mathcal{C}$  with image in  $\{-1, 1\}$ . Then, for  $\epsilon > 0$  if the curation dataset contains  $m \in \mathbb{N}$  samples from the curated data distribution  $Q$  such that*

$$m \geq \frac{128 \text{VC}(\mathcal{C})}{\epsilon^2} + \frac{2 \log\left(\frac{2M}{\delta}\right)}{\epsilon^2} \quad (22)$$

then we have with probability at least  $1 - \delta$  that

$$\sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(x_i) - \mathbb{E}_Q[c(X)] \right| \leq \text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) + \epsilon \quad (23)$$

*Proof.* First, recall that the Rademacher complexity  $\mathcal{R}_m(\mathcal{C})$  is upper bounded by the VC-dimension of  $\mathcal{C}$  by the relation

$$\mathcal{R}_m(\mathcal{C}) \leq \sqrt{\frac{2\text{VC}(\mathcal{C}) \log\left(\frac{em}{\text{VC}(\mathcal{C})}\right)}{m}}, \quad (24)$$

where  $e$  is Euler's number.

Denote the samples retrieved for a given query  $q$  by  $\mathcal{R}(q) = \{\mathbf{x}_i^r(q)\}_{i=1}^k$ . From Proposition 1 we have that for all  $\delta^*$

$$\Pr \left[ \left| \text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q) \right| \geq \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2}{\delta^*}\right)}{8m}} \right] \leq \delta^*.$$

Therefore, using the previous equation if we take  $\delta^* = \frac{\delta}{M}$  and denote  $\mathcal{R}(q) = \mathcal{R}$  we have that

$$\begin{aligned}
& \Pr \left[ \sup_{q \in \mathcal{Q}} |\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q)| \geq \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2}{\delta^*}\right)}{8m}} \right] \\
& \leq \sum_{q \in \mathcal{Q}} \Pr \left[ |\text{MPR}(\mathcal{C}, \mathcal{R}, \mathcal{D}_C) - \text{MPR}(\mathcal{C}, \mathcal{R}, Q)| \geq \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2}{\delta^*}\right)}{8m}} \right] \\
& \leq \sum_{q \in \mathcal{Q}} \delta^* = \frac{\delta M}{M} = \delta.
\end{aligned} \tag{25}$$

Hence, we have that, with probability at least  $1 - \delta$  for all  $q \in \mathcal{Q}$

$$\sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(\mathbf{x}_i^r(q)) - \mathbb{E}_Q[c(X)] \right| \leq \text{MPR}(\mathcal{C}, \mathcal{R}(q), \mathcal{D}_C) + \mathcal{R}_m(\mathcal{C}) + \sqrt{\frac{\log\left(\frac{2M}{\delta}\right)}{8m}} \tag{26}$$

$$\leq \text{MPR}(\mathcal{C}, \mathcal{R}(q), \mathcal{D}_C) + \sqrt{\frac{2\text{VC}(\mathcal{C}) \log\left(\frac{em}{\text{VC}(\mathcal{C})}\right)}{m}} + \sqrt{\frac{\log\left(\frac{2M}{\delta}\right)}{8m}}. \tag{27}$$

Where the inequality in (27) comes from the upper bound in (24).

Moreover, if  $m \geq \frac{32\text{VC}(\mathcal{C})}{\epsilon^2}$  then  $\sqrt{\frac{2\text{VC}(\mathcal{C}) \log\left(\frac{em}{\text{VC}(\mathcal{C})}\right)}{m}} \leq \frac{\epsilon}{2}$  and if  $m \geq \frac{\log\left(\frac{2M}{\delta}\right)}{2\epsilon^2}$  then  $\sqrt{\frac{\log\left(\frac{2M}{\delta}\right)}{8m}} \leq \frac{\epsilon}{2}$ . Therefore, we conclude that if  $m$  is such that

$$m \geq \frac{32\text{VC}(\mathcal{C})}{\epsilon^2} + \frac{\log\left(\frac{2M}{\delta}\right)}{2\epsilon^2} \tag{28}$$

then

$$\sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^k c(\mathbf{x}_i^r(q)) - \mathbb{E}_Q[c(X)] \right| \leq \text{MPR}(\mathcal{C}, \mathcal{R}(q), \mathcal{D}_C) + \epsilon \tag{29}$$

□

As described in Section 3, such bounds tend to be conservative and these bounds can be improved by doing a sharper analysis with PAC-Bayesian [72] or mutual information bounds [73]. See also [74] and [75].

We now prove Proposition 3. This proposition states that for specific function classes, computing MPR is equivalent to solving an MSE regression problem. This proposition allows us to efficiently estimate MPR with standard regression models from packages such as scikit-learn [68].

**Proposition 7.** Let  $\mathcal{C}' \triangleq \{c \in \mathcal{C} \mid \sum_{i=1}^{m+n} c(\mathbf{x}_i)^2 = \frac{mk}{m+k}\}$  where  $\mathcal{C}$  is closed under scalar multiplication. Let  $c(\mathbf{X}) = [c(\mathbf{x}_1), \dots, c(\mathbf{x}_{n+m})]$ . Then

$$0 \leq \text{MPR}(\mathcal{C}', \mathcal{R}, \mathcal{D}_C) \leq 1, \tag{30}$$

and for any

$$c^* \in \arg \inf_{c \in \mathcal{C}} \sum_{i=1}^{n+m} (c(\mathbf{x}_i) - \tilde{a}_i)^2, \tag{31}$$

let  $\hat{c} : \mathcal{X} \rightarrow \mathbb{R}$  be defined as  $\hat{c}(\mathbf{x}) = \frac{\sqrt{C}}{\|c^*(\mathbf{X})\|_2} c^*(\mathbf{x})$ . Then, we have that

$$\hat{c} \in \arg \sup_{c \in \mathcal{C}'} \left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right|. \tag{32}$$

*Proof.* We begin proving the first statement. As a shorthand, let  $c(\mathbf{X}) = [c(\mathbf{x}_1), \dots, c(\mathbf{x}_{n+m})]$ . The Cauchy-Schwarz inequality gives,

$$\left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right| \leq \|c(\mathbf{X})\|_2 \|\tilde{\mathbf{a}}\|_2, \tag{33}$$

where  $\mathbf{X} \in \mathbb{R}^{(m+n) \times l}$  is the matrix formed by the row-wise concatenation of  $\mathcal{D}_R$  and  $\mathcal{D}_C$  and  $\tilde{\mathbf{a}}$  is the vector  $[\tilde{a}_0, \dots, \tilde{a}_{m+n}]$ .  $\mathcal{C}'$  gives us a constraint on the norm of  $c(\mathbf{X})$ , and we can compute  $\tilde{\mathbf{a}}$  given there are  $k$  terms with value  $1/k$ ,  $m$  terms with value  $1/m$ , and  $n - k$  terms with value 0. Also note that  $\frac{mk}{m+k} = (\frac{1}{k} + \frac{1}{m})^{-1}$

$$\left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right| \leq \left( \frac{1}{k} + \frac{1}{m} \right)^{-\frac{1}{2}} \left( \frac{1}{k} + \frac{1}{m} \right)^{\frac{1}{2}} = 1. \quad (34)$$

Next, we prove the second statement. Consider the minimizer of the MSE problem,

$$\arg \inf_{c \in \mathcal{C}} \sum_{i=1}^{n+m} (c(\mathbf{x}_i) - \tilde{a}_i)^2, \quad (35)$$

As  $\mathcal{C}$  is closed under scalar multiplication, we can equivalently write this a two-part optimization problem

$$\arg \inf_{c \in \mathcal{C}} \left( \inf_{\lambda} \sum_{i=1}^{n+m} (\lambda c(\mathbf{x}_i) - \tilde{a}_i)^2 \right), \quad (36)$$

where the inner optimization is quadratic and yields a solution

$$\lambda^* = \frac{\sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i}{\|c(\mathbf{X})\|_2^2}, \quad (37)$$

assuming  $\|c(\mathbf{X})\|_2 < \infty$ . Plugging this back into Equation (36), the MSE problem becomes

$$\arg \inf_{c \in \mathcal{C}} \sum_{i=1}^{n+m} \left( \frac{\sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i}{\|c(\mathbf{X})\|_2^2} c(\mathbf{x}_i) - \tilde{a}_i \right)^2 \quad (38)$$

$$= \arg \inf_{c \in \mathcal{C}} \sum_{i=1}^{n+m} \left( \frac{\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle^2}{\|c(\mathbf{X})\|_2^4} c(\mathbf{x}_i)^2 - 2 \frac{\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle}{\|c(\mathbf{X})\|_2^2} c(\mathbf{x}_i) \tilde{a}_i + \tilde{a}_i^2 \right) \quad (39)$$

$$= \arg \inf_{c \in \mathcal{C}} \left( \frac{\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle^2}{\|c(\mathbf{X})\|_2^4} \|c(\mathbf{X})\|_2^2 - 2 \frac{\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle}{\|c(\mathbf{X})\|_2^2} \langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle + \sum_{i=1}^{n+m} \tilde{a}_i^2 \right) \quad (40)$$

$$= \arg \inf_{c \in \mathcal{C}} - \frac{\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle^2}{\|c(\mathbf{X})\|_2^2} + \sum_{i=1}^{n+m} \tilde{a}_i^2 \quad (41)$$

As  $\tilde{a}_i$  does not depend on  $c$ , this optimization is equivalent to

$$\arg \sup_{c \in \mathcal{C}} \frac{\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle^2}{\|c(\mathbf{X})\|_2^2} = \arg \sup_{c \in \mathcal{C}} \frac{|\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle|^2}{\|c(\mathbf{X})\|_2^2} \quad (42)$$

Note that the supremum can be multiplied by a constant. Then we can multiply by some  $\Delta > 0$  and get

$$\arg \sup_{c \in \mathcal{C}} \frac{\Delta |\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle|^2}{\|c(\mathbf{X})\|_2^2} = \arg \sup_{\substack{c \in \mathcal{C} \\ \|c(\mathbf{X})\|_2 = \sqrt{\Delta}}} |\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle|^2. \quad (43)$$

In other words, for  $\Delta > 0$  and

$$c^* \in \arg \sup_{c \in \mathcal{C}} \frac{|\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle|^2}{\|c(\mathbf{X})\|_2^2}, \quad (44)$$

and letting  $\hat{c} : \mathcal{X} \rightarrow \mathbb{R}$  be defined as  $\hat{c}(\mathbf{x}) = \frac{\sqrt{\Delta}}{\|c^*(\mathbf{X})\|_2} c^*(\mathbf{x})$ , we have that

$$\hat{c} \in \arg \sup_{\substack{c \in \mathcal{C}, \\ \|c(\mathbf{X})\|_2 = \sqrt{\Delta}}} |\langle c(\mathbf{X}), \tilde{\mathbf{a}} \rangle|^2 = \arg \sup_{\|c(\mathbf{X})\|_2 = \sqrt{\Delta}} \left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right|^2 = \arg \sup_{\|c(\mathbf{X})\|_2 = \sqrt{\Delta}} \left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{a}_i \right|. \quad (45)$$

Letting  $\Delta = \frac{mk}{m+k}$ , we can conclude that solving an MSE regression problem is equivalent to finding the representation statistic for MPR.  $\square$

Now, we establish Proposition 4, restated below for convenience. It says that MPR enjoys a closed-form expression whenever the class  $\mathcal{C}$  is given by linear functions. This proposition allows us to simplify MAPR since, in this case, the optimization problem can be cast as a quadratic program.

**Proposition 8.** *Let items in the retrieval and curated datasets be vectors in  $\mathbb{R}^l$  for  $l < m + n$  and  $\mathcal{C} = \{x \mapsto w^\top x \mid w \in \mathbb{R}^k\}$ . Moreover, let  $\mathbf{X} \in \mathbb{R}^{(m+n) \times l}$  be the matrix formed by concatenating items in the retrieval and curated dataset  $\mathcal{D}_R$  and  $\mathcal{D}_C$ , respectively. For  $\mathcal{C}'$  in Proposition 3, we have*

$$\text{MPR}(\mathcal{C}', \mathcal{R}, \mathcal{D}_C) = \sqrt{\frac{mk}{m+k}} \|\mathbf{U}_l^\top \tilde{\mathbf{a}}\|_2, \quad (46)$$

where  $\mathbf{X} = \mathbf{U}\Sigma\mathbf{V}^\top$  is the SVD of  $\mathbf{X}$  and  $\mathbf{U}_l \in \mathbb{R}^{(m+n) \times l}$  are the left singular vectors in  $\mathbf{U}$  corresponding to the top- $l$  largest singular values.

The closed-form expression for MPR in (9) allows MPR-constrained retrieval to be approximated by a quadratic program, whose proof can be found in Appendix B. Moreover, the above proposition can be directly adapted to linear functions defined only for embeddings or a subset of features of retrieved items.

*Proof.* Since we are considering the class  $\mathcal{C}' \triangleq \{c \in \mathcal{C} \mid \sum_{i=1}^{m+n} c(\mathbf{x}_i)^2 = \frac{mk}{m+k}\}$ , where  $\mathcal{C} = \{x \mapsto w^\top x \mid w \in \mathbb{R}^d\}$ , the computation of the Multi-Group Proportional Representation metric

$$\text{MPR}(\mathcal{C}', \mathcal{R}, \mathcal{D}_C) = \arg \sup_{c \in \mathcal{C}'} \left| \sum_{i=1}^{n+m} c(\mathbf{x}_i) \tilde{\mathbf{a}}_i \right| \quad (47)$$

boils down to the following optimization problem

$$\max_{c \in \mathcal{C}'} \sum_{i=1}^{n+m} (w^\top x) \tilde{\mathbf{a}}_i \quad (48)$$

$$\text{subject to } \sum_{i=1}^{m+n} [w^\top x]^2 = \frac{mk}{m+k}, \quad (49)$$

which can be written as

$$\max_{w \in \mathbb{R}^{n+m}} \tilde{\mathbf{a}}^T \mathbf{X} \mathbf{w} \quad (50)$$

$$\text{subject to } \|\mathbf{X} \mathbf{w}\|_2^2 = \frac{mk}{m+k}, \quad (51)$$

where  $\mathbf{X} \in \mathbb{R}^{(n+m) \times l}$  is the matrix formed by concatenating items in the retrieval and curated dataset  $\mathcal{D}_R$  and  $\mathcal{D}_C$ , respectively. Let  $\mathbf{X} = \mathbf{U}\Sigma\mathbf{V}^\top$  be the SVD of  $\mathbf{X}$  and  $\mathbf{U}_l \in \mathbb{R}^{(m+n) \times l}$  are the left singular vectors in  $\mathbf{U}$  corresponding to the top- $l$  largest singular values. Then, the problem becomes

$$\max_{w \in \mathbb{R}^{m+n}} \tilde{\mathbf{a}}^T \mathbf{U} \Sigma \mathbf{V}^\top \mathbf{w} \quad (52)$$

$$\text{subject to } \|\Sigma \mathbf{V}^\top \mathbf{w}\|_2^2 = \frac{mk}{m+k}. \quad (53)$$

Now, by a change of variables  $\Sigma \mathbf{V}^\top \mathbf{w} = \tilde{\mathbf{w}}$  and  $\mathbf{U}^\top \tilde{\mathbf{a}} = \mathbf{z}$

$$\max_{\tilde{\mathbf{w}}, \mathbf{w} \in \mathbb{R}^{m+n}} \mathbf{z}^T \tilde{\mathbf{w}} \quad (54)$$

$$\text{subject to } \|\tilde{\mathbf{w}}\|_2^2 = \frac{mk}{m+k}, \quad (55)$$

$$\Sigma \mathbf{V}^\top \mathbf{w} = \tilde{\mathbf{w}}. \quad (56)$$

we can use the method of Lagrange multipliers. Let us define the Lagrangian function:

$$L(\tilde{\mathbf{w}}, \mathbf{w}, \lambda, \mu) = \mathbf{z}^T \tilde{\mathbf{w}} - \frac{\lambda}{2} \left( \|\tilde{\mathbf{w}}\|_2^2 - \frac{mk}{m+k} \right) - \mu^T (\Sigma \mathbf{V}^\top \mathbf{w} - \tilde{\mathbf{w}}). \quad (57)$$

To find the optimal solution, we set the partial derivatives of the Lagrangian with respect to  $\tilde{\mathbf{w}}$ ,  $\mathbf{w}$ ,  $\lambda$ , and  $\mu$  to zero:

$$\frac{\partial L}{\partial \tilde{\mathbf{w}}} = \mathbf{z} - \lambda \tilde{\mathbf{w}} + \mu = 0, \quad \frac{\partial L}{\partial \mathbf{w}} = -\mathbf{V} \Sigma \mu = 0, \quad (58)$$

$$\frac{\partial L}{\partial \lambda} = \frac{1}{2} \left( \|\tilde{\mathbf{w}}\|_2^2 - \frac{mk}{m+k} \right) = 0, \quad \frac{\partial L}{\partial \boldsymbol{\mu}} = \boldsymbol{\Sigma} \mathbf{V}^T \mathbf{w} - \tilde{\mathbf{w}} = 0. \quad (59)$$

From the second equation, we have  $\mathbf{V} \boldsymbol{\Sigma} \boldsymbol{\mu} = 0$ . Assuming  $\mathbf{V}$  and  $\boldsymbol{\Sigma}$  are full rank, this implies  $\boldsymbol{\mu} = 0$ . Substituting this into the first equation, we get:

$$\mathbf{z} - \lambda \tilde{\mathbf{w}} = 0 \implies \tilde{\mathbf{w}} = \frac{1}{\lambda} \mathbf{z}. \quad (60)$$

Using the third equation and the constraint  $\|\tilde{\mathbf{w}}\|_2^2 = \frac{mk}{m+k}$ , we can solve for  $\lambda$ :

$$\|\tilde{\mathbf{w}}\|_2^2 = \frac{1}{\lambda^2} \|\mathbf{z}\|_2^2 = \frac{mk}{m+k} \implies \lambda = \pm \|\mathbf{z}\|_2 \sqrt{\frac{m+k}{mk}} \quad (61)$$

Since we are maximizing  $\mathbf{z}^T \tilde{\mathbf{w}}$ , we choose the positive value of  $\lambda$ . Thus, the optimal  $\tilde{\mathbf{w}}$  is:

$$\tilde{\mathbf{w}}^* = \frac{\sqrt{\frac{mk}{m+k}}}{\|\mathbf{z}\|_2} \mathbf{z}. \quad (62)$$

Finally, using the fourth equation, we can find the optimal  $\mathbf{w}$ :

$$\boldsymbol{\Sigma} \mathbf{V}^T \mathbf{w}^* = \tilde{\mathbf{w}}^* \implies \mathbf{w}^* = (\boldsymbol{\Sigma} \mathbf{V}^T)^{-1} \tilde{\mathbf{w}}^* = \frac{\sqrt{\frac{mk}{m+k}}}{\|\mathbf{z}\|_2} (\boldsymbol{\Sigma} \mathbf{V}^T)^{-1} \mathbf{z} = \frac{\sqrt{\frac{mk}{m+k}}}{\|\mathbf{z}\|_2} (\boldsymbol{\Sigma} \mathbf{V}^T)^{-1} \mathbf{U}^T \tilde{\mathbf{a}}. \quad (63)$$

The optimal  $\mathbf{w}$  is then obtained by solving the linear system  $\boldsymbol{\Sigma} \mathbf{V}^T \mathbf{w}^* = \tilde{\mathbf{w}}^*$ . □

## B The MPR-aware retrieval algorithm

In this section, we discuss the convergence of MAPR, the Multi-group Aware Proportional Retrieval algorithm. As described in Section 4, the MPR-aware method is essentially a cutting plane method (also known as the Kelley-Cheney-Goldstein method [76, 77]) applied to the linear function  $\mathbf{a}^T \mathbf{s}$ ; see also [78].

The algorithm begins by identifying the  $k$ -most similar items to a given query in  $\mathcal{D}_R$ . Then, an MSE-minimizing oracle is called and returns the statistic (or group-denoting function)  $c \in \mathcal{C}$  with the most disproportionate representation for the set of retrieved items. The function  $c$  is then added as a constraint to a linear program that outputs a vector  $\mathbf{a} \in [0, 1]^n$  maximizing average similarity as in (10) subject to a single constraint  $|\frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c)| \leq \rho$ , where integer constraints are relaxed. The optimal  $\mathbf{a}$  is rounded so only the largest  $k$  entries are marked as 1, corresponding to a new set of retrieved items. The process repeats with an increasing number of constraints to the linear program and halts when the oracle does not return a function that violates the target MPR constraint  $\rho$ . In mathematical terms, we start by solving the problem

$$\max_{\mathbf{a} \in \{0,1\}^n} \mathbf{a}^T \mathbf{s} \quad (64)$$

$$\text{subject to } \sum_{i=1}^k \mathbf{a}_i = k. \quad (65)$$

Note that the solution to this problem is given by the vector  $\mathbf{a}$  that finds the  $k$ th largest entries of  $\mathbf{s}$ , i.e., it identifies the  $k$ -most similar items to a given query in  $\mathcal{D}_R$ . Then, Proposition 3 provides a way to generate cuts given the vector  $\mathbf{a}_k \in \mathbb{R}^n$  found as a solution of the previous iteration. These cuts are given by the function  $c \in \mathcal{C}$  with the most disproportionate representation for the set of retrieved items.

At each iteration, we test if the MPR constraint, less or equal to  $\rho$ , is satisfied. If not, this gives us a new inequality to be incorporated into the linear problem (B) that outputs a vector  $\mathbf{a} \in [0, 1]^n$  maximizing average similarity as in (10) subject to a single constraint  $|\frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c)| \leq \rho$ , where integer constraints are relaxed. Therefore, the algorithm consists of iteratively adding a new constraint (cut) of the form

$$G(a) =: \sup_{c \in \mathcal{C}} \left| \frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^c) \right| \quad (66)$$

and solving the problem again until all the inequalities are fulfilled, i.e., until the oracle does not return a function that violates the target MPR constraint  $\rho$ . At this point, the algorithm halts. It remains to be shown that the description above indeed corresponds to a traditional cutting plane method for convex functions. For the subsequent discussion, we will denote the term inside the supremum in (66) by  $g(\mathbf{a}, c)$ , i.e.,

$$g(\mathbf{a}, c) = \frac{1}{k} \sum_{i=1}^n a_i c(\mathbf{x}_i^r) - \frac{1}{m} \sum_{i=1}^m c(\mathbf{x}_i^e), \quad \text{for } c \in \tilde{\mathcal{C}}. \quad (67)$$

The next proposition links the oracle via MSE, described in Proposition 3, with the subdifferential of the function  $G(\mathbf{a})$ .

**Proposition 9.** *Let  $\mathcal{C}$  be an infinite set and let  $G(\mathbf{a}) = \sup_{c \in \mathcal{C}} |g(\mathbf{a}, c)|$  be the convex restriction of the optimization problem (10) given by the supremum, i.e.,  $G(\mathbf{a}) \leq \rho, \forall \mathbf{a} \in \mathbb{R}^n$ . If  $\mathbf{c}^* \in \arg \sup_{c \in \mathcal{C}} |g(\mathbf{a}^*, c)|$  and  $\mathbf{c}$  denote the function  $c^*$  evaluated at the points  $x_1, \dots, x_n$ , i.e.,  $\mathbf{c} = [c_*(x_1), \dots, c_*(x_m)]$ , then  $g^* := \text{sign}(g(\mathbf{a}^*, \mathbf{c}^*)) \cdot \mathbf{c} \in \partial G(\mathbf{a}^*)$ , i.e.,  $g^*$  is a subgradient of  $G$  at a point  $\mathbf{a}^*$ .*

*Proof.* We start by noting that  $G(\mathbf{a})$  is a convex function since it is a supremum of a composition of an affine function with the absolute value. Also, note that  $G(\mathbf{a})$  can be written as  $G(\mathbf{a}) = \sup_{c \in \mathcal{C}} |g(\mathbf{a}, c)| = \sup_{c \in \mathcal{C}} |\mathbf{c}^\top \mathbf{a} + b_c|$ , where  $b : \mathcal{C} \rightarrow \mathbb{R}$ . We need to prove that

$$G(\mathbf{a}^*) + g^{*\top}(\mathbf{a} - \mathbf{a}^*) \leq G(\mathbf{a}), \forall \mathbf{a} \in \mathbb{R}^n \quad (68)$$

In fact, starting from the left-hand side leads to

$$|g(\mathbf{a}^*, \mathbf{c}^*)| + \text{sign}(g(\mathbf{a}^*, \mathbf{c}^*)) \mathbf{c}^\top (\mathbf{a} - \mathbf{a}^*) \quad (69)$$

$$= |\mathbf{c}^\top \mathbf{a} + b_c| + \frac{\mathbf{c}^\top \mathbf{a} + b_c}{|\mathbf{c}^\top \mathbf{a} + b_c|} \mathbf{c}^\top (\mathbf{a} - \mathbf{a}^*) \quad (70)$$

$$= |\mathbf{c}^\top \mathbf{a} + b_c| + \frac{\mathbf{c}^\top \mathbf{a} + b_c}{|\mathbf{c}^\top \mathbf{a} + b_c|} - \mathbf{c}^\top \mathbf{a}^* - b_{c^*} + \mathbf{c}^\top \mathbf{a} + b_{c^*} \quad (71)$$

$$= |\mathbf{c}^\top \mathbf{a} + b_c| - \frac{|\mathbf{c}^\top \mathbf{a} + b_c|^2}{|\mathbf{c}^\top \mathbf{a} + b_c|} + \text{sign}(g(\mathbf{a}^*, \mathbf{c}^*)) (\mathbf{c}^\top \mathbf{a} + b_{c^*}) \quad (72)$$

$$\leq |\mathbf{c}^\top \mathbf{a} + b_{c^*}| \leq G(\mathbf{a}), \forall \mathbf{a} \in \mathbb{R}^n \quad (73)$$

This shows that  $\mathbf{c} = [c_*(x_1), \dots, c_*(x_m)]$  is a subgradient of  $G(\mathbf{a})$ .  $\square$

The cutting plane strategy described in Algorithm 1 addresses the constraints of the form  $G(\mathbf{a}) \leq \rho$  that are not fulfilled. Since (68) holds, the algorithm adds linear approximations (or cutting planes) of the form

$$G(\mathbf{a}^*) + g^{*\top}(\mathbf{a} - \mathbf{a}^*) \leq \rho \quad (74)$$

to the problem at each iteration until the solution satisfies all the inequalities. This reformulation demonstrates that the MPR-aware algorithm can be viewed as a traditional cutting plane method for minimizing a linear function over the polyhedron  $P = \{a_i \in [0, 1] \cap \sum_{i=1}^n a_i = k\}$ . If, at a certain iteration, the algorithm finds an iterate that satisfies all the inequalities, it terminates since the lower bound provided by the cutting plane method matches the upper bound. In the case where the algorithm continues adding constraints, the accumulation point (guaranteed to exist due to the compactness of the set  $P$ ) will converge to an optimal solution, as proven in [79, Proposition 4.1.2] or the main theorem in [76, Section 2].

However, it is important to note that even when the algorithm terminates in a finite number of steps, the cutting plane method often requires a substantial number of iterations to converge and may exhibit numerical instabilities. Addressing these instabilities or exploring techniques to discard certain cuts for improved convergence, such as partial cutting plane methods, is beyond the scope of this paper. For further information on these topics, refer to [80, 81] and the references therein.

The integer program may not be as scalable as its convex relaxation. If we relax it to  $a_i \in [0, 1]$ , this becomes a convex optimization problem solvable by standard methods (even for very large  $\mathbf{C}$ ) and provides an upper bound to the original program for reasonable values of the MPR violation (and for which Proposition 9 applies). However, the optimal solution of the relaxed problem might not be feasible for the original problem, because it might have fractional values for some  $a_i$ , while the original problem requires these to be binary. There are certain special cases where the optimal solution of the relaxed problem is guaranteed to be integral (i.e., all  $a_i$  are 0 or 1), in which case it is also an optimal

solution for the original problem. This is the case, for example, when the constraint matrix is totally unimodular and the right-hand sides of the constraints are integral [82]. Still, we observe from empirical experiments that selecting the top  $k$   $a_i$  of the relaxed problem is a computationally efficient alternative to solving the integer program  $\text{MPR-RETRIV}(k, \rho)$ , since results from rounding produce a negligible difference to the upper bound (see Figures 8 and 9).

Now, we describe how the MPR constraint can be simplified for the class of linear functions. In this case, the MPR-aware retrieval algorithm becomes a scalable quadratic program.

### B.1 MPR-aware Retrieval via Quadratic Programming

Proposition 4 allowed us to have a simple closed-form representation of MPR in the case of bounded-norm linear regression functions, i.e., when  $\mathcal{C}' \triangleq \{c \in \mathcal{C} \mid \frac{1}{m+n} \sum_{i=1}^{m+n} c(x_i)^2 = 1\}$ , and  $\mathcal{C} = \{x \mapsto w^\top x \mid w \in \mathbb{R}^d\}$ . In this case, MAPR becomes

$$\max_{\mathbf{a}, \mathbf{y}} \mathbf{a}^\top \mathbf{s} \quad (75)$$


$$\text{subject to } \sqrt{m+n} \|\mathbf{U}_i^\top \tilde{\mathbf{a}}\|_2 \leq \rho, \quad (76)$$

$$\mathbf{a}^\top \mathbf{1} = k, \quad (77)$$

$$a_i \in \{0, 1\}, \quad (78)$$

where  $\tilde{\mathbf{a}} \in \mathbb{R}^{n+m}$  has  $i$ -th entry given by  $\tilde{a}_i \triangleq \mathbb{1}_{i \leq n} \frac{a_i}{k} - \mathbb{1}_{i > n} \frac{1}{m}$ .


Furthermore, the result from Proposition 4 allows us to explore the efficiency of our cutting plane algorithm. In Figures 4 and 6, we compare the quadratic optimization problem (Eqn. 75) to MAPR (a linear program, Algorithm 1) for linear regression and measure the MPR of our solutions with the closed form value from Proposition 4. As we can see, while the quadratic program traces a smoother curve, MAPR’s cutting plane approach well-approximates the closed form solution. In these experiments, we retrieve 50 items from CelebA, without a curation set. Finally, in Figures 5 and 7, we run the quadratic program and compare the MPR as measured with the closed form solution and linear regressor-approximated measurement of MPR. In other words, where Figures 4 and 6 measure the quality of our *retrieval algorithm* given a perfect (closed form) MPR oracle, Figures 5 and 7 measure the quality of our MSE oracle in comparison to the perfect oracle. We observe that the MSE oracle is a perfect approximator of the closed form for MPR.

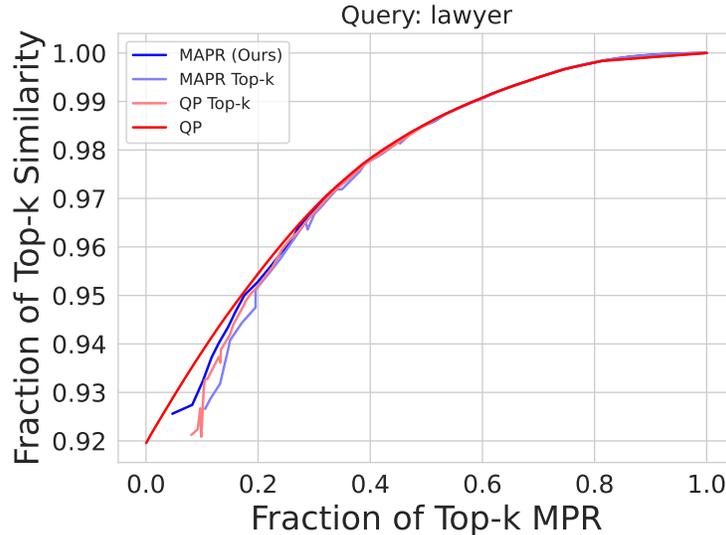

**Figure 4:** Similarity vs MPR for Quadratic Program (Eqn. 75) and MAPR. MAPR well approximates the quadratic program along the Pareto frontier. Measured over a single query “A photo of a lawyer” for 50 retrieved samples on CelebA.

### B.2 Computing MPR for Functions in an RKHS

Kernel methods are a generalized but practical, non-linear, and easy technique to implement algorithms for a plethora of important problems in machine learning [83, 84]. As MPR is closely related to the maximum mean discrepancy

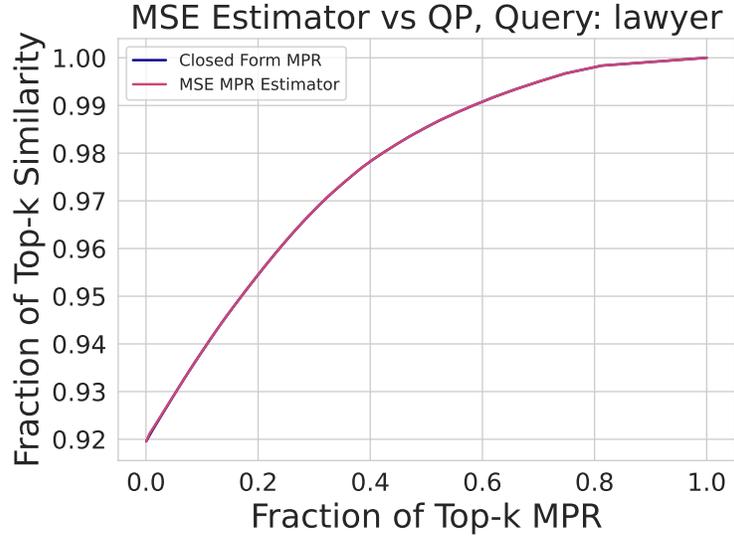

**Figure 5:** Similarity vs MPR for MSE estimated (Prop 3 and closed form (Prop 4) measures of MPR. For the class of linear models, a linear regression oracle perfectly achieves the analytical solution for MPR. Measured over a single query “A photo of a lawyer” for 50 retrieved samples on CelebA.

problem, a closed-form expression of MPR can be easily deduced by using results from [63, Lemma 6] when  $\mathcal{C}$  is a reproducing kernel Hilbert space, which includes, for example, linear regression, logistic regression, Gaussian kernel ridge regression, and hard-margin SVMs.

**Proposition 10** (MPR for RKHS [63]). *Let  $\{\mathbf{x}_i^r\}_{i=1}^k$  be retrieved samples  $\mathcal{R}$  and  $\{\mathbf{x}_i^c\}_{i=1}^m$  the samples from the curation dataset  $\mathcal{D}_C$ . Let  $\mathcal{C}$  be a reproducing kernel hilbert space with kernel  $\mathcal{K}(\cdot, \cdot)$ , then*


$$\text{MPR}(\mathcal{C}, \mathcal{R}, Q) = \left[ \frac{1}{k^2} \sum_{i,j=1}^k \mathcal{K}(\mathbf{x}_i^r, \mathbf{x}_j^r) - \frac{2}{mk} \sum_{i,j=1}^{k,m} \mathcal{K}(\mathbf{x}_i^r, \mathbf{x}_j^c) + \frac{1}{n^2} \sum_{i,j=1}^m \mathcal{K}(\mathbf{x}_i^c, \mathbf{x}_j^c) \right]^{1/2}. \quad (79)$$

Therefore, given a kernel  $\mathcal{K}(\cdot, \cdot)$ , we can easily compute  $\text{MPR}(\mathcal{C}, \mathcal{R}, Q)$  by evaluating the kernel at the points  $\mathbf{x}_i^r, \mathbf{x}_j^c$  and use this in Algorithm 1.

## C Description of Fair Retrieval Algorithms and Retrieval Statistics and Other Related Works

In this section, we describe the methods we benchmark against that aim to promote fairness multimodal models like CLIP [23]. We also briefly overview proportional representation in political sciences.

- **CLIP-clip** (Wang et al. [18]): CLIP-clip is a post-processing algorithm with two stages. First, the mutual information between each positional feature of an embedding and some sensitive attributes is estimated (treating each sensitive attribute as a discrete random variable and each position as a continuous random variable [85]). Then, in order of greatest to lowest mutual information, at test-time some number of CLIP features are dropped from both the text and image embedding, resulting in less bias (at cost to the fidelity of the embedding). By varying the number of features dropped, a recall-bias trade-off is induced.
- **CLIP-debias** (Berg et al. [20]): The algorithm learns a series of tokens that are pre-pended to text queries into CLIP via adversarial training to minimize the ability to predict a sensitive attribute of the resulting embedding (in the default case, gender). Then, retrieval is conducted with the debiased embeddings.
- **Post-Hoc Bias Mitigation** ([29]): Post-Hoc Bias Mitigation is a post-processing method that relies on an oracle classifier to label elements that might be retrieved with either one of several sensitive attributes or a neutral label. Then, iteratively, Post-Hoc Bias Mitigation adds either a set of elements (one of each predicted sensitive attribute) or a predicted neutral element to target equal representation, based on which option has higher average cosine similarity. The oracle may be a pretrained classifier, a zero-shot method using CLIP embeddings, or the true labels.

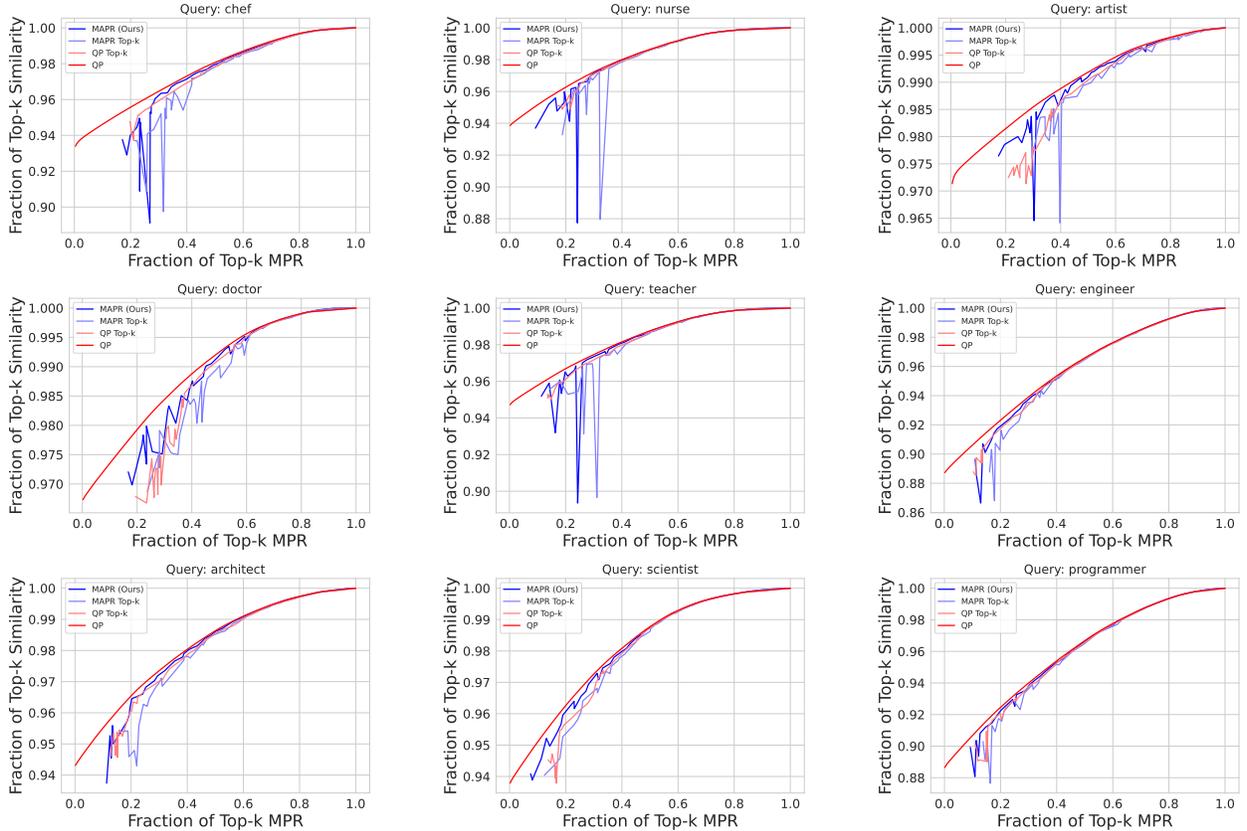

**Figure 6:** Additional comparisons of Quadratic Program (Eqn. 75) and MAPR over queries “chef”, “nurse”, “artist”, “doctor”, “teacher”, “engineer”, “architect”, “scientist”, and “programmer”.


- PATHS (Srinivasan et al. [27]): It constructs a new embedding space built upon the pretrained image-text model CoCa and leveraged text-guided projections to extract an embedding that captures complex notions of diversity in people, upon which a diverse retrieval method (such as the MMR method detailed above) can be run to effectively increase the diversity of the returned samples.

*Proportional Representation (PR) in political sciences.* As described in the *related works* in Section 1, proportional representation (broadly construed) has a long history in social choice theory and political sciences [56–60] and has been a guiding principle in the design of political systems, aiming to ensure representation reflects underlying population preferences and demographics. It can be traced back to the late 18th century, with early proponents such as Honoré Gabriel Riqueti, Comte de Mirabeau, who discussed the idea in 1780. The 19th century saw significant contributions to the development of proportional representation, including the works of Thomas Wright Hill and Thomas Hare. Hare’s 1859 publication, “A Treatise on the Election of Representatives, Parliamentary and Municipal” [86], outlined a system of single transferable vote for proportional representation. In the late 19th and early 20th centuries, the works of Carl Andrae, Victor D’Hondt, and John Stuart Mill further explored and contributed to the discussion of proportional representation in the political science literature. See [56–60].

Similarly, in ML, our aim is proportional representation in data and outputs, ensuring equitable performance across groups, and mirroring representation goals in political systems. PR electoral systems [87], used by countries like Uruguay, Sweden, South Africa, and New Zealand, allocate legislative seats proportionally to votes received by parties. Challenges include e.g., gerrymandering [87] and the complexity of apportionment and seat allocation [88, 89].

## D Additional Results.

In this section we include additional experimental results. First, we include full tables of intersectional retrieval performance on UTKFace for our method,  $k$ -NN, MMR, ClipClip, PBM, and DebaisCLIP. We average over 10 queries

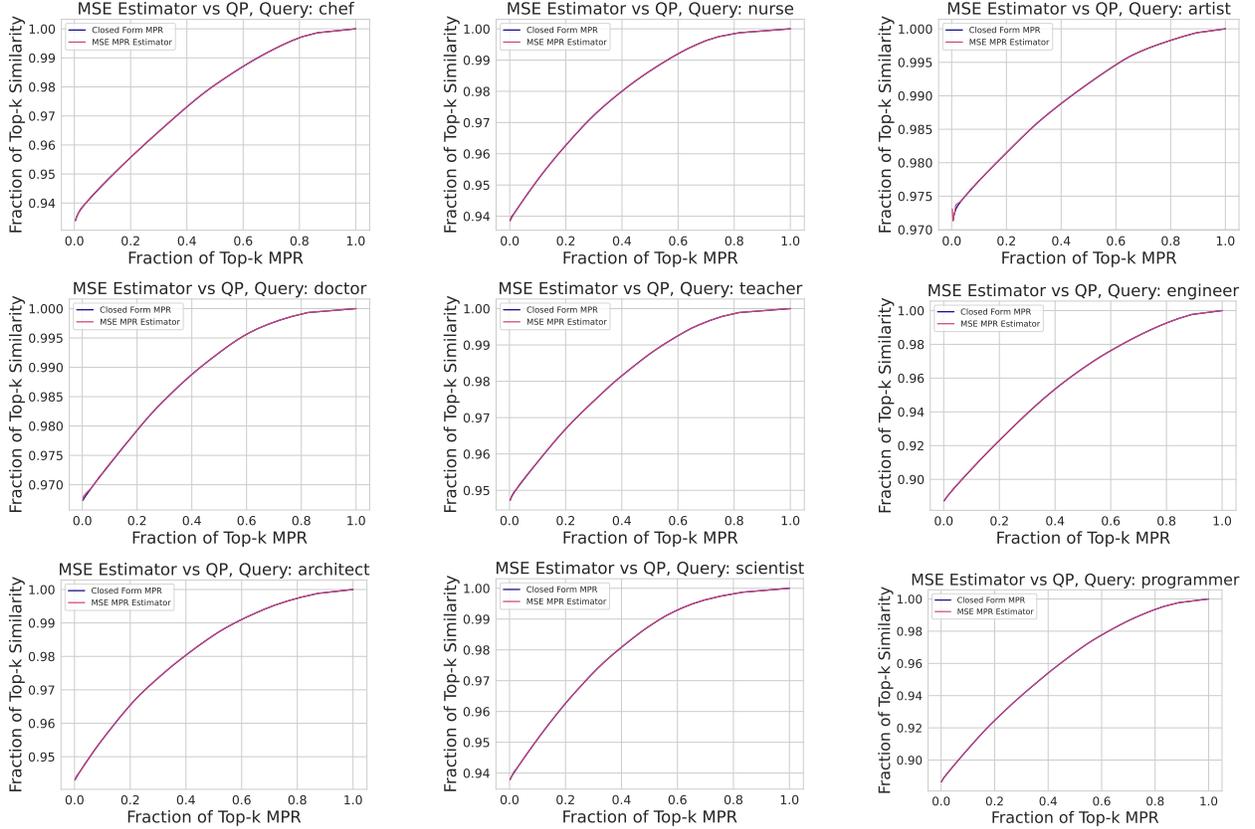

**Figure 7:** Additional comparisons of MSE to closed form MPR estimator for queries “chef”, “nurse”, “artist”, “doctor”, “teacher”, “engineer”, “architect”, “scientist”, and “programmer”.


	Embedding	Change Embedding	Change Retrieval	Pre-defined features	Approach to Diversity
DebiasCLIP	Custom	✓	✗	✓	Ignore/Decorrelate Attributes
PBM	Any VLM	✗	✓	✓	Equal Representation over Attributes
PATHS	Custom	✓	✓	✓	High Variance Representation over Attributes
ClipCLIP	Any VLM	✓	✗	✓	Ignore/Decorrelate Attributes
OURS	Any	✗	✓	✗	Multigroup Proportional Representation over Attributes

**Table 2:** Axis of comparison for ours and existing fair retrieval methods. The blue color indicates a positive feature of the method while the red color indicates a negative one.

as while retrieving 50 images. In Table 3, we compute MPR with a linear regression oracle and optimize our method with the same linear regression oracle. We are able to perfectly balance across intersectional groups while other methods often fail to account for the ‘Others’ race category and the ‘Female’ gender category. Some methods such as PBM which optimize for equal representation are able to achieve balanced representation across the gender axis but fail to consider diversity in race. In Table 4, we see a similar story for MPR measured and optimized with a decision tree.

Next, we include additional similarity-MPR tradeoff curves when measuring and optimizing MPR with a decision tree (Figure 10) and with an MLP with 1 hidden layer of dimension 64 (Figure 11). We observe a similar Pareto-domination to that observed in the main paper, as our method is able to lower MPR the most while preserving similarity even with more nonlinear oracle estimators of MPR. Figure 11, we plot on a log-scale for MPR as the MLP is able to find such violating functions for baseline methods that their “Fraction of top-k MPR” can reach values of 35. In the MLP setting, while PBM preserves high similarity on a whole, it is still unable to decrease MPR as low as MAPR is able to at  $\approx 95\%$  of top-k similarity.

In Figure 12 we include nine additional precision-representation curves. Similar to the result for the query “chief executive officer” in the main paper, MAPR maintains similar precision-representation performance to baseline methods.

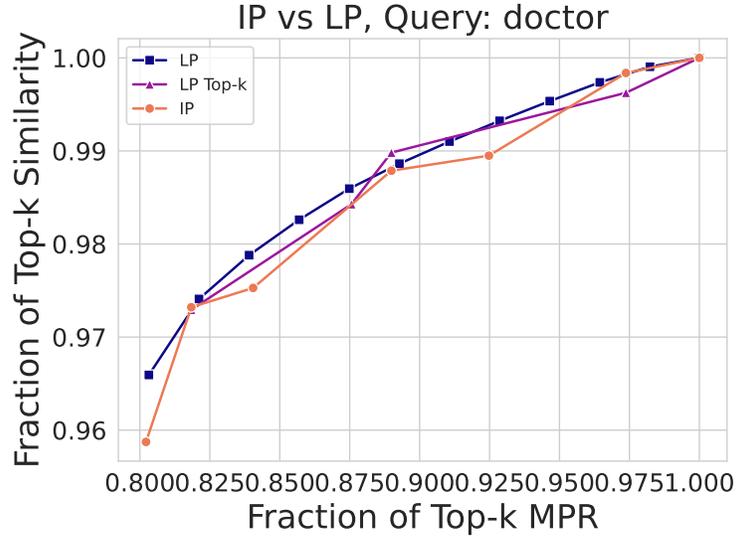


**Figure 8:** Comparison of linear program with and without taking the top-k to integer program. Solving the relaxed program is much more computationally efficient and achieves similar performance after rounding to solving the integer program.


**Table 3:** Retrieval averaged over 10 queries with 50 retrievals on UTKFace dataset [39] for MAPR,  $k$ -NN, MMR [27], ClipClip PBM, and DebiasCLIP with MPR optimized and measured with a linear regression oracle. Entries indicate average percentage representation in retrieved items. MAPR is able to balance representation across classes, whereas other baselines miss intersectional groups (highlighted in red).

		White	Black	Asian	Indian	Others	Sum
MAPR (Ours)	Male	7.8 ± 3.74	10.2 ± 2.90	13.0 ± 2.56	11.8 ± 2.44	7.2 ± 3.70	<b>50 ± 0</b>
	Female	12.2 ± 3.74	9.8 ± 2.90	7.0 ± 2.56	8.2 ± 2.44	12.8 ± 3.70	<b>50 ± 0</b>
	Sum	<b>20 ± 0</b>	<b>20 ± 0</b>	<b>20 ± 0</b>	<b>20 ± 0</b>	<b>20 ± 0</b>	
Top-K	Male	21.2 ± 11.84	13.2 ± 7.70	10.8 ± 7.54	21.2 ± 20.70	1.4 ± 1.56	<b>67.8 ± 23.72</b>
	Female	17.2 ± 21.04	6.6 ± 6.14	4.0 ± 2.82	2.8 ± 2.56	1.6 ± 1.50	<b>32.2 ± 23.72</b>
	Sum	<b>38.4 ± 17.18</b>	<b>19.8 ± 12.56</b>	<b>14.8 ± 7.38</b>	<b>24 ± 19.38</b>	<b>3.0 ± 2.04</b>	
MMR	Male	28.8 ± 8.96	11.0 ± 4.58	10.2 ± 4.04	10.8 ± 2.40	3.8 ± 1.06	<b>64.6 ± 7.74</b>
	Female	16.2 ± 9.06	7.6 ± 3.66	5.0 ± 3.00	4.0 ± 1.26	2.6 ± 1.56	<b>35.4 ± 7.74</b>
	Sum	<b>45.0 ± 7.76</b>	<b>18.6 ± 5.38</b>	<b>15.2 ± 5.82</b>	<b>14.8 ± 3.12</b>	<b>6.4 ± 1.96</b>	
ClipClip	Male	23.2 ± 9.96	11.0 ± 5.16	10.8 ± 5.88	14.2 ± 8.70	1.8 ± 2.08	<b>61.0 ± 17.08</b>
	Female	15.2 ± 9.44	7.0 ± 4.32	7.4 ± 5.30	6.6 ± 5.52	2.8 ± 1.84	<b>39.0 ± 17.08</b>
	Sum	<b>38.4 ± 11.42</b>	<b>18.0 ± 8.20</b>	<b>18.2 ± 5.68</b>	<b>20.8 ± 9.52</b>	<b>4.6 ± 2.2</b>	
PBM	Male	19.8 ± 7.82	13.0 ± 7.12	9.4 ± 5.66	15.2 ± 8.72	1.2 ± 1.6	<b>58.6 ± 11.62</b>
	Female	18.6 ± 12.96	8.4 ± 5.92	5.6 ± 3.88	7.2 ± 5.16	1.6 ± 1.50	<b>41.4 ± 11.62</b>
	Sum	<b>38.4 ± 13.50</b>	<b>21.4 ± 11.38</b>	<b>15.0 ± 6.70</b>	<b>22.4 ± 13.44</b>	<b>2.8 ± 2.04</b>	
DebiasCLIP	Male	20.4 ± 7.48	8.2 ± 3.94	5.4 ± 2.54	11.0 ± 3.50	3.8 ± 2.6	<b>48.8 ± 5.52</b>
	Female	19.4 ± 6.98	9.4 ± 5.14	8.4 ± 4.28	10.0 ± 4.64	4.0 ± 1.78	<b>51.2 ± 5.52</b>
	Sum	<b>39.8 ± 9.78</b>	<b>17.6 ± 3.66</b>	<b>13.8 ± 5.62</b>	<b>21.0 ± 6.52</b>	<b>7.8 ± 3.16</b>	

Finally, we include example retrievals for ‘architect’ and ‘teacher’ queries over UTKFace with each of our baselines. Similar to the tables, we select each algorithm’s solution with the lowest MPR after doing a hyperparameter sweep for each respective algorithm and plot the corresponding images below.

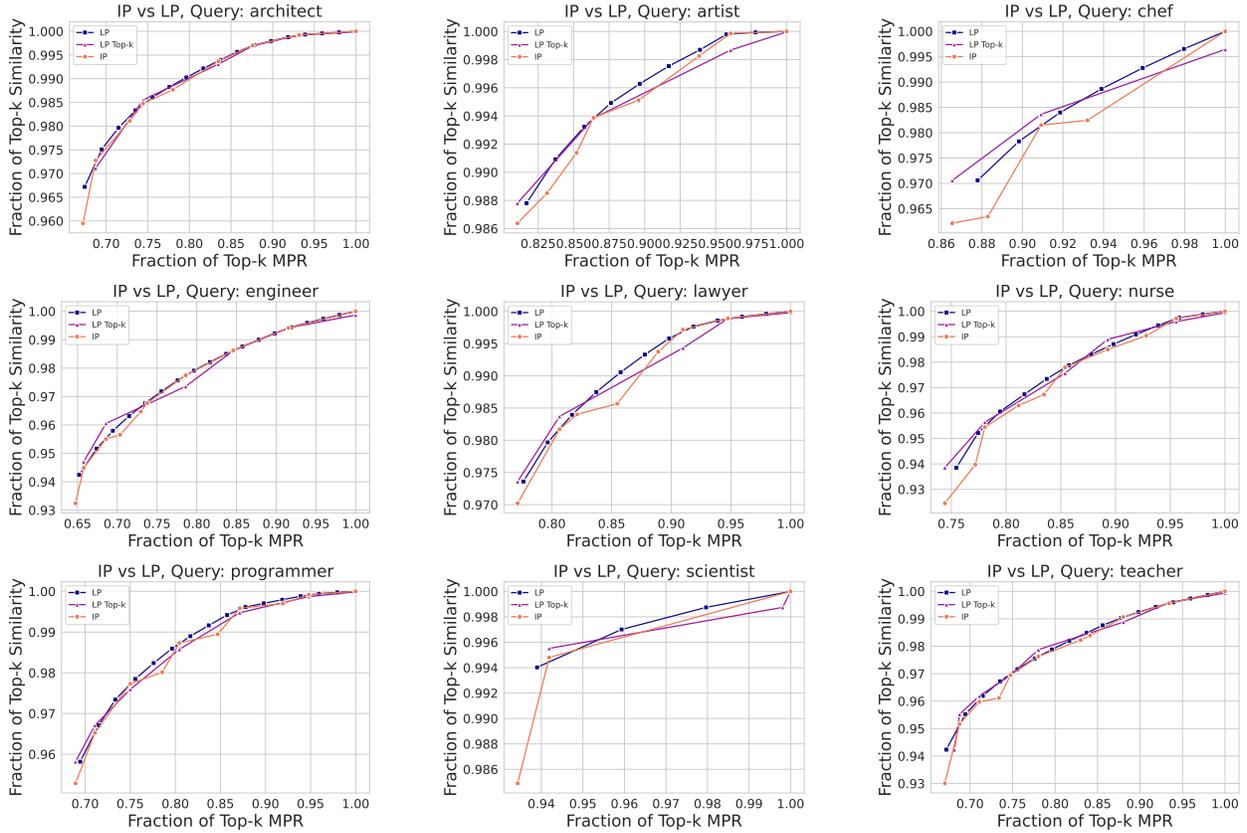


**Figure 9:** Additional comparisons of relaxed problem and top-k selection to integer program. “chef”, “nurse”, “artist”, “lawyer”, “teacher”, “engineer”, “architect”, “scientist”, and “programmer”.

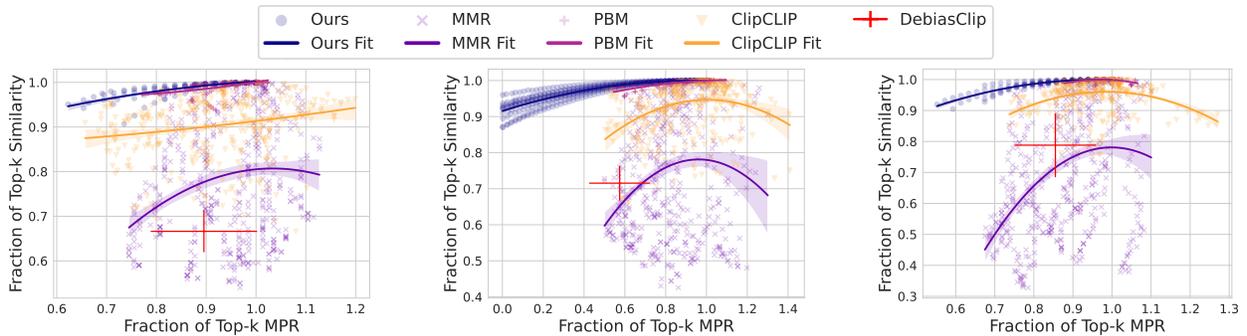


**Figure 10:** Fraction of Top- $k$  cosine similarity vs Fraction of Top- $k$  MPR for MPR measured by function class  $\mathcal{C}$  given by the set of decision trees. Averaged over 10 queries for  $k = 50$  images retrieved. From Left-to-Right: CelebA, UTKFaces, Occupations. Values are normalized so  $k$ -NN achieves point (1,1) in each case. MAPR Pareto-dominates baselines and significantly closes the MPR gap.

**Table 4:** Retrieval averaged over 10 queries with 50 retrievals on UTKFace dataset [39] for MAPR,  $k$ -NN, MMR [27], PBM, and DebiasCLIP with MPR optimized and measured with a decision tree oracle. Entries indicate average percentage representation in retrieved items. MAPR is able to balance representation across classes, whereas other baselines miss intersectional groups (highlighted in red).

		White	Black	Asian	Indian	Others	Sum
<b>Ours</b>	Male	11.0 ± 1.34	10.4 ± 0.8	10.0 ± 0	10.2 ± 0.6	8.8 ± 0.98	<b>50.4 ± 1.64</b>
	Female	10.6 ± 1.28	9.6 ± 0.80	9.6 ± 1.20	10.2 ± 1.08	9.6 ± 1.2	<b>49.6 ± 1.64</b>
	Sum	<b>21.6 ± 1.64</b>	<b>20 ± 1.26</b>	<b>18.6 ± 1.2</b>	<b>20.4 ± 1.2</b>	<b>18.4 ± 1.2</b>	
<b>Top-K</b>	Male	21.2 ± 11.84	13.2 ± 7.70	10.8 ± 7.54	21.2 ± 20.70	1.4 ± 1.56	<b>67.8 ± 23.72</b>
	Female	17.2 ± 21.04	6.6 ± 6.14	4.0 ± 2.82	2.8 ± 2.56	1.6 ± 1.50	<b>32.2 ± 23.72</b>
	Sum	<b>38.4 ± 17.18</b>	<b>19.8 ± 12.56</b>	<b>14.8 ± 7.38</b>	<b>24 ± 19.38</b>	<b>3.0 ± 2.04</b>	
<b>MMR</b>	Male	27.4 ± 9.13	11.8 ± 5.02	10.2 ± 4.33	10.2 ± 3.03	3.2 ± 2.4	<b>62.8 ± 11.77</b>
	Female	17 ± 9.13	9 ± 5.67	5.4 ± 3.47	3.6 ± 1.5	2.2 ± 1.08	<b>37.2 ± 11.77</b>
	Sum	<b>44.4 ± 6.62</b>	<b>20.8 ± 9.39</b>	<b>15.6 ± 5.64</b>	<b>13.8 ± 3.84</b>	<b>5.4 ± 2.37</b>	
<b>PBM</b>	Male	19.6 ± 13.11	12.4 ± 6.56	9.4 ± 6	15 ± 8.91	1.2 ± 1.6	<b>57.6 ± 12.74</b>
	Female	19.6 ± 13.11	8.4 ± 5.92	5.4 ± 3.69	7.2 ± 5.15	1.8 ± 1.66	<b>42.4 ± 12.74</b>
	Sum	<b>39.2 ± 13.45</b>	<b>20.8 ± 11.07</b>	<b>14.8 ± 6.46</b>	<b>22.2 ± 13.61</b>	<b>3 ± 2.05</b>	
<b>DebiasCLIP</b>	Male	20.4 ± 6.99	8.2 ± 3.94	5.4 ± 2.54	11 ± 3.49	3.8 ± 2.6	<b>48.8 ± 5.53</b>
	Female	19.4 ± 6.99	9.4 ± 5.14	8.4 ± 4.27	10 ± 4.65	4 ± 1.79	<b>51.2 ± 5.53</b>
	Sum	<b>39.8 ± 9.78</b>	<b>17.6 ± 3.67</b>	<b>13.8 ± 5.62</b>	<b>21 ± 6.53</b>	<b>7.8 ± 3.16</b>	

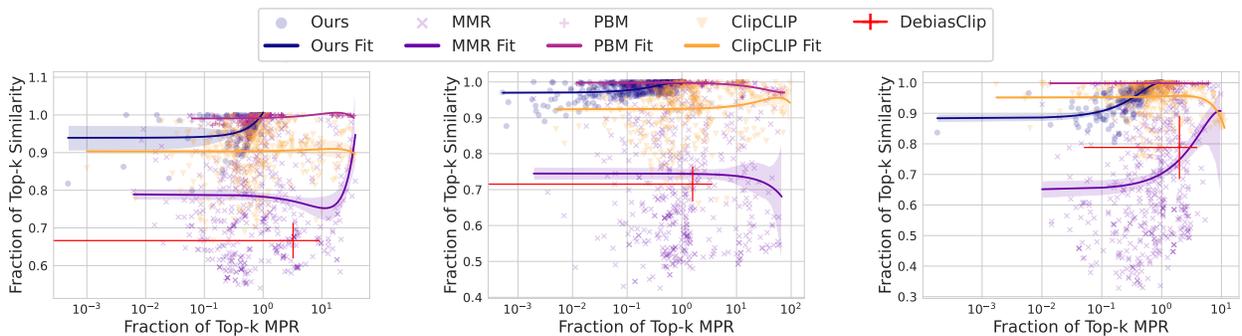

**Figure 11:** Fraction of Top- $k$  cosine similarity vs Fraction of Top- $k$  MPR for MPR measured by function class  $\mathcal{C}$  given by the set of 2-layer MLPs with hidden dimension 64. Averaged over 10 queries for  $k = 50$  images retrieved. From Left-to-Right: CelebA, UTKFaces, Occupations. Values are normalized so  $k$ -NN achieves point (1,1) in each case. MAPR Pareto-dominates baselines and significantly closes the MPR gap.

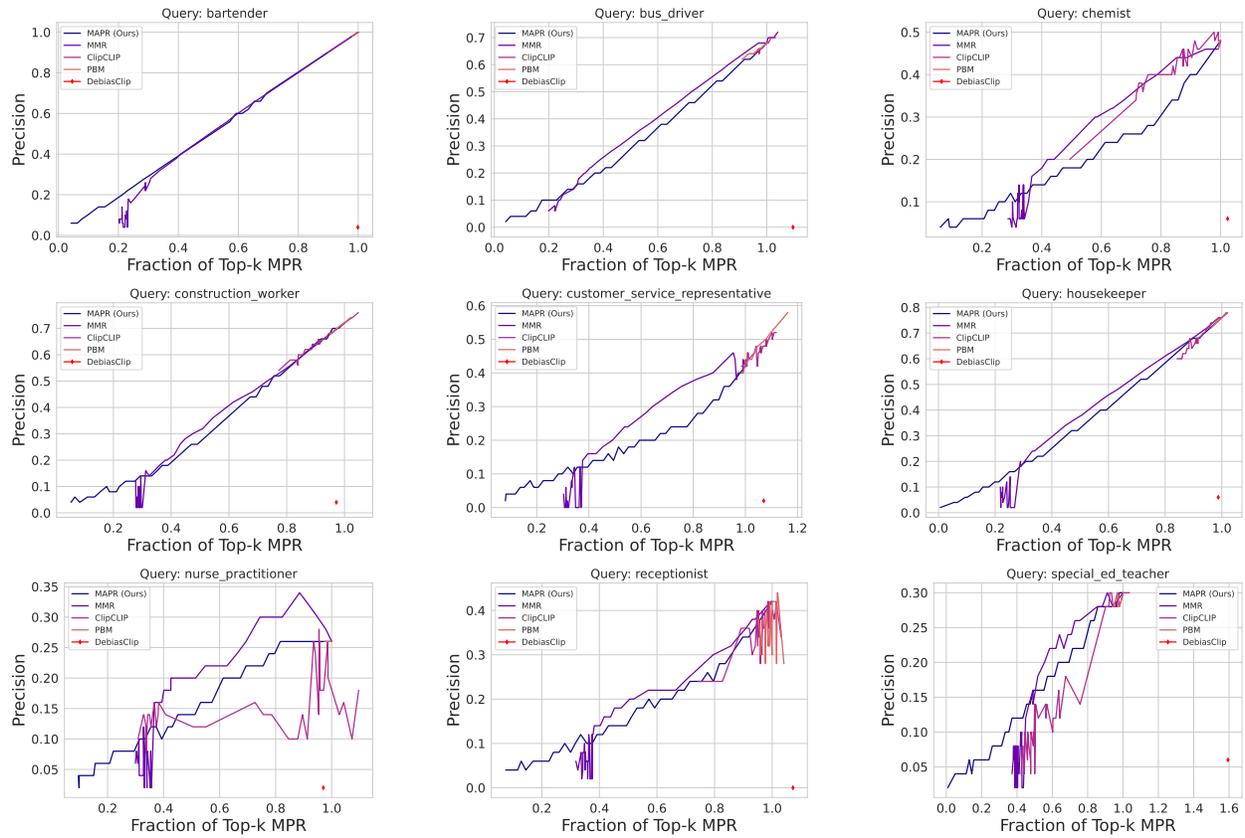

**Figure 12:** Additional precision-recall plots over queries “bartender”, “bus driver”, “chemist”, “construction worker”, “customer service representative”, “housekeeper”, “nurse practitioner”, “receptionist”, and “special ed teacher”.



**Figure 13:** Retrievals for MAPR with query “A photo of a teacher”



Figure 14: Retrievals for  $k$ -NN with query "A photo of a teacher"



Figure 15: Retrievals for MMR with query "A photo of a teacher"



Figure 16: Retrievals for ClipClip with query "A photo of a teacher"



Figure 17: Retrievals for PBM with query "A photo of a teacher"



Figure 18: Retrievals for DeBiasClip with query "A photo of a teacher"



Figure 19: Retrievals for MAPR with query "A photo of an architect"



Figure 20: Retrievals for  $k$ -NN with query "A photo of an architect"



Figure 21: Retrievals for MMR with query "A photo of an architect"



Figure 22: Retrievals for ClipClip with query "A photo of an architect"



Figure 23: Retrievals for PBM with query "A photo of an architect"



Figure 24: Retrievals for DebiasClip with query "A photo of an architect"

## E Experiment Notes

### E.1 GPT Generated Queries.

The 10 queries used in experiments and generated by GPT are as follows: [programmer, nurse, architect, scientist, artist, chef, lawyer, teacher, engineer, doctor].

### E.2 Experiment Setting and Details.

These experiments were conducted mainly on cpu after initially using a single A100 GPU to compute CLIP and DebiasCLIP embeddings and run FAISS to compute the top 10k candidates for each. Then, all embeddings are saved so that retrieval across all methods can be run on cpu. When training linear probes, we conduct cross-validated hyperparameter search from 0.01 to 100 over  $\ell_2$  regularized logistic regression models from scikit-learn [68] to find the optimal probe.

To run MAPR, we use Gurobi [90] with an Academic License to solve Eqn. (10) each iteration of our cutting plane method, and use CVXPY [91, 92] to solve our closed-form, quadratic program.

To train our oracle estimators, we call scikit-learn’s implementations of Linear Regression, Decision Trees with depth 3, and MLPs with one hidden layer of size 64.

On average, the runtime for MAPR is approximately 1-5 minutes with 50 queries and 10000 elements in each of our retrieval and curation sets. However, with more features (such as using CLIP embeddings instead of group attributes) this runtime can increase. We note however, that our most competitive baseline, MMR, is a greedy algorithm that requires 1-2 hours per query to compute. In live image retrieval settings, this runtime is too slow to be of any practical use.