

Data-Locality-Aware Task Assignment and Scheduling for Distributed Job Executions

Hailiang Zhao, Xueyan Tang, *Senior Member, IEEE*, Peng Chen, Jianwei Yin,
and Shuiguang Deng, *Senior Member, IEEE*

Abstract—This paper investigates a data-locality-aware task assignment and scheduling problem aimed at minimizing job completion times for distributed job executions. Without prior knowledge of future job arrivals, we propose an optimal balanced task assignment algorithm (OBTA) that minimizes the completion time of each arriving job. We significantly reduce OBTA’s computational overhead by narrowing the search space of potential solutions. Additionally, we extend an approximate algorithm known as water-filling (WF) and nontrivially prove that its approximation factor equals the number of task groups in the job assignment. We also design a novel heuristic, replica-deletion (RD), which outperforms WF. To further reduce the completion time of each job, we expand the problem to include job reordering, where we adjust the order of outstanding jobs following the shortest-estimated-time-first policy. Extensive trace-driven evaluations validate the performance and efficiency of the proposed algorithms.

Index Terms—task assignment, job scheduling, distributed job execution, approximate analysis, trace-driven evaluation.

I. INTRODUCTION

SCHEDULING plays a critical role in the performance of big data analysis and high-performance computing, where jobs are executed across multiple distributed servers [1], [2]. These jobs typically consist of numerous tasks, each requiring access to distinct data chunks that might be replicated across different locations. Data locality, which involves assigning tasks to servers holding the required data chunks, is crucial in this context [3]. Designing online scheduling algorithms that uphold data locality in distributed job executions, without prior knowledge of job arrivals, involves two key aspects: *task assignment* and *job reordering*. Task assignment involves allocating tasks within a job to appropriate servers, conceptualized as a semi-matching problem in a bipartite graph where tasks and servers are distinct sets of nodes. Job reordering addresses the sequence in which the arrived but unfinished job tasks are executed, facilitating optimized task assignments and reducing overall job completion times.

Prior studies have addressed these issues either in isolation or in tandem [4]–[7]. For instance, Hung *et al.* [4] proposed a Workload-Aware Greedy Scheduling (SWAG) strategy that schedules jobs based on their estimated completion times, prioritizing the job with the minimal completion time. Guan

et al. [5] presented an offline fairness-aware task assignment algorithm that ensures max-min fairness in resource allocation across all servers. However, both [4] and [5] did not consider data replication across multiple servers, significantly reducing the complexity of the scheduling problem. Beaumont *et al.* [6] investigated data replication-aware scheduling, but their study focused on a single job and did not consider job reordering. Additionally, their proposed semi-matching-based strategies are only applicable to homogeneous servers with the same processing capacity and homogeneous tasks with the same execution time, which oversimplifies real-world scenarios. Guan *et al.* [7] studied an online scheduling problem for distributed job executions where the data chunks requested by each job could be available at multiple servers. They solved the task assignment problem using a well-constructed flow network, mapping the assignment of tasks into a maximum flow problem. For job reordering, they adopted a similar approach to [4], considering job priorities. However, they did not provide an in-depth performance analysis of the proposed algorithms.

Our work primarily focuses on the task assignment aspect of scheduling while maintaining data locality. This challenge is addressed in an online setting, where the arrival of jobs over time demands immediate scheduling decisions. The objective is to minimize the completion time of all arrived jobs, defined as the time duration from a job’s arrival to the completion of all its tasks. We study the problem in two scenarios. In the first scenario, the outstanding jobs are pending in the queues in a first-in-first-out (FIFO) manner. In the second scenario, the outstanding jobs can be prioritized and then reordered. Our contributions are summarized as follows.

- We formulate the task assignment problem as a bipartite graph-based non-linear program and develop an optimal algorithm called OBTA to solve it efficiently by significantly narrowing the search space of potential solutions.
- We extend an approximate algorithm called water-filling (WF), initially proposed for homogeneous scenarios in [7], to our settings. We nontrivially prove that WF is K -approximate, where K is the number of task groups in a job.
- A novel heuristic, replica-deletion (RD), is developed for task assignment. RD assigns the tasks of a job to servers with a complexity of $\mathcal{O}(M^2 \cdot n \log n)$, where M is the number of servers and n is the number of tasks in a job.
- We extend WF to accommodate job reordering and introduce an early-exit technique to expedite the process,

H. Zhao is with the School of Software Technology, Zhejiang University, 315048 Ningbo, China. E-mail: hliangzhao@zju.edu.cn.

X. Tang is with the College of Computing and Data Science, Nanyang Technological University, 639798 Singapore. E-mail: asxytang@ntu.edu.sg.

P. Chen, J. Yin and S. Deng are with the College of Computer Science and Technology, Zhejiang University, 310027 Hangzhou, China. E-mails: naturechenpeng@gmail.com, {zjuyjw, dengsg}@zju.edu.cn.

resulting in the OCWF-ACC (accelerated order-conscious WF) algorithm.

- Our trace-driven simulations underscore the effectiveness and efficiency of the proposed algorithms. OBTA, in particular, demonstrates a notable reduction in computation overhead, while WF offers a low-overhead yet effective approximation. RD further enhances performance. Additionally, compared to a job-reordered task assignment algorithm without early-exit, OCWF-ACC significantly reduces computation overhead.

The rest of this paper is organized as follows. Sec. II presents the problem formulation. Sec. III introduces the task assignment algorithms for FIFO queues. Sec. IV expands the algorithms to include job reordering. Experimental results using real job traces are discussed in Sec. V. Sec. VI reviews the related work, and Sec. VII concludes the paper.

II. PROBLEM FORMULATION

We consider a distributed computing system consisting of M servers, indexed by m for $m \in \mathcal{M} := \{1, \dots, M\}$. The system stores a collection of items, such as key-value pairs, objects, files, etc. They are partitioned into equally-sized data chunks. Each server holds some data chunks, and a data chunk can be replicated across multiple servers. For each $m \in \mathcal{M}$, we denote by \mathcal{D}_m the set of data chunks stored in server m . The intersection $\mathcal{D}_m \cap \mathcal{D}_{m'}$ can be non-empty for different m and m' in \mathcal{M} . We make no particular assumptions about data chunk distributions. We assume that the placement of data chunks is given and does not change over time.

Jobs arrive in the system online, one by one, for execution. Each job consists of multiple independent tasks that process different data partitions. Each task takes one data chunk as input, and the tasks of the same job are assumed to have equal demands on the compute resources. We denote by $c \in \mathbb{N}^+$ the c -th job (also referred to as job c) in chronological order. Further, we use \mathcal{T}_c to represent the set of tasks in job c , and d_r to represent the data chunk demanded by a task $r \in \mathcal{T}_c$. For each task $r \in \mathcal{T}_c$, we define

$$\mathcal{S}^r := \{m \in \mathcal{M} \mid d_r \in \mathcal{D}_m\} \quad (1)$$

as the set of its *available servers*. Due to data locality, each task should be assigned to one of its available servers for processing. We assume that each server m has a sufficiently large queue, denoted by q_m , to store the outstanding job tasks. For analysis purposes, we divide the time into time slots of identical length.

We denote by μ_m^c the profiled number of tasks for job c that can be processed at server m within a time slot. We define the *busy time* of each server m just before job c 's arrival, denoted by b_m^c , as the number of time slots required to finish all the outstanding job tasks in the corresponding queue. The busy time b_m^c can be estimated using the following equation:

$$b_m^c = \sum_{h=1}^{c-1} \left\lceil \frac{o_m^h}{\mu_m^h} \right\rceil, \quad (2)$$

where $o_m^h \leq |\mathcal{T}_h|$ is the number of outstanding tasks from job h queued in q_m just before job c 's arrival.

Our task is to make assignment and scheduling decisions for each arriving job. The objective is to minimize the completion time of each job. For each job, the completion time is defined as the time between its arrival and the completion of its last processed task. This objective is equivalent to minimizing the completion time of the last processed task issued by the job. We study the problem in two scenarios:

- **FIFO queues.** The outstanding job tasks are queued in servers in a FIFO manner. The key is to assign the tasks of each arriving job to their available servers in a way that minimizes the job completion time by keeping the servers' estimated busy time as balanced as possible.
- **Prioritized reordering.** The outstanding job tasks in each queue can be reordered. The challenge lies in prioritizing the outstanding jobs in such a way that the completion times of the jobs can be further reduced.

We make no particular assumptions about job arrival times.

III. ALGORITHMS FOR FIFO QUEUES

A. Matching-based Non-Linear Programming

1) *Programming in a Bipartite Graph:* When a new job c arrives, we need to assign all the tasks in \mathcal{T}_c to appropriate available servers.

We do this by dividing these tasks into *task groups*, where each task group contains tasks that share the same set of available servers. We denote by K_c the number of task groups in job c . Further, for each $k \in \mathcal{K}_c := \{1, \dots, K_c\}$, we denote by \mathcal{T}_c^k and \mathcal{S}_c^k the set of tasks in the k -th group (also referred to as group k) and the set of available servers for tasks in the k -th group, respectively. By definition, we have

$$\mathcal{T}_c^k = \{r \in \mathcal{T}_c \mid \mathcal{S}^r = \mathcal{S}_c^k\}. \quad (3)$$

The task assignment problem can be modeled as a matching problem with respect to a bipartite graph. The left-side nodes in the bipartite graph are the K_c task groups, while the right-side nodes are the M servers. For each $k \in \mathcal{K}_c$, an edge (k, m) exists if $m \in \mathcal{S}_c^k$. We can formulate the assignment problem as a non-linear integer program as follows:

$$\begin{aligned} \mathcal{P} : & \quad \min_{\Phi_c, n_m^k \in \mathbb{N}^+} \Phi_c \\ \text{s.t.} & \quad \begin{cases} \sum_{k \in \mathcal{K}_c} n_m^k \leq \max\{\Phi_c - b_m^c, 0\} & \forall m \in \bigcup_{k \in \mathcal{K}_c} \mathcal{S}_c^k, \\ \sum_{m \in \mathcal{S}_c^k} n_m^k \cdot \mu_m^c \geq |\mathcal{T}_c^k| & \forall k \in \mathcal{K}_c. \end{cases} \end{aligned} \quad (4)$$

Recall that b_m^c is the estimated busy time of server m before the assignment of tasks in \mathcal{T}_c , calculated by (2). In \mathcal{P} , n_m^k is the number of time slots required to process the tasks in group \mathcal{T}_c^k at server m , given the profiled processing capacity μ_m^c . Each n_m^k is associated with an edge (k, m) in the bipartite graph. Φ_c is the estimated completion time of job c . The first constraint in (4) means that any available server whose estimated busy time is larger than Φ_c should not participate in the assignment of tasks in \mathcal{T}_c . This constraint ensures balance among the participating servers. The second constraint in (4) ensures that all the tasks in \mathcal{T}_c can be processed. The program \mathcal{P} can be solved optimally by commercial solvers, e.g., CPLEX.¹

¹<https://www.ibm.com/products/ilog-cplex-optimization-studio>

2) *Narrowing the Search of Φ_c* : A commercial solver could be slow to solve the non-linear integer program in large-scale scenarios. To reduce the computational overhead, we narrow the search space of Φ_c by analyzing the characteristics of the problem.

After job c 's arrival, the number of time slots required to process all the backlogged tasks and the newly assigned tasks issued by job c is upper bounded by

$$\Phi_c^+ := \max_{m \in \bigcup_{k \in \mathcal{K}_c} \mathcal{S}_c^k} \left\{ \left\lceil \frac{\sum_{k \in \mathcal{K}_c: m \in \mathcal{S}_c^k} |\mathcal{T}_c^k|}{\mu_m^c} \right\rceil + b_m^c \right\}. \quad (5)$$

Φ_c^+ is obtained by assuming that for each available server m , all the tasks in \mathcal{T}_c are assigned to it. Correspondingly, the lower bound of Φ_c is

$$\Phi_c^- := \max_{k \in \mathcal{K}_c} x_k, \quad (6)$$

where x_k is the *minimum* integer such that

$$\sum_{m \in \mathcal{S}_c^k} (\max \{x_k - b_m^c, 0\}) \cdot \mu_m^c \geq |\mathcal{T}_c^k|. \quad (7)$$

Note that x_k is the minimal number of time slots required to process all the tasks in \mathcal{T}_c^k under the assumption that group k is the only task group of job c . With the above analysis, we can reduce the search space of Φ_c from \mathbb{N}^+ to the integer interval $[\Phi_c^-, \Phi_c^+]$.

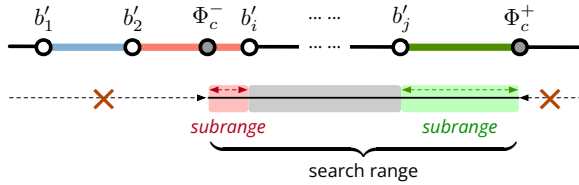


Fig. 1. Divide $[\Phi_c^-, \Phi_c^+]$ into disjoint subranges.

3) *The Matching-based Algorithm*: By introducing Φ_c^- and Φ_c^+ , the search space of Φ_c is greatly narrowed. However, \mathcal{P} is still non-linear since the first constraint in (4) is piecewise. To solve \mathcal{P} efficiently, we divide $[\Phi_c^-, \Phi_c^+]$ into several disjoint sub-intervals based on the estimated busy times of available servers. The division is illustrated in Fig. 1. Specifically, we sort the estimated busy time b_m^c of each server $m \in \bigcup_{k \in \mathcal{K}_c} \mathcal{S}_c^k$ in ascending order, and we denote the sorted values by b'_1, b'_2, \dots . We then denote by i (j) the minimal (maximal) index of these values such that $b'_i \geq \Phi_c^-$ ($b'_j \leq \Phi_c^+$). Then, we can solve \mathcal{P} with the search space of Φ_c falling into each sub-interval $[\Phi_c^-, b'_i), [b'_i, b'_{i+1}), \dots, [b'_j, \Phi_c^+]$ in turn. Each of these problems is transformed into a linear integer program since the first constraint of (4) is no longer piecewise. The sub-intervals are checked one by one. If \mathcal{P} is solvable within the current sub-interval, then its solution is the optimal one since the remaining sub-intervals cannot contain a smaller Φ_c .

With \mathcal{P} solved as detailed above, we design a task assignment algorithm named Optimal Balanced Task Assignment (OBTA). The pseudocode is presented in Algorithm 1. When the profiling of $\{\mu_m^c\}_{m,c}$ is precise, the solution of OBTA is optimal since OBTA outputs the optimal n_m^k 's.

Algorithm 1: OBTA

```

1 while a new job  $c$  arrives do
2   for each server  $m \in \bigcup_{k \in \mathcal{K}_c} \mathcal{S}_c^k$  do
3     Estimate  $b_m^c$  by (2)
4   Solve  $\mathcal{P}$  as described in Sec. III-A3, and get the
   result  $\{n_m^k\}_{m,k}$ 
5   for each task group  $k \in \mathcal{K}_c$  do
6     Sort the servers in  $\mathcal{S}_c^k$  in ascending order of
     their estimated busy times, i.e.,  $b_m^c$ 
7     for each server  $m$  in the sorted  $\mathcal{S}_c^k$  do
8       if server  $m$  is not the last one in  $\mathcal{S}_c^k$  then
9         Assign  $n_m^k \cdot \mu_m^c$  group- $k$  tasks to server
           $m$ 
10      else
11        Assign all the remaining group- $k$  tasks
          to server  $m$ 

```

B. Water-Filling

Solving a group of integer programs might still be time-consuming for large-scale distributed computing systems. To improve efficiency, we propose another task assignment algorithm called water-filling (WF), extended from [7], which assigns tasks one group at a time in an *approximate* manner.

1) *Algorithm Design*: We denote by $b_m^c(k)$ the estimated busy time of server m after assigning the tasks in group k . By definition, for each $m \in \mathcal{M}$, we have

$$b_m^c(0) := b_m^c \leq b_m^c(1) \leq \dots \leq b_m^c(K_c). \quad (8)$$

For each $k \in \mathcal{K}_c$, WF allocates $\max\{\xi_k - b_m^c(k-1), 0\}$ time slots on each available server $m \in \mathcal{S}_c^k$, where ξ_k is the minimal integer such that

$$\sum_{m \in \mathcal{S}_c^k} (\max\{\xi_k - b_m^c(k-1), 0\}) \cdot \mu_m^c \geq |\mathcal{T}_c^k|. \quad (9)$$

The calculation of ξ_k is similar to x_k in (7). It is the estimated time for all the tasks in group k to be processed by server m , given the assignment of tasks in $\mathcal{T}_c^1, \dots, \mathcal{T}_c^{k-1}$. We call $m \in \mathcal{S}_c^k$ a *participating server* if $\xi_k - b_m^c(k-1) > 0$. We then allocate $(\xi_k - b_m^c(k-1)) \cdot \mu_m^c$ tasks in group k to each participating server m (or all the remaining tasks in group k if server m is the last participating server). After that, we update $b_m^c(k)$ by

$$b_m^c(k) = \max\{b_m^c(k-1), \xi_k\} \quad (10)$$

for each $m \in \mathcal{S}_c^k$. WF repeats this procedure for each task group sequentially, performing like filling water, ensuring that the participating servers have the same estimated busy time. Fig. 2 illustrates the idea of *water-filling*.

The pseudocode of WF is presented in Algorithm 2. The complexity of WF is $\mathcal{O}(\sum_{k \in \mathcal{K}_c} |\mathcal{S}_c^k| \log(|\mathcal{T}_c^k|))$, since for each group k , ξ_k can be found through a binary search with an overhead of $\mathcal{O}(\log(|\mathcal{T}_c^k|))$, and WF needs to walk through all the available servers to verify that the searched ξ_k satisfies (9). Note that the complexity of WF can also be written as $\mathcal{O}(K_c \cdot M \cdot \log |\mathcal{T}_c|)$.

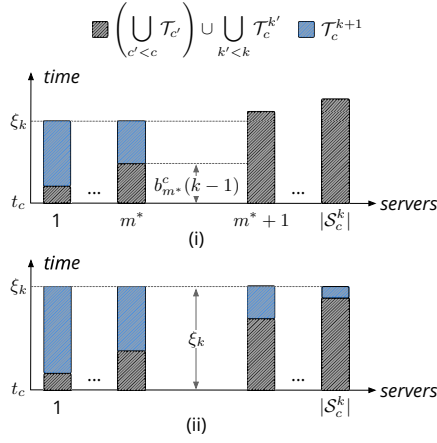


Fig. 2. Assign tasks in \mathcal{T}_c^k to their available servers in a water-filling manner. In (i), only a subset of S_c^k , includes servers $1, \dots, m^*$, participate in the assignment of \mathcal{T}_c^k ; In (ii), every server in S_c^k participates in the assignment of \mathcal{T}_c^k .

Algorithm 2: WF

```

1 while a new job  $c$  arrives do
2   for each server  $m \in \bigcup_{k \in \mathcal{K}_c} S_c^k$  do
3     Estimate  $b_m^c$  by (2)
4      $b_m^c(0) \leftarrow b_m^c$ 
5   for each task group  $k \in \mathcal{K}_c$  do
6     Calculate  $\xi_k$  as detailed in Sec. III-B1
7     for each server  $m \in S_c^k$  do
8       if  $b_m^c(k-1) \leq \xi_k$  then
9         continue
10      if server  $m$  is not the last server in  $S_c^k$  then
11        Assign  $(\xi_k - b_m^c(k-1)) \cdot \mu_m^c$  group- $k$ 
12        tasks to server  $m$ 
13      else
14        Assign all the remaining group- $k$  tasks
15        to server  $m$ 
16      Update  $b_m^c(k)$  by (10)

```

2) *Approximation Analysis:* In this section, we present the performance analysis of WF. The *approximation factor* of WF against the optimum is defined as

$$\alpha_{\text{WF}} := \max_I \frac{\text{WF}(I)}{\text{OPT}(I)}, \quad (11)$$

where $I := I(c, \{b_m^c\}_m)$ is an arrival instance of a new job c and the estimated busy time of each server at job c 's arrival. $\text{OPT}(I)$ and $\text{WF}(I)$ are respectively the maximum estimated busy times of participating servers after the tasks of job c are assigned by the optimal algorithm and WF.

Theorem 1. *For each newly arrived job c , the approximation factor of WF is at least K_c .*

Proof. The WF-to-optimal ratio is 1 whenever \mathcal{T}_c has only one task group or $S_c^k \cap S_c^{k'} = \emptyset$ holds for any $k \neq k'$. Thus, to get a worst-case ratio, we construct an instance I as illustrated

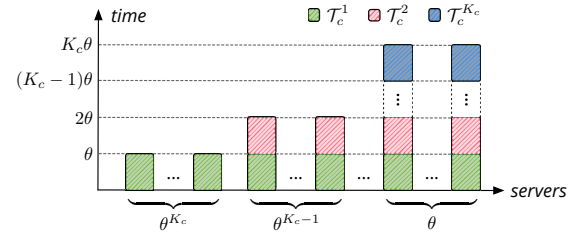


Fig. 3. A visualization of the assignment made by WF for the constructed instance.

in Fig. 3, where the available servers of different task groups overlap.

For simplicity, we assume $\mu_m^c = 1$ and $b_m^c = 0$ for each server m . For each group k , the number of its available servers is given by $|S_c^k| = \sum_{k'=1}^{K_c-k+1} \theta^{k'}$, where $\theta \geq 2$ is an integer. Moreover,

$$S_c^1 \supset S_c^2 \supset \dots \supset S_c^{K_c}, \quad (12)$$

i.e., the available servers of a higher-indexed group are a subset of those of a lower-indexed group. The number of tasks in group k is given by $|\mathcal{T}_c^k| = \theta \cdot |S_c^k|$. The task assignment made by WF is shown in Fig. 3, where θ time slots are required to process the tasks in each group.




Fig. 4. A visualization of the assignment made by OPT for the constructed instance.

By contrast, in OPT, for each $k < K_c$, the tasks in group k are assigned to a subset of its available servers $S_c^k \setminus S_c^{k+1}$ only, as illustrated in Fig. 4. Then, the number of time slots needed to process all the tasks in group k is

$$\left\lceil \frac{\theta \cdot \sum_{k'=1}^{K_c-k+1} \theta^{k'}}{\theta^{K_c-k+1}} \right\rceil = \theta + 2. \quad (13)$$

Additionally, the number of time slots needed to process all the tasks in group K_c is θ . Hence, by OPT, the completion time of job c is $\text{OPT}(I) = \theta + 2$.

Thus, the WF-to-optimal ratio is

$$\frac{\text{WF}(I)}{\text{OPT}(I)} = \frac{K_c \cdot \theta}{\theta + 2}, \quad (14)$$

which can be made arbitrarily close to K_c as θ approaches infinity. \square

Theorem 1 shows that K_c is a lower bound of α_{WF} . In the following, we prove that K_c is also an upper bound of α_{WF} .

Theorem 2. *For each newly arrived job c , the approximation factor of WF is at most K_c .*

Proof. We need to prove that $\text{WF}(I) \leq K_c \cdot \text{OPT}(I)$ holds for any possible arrival instance I . Hereafter, we drop I for simplicity and use ALG to represent the algorithm itself or the

estimated completion time of job c by applying the algorithm interchangeably (ALG can be OPT, WF, WF_k , and OPT_k , where the last two notations will be introduced soon).

Remember that when WF dispatches tasks in group k , we call server $m \in \mathcal{S}_c^k$ a participating server if $\xi_k - b_m^c(k-1) > 0$. We use $\Omega_c^k \subseteq \mathcal{S}_c^k$ to denote this set of participating servers. We denote by WF_k the number of time slots required to complete the processing of all the tasks in $\bigcup_{k' \leq k} \mathcal{T}_c^{k'}$.² Note that for each server $m \in \bigcup_{k' \leq k} \mathcal{S}_c^{k'}$ with FIFO queues, the tasks issued by job c can be processed only after the outstanding tasks of previous jobs are processed. Thus, by definition, for each $k \in \mathcal{K}_c$,

$$WF_k = \max_{m \in \bigcup_{k' \leq k} \Omega_c^{k'}} b_m^c(k), \quad (15)$$

and for each $k < K_c$,

$$WF_{k+1} = \max \left\{ WF_k, \max_{m \in \Omega_c^{k+1}} b_m^c(k+1) \right\}. \quad (16)$$

Recall that $b_m^c(k)$ is updated by (10). Fig. 5 visualizes WF_k .

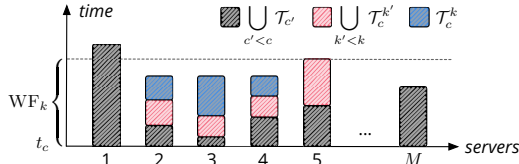


Fig. 5. Visualization of WF_k . Note that $WF_k = WF_{k-1}$ for the constructed example.

Since $\mathcal{T}_c^1 \subseteq \mathcal{T}_c$, $WF_1 \leq OPT$. Note that $WF = WF_{K_c}$. If we can prove that for each $k < K_c$,

$$WF_{k+1} - WF_k \leq OPT, \quad (17)$$

then we have

$$WF = WF_1 + \sum_{k < K_c} (WF_{k+1} - WF_k) \leq K_c \cdot OPT, \quad (18)$$

which is exactly our target. In the following, we will show that (17) indeed holds. To do so, we exploit the optimal assignment of the tasks of a job containing the tasks \mathcal{T}_c^{k+1} only. Similar to WF_{k+1} , we denote by OPT_{k+1} the number of time slots required to complete the processing of tasks in \mathcal{T}_c^{k+1} . It is easy to see that

$$OPT_{k+1} \leq OPT \quad (19)$$

holds for each $k \in \mathcal{K}_c$, since $\mathcal{T}_c^k \subseteq \mathcal{T}_c$.

To prove (17), we consider different cases of the assignment of tasks in \mathcal{T}_c^{k+1} by WF separately.

Case I. $\mathcal{S}_c^{k+1} \cap \bigcup_{k' \leq k} \Omega_c^{k'} = \emptyset$. In this case, the available servers for group $k+1$ do not overlap with the participating servers for groups $1, \dots, k$. Thus, by the definition of WF, such an assignment must be optimal if a job contains only the tasks \mathcal{T}_c^{k+1} . Hence, by (19), we have

$$\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) = OPT_{k+1} \leq OPT. \quad (20)$$

² WF_k is the number of time slots between job c 's arrival and the time when the last task in \mathcal{T}_c^k completes.

- As visualized in Fig. 6(i), if $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) \leq WF_k$, by (16), we have $WF_{k+1} = WF_k$. Thus,

$$WF_{k+1} - WF_k = 0 < OPT. \quad (21)$$

- As visualized in Fig. 6(ii), if $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) > WF_k$, by (16) and (20), we have

$$\begin{aligned} WF_{k+1} - WF_k &< WF_{k+1} \\ &= \max_{m \in \Omega_c^{k+1}} b_m^c(k+1) \\ &\leq OPT. \end{aligned} \quad (22)$$

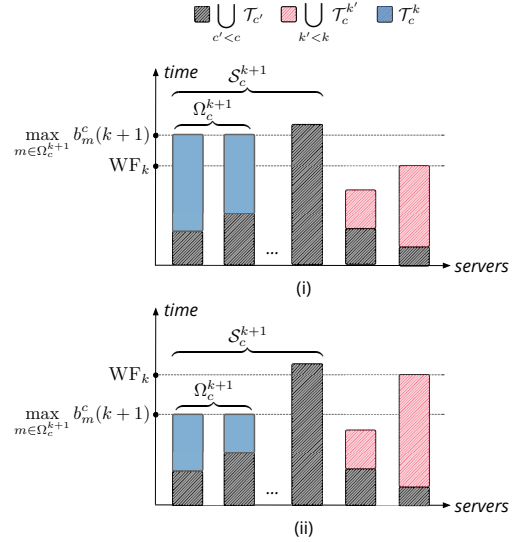


Fig. 6. Visualization of Case I. In (i), $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) > WF_k$. In (ii), $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) \leq WF_k$.

Case II. $\mathcal{S}_c^{k+1} \cap \bigcup_{k' \leq k} \Omega_c^{k'} \neq \emptyset$, i.e., the available servers of group $k+1$ overlap with the participating servers of lower-indexed groups.

If $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) \leq WF_k$, we again have $WF_{k+1} = WF_k$ by (16) and thus, $WF_{k+1} - WF_k = 0 < OPT$.

If $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1) > WF_k$, we have $WF_{k+1} > WF_k$. In this case, by definition, each participating server of groups $1, \dots, k$ must also be a participating server of group $k+1$ by WF (because the estimated busy times of all these servers are smaller than $\max_{m \in \Omega_c^{k+1}} b_m^c(k+1)$).

For each $m \in \mathcal{S}_c^{k+1} \setminus \Omega_c^{k+1}$ (i.e., server m is available to group $k+1$ but does not participate in \mathcal{T}_c^{k+1} 's assignment), it can be shown that:

- 1) $b_m^c(k) \geq \max_{m' \in \Omega_c^{k+1}} b_{m'}^c(k+1)$, and
- 2) by WF, server m does not participate in the assignment of groups $1, \dots, k$.

Property 1) follows directly from the definition of WF (otherwise, server m must be a participating server of group $k+1$). Property 2) follows from the above observation that each participating server of groups $1, \dots, k$ must also be a participating server of group $k+1$ by WF. By properties 1) and 2), for each server $m \in \mathcal{S}_c^{k+1} \setminus \Omega_c^{k+1}$, the initial estimated busy time $b_m^c(0)$ satisfies

$$b_m^c(0) = b_m^c(k) \geq \max_{m' \in \Omega_c^{k+1}} b_{m'}^c(k+1). \quad (23)$$

With this result, we prove $\text{WF}_{k+1} - \text{WF}_k \leq \text{OPT}$ by comparing Ω_c^{k+1} and \mathfrak{Z}_c^{k+1} , where $\mathfrak{Z}_c^{k+1} \subseteq \mathcal{S}_c^{k+1}$ is the set of participating servers for the assignment of \mathcal{T}_c^{k+1} by OPT_k .

Case II-A. $\mathfrak{Z}_c^{k+1} \cap (\mathcal{S}_c^{k+1} \setminus \Omega_c^{k+1}) \neq \emptyset$, i.e., at least one server in $\mathcal{S}_c^{k+1} \setminus \Omega_c^{k+1}$ is chosen for assignment of \mathcal{T}_c^{k+1} by OPT_{k+1} . Taking any server $m \in \mathfrak{Z}_c^{k+1} \cap (\mathcal{S}_c^{k+1} \setminus \Omega_c^{k+1})$, we have

$$\text{WF}_{k+1} = \max_{m' \in \Omega_c^{k+1}} b_{m'}^c(k+1) \stackrel{(23)}{\leq} b_m^c < \text{OPT}_{k+1} \stackrel{(19)}{\leq} \text{OPT}. \quad (24)$$

As a result, $\text{WF}_{k+1} - \text{WF}_k < \text{WF}_{k+1} < \text{OPT}$.

Case II-B. $\mathfrak{Z}_c^{k+1} \cap (\mathcal{S}_c^{k+1} \setminus \Omega_c^{k+1}) = \emptyset$. It follows that $\mathfrak{Z}_c^{k+1} \subseteq \Omega_c^{k+1}$, which implies

$$\mathfrak{Z}_c^{k+1} = \Omega_c^{k+1} \cap \mathfrak{Z}_c^{k+1}. \quad (25)$$

We divide the servers in Ω_c^{k+1} into two disjoint sets:

$$\Omega_{c,\leq}^{k+1} := \{m \in \Omega_c^{k+1} \mid b_m^c(k) \leq \text{WF}_k\}, \quad (26)$$

$$\Omega_{c,>}^{k+1} := \{m \in \Omega_c^{k+1} \mid b_m^c(k) > \text{WF}_k\}. \quad (27)$$

For each $m \in \Omega_{c,>}^{k+1}$, if server m is a participating server in the assignment of any group $1, \dots, k$ by WF, we have

$$\text{WF}_k \stackrel{(15)}{\geq} b_m^c(k) \stackrel{(27)}{>} \text{WF}_k, \quad (28)$$

giving a contradiction. Thus, server m is not a participating server in the assignment of groups $1, \dots, k$ by WF. As a result, $b_m^c(k) = b_m^c(0)$ holds for each $m \in \Omega_{c,>}^{k+1}$.

Case II-B1. $\mathfrak{Z}_c^{k+1} \cap \Omega_{c,>}^{k+1} = \emptyset$. In this case, we have $\mathfrak{Z}_c^{k+1} \subseteq \Omega_{c,\leq}^{k+1}$. In OPT_{k+1} , OPT_{k+1} time slots of all the participating servers \mathfrak{Z}_c^{k+1} can accommodate all the tasks of \mathcal{T}_c^{k+1} . Thus,

$$|\mathcal{T}_c^{k+1}| \leq \text{OPT}_{k+1} \cdot \sum_{m \in \mathfrak{Z}_c^{k+1}} \mu_m^c. \quad (29)$$

On the other hand, by the definition of WF, $(\text{WF}_{k+1} - \text{WF}_k - 1)$ time slots of all the participating servers $\Omega_{c,\leq}^{k+1}$ are not adequate for all the tasks of \mathcal{T}_c^{k+1} . Hence,

$$(\text{WF}_{k+1} - \text{WF}_k - 1) \cdot \sum_{m \in \Omega_{c,\leq}^{k+1}} \mu_m^c < |\mathcal{T}_c^{k+1}|. \quad (30)$$

Combining (29) and (30) and noting that $\mathfrak{Z}_c^{k+1} \subseteq \Omega_{c,\leq}^{k+1}$, we obtain $\text{WF}_{k+1} - \text{WF}_k - 1 < \text{OPT}_{k+1}$. By (19), we have $\text{WF}_{k+1} - \text{WF}_k \leq \text{OPT}$.

Case II-B2. $\mathfrak{Z}_c^{k+1} \cap \Omega_{c,>}^{k+1} \neq \emptyset$. In this case, at least one server in $\Omega_{c,>}^{k+1}$ is a participating server for the assignment of \mathcal{T}_c^{k+1} by OPT_{k+1} . Hence, all the servers in $\Omega_{c,\leq}^{k+1}$ must also be participating servers for the assignment of \mathcal{T}_c^{k+1} by OPT_{k+1} . In other words, $\Omega_{c,\leq}^{k+1} \subseteq \mathfrak{Z}_c^{k+1}$.

In OPT_{k+1} , OPT_{k+1} time slots of all the participating servers \mathfrak{Z}_c^{k+1} can accommodate all the tasks of \mathcal{T}_c^{k+1} and the outstanding tasks of previous jobs queuing at the servers in $\mathfrak{Z}_c^{k+1} \cap \Omega_{c,>}^{k+1}$. Thus,

$$|\mathcal{T}_c^{k+1}| + \sum_{m \in \Omega_{c,>}^{k+1} \cap \mathfrak{Z}_c^{k+1}} b_m^c(0) \cdot \mu_m^c \leq \text{OPT}_{k+1} \cdot \sum_{m \in \mathfrak{Z}_c^{k+1}} \mu_m^c. \quad (31)$$

On the other hand, by the definition of WF, $(\text{WF}_{k+1} - \text{WF}_k - 1)$ time slots of all the participating servers in

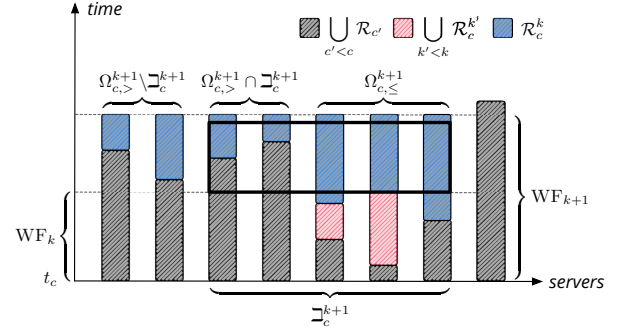


Fig. 7. Visualization of Case II-B2.

$\Omega_c^{k+1} \cap \mathfrak{Z}_c^{k+1}$ are not adequate for all the tasks of \mathcal{T}_c^{k+1} and the backlogs beyond WF_k (see the black box in Fig. 7 for an illustration). Hence,

$$\begin{aligned} & (\text{WF}_{k+1} - \text{WF}_k - 1) \cdot \sum_{m \in \mathfrak{Z}_c^{k+1}} \mu_m^c \\ & \stackrel{(25)}{=} (\text{WF}_{k+1} - \text{WF}_k - 1) \cdot \sum_{m \in \Omega_{c,\leq}^{k+1} \cap \mathfrak{Z}_c^{k+1}} \mu_m^c \\ & < |\mathcal{T}_c^{k+1}| + \sum_{m \in \Omega_{c,>}^{k+1} \cap \mathfrak{Z}_c^{k+1}} (b_m^c(0) - \text{WF}_k) \cdot \mu_m^c. \quad (32) \end{aligned}$$

Note that the right side of (32) is no greater than the left side of (31). Combining (31) with (32), we obtain $\text{WF}_{k+1} - \text{WF}_k - 1 < \text{OPT}_{k+1}$. By (19), we have $\text{WF}_{k+1} - \text{WF}_k \leq \text{OPT}$.

With the above analysis for **Case I** and **Case II**, we have shown that (17) indeed holds. \square

Theorems 1 and 2 together show that WF has a tight approximation ratio of K_c .

C. Replica-Deletion

In this section, we introduce another task assignment heuristic called RD (replica-deletion).

1) *Algorithm Design:* We illustrate RD with an example, as shown in Fig. 8. When a new job c arrives, each task r in \mathcal{T}_c is initially replicated $|\mathcal{S}^r|$ times at all of its available servers. For instance, the blue task in Fig. 8 has three available servers: servers 1, 2, and 5, so it is replicated at these three servers in Fig. 8(i).

After initialization, RD enters the deletion phase. To minimize the completion time of job c , RD removes redundant task replicas while keeping the estimated busy time of participating servers as balanced as possible. In each deletion iteration, RD first identifies the participating server(s) with the largest estimated busy time, referred to as the *target server(s)*, denoted by m^* . For example, in the first deletion iteration (Fig. 8(i)), the target server is server 2. RD then removes up to $\mu_{m^*}^c$ task replicas from the target server to reduce its estimated busy time by one time slot. In each deletion iteration, RD removes task replicas with the largest numbers of copies.

In the example in Fig. 8, we assume $\mu_m^c \equiv 1$ for all the servers, so RD will remove at most one task replica from the target server. In Fig. 8(i), at server 2, the red task has two replicas (in servers 2 and 5), the blue task has three replicas,

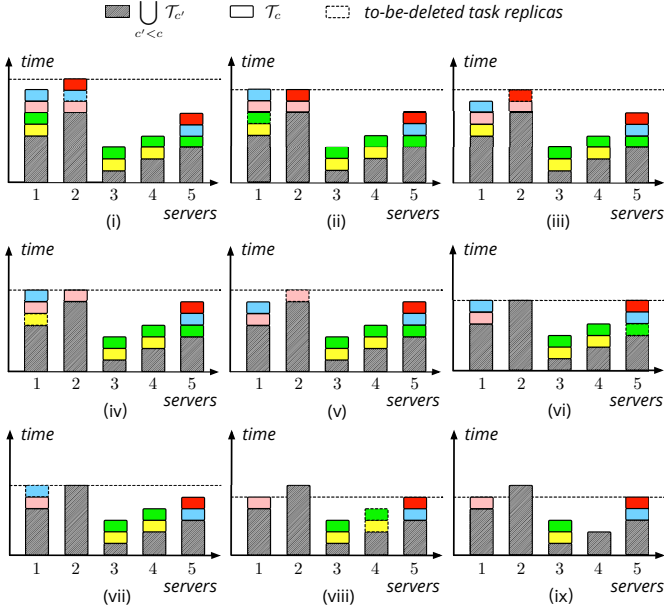


Fig. 8. How RD works. (i)–(ix) demonstrate how to delete task replicas. In this example, $\mu_m^c \equiv 1$ for all the servers $m \in \mathcal{M}$.

and the pink task has two replicas. Therefore, RD deletes the blue task replica from server 2. In the second deletion iteration (Fig. 8(ii)), the target servers are servers 1 and 2. In this case, the green task has the maximum number of replicas among all the tasks in these target servers. Thus, a green task replica is removed from server 1. In the third deletion iteration (Fig. 8(iii)), the target server is server 2, and both the red task and the pink task have two replicas. In this case, RD randomly removes one of them. Figs. 8(iv) to 8(vii) show the subsequent deletion iterations.

If there are multiple tasks with the same maximum number of replicas on distinct target servers, RD selects the server with the largest *initial* estimated busy time, i.e., the estimated busy time of servers before assigning any tasks of job c , as the target server. For example, in Fig. 9, the target servers are servers 1 and 5, and both the blue task and the green task have three replicas. In this case, the blue task replica on server 1 will be deleted since server 1 has a larger initial estimated busy time.

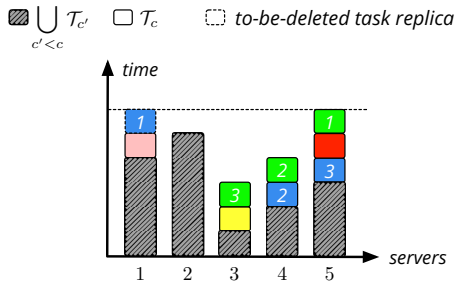


Fig. 9. A target server with a larger initial estimated busy time has a task replica removed.

RD exits the deletion phase when all the tasks in the target server(s) have only one replica, indicating that the completion

time of job c cannot be reduced further. In Fig. 8(viii), the deletion phase terminates since all the tasks in target servers 1 and 5 have no other replicas. In the final phase, RD removes redundant task replicas from the remaining participating servers so that each task is processed by only one server. This removal procedure operates similarly to the deletion phase, identifying and removing replicas from the server with the largest estimated busy time among the remaining servers. For example, in Fig. 8(ix), RD deletes the replicas of the yellow and green tasks from server 4. This is done to keep the estimated busy time of all the servers as small and balanced as possible.

RD assigns tasks to servers from a global perspective because it scans all available servers when selecting a task replica to delete. In contrast, WF minimizes the completion time of the arrived job locally by partitioning tasks into task groups and balancing only the available servers within each task group in each iteration. Intuitively, RD can outperform WF in most cases, but RD's procedure is more complex to execute.

2) *Complexity Analysis*: In the implementation of RD, we use a priority queue to maintain all servers, prioritizing by their estimated busy times (and break ties by their initial estimated busy times). Additionally, for each server m , we use a priority queue to maintain the assigned tasks, prioritizing by their numbers of replicas. In the worst case, each task is replicated on all servers, requiring $\mathcal{O}(|\mathcal{T}_c| \cdot M)$ deletions. Moreover, each deletion affects the priority queues of the servers containing replicas of the deleted task. Thus, each deletion leads to updating the priority queue of up to M servers, resulting in a complexity of $\mathcal{O}(M \cdot \log |\mathcal{T}_c|)$. Therefore, the total time complexity of RD is $\mathcal{O}(M^2 \cdot |\mathcal{T}_c| \cdot \log |\mathcal{T}_c|)$. We experimentally compare the performance of RD with WF and other algorithms in Sec. V, and leave its theoretical analysis as future work.

IV. ALGORITHMS WITH JOB REORDERING

In this section, we consider an extended scenario in which the outstanding job tasks queued on each server can be prioritized and reordered. By adjusting the execution order of outstanding jobs and reassigning their remaining tasks, their average completion time can be further reduced.

Inspired by [4] and [7], we use a similar approach to derive the job execution order, which emulates a *shortest-remaining-time-first* policy for distributed job executions. When a new job c arrives, job reordering is triggered. We denote by \mathcal{O}_c the set of outstanding jobs after job c 's arrival and denote by \mathcal{Q}_c the reordered list of outstanding jobs. Our goal is to retrieve jobs from \mathcal{O}_c and insert them into \mathcal{Q}_c in a specific sequence until $|\mathcal{Q}_c| = |\mathcal{O}_c|$.

Assume that there are p sorted outstanding jobs in \mathcal{Q}_c . For each job $c' \in \mathcal{O}_c \setminus \mathcal{Q}_c$, we estimate the remaining time to complete job c' as $\Phi_{c'}$, assuming that job c' is the $(p+1)$ -th job in the new order. Here, $\Phi_{c'}$ is derived by WF with the estimated busy times of servers, given the assignment of p jobs in \mathcal{Q}_c and the number of unprocessed tasks of job c' . We denote by l the index of the job with the minimal

Φ_l among all the outstanding jobs explored. When exploring each job $c' \in \mathcal{O}_c \setminus \mathcal{Q}_c$, we first compute a lower bound $\Phi_{c'}$ on the completion time of job c' , as indicated by (6) and (7) in Section III-A2. If $\Phi_{c'} \geq \Phi_l$, the exploration of job c' terminates. Otherwise, we calculate $\Phi_{c'}$ by WF and update the best-explored job l if $\Phi_{c'} < \Phi_l$. The reason is that if $\Phi_{c'} > \Phi_l$, letting job c' be the $(p+1)$ -th job can never lead to a lower average job completion time. This technique, which significantly reduces the computation overhead on finding the $(p+1)$ -th job in the new order, is named *early-exit*.

Algorithm 3: OCWF-ACC

```

1 while a new job  $c$  arrives do
2    $\mathcal{O}_t \leftarrow \mathcal{O}_t \cup \{c\}$ 
3    $\mathcal{Q}_t \leftarrow \emptyset$ 
4   Initialize the estimated busy times of servers:
    $\forall m \in \mathcal{M}, b_m^c \leftarrow 0$ 
5   while  $|\mathcal{Q}_c| < |\mathcal{O}_c|$  do
6      $l \leftarrow \text{nullptr}$ 
7     for each job  $c' \in \mathcal{O}_t \setminus \mathcal{Q}_t$  do
8       Get the unprocessed tasks of job  $c'$ , and
       calculate  $\Phi_{c'}$  by (6) and (7)
9       if  $l == \text{nullptr}$  or  $\Phi_{c'} < \Phi_l$  then
10        Get the unprocessed tasks of job  $c'$ , and
        solve the task assignment problem  $\mathcal{P}$ 
        by WF to get  $\Phi_{c'}$ 
11        if  $l == \text{nullptr}$  or  $\Phi_{c'} < \Phi_l$  then
12         Derive the assignment of
         unprocessed tasks by WF
13          $l \leftarrow c'$ 
14        else
15         break // early-exit
16    $\mathcal{Q}_c \leftarrow \mathcal{Q}_c \cup \{l\}$ 
17   For each  $m \in \mathcal{M}$ , update the estimated busy
   time of server  $m$ 

```

We name the algorithm as OCWF-ACC (accelerated order-conscious WF). Algorithm 3 presents the details of OCWF-ACC. Note that WF can be replaced by other task assignment algorithms.

V. EXPERIMENTAL RESULTS

We conduct extensive simulations to verify the performance and efficiency of the proposed algorithms. We first present the simulation settings. Then, we show and discuss the results.

A. Experimental Setup

Job Traces. We use the Alibaba cluster trace program [8] to drive the simulation. We extract a segment from the dataset `batch_task.csv` in `cluster-trace-v2017` that contains 250 jobs. There are a total of 113,653 tasks in these jobs. We derive job arrivals and task durations from the timestamps of the recorded task events. We scale the inter-arrival times of the jobs to simulate different levels of system utilization, ranging from 25% to 75%. The default number of

servers is 100. For each server, its computing capacity for each job is randomly generated between 3 and 5 by default.

Available Servers. We consider each entry of a job in the trace file as one task group of the job. Each entry is a task event, which records the creation timestamp, job_id, number of task instances, etc. On average, there are 5.52 task groups in a job. The data inputs to task groups are assumed to be distributed among the servers according to a Zipf distribution. Specifically, for each task group, we first randomly generate a permutation of all servers. Then, the task group is associated with the i -th server in the permutation with a probability proportional to $\frac{1}{i^\alpha}$, where $\alpha \in [0, 2]$ is the Zipf skew parameter ($\alpha = 0$ means a uniform distribution). If the associated server of the task group is server m , then servers $m, m+1, \dots, m+p-1$ are chosen to be its available servers. Here, p is randomly generated between 8 and 12 by default.

Algorithms. We implement six algorithms with DOcplex³: NLIP, OBTA, WF, RD, OCWF, and OCWF-ACC. NLIP differs from OBTA in that it solves the non-linear program \mathcal{P} for each job directly, without narrowing the search space of Φ_c and dividing it into subranges. For NLIP, OBTA, WF, and RD, we use the default FIFO policy for ordering job execution. OCWF is the non-accelerated version of OCWF-ACC, where the early-exit technique is not employed in the reordering of outstanding jobs (essentially the same as the implementation of the SWAG [4] and ATA-Greedy [7] algorithms). The code is available for tests in other settings or large-scale validations.⁴

Metrics. We use the average job completion time of all jobs to measure performance and the computation overhead of each algorithm to measure efficiency.

B. Experimental Results

We compare the performance and efficiency of the algorithms by varying the Zipf parameter α from 0 to 2 and the system utilization from 25% to 75%. Figs. 10-12 present the results. In these figures, the right y-axis in the first subfigure indicates the average job completion time, while the left y-axis shows the log-scaled average computation overhead per job arrival. The other four subfigures visualize the cumulative distribution of job completion times for different α values. The key findings are summarized as follows:

Compared with NLIP, OBTA achieves a significant improvement in efficiency. From Figs. 10-12, we observe that OBTA and NLIP have fairly close performance of job completion time since both are theoretically optimal for balanced task assignment. By narrowing the search space and dividing it into subranges, OBTA reduces the computation overhead by nearly half compared to NLIP. This verifies our contribution in Section III-B.

WF closely approximates balanced task assignment with extremely low overhead. WF performs close to OBTA and NLIP at almost all percentiles of job completion times, and its computation overhead is two orders of magnitude lower than OBTA's. The ultra-low overhead offers a significant advantage and facilitates job reordering.

³<https://ibmdecisionoptimization.github.io/docplex-doc/index.html>

⁴<https://github.com/hliangzhao/taos>

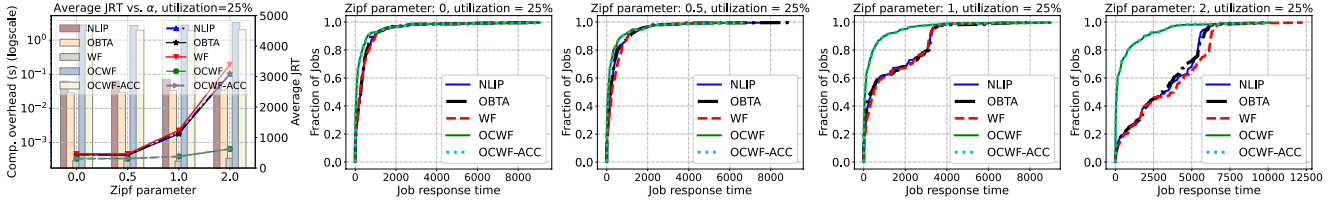


Fig. 10. Average job completion time, computation overheads, and CDF of job completion times under 25% system utilization for different algorithms.

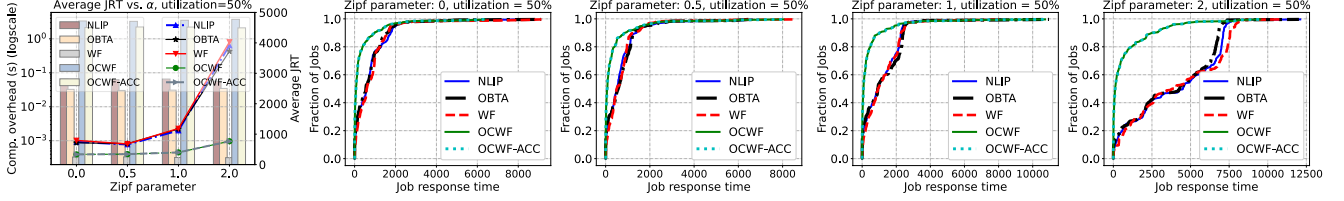


Fig. 11. Average job completion time, computation overheads, and CDF of job completion times under 50% system utilization for different algorithms.

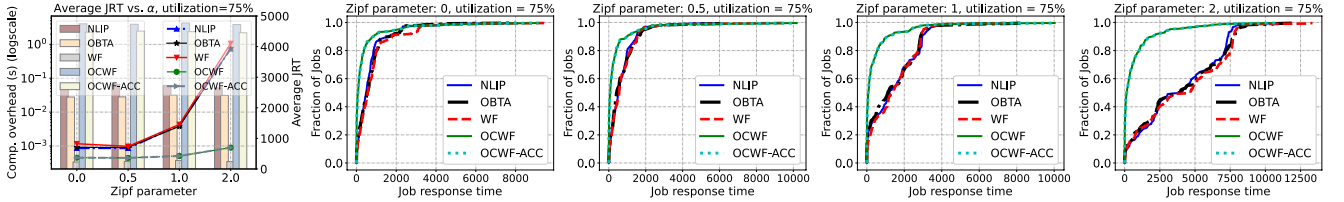


Fig. 12. Average job completion time, computation overheads, and CDF of job completion times under 75% system utilization for different algorithms.

RD's performance positions it between WF and OBTA. Our results show that RD generally outperforms WF. This observation is detailed in Table I, which presents the performance of each algorithm when $\alpha = 2$ and system utilization is at 75%, as shown in the first figure of Fig. 13. However, it is noteworthy that RD has a higher computation overhead than WF, which aligns with our complexity analysis. The time complexity of RD is quantified as $\mathcal{O}(M^2 \cdot n \log n)$, which is higher than WF's $\mathcal{O}(KM \cdot \log n)$, where M is the number of servers, n is the number of tasks, and K is the number of task groups in a job.

TABLE I
AVERAGE JOB COMPLETION TIME VS. #AVAILABLE SERVERS.

Algorithms	Number of available servers					Aver.
	4	6	8	10	12	
OBTA	12551	5814	4217	3609	3160	5870
NLIP	12468	5924	4394	3547	3164	5899
WF	12872	6125	4408	3617	3188	6042
RD	12857	5987	4261	3595	3150	5970
OCWF	1699	958	765	712	657	958
OCWF-ACC	1699	958	765	712	657	958

OCWF-ACC and OCWF are robust to skewness in data availability. As shown in Figs. 10-12, when the skew parameter α changes from 0 to 2, the average job completion time achieved by FIFO-based algorithms (NLIP, OBTA, WF, and RD) shows a clear upward trend. In contrast, OCWF and OCWF-ACC do not exhibit a significant increase in average job completion time. This demonstrates that reordering and

reallocation are crucial for handling skewness in data availability.

OCWF-ACC significantly accelerates OCWF. The computation overhead of OCWF-ACC is only about half of OCWF's overhead. This verifies the advantage of the early-exit technique.

Figs. 10-12 show that job completion times increase with system utilization. The performance trends discussed above are consistently observed across different levels of system utilization.

Figs. 13-14 show the job completion times for varying numbers of available servers and computing capacities, respectively. These experiments are conducted with $\alpha = 2$ and a system utilization of 75%, as we are particularly interested in the performance when resource contention is high. From Fig. 13, we observe that a larger number of available servers decreases job completion times. More available servers provide greater flexibility in task assignment, allowing tasks to be distributed in a manner that better balances the load among servers and reduces job completion times. Fig. 14 demonstrates that increasing computing capacity also reduces job completion times. This is expected, as higher computing capacities enable more tasks to run in parallel, thereby decreasing job completion times. Notably, the relative performance of the algorithms remains largely unchanged across different numbers of available servers and computing capacities.

VI. RELATED WORK

Job scheduling is extensively studied from both theoretical [9]–[16] and system-level perspectives [17]–[22]. Theoretic-

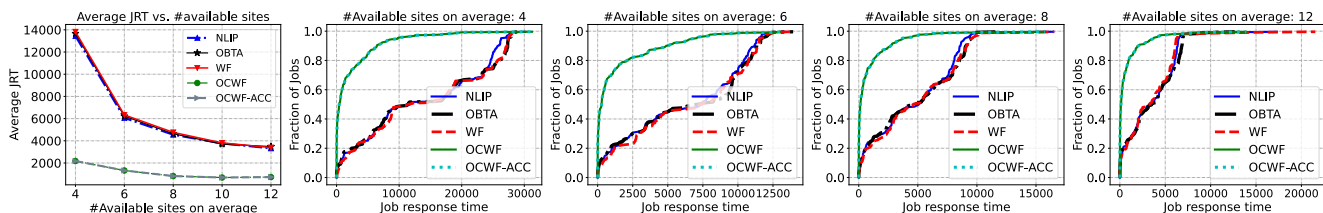


Fig. 13. Average job completion time, and CDF of job completion times when $\alpha = 2$ under 75% system utilization for different numbers of available servers.

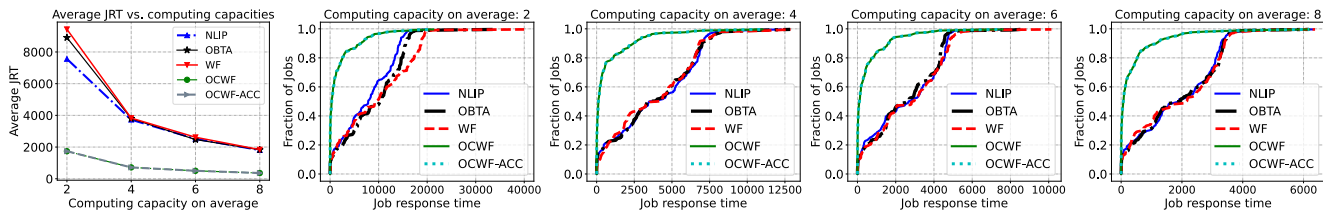


Fig. 14. Average job completion time, and CDF of job completion times when $\alpha = 2$ under 75% system utilization for different computing capacities.

cal works often formulate job completion time minimization problems as combinatorial, constrained optimization problems, solving them with various approaches, especially approximate algorithms. Data locality refers to executing a job close to where the requested data chunk resides, instead of moving data to computation. Originating from Map-Reduce [3], many algorithms have been proposed in both homogeneous and heterogeneous settings [6], [23]–[25]. Generally, these works aim to balance data locality with scenario-oriented performance indicators such as load balancing [26], throughput [27], delay [25], [28], fairness [5], and job completion time [4], [29], [30].

Preserving data locality, some works have studied the scheduling of distributed job executions [4]–[7], [31]. In these scenarios, jobs arrive online with multiple tasks, and each task requires a data chunk that may be replicated across different servers. To minimize job completion times, Hung *et al.* [4] proposed a workload-aware greedy scheduling algorithm called SWAG, which orders job executions by estimating the completion times of outstanding jobs. SWAG is the first algorithm to consider the order of outstanding jobs in distributed job executions. Guan *et al.* [7] significantly improved SWAG with a BTAAJ algorithm, which assigns tasks of a newly arrived job based on a well-constructed flow network. BTAAJ groups the tasks of a job by their available servers and achieves load balancing by minimizing a control parameter C . They also proposed an ATA-Greedy algorithm to improve scheduling performance by reordering outstanding jobs using a similar approach to [4], but with the control parameter C to estimate completion times. Our work presents significant improvements over [4] and [7].

The scheduling of distributed job executions has also been considered from other perspectives, such as fairness [5], [31] and data movement [6]. Guan *et al.* [5] extended conventional max-min fairness on a single machine to distributed job execution over multiple servers, proposing a policy called Aggregate Max-min Fairness, which is Pareto-efficient, envy-free, and strategy-proof. Beaumont *et al.* [6] studied a problem called COMM-ORIENTED, which enforces the optimality of

makespan and minimizes data movement. However, this work focused on a single job only and is not applicable to our problem.

VII. CONCLUSION

In this paper, we explored the task assignment problem in the context of online distributed job executions, with data locality preserved. Our contributions began with formulating the task assignment problem as a non-linear integer program. We developed the OBTA algorithm, known for its efficiency in reducing computational overhead by narrowing the search space of potential solutions. Additionally, we extended the WF heuristic, providing an in-depth, nontrivial tight analysis of its approximation factor, and introduced the innovative RD algorithm, which demonstrates enhanced performance. Our investigation into job reordering, particularly with the implementation of the novel early-exit technique, effectively optimized average job completion times while maintaining low computational overheads. The effectiveness of all proposed algorithms was validated through extensive trace-driven simulations. Both OBTA and the early-exit technique showed substantial reductions in computational overhead. Meanwhile, WF emerged as a practical, lower-overhead alternative for large-scale scenarios. Despite its greater computational intensity compared to WF, RD exhibited superior performance of job completion time. Looking ahead, integrating these algorithms into diverse computational settings and adapting them to the evolving dynamics of distributed job executions hold potential for further enhancing their applicability.

ACKNOWLEDGMENTS

This work was supported in part by the Singapore Ministry of Education under Academic Research Fund Tier 2 Award MOE-T2EP20121-0005, the National Science Foundation of China under Grants 62125206 and U20A20173, the National Key Research and Development Program of China under Grant 2022YFB4500100, and the Key Research Project of Zhejiang Province under Grant 2022C01145.

REFERENCES


- [1] A. Reuther, C. Byun, W. Arcand, D. Bestor, B. Bergeron, M. Hubbell, M. Jones, P. Michaleas, A. Prout, A. Rosa *et al.*, “Scalable system scheduling for hpc and big data,” *Journal of Parallel and Distributed Computing*, vol. 111, pp. 76–92, 2018.
- [2] B. Wang, Z. Chen, and N. Xiao, “A survey of system scheduling for hpc and big data,” in *Proceedings of the 2020 4th International Conference on High Performance Compilation, Computing and Communications*, 2020, pp. 178–183.
- [3] Z. Guo, G. Fox, and M. Zhou, “Investigation of data locality in mapreduce,” in *2012 12th IEEE/ACM International Symposium on Cluster, Cloud and Grid Computing (ccgrid 2012)*. IEEE, 2012, pp. 419–426.
- [4] C.-C. Hung, L. Golubchik, and M. Yu, “Scheduling jobs across geo-distributed datacenters,” in *Proceedings of the Sixth ACM Symposium on Cloud Computing*, 2015, pp. 111–124.
- [5] Y. Guan, C. Li, and X. Tang, “On max-min fair resource allocation for distributed job execution,” in *Proceedings of the 48th International Conference on Parallel Processing*, ser. ICPP ’19. New York, NY, USA: Association for Computing Machinery, 2019.
- [6] O. Beaumont, T. Lambert, L. Marchal, and B. Thomas, “Performance analysis and optimality results for data-locality aware tasks scheduling with replicated inputs,” *Future Generation Computer Systems*, vol. 111, pp. 582–598, 2020.
- [7] Y. Guan and X. Tang, “On task assignment and scheduling for distributed job execution,” in *2022 22nd IEEE International Symposium on Cluster, Cloud and Internet Computing (CCGrid)*, 2022, pp. 726–735.
- [8] “Alibaba cluster trace program.” <https://github.com/alibaba/clusterdata>.
- [9] J. V. Gautam, H. B. Prajapati, V. K. Dabhi, and S. Chaudhary, “A survey on job scheduling algorithms in big data processing,” in *2015 IEEE International Conference on Electrical, Computer and Communication Technologies (ICECCT)*. IEEE, 2015, pp. 1–11.
- [10] Z. Han, H. Tan, S. H.-C. Jiang, X. Fu, W. Cao, and F. C. Lau, “Scheduling placement-sensitive bsp jobs with inaccurate execution time estimation,” in *IEEE INFOCOM 2020 - IEEE Conference on Computer Communications*. IEEE Press, 2020, p. 1053–1062.
- [11] Y. Bao, Y. Peng, C. Wu, and Z. Li, “Online job scheduling in distributed machine learning clusters,” in *IEEE INFOCOM 2018 - IEEE Conference on Computer Communications*, 2018, pp. 495–503.
- [12] I. Attiya, M. Abd Elaziz, and S. Xiong, “Job scheduling in cloud computing using a modified harris hawks optimization and simulated annealing algorithm,” *Computational intelligence and neuroscience*, vol. 2020, 2020.
- [13] F. Zhang, Y. Mei, S. Nguyen, and M. Zhang, “Evolving scheduling heuristics via genetic programming with feature selection in dynamic flexible job-shop scheduling,” *IEEE transactions on cybernetics*, 2020.
- [14] S. Liang, Z. Yang, F. Jin, and Y. Chen, “Data centers job scheduling with deep reinforcement learning,” in *Pacific-Asia Conference on Knowledge Discovery and Data Mining*. Springer, 2020, pp. 906–917.
- [15] D. Narayanan, K. Santhanam, F. Kazhamiaka, A. Phanishayee, and M. Zaharia, “Heterogeneity-aware cluster scheduling policies for deep learning workloads,” in *14th {USENIX} Symposium on Operating Systems Design and Implementation ({OSDI} 20)*, 2020, pp. 481–498.
- [16] S. Deng, H. Zhao, Z. Xiang, C. Zhang, R. Jiang, Y. Li, J. Yin, S. Dustdar, and A. Y. Zomaya, “Dependent function embedding for distributed serverless edge computing,” *IEEE Transactions on Parallel and Distributed Systems*, vol. 33, no. 10, pp. 2346–2357, 2022.
- [17] R. Grandl, G. Ananthanarayanan, S. Kandula, S. Rao, and A. Akella, “Multi-resource packing for cluster schedulers,” in *Proceedings of the 2014 ACM Conference on SIGCOMM*, ser. SIGCOMM ’14. New York, NY, USA: Association for Computing Machinery, 2014, p. 455–466.
- [18] R. Grandl, S. Kandula, S. Rao, A. Akella, and J. Kulkarni, “GRAPHENE: Packing and dependency-aware scheduling for data-parallel clusters,” in *12th USENIX Symposium on Operating Systems Design and Implementation (OSDI 16)*, Nov. 2016, pp. 81–97.
- [19] K. Mahajan, M. Chowdhury, A. Akella, and S. Chawla, “Dynamic query re-planning using QOOP,” in *13th USENIX Symposium on Operating Systems Design and Implementation (OSDI 18)*, Oct. 2018, pp. 253–267.
- [20] R. Grandl, M. Chowdhury, A. Akella, and G. Ananthanarayanan, “Altruistic scheduling in multi-resource clusters,” in *12th USENIX Symposium on Operating Systems Design and Implementation (OSDI 16)*, Nov. 2016, pp. 65–80.
- [21] M. Tirmazi, A. Barker, N. Deng, M. E. Haque, Z. G. Qin, S. Hand, M. Harchol-Balter, and J. Wilkes, “Borg: The next generation,” in *Proceedings of the Fifteenth European Conference on Computer Systems*, ser. EuroSys ’20, 2020.
- [22] H. Mao, M. Schwarzkopf, S. B. Venkatakrisnan, Z. Meng, and M. Alizadeh, “Learning scheduling algorithms for data processing clusters,” in *Proceedings of the ACM Special Interest Group on Data Communication*, ser. SIGCOMM ’19, 2019, p. 270–288.
- [23] X. Zhang, Z. Zhong, S. Feng, B. Tu, and J. Fan, “Improving data locality of mapreduce by scheduling in homogeneous computing environments,” in *2011 IEEE Ninth International Symposium on Parallel and Distributed Processing with Applications*. IEEE, 2011, pp. 120–126.
- [24] W. Wang, K. Zhu, L. Ying, J. Tan, and L. Zhang, “Maptask scheduling in mapreduce with data locality: Throughput and heavy-traffic optimality,” *IEEE/ACM Transactions On Networking*, vol. 24, no. 1, pp. 190–203, 2014.
- [25] N. S. Naik, A. Negi, T. B. Br, and R. Anitha, “A data locality based scheduler to enhance mapreduce performance in heterogeneous environments,” *Future Generation Computer Systems*, vol. 90, pp. 423–434, 2019.
- [26] K. Wang, X. Zhou, T. Li, D. Zhao, M. Lang, and I. Raicu, “Optimizing load balancing and data-locality with data-aware scheduling,” in *2014 IEEE International Conference on Big Data (Big Data)*. IEEE, 2014, pp. 119–128.
- [27] Q. Xie, A. Yekkehkhany, and Y. Lu, “Scheduling with multi-level data locality: Throughput and heavy-traffic optimality,” in *The 35th Annual IEEE International Conference on Computer Communications*. IEEE, 2016, pp. 1–9.
- [28] Z. Fu, Z. Tang, L. Yang, and C. Liu, “An optimal locality-aware task scheduling algorithm based on bipartite graph modelling for spark applications,” *IEEE Transactions on Parallel and Distributed Systems*, vol. 31, no. 10, pp. 2406–2420, 2020.
- [29] J.-Q. Dong, Z.-H. He, Y.-Y. Gong, P.-W. Yu, C. Tian, W.-C. Dou, G.-H. Chen, N. Xia, and H.-R. Guan, “Smart: Speedup job completion time by scheduling reduce tasks,” *Journal of Computer Science and Technology*, vol. 37, no. 4, pp. 763–778, 2022.
- [30] A. M. Abdelmoniem and M. Canini, “Dc2: Delay-aware compression control for distributed machine learning,” in *IEEE INFOCOM 2021 - IEEE Conference on Computer Communications*, 2021, pp. 1–10.
- [31] L. Chen, S. Liu, B. Li, and B. Li, “Scheduling jobs across geo-distributed datacenters with max-min fairness,” in *IEEE INFOCOM 2017 - IEEE Conference on Computer Communications*, 2017, pp. 1–9.



Hailiang Zhao is currently an assistant professor at the School of Software Technology in Zhejiang University, China, where he received a PhD degree in Computer Science and Technology in 2024. His research interests include distributed computing and services computing. He has published several papers in flagship conferences and journals such as IEEE ICWS, TPDS, TMC, TSC, Proc. IEEE, etc. He was a recipient of the Best Student Paper Award of IEEE ICWS 2019.



Xueyan Tang received the BEng degree in computer science and engineering from Shanghai Jiao Tong University in 1998, and the PhD degree in computer science from the Hong Kong University of Science and Technology in 2003. He is currently an associate professor in the College of Computing and Data Science at Nanyang Technological University, Singapore. His research interests include distributed systems, cloud computing, and resource allocation. He has served as an associate editor of IEEE Transactions on Parallel and Distributed Systems, and a program co-chair of IEEE ICPADS 2012, CloudCom 2014 and ICDCS 2020. He is now serving as an associate editor of IEEE Transactions on Cloud Computing.



Peng Chen is currently pursuing the Ph.D. degree with the College of Computer Science and Technology, Zhejiang University, China. He received the B.S. degree in Computer Science from Soochow University, China, and an M.S. degree in Informatics from Kyoto University, Japan, in 2020. His research interests focus on cloud computing, service computing, and distributed systems.



Jianwei Yin received the Ph.D. degree in computer science from Zhejiang University (ZJU) in 2001. He was a Visiting Scholar with the Georgia Institute of Technology. He is currently a Full Professor with the College of Computer Science, ZJU. Up to now, he has published more than 100 papers in top international journals and conferences. His current research interests include service computing and business process management. He is an Associate Editor of the IEEE Transactions on Services Computing.



Shuiguang Deng is currently a full professor at the College of Computer Science and Technology in Zhejiang University, China, where he received a BS and PhD degree both in Computer Science in 2002 and 2007, respectively. He previously worked at the Massachusetts Institute of Technology in 2014 and Stanford University in 2015 as a visiting scholar. His research interests include Edge Computing, Service Computing, Cloud Computing, and Business Process Management. He serves for the journal IEEE Transactions on Services Computing, Knowledge and Information Systems, Computing, and IET Cyber-Physical Systems: Theory & Applications as an Associate Editor. Up to now, he has published more than 100 papers in journals and refereed conferences. In 2018, he was granted the Rising Star Award by IEEE TCSVC. He is a fellow of IET and a senior member of IEEE.