

# One-Shot Pose-Driving Face Animation Platform

He Feng  
fenghe021209@gmail.com  
Harbin Institute of Technology  
Harbin, China

Donglin Di\*  
didonglin@lixiang.com  
Space AI, Li Auto  
Beijing, China

Yongjia Ma  
maguire9993@gmail.com  
Space AI, Li Auto  
Beijing, China

Wei Chen  
chenwei10@lixiang.com  
Space AI, Li Auto  
Beijing, China

Tonghua Su  
thsu@hit.edu.cn  
Harbin Institute of Technology  
Harbin, China

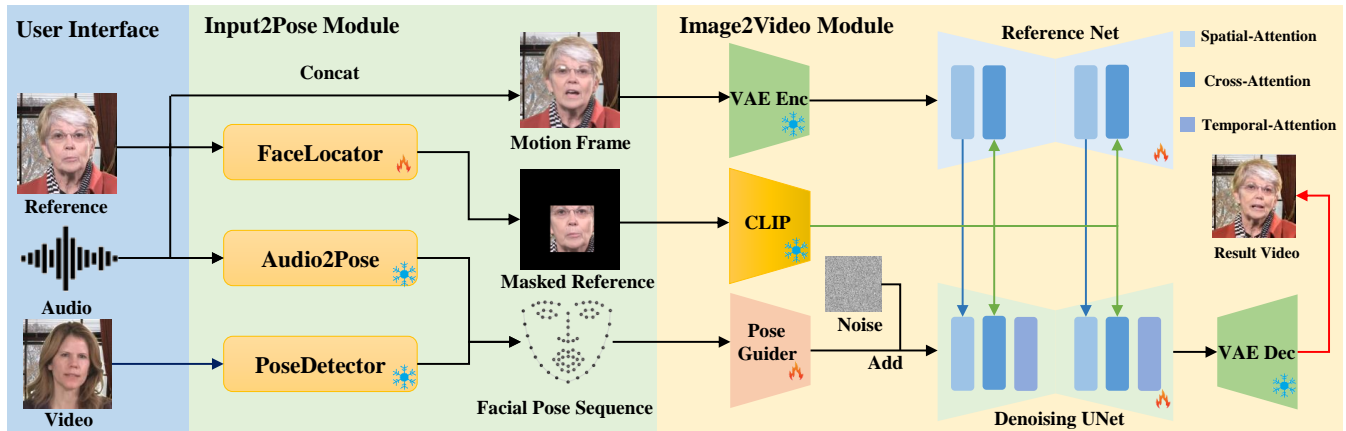


Figure 1. Illustration of the face animation platform pipeline.

## Abstract

The objective of face animation is to generate dynamic and expressive talking head videos from a single reference face, utilizing driving conditions derived from either video or audio inputs. Current approaches often require fine-tuning for specific identities and frequently fail to produce expressive videos due to the limited effectiveness of Wav2Pose modules. To facilitate the generation of one-shot and more consecutive talking head videos, we refine an existing Image2Video model by integrating a Face Locator and Motion Frame mechanism. We subsequently optimize the model using extensive human face video datasets, significantly enhancing its ability to produce high-quality and expressive talking head videos. Additionally, we develop a demo platform using the Gradio framework, which streamlines the process, enabling users to quickly create customized talking head videos.

## 1 Introduction

The core of face animation lies in accurately capturing a wide range of expressions and movements within a driving pose sequence while preserving rich facial details of the reference face. Methods to animate face can be broadly classified as video-driven, audio-driven, or a blend of both. Video-driven

methods [1–3, 5] extract facial landmarks from driving video, called pose sequences, or extract other control signals. These pose sequences are then used to animate arbitrary reference face images and generate talking head videos that mirror the facial expressions and motions observed in the driving video. In contrast, audio-driven methods, such as [6, 8, 12–14] obtain driving signals or generate 3D intermediate representations from audio input and reference image. Despite their innovative designs, these methods encounter common challenges: (1) a deficiency in consecutiveness and expressiveness, especially in scenarios involving significant facial movements; (2) instability of the video background, excluding the subjects; and (3) the necessity for identity-specific fine-tuning, lack of generalizability.

To address the aforementioned challenges, we employ an Image2Video model [4], further fine-tuning it on high-quality talking head video datasets, facilitating one-shot talking head video generation. To produce videos with enhanced continuity and minimal background artifacts, we integrate two pioneering modules from [9]: Face Locator and Motion Frame mechanism. Face Locator accurately identifies the location for generating the animated face, while Motion Frame mechanism improves video coherence by randomly selecting and inputting several consecutive frames from the driving

\*Donglin Di is the corresponding author.



Figure 2. Selected running results of our platform.

video, along with the reference image as input of following network during training. Additionally, we developed a user-friendly platform that enables users to upload a reference image and choose from three methods to generate pose sequences for creating personalized talking head videos.

## 2 Method

Our method is based on AnimateAnyone, which comprises a Reference Net extracting features from the reference image, a Denoising UNet that denoises multiframe noise and generates videos, a pre-trained CLIP [7] guides the video generation process through cross-attention. The pose sequence, obtained from either DWPose [11] or the Audio2Pose module from [10], is input into the Pose Guider, a lightweight CNN, which transforms it into latent space and combines it with noisy latents for facial animation. Face Locator first locates the facial area from the reference image, then generates a masked reference face to explicitly guide the model in generating facial areas while ensuring the stability of the background. The Motion Frame mechanism operates by randomly selecting consecutive frames during training, which are then channel-wise concatenated with the reference face. This concatenated input is subsequently fed into the Reference Net to extract feature.

The integration of Face Locator and Motion Frame mechanism enhances the talking head videos generation capabilities of AnimateAnyone, without notably extending the training and inference time. Our training protocol adheres to the open source code provided by Moore Threads, with CelebV-HQ [16] and HDTF [15] serving as training data sets.

## 3 Platform

Figure 1 shows the workflow of our platform. Our platform can be divided into two main modules: the Input2Pose module and the Image2Video module.

**Input2Pose module.** In this module, users are initially required to upload a reference face image. Subsequently, they are to select one of the three methods (selecting from our offerings, extracting from uploaded videos, or predicting

from uploaded audio) to acquire a pose sequence. Figure 2 shows some selected running results of our platform.

**Image2Video module.** After acquiring a pose sequence and reference image, users can generate result video by animating the reference image using the pose sequence. All generated videos are set to a default resolution of 512x512 at 24 frames per second. Users may specify the duration of the generated video based on the length of the pose sequence.

**Application.** The proposed platform exhibits significant untapped potential in various areas, including personal assistance, intelligent customer service, and digital education. Within the sphere of digital education, it can be used to produce digital teachers, boosting student engagement and reducing teacher workload.

## 4 Conclusion

In this work, we introduce a platform for one-shot pose-driving human face animation. Our platform facilitates the generation of high-quality and expressive talking head videos from a single reference facial image, eliminating the requirement for fine-tuning for specific identities. The platform offers users convenient, personalized talking head video generation services, bridging the gap between related technological research and user interaction. Our current method employs a dual U-Net architecture and still has room for optimization in inference and training speeds to ensure the capability for real-time animation. Future research should prioritize enhancing computational efficiency, for instance, through the adoption of more efficient architectures.

## References

- [1] Nikita Drobyshv, Janya Chelischev, Taras Khakhulin, Aleksei Ivakhnenko, Victor Lempitsky, and Egor Zakharov. 2022. Megaportraits: One-shot megapixel neural head avatars. In *Proceedings of the 30th ACM International Conference on Multimedia*. 2663–2671.
- [2] Fa-Ting Hong, Li Shen, and Dan Xu. 2023. DaGAN++: Depth-Aware Generative Adversarial Network for Talking Head Video Generation. *IEEE Transactions on Pattern Analysis and Machine Intelligence (TPAMI)* (2023).
- [3] Fa-Ting Hong and Dan Xu. 2023. Implicit Identity Representation Conditioned Memory Compensation Network for Talking Head video Generation. In *ICCV*.
- [4] Li Hu, Xin Gao, Peng Zhang, Ke Sun, Bang Zhang, and Liefeng Bo. 2023. Animate anyone: Consistent and controllable image-to-video synthesis for character animation. *arXiv preprint arXiv:2311.17117* (2023).
- [5] Haomiao Ni, Yihao Liu, Sharon X Huang, and Yuan Xue. 2023. Cross-identity video motion retargeting with joint transformation and synthesis. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*. 412–422.
- [6] KR Prajwal, Rudrabha Mukhopadhyay, Vinay P Namboodiri, and CV Jawahar. 2020. A lip sync expert is all you need for speech to lip generation in the wild. In *Proceedings of the 28th ACM international conference on multimedia*. 484–492.
- [7] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. 2021. Learning transferable visual models from natural

- language supervision. In *International conference on machine learning*. PMLR, 8748–8763.
- [8] Shuai Shen, Wenliang Zhao, Zibin Meng, Wanhua Li, Zheng Zhu, Jie Zhou, and Jiwen Lu. 2023. DiffTalk: Crafting diffusion models for generalized audio-driven portraits animation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 1982–1991.
- [9] Linrui Tian, Qi Wang, Bang Zhang, and Liefeng Bo. 2024. EMO: Emote Portrait Alive-Generating Expressive Portrait Videos with Audio2Video Diffusion Model under Weak Conditions. *arXiv preprint arXiv:2402.17485* (2024).
- [10] Huawei Wei, Zejun Yang, and Zhisheng Wang. 2024. AniPortrait: Audio-driven synthesis of photorealistic portrait animation. *arXiv preprint arXiv:2403.17694* (2024).
- [11] Zhendong Yang, Ailing Zeng, Chun Yuan, and Yu Li. 2023. Effective whole-body pose estimation with two-stages distillation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*. 4210–4220.
- [12] Zhenhui Ye, Jinzheng He, Ziyue Jiang, Rongjie Huang, Jiawei Huang, Jinglin Liu, Yi Ren, Xiang Yin, Zejun Ma, and Zhou Zhao. 2023. GeneFace++: Generalized and Stable Real-Time Audio-Driven 3D Talking Face Generation. *arXiv preprint arXiv:2305.00787* (2023).
- [13] Zhenhui Ye, Tianyun Zhong, Yi Ren, Jiaqi Yang, Weichuang Li, Jiawei Huang, Ziyue Jiang, Jinzheng He, Rongjie Huang, Jinglin Liu, et al. 2024. Real3d-portrait: One-shot realistic 3d talking portrait synthesis. *arXiv preprint arXiv:2401.08503* (2024).
- [14] Wenxuan Zhang, Xiaodong Cun, Xuan Wang, Yong Zhang, Xi Shen, Yu Guo, Ying Shan, and Fei Wang. 2022. SadTalker: Learning Realistic 3D Motion Coefficients for Stylized Audio-Driven Single Image Talking Face Animation. *arXiv preprint arXiv:2211.12194* (2022).
- [15] Zhimeng Zhang, Lincheng Li, Yu Ding, and Changjie Fan. 2021. Flow-guided one-shot talking face generation with a high-resolution audio-visual dataset. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 3661–3670.
- [16] Hao Zhu, Wayne Wu, Wentao Zhu, Liming Jiang, Siwei Tang, Li Zhang, Ziwei Liu, and Chen Change Loy. 2022. CelebV-HQ: A Large-Scale Video Facial Attributes Dataset. In *ECCV*.