

Blow-up in Non-Deterministic Automata

Ivan Baburin 

Department of Computer Science, ETH Zürich, Switzerland

Ryan Cotterell 

Department of Computer Science, ETH Zürich, Switzerland

Abstract

In this paper we examine the difficulty of finding an equivalent deterministic automaton when confronted with a non-deterministic one. While for some automata the exponential blow-up in their number of states is unavoidable, we show that in general, any approximation of state complexity with polynomial precision remains PSPACE-hard. The same is true when using the subset construction to determinize the NFA, meaning that it is PSPACE-hard to predict whether subset construction will produce an exponential “blow-up” in the number of states or not. To give an explanation for its behaviour, we propose the notion of subset complexity, which serves as an upper bound on the size of subset construction. Due to its simple and intuitive nature it allows to identify large classes of automata which can have limited non-determinism and completely avoid the “blow-up”. Subset complexity also remains invariant under NFA reversal and allows to predict how the introduction or removal of transitions from the NFA will affect its size.

2012 ACM Subject Classification Theory of computation → Formal languages and automata theory

Keywords and phrases Non-Deterministic Automata, Subset construction, Determinization, Complexity

Digital Object Identifier 10.4230/LIPIcs.CVIT.2016.23

1 Introduction

Among the very first results in automata theory was the equivalence between non-deterministic automata (NFAs) and deterministic automata (DFAs). The original proof by Rabin and Scott [29] presented the powerset construction: a general algorithm for converting arbitrary NFAs into DFAs. A major drawback of powerset construction (and its improved version, the subset construction) is the fact that it may produce an exponential “blow-up” of up to $2^{|\mathcal{Q}|}$ states, and as later shown by Moore [25] this turned out to be unavoidable — he constructed a n -state NFA, known as the Moore’s automaton (see Figure 1), with the property that the minimal equivalent DFA requires exactly 2^n states, i.e. exhibiting a “blow-up”. Since then, many classes of automata and regular languages have been shown to exhibit a similar “blow-up” behaviour [7], but the question of why and when it happens remains open.

On the other hand there have been many approaches to model the non-determinism in finite state automata. Some of the more prominent ones include ambiguity [24], tree width [21], size of syntactic semigroup, number of atoms, reversal complexity, star complexity [10], and, more recently the NFA width [23]. Since determinization plays a key role in answering many questions about NFA properties, several other determinization algorithms besides subset construction have been developed: for example Brzozowski’s algorithm [9] which applies subset construction two times to directly produce a minimal DFA. An overview for some other minimization (and determinization) algorithms can be found in [3]. While determinization remains important, due to accompanying difficulties there are now a handful of approaches answering NFA related questions without an explicit determinization. Some examples of such algorithms include the “hacking universality” algorithm [5] for NFA equivalence and the antichain algorithm for NFA universality [15]. In this paper we return back to the roots of the problem and try to answer the question on when the determinization can



© Ivan Baburin and Ryan Cotterell;
licensed under Creative Commons License CC-BY 4.0


42nd Conference on Very Important Topics (CVIT 2016).

Editors: John Q. Open and Joan R. Access; Article No. 23; pp. 23:1–23:18



Leibniz International Proceedings in Informatics

Schloss Dagstuhl – Leibniz-Zentrum für Informatik, Dagstuhl Publishing, Germany

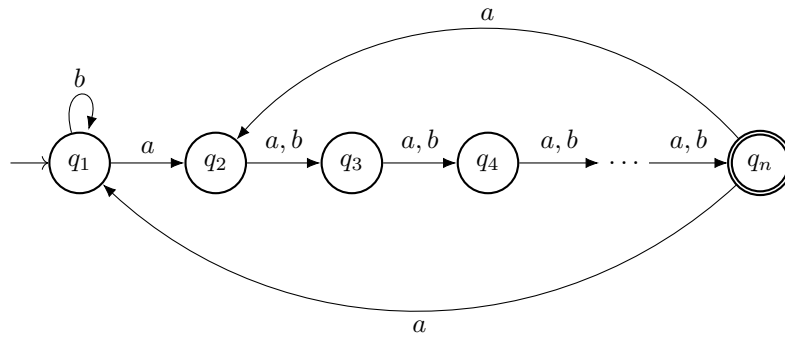

■ **Figure 1** Moore’s non-deterministic automaton $\mathcal{A}_{\text{MOORE}}$ with n states which for $n \geq 2$ requires at least 2^n states in its deterministic analogue

be performed efficiently, i.e. avoids the exponential “blow-up” and how to predict it. Furthermore, we will resort to the subset construction as our default method since it is the most commonly used determinization algorithm and implemented in many automata libraries [1]. Optimality of subset construction was studied in [8] which characterized all automata for which the subset construction results in a minimal DFA.

As we see it, there are two ways to approach the “blow-up” problem:

- Find an efficient algorithm which accurately predicts whether the minimal DFA is large or the subset construction produces a “blow-up”
- Propose a simple characterization for non-deterministic automata which allow for efficient determinization

We investigate the first point in Section 3 and show that it is PSPACE-hard to answer both of these questions, even if we relax our demands to a fairly coarse grained approximation. A summary of our findings can be found in Table 1.

■ **Table 1** Complexity results on estimating the size of minimal DFA and the size of the output from subset construction. Gray entries indicate known results, and black entries are our contributions. The difficulty of decision problems translates into the difficulty of computing exact values.

	Exact size	Approximation
Minimal DFA	PSPACE-complete	PSPACE-complete
Subset construction	PSPACE-complete	PSPACE-complete

On the second point [4] provides a converse bound by describing a simple class of NFAs, called δ NFAs, for which determinization is NP-hard, even though the minimal deterministic automaton for any δ NFA only has a quadratic number of states (thus the subset construction has to explode). We take the opposite approach and in Section 4 introduce a simple measure called “subset complexity” which serves as an upper bound for the size of subset construction. Subset complexity has no explicit relation to any language properties of the NFA and is purely based on its transition structure. In Section 5 we discuss how to efficiently bound the subset complexity when confronted with NFA (see Figure 4 for the overall summary), and in Section 6 provide some examples where subset complexity can explain the “blow-up” particularly well. Section 7 states some open questions.

2 Background: Automata and Semigroups

We start by briefly reciting core definitions for finite-state automata in the context of language recognition, determinism and their complexity, as well as the duality between automata and finite semigroups.

► **Definition 1.** A *finite-state automaton (FSA)* \mathcal{A} is a quintuple $(\Sigma, Q, I, F, \delta)$ where Σ is an alphabet, Q is a finite set of states, $I \subseteq Q$ is a set of starting states, $F \subseteq Q$ is a set of accepting states and $\delta \subseteq Q \times \Sigma \cup \{\varepsilon\} \times Q$ a finite multi-set of transitions.

The symbol ε represents an empty symbol, and thus a transition with label ε (or in short ε -transition) can always be performed without the need for any additional input.

► **Definition 2.** A *path* $\pi \in \delta^*$ is a sequence of consecutive transitions of the form $q_0 \xrightarrow{\bullet} q_1 \xrightarrow{\bullet} \dots \xrightarrow{\bullet} q_m$ where \bullet is a placeholder for the transition label. We will refer to the concatenation of symbols along the path as its *yield*.

We say that a word $\mathbf{y} \in \Sigma^*$ is **recognized** by the FSA \mathcal{A} if there exists a path from some starting state $q \in I$ to some final state $q' \in F$ with yield \mathbf{y} . Moreover, we denote with $\mathcal{L}(\mathcal{A})$ the **language** (set of all words) recognized by \mathcal{A} . Two FSAs \mathcal{A} and \mathcal{A}' are called **equivalent** if $\mathcal{L}(\mathcal{A}) = \mathcal{L}(\mathcal{A}')$.

► **Definition 3.** FSA \mathcal{A}_{DET} is called **deterministic** if and only if it does not contain any ε transitions, the starting state is unique, i.e., $|I| = 1$, and for every $(q, a) \in Q \times \Sigma$ there is at most one $q' \in Q$ such that $(q, a, q') \in \delta$, thus we have at most one unique labeled transition from every state.

For the remainder of this work we assume without loss of generality that all NFAs are ε -free, since there exist a handful of asymptotically efficient procedures for computing an equivalent NFA containing no ε -transitions [1].

► **Definition 4.** Given a finite state automaton \mathcal{A} we denote the number of states in its **minimal** (in terms of number of states) equivalent deterministic automaton its **state complexity**.

To denote the number of states in a (non-)deterministic automaton we use the cardinality operator $|\cdot|$. Transforming a non-deterministic automaton into an equivalent deterministic one is a procedure we refer to as **determinization**. In general, determinization requires an exponential number of memory, due to existence of n -state NFAs with state complexity of 2^n . An example of such NFA is the famous Moore's automaton [6], which is given in Figure 1.

► **Definition 5.** The **reverse FSA** of a \mathcal{A} , marked by \mathcal{A}^R , is a FSA obtained by reversing the direction of all transitions in \mathcal{A} and swapping initial and final states. We call FSA \mathcal{A} **co-deterministic** if \mathcal{A}^R is deterministic.

The notion of co-determinism in FSAs is closely related to the notion of reversibility [26] for finite state transducers (i.e. automata which produce symbols on every transition), and for that reason is of special interest. For a complete introduction to finite state automata we recommend the book “Introduction to automata theory, languages, and computation” [20].

► **Definition 6.** A state $q \in Q$ is called **accessible** if there exists a path from I to q , and **co-accessible** if there exists a path from q to F . An automaton where all states are both accessible and co-accessible is called **trim**.

Another way to characterize automata is by using semigroups and exploiting their algebraic properties (for a more detailed introduction we refer to [27]).

► **Definition 7.** Consider a FSA $\mathcal{A} = (\Sigma, Q, I, F, \delta)$ and for each $a \in \Sigma$ define a binary relation $T^{(a)}$ over Q with $T^{(a)}(q, q') := \delta(q, a, q')$ for all $q, q' \in Q$. A **transition monoid** $\mathbb{S}(\mathcal{A})$ is a binary relation monoid over Q generated by $\{T^{(a)} \mid a \in \Sigma\}$ and closed under relation composition operator \circ with the identity relation id .

It is often more convenient to think of $\mathbb{S}(\mathcal{A})$ as a monoid of $|Q| \times |Q|$ matrices over Boolean semifield $\mathbb{B} := \langle \{0, 1\}, \vee, \wedge, 0, 1 \rangle$ closed under Boolean matrix multiplication and the identity element \mathcal{I} , such that:

$$T_{i,j}^{(a)} = 1 : \iff (q_i, q_j) \in T^{(a)} \quad (1)$$

Notice that the monoid $\mathbb{S}(\mathcal{A})$ is per construction closely related to the regular language $\mathcal{L}(\mathcal{A})$. This property can be further formalized algebraically.

► **Definition 8.** A language $\mathcal{L} \subseteq \Sigma^*$ is **recognized by a monoid** \mathbb{M} of binary relations over Q if there exists a surjective morphism $\mu : \Sigma^* \rightarrow \mathbb{M}$ and an **accepting subset** $\mathbb{M}_F \subseteq \mathbb{M}$ such that $\mathcal{L} = \mu^{-1}(\mathbb{M}_F)$.

From the definition above it is immediately visible that $\mathbb{S}(\mathcal{A})$ recognizes the language $\mathcal{L}(\mathcal{A})$. Indeed, if we view I and F as Boolean vectors we can define the accepting subset as

$$\mathbb{S}_F := \{M \in \mathbb{S}(\mathcal{A}) \mid I^\top M F \neq 0\} \quad (2)$$

and a morphism μ for an arbitrary word $\mathbf{y} = a_1 a_2 a_3 \dots a_m \in \Sigma^*$

$$\mu(\mathbf{y}) = \mathcal{I} \cdot \prod_{i=1}^m T^{(a_i)} \in \mathbb{S}(\mathcal{A}) \quad (3)$$

with $\mu(\varepsilon) = \mathcal{I}$. As a consequence, the inverse $\mu^{-1}(\mathbb{S}_F)$ only contains words $\mathbf{y} \in \Sigma^*$ that are a yield of at least one path from I to F in \mathcal{A} .

Finally, we assume that the reader has familiarity with basics of graph theory and the \mathcal{O} -notation, as well as the understanding of fundamental complexity classes such as L, P, PSPACE, NPSpace etc. For the sake of simplicity we will use the same naming for both decision and function complexity classes.

3 Difficulties of NFA to DFA conversion

We have seen that the state complexity of NFAs can be exponentially large, however this doesn't always have to be the case: for example, for all deterministic automata their state complexity is always bounded by their number of states, and moreover the minimal DFA can be constructed in almost linear time [19]. Due to the possibility of a blow-up it follows that there can't exist a polynomial (in the number of NFA states) time algorithm producing a minimal DFA when given an NFA. Hence the next step would be to look for an algorithm computing the minimal DFA, parameterized by the corresponding state complexity. This means that we allow the running time to be (polynomially) proportional to the number of states in the minimal DFA. Somewhat surprisingly this is also impossible, and to see that we consider the following one state DFA

$$\mathcal{A}_{\text{UNIV}} := (\{a, b\}, \{q\}, q, q, \{(q, a, q), (q, b, q)\}) \quad (4)$$

which is minimal, and accepts the **universal** language $\{a, b\}^*$, i.e. all words over the binary alphabet. The subsequent result demonstrates that the minimization becomes intractable already for this specific case.

► **Theorem 9** (NFA Universality [18]). *Given a n -state NFA \mathcal{A} the decision problem of whether $\mathcal{L}(\mathcal{A}) = \mathcal{L}(\mathcal{A}_{\text{UNIV}})$ is PSPACE-complete.*

Under assumption that $\text{PSPACE} \neq \text{P}$ we have that finding minimal equivalent DFAs is hard. For the same reason it remains hard to find an “approximately minimal” equivalent DFA, since we can minimize any DFA in almost linear time. Furthermore, as a direct consequence of Theorem 9 it remains hard to compute the state complexity of a NFA.

► **Corollary 10.** *Given a n -state NFA \mathcal{A} the computation of state complexity for \mathcal{A} is PSPACE-complete.*

Proof. The hardness follows immediately from Theorem 9, since the state complexity of 1 implies either a universal or an empty NFA. Checking the emptiness of an NFA is a simple graph connectivity problem which can be done in linear time, hence we have obtained a polynomial reduction from universality to state complexity. Due to Observation 13 the state complexity is in PSPACE, which concludes the proof. ◀

Hence we proceed by asking a simpler question: Is it possible to predict whether a NFA to DFA conversion will produce a “blow-up” or not?

► **Proposition 11.** *Let p be an arbitrary polynomial and assume we are given a n -state NFA \mathcal{A} with state complexity m . The problem of finding an upper bound for the state complexity of \mathcal{A} which is smaller than $p(m, n)$ is PSPACE-complete.*


Proof. To show PSPACE-hardness we make a polynomial reduction to the NFA universality problem. Assume we are given some algorithm which given any $\mathcal{A} = (\Sigma, Q, I, F, \delta)$ reports an estimate on its state complexity within the range from m to $p(n, m)$. We show how to use it to decide whether \mathcal{A} accepts a universal language or not. Let k be the degree of polynomial p and w.l.o.g. assume that $\Sigma = \{a, b\}$. Next, we construct an automaton \mathcal{A}' over the alphabet $\Sigma' = \{a, b, \#\}$ and $2(n+1)$ states using a copy of \mathcal{A} , a copy of $\mathcal{A}_{\text{MOORE}}$ and two copies of $\mathcal{A}_{\text{UNIV}}$ as shown in Figure 2. \mathcal{A}' is a combination (i.e. union) of two disjoint automata:

1. The first is a connection $\mathcal{A}_{\text{UNIV}} \xrightarrow{\#} \mathcal{A}_{\text{MOORE}}$ where $\mathcal{A}_{\text{MOORE}}$ denotes is Moore’s automaton with exactly n states, and the transition labelled with $\#$ connects the unique state of $\mathcal{A}_{\text{UNIV}}$ with the starting state of $\mathcal{A}_{\text{MOORE}}$. The starting state of $\mathcal{A}_{\text{MOORE}}$ no longer serves as a starting state, and $\mathcal{A}_{\text{UNIV}}$ no longer has a final state.
2. The second is a connection $\mathcal{A} \xrightarrow{\#} \mathcal{A}_{\text{UNIV}}$ where we connect all final states of \mathcal{A} with the single state of $\mathcal{A}_{\text{UNIV}}$ using label $\#$. The starting state of $\mathcal{A}_{\text{UNIV}}$ no longer serves as a starting state and \mathcal{A} no longer has a final state.

It is not difficult to see that the first automaton accepts the language $\Sigma^* \# \mathcal{L}(\mathcal{A}_{\text{MOORE}})$ while the second one accepts the language $\mathcal{L}(\mathcal{A}) \# \Sigma^*$. Now the combined (union) automaton \mathcal{A}' accepts the union of these languages. Notice, in case $\mathcal{L}(\mathcal{A}) = \Sigma^*$ the union of these languages is precisely $\Sigma^* \# \Sigma^*$, and as a consequence the state complexity of \mathcal{A} is 3. On the other hand if $\mathcal{L}(\mathcal{A})$ is not universal, there exists a word $y \notin \mathcal{L}(\mathcal{A})$, meaning that

$$y \# \mathcal{L}(\mathcal{A}_{\text{MOORE}}) \subset \mathcal{L}(\mathcal{A}') \quad \text{and} \quad y \# \mathcal{L}(\mathcal{A}_{\text{MOORE}})^c \cap \mathcal{L}(\mathcal{A}') = \emptyset$$

Consider the minimal deterministic automaton for \mathcal{A}' , which we denote with $\mathcal{A}_{\text{DET}}'$. Let q be the state in $\mathcal{A}_{\text{DET}}'$ to which the path π with yield $y \#$ leads to. Now if we change the

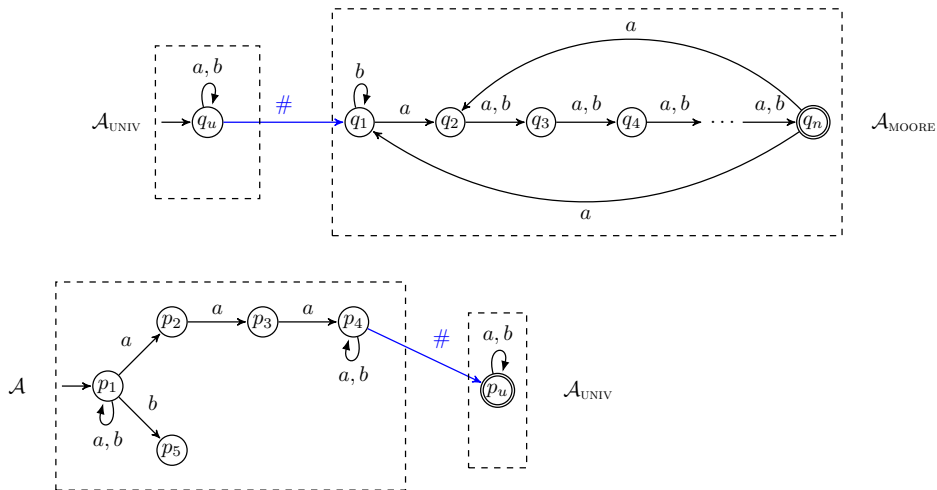

■ **Figure 2** Construction for automaton \mathcal{A}' consisting of a union of two non-deterministic automata: the upper one is a connection of $\mathcal{A}_{\text{UNIV}}$ and $\mathcal{A}_{\text{MOORE}}$ using symbol $\#$, and the lower one is the connection of \mathcal{A} and $\mathcal{A}_{\text{UNIV}}$ using symbol $\#$. In both cases the final states of the first automaton are connected to the initial states of the second one, with the corresponding initial/final labels being dropped.

starting state in $\mathcal{A}_{\text{DET}}'$ to q , it will recognize $\mathcal{L}(\mathcal{A}_{\text{MOORE}})$! This means that $\mathcal{A}_{\text{DET}}'$ will have a state complexity of at least 2^n . Thus, depending on whether \mathcal{A} is universal or not, the state complexity of \mathcal{A}' will be either 3 or at least 2^n . Because 2^n is exponentially larger than both $2(n + 1)$ and 3, any algorithm returning an upper bound on the state complexity for \mathcal{A}' of at most $p(n, m)$ would decide the universality of \mathcal{A} . The problem is clearly in PSPACE due to Corollary 10. ◀

Hence, in general, one cannot produce any accurate approximation for the state complexity in any “reasonable” time, meaning that there is no simple method of distinguishing between NFAs with “large” and “small” non-determinism. As a direct consequence of Proposition 11 there doesn’t exist any “efficient” approach of converting NFAs to DFAs, meaning that we have to relax our goals even further. This would be to define a procedure which, given an NFA, produces an equivalent DFA, essentially dropping the minimality condition. Currently the go-to method for determinization is the subset construction, a version of a powerset construction where we only keep reachable states in the process [13]. The question of optimality for subset construction has been settled in [8] which states that for a trim NFA the subset construction produces a minimal DFA if and only if the reverse of the NFA is “atomic”. A more well-known special case of this result is given below.

► **Theorem 12** (Brzozowski [9]). *If a NFA \mathcal{A} is a trim co-deterministic automaton then the subset construction produces a minimal deterministic automaton.*

For the sake of completeness we provide the pseudocode for efficient implementation of subset construction in Algorithm 1 and briefly recall the associated machinery. Given a non-deterministic automaton \mathcal{A} its deterministic counterpart will have a state space which is a subset of a power set construction $Q_{\text{DET}} \subseteq \mathcal{P}(Q)$. Subset construction will start in the **power state** $\mathcal{Q}_I := \{q \mid q \in I\}$ and explore all possible power states that can be reached following the labeled transitions δ . Algebraically this can be seen as multiplying the initial power state \mathcal{Q}_I with all possible sequences of transition matrices and terminating as soon

Algorithm 1 (Subset construction)

Ensure: $\mathcal{A} = (\Sigma, Q, I, F, \delta)$
 $\mathcal{A}_{\text{DET}} \leftarrow (\Sigma, Q_{\text{DET}}, Q_I, F_{\text{DET}}, \delta_{\text{DET}})$
 $\text{stack} \leftarrow Q_I$
 $Q_{\text{DET}} \leftarrow \{Q_I\}$
while $|\text{stack}| > 0$ **do**
 pop Q from the stack
 for all $a \in \Sigma$ **do**
 $Q' \leftarrow \{q' \mid (q, a, q') \subseteq \delta, q \in Q\}$
 $\delta_{\text{DET}} \leftarrow \delta_{\text{DET}} \cup \{Q \xrightarrow{a} Q'\}$
 if $Q' \notin Q_{\text{DET}}$ **then**
 $Q_{\text{DET}} \leftarrow Q_{\text{DET}} \cup \{Q'\}$
 push Q' on the stack
 $F_{\text{DET}} \leftarrow \{Q \in Q_{\text{DET}} \mid Q \cap F \neq \emptyset\}$
return \mathcal{A}_{DET}

as no new power states can be produced.

The implementation of subset construction given in Algorithm 1 has a major advantage compared to alternative determinization algorithms (for example [23] and [9]), namely the fact that its running time is linear if parameterized by the output size. Indeed, the number of **while**-loop iterations corresponds to the number of states $|Q_{\text{DET}}|$, and each iteration requires examining $|Q|$ states for every possible symbol in Σ , hence requiring a total running time of $\mathcal{O}(|\Sigma||Q||Q_{\text{DET}}|)$, in case an optimal implementation using hash sets is given. This reduces the question of whether it is possible to efficiently find an equivalent DFA to the question of how large the output size produced by subset construction is going to be.

While we believe the next result to be known, we weren't able to find a formal presentation or reference for it in the literature, hence we'll state it as an observation and provide a proof sketch.

► **Observation 13.** *The size of the output of subset construction can be computed using only polynomial space, hence the corresponding decision problem is in PSPACE. The same holds for the computation of state complexity.*

Proof sketch. Instead of computing the exact value we consider a decision problem: for a given k , is the size of subset construction/state complexity $\geq k$ (the exact values can then be recovered using binary search over k)? We claim that both of them are in NPSpace, and hence due to Savitch's theorem [30] also in PSPACE.

We define a total ordering on the set of power states 2^Q . We store a $|Q|$ -bit counter which describes which power state in the total ordering is currently being processed, and a second counter which stores the number of distinct reachable power states in the subset construction. We traverse the total ordering and for each power state Q non-deterministically “guess” the path from Q_I to Q (if it exists), where in each step we either non-deterministically choose a symbol $a \in \Sigma$ to lead us to the next power state, or simply stop. In case we successfully guessed a path to Q , we increase the second counter by 1, and if we didn't we keep it unchanged. After all $2^{|Q|}$ power states have been traversed, we compare the counter value and k .

For deciding the state complexity being $\geq k$ we use the idea suggested by Stefan Kiefer [22]: since (deterministic) automata minimization is in NL [12] and hence, due to Savitch's

Theorem, in polyL, we are only required to keep track of polynomially many states from subset construction (at once) in order to compute the number of equivalence classes. ◀

Unfortunately, it turns out that the considerations from Observation 13 are essentially tight: just as in the case with state complexity, there is no easy way of predicting the size of the subset construction.

► **Proposition 14.** *Let p be an arbitrary polynomial and assume we are given a n -state NFA \mathcal{A} with $m = |\mathcal{A}_{\text{DET}}|$ the size of the output from the subset construction on \mathcal{A} . Finding an upper bound for $|\mathcal{A}_{\text{DET}}|$ which is smaller than $p(n, m)$ is PSPACE-complete.*

Proof. To show PSPACE-hardness we again make a polynomial reduction to the NFA universality problem. Assume we have an algorithm, which, given any $\mathcal{A} = (\Sigma, Q, I, F, \delta)$ reports an estimate on the size of the subset construction within the range from m to $p(n, m)$. Again, let k be the degree of the polynomial p and w.l.o.g. assume that $\Sigma = \{a, b\}$. This time we bring in a copy of a $n(k+1)$ -state Meyer-Fischer’s NFA \mathcal{A}_{MF} [17] operating over the alphabet $\Sigma = \{a, b\}$. The automaton \mathcal{A}_{MF} similarly to $\mathcal{A}_{\text{MOORE}}$ is known to have a maximal state complexity of $2^{n(k+1)}$, and has a unique starting state p_1 which is also the unique accepting state, as shown in the top part of Figure 3 (the starting state arrow was removed).

▷ **Claim 15.** The complete power state $\mathcal{Q}_1 = \{p_1, \dots, p_t\}$ in \mathcal{A}_{MF} serves as a terminal node for both symbols a and b , meaning that once the subset construction reaches \mathcal{Q}_1 it will stay in \mathcal{Q}_1 .

Proof. This follows from the fact that every state in \mathcal{A}_{MF} has at least one incoming transition will label a and at least one incoming transition with label b , i.e. once you are in the superposition of all states your next transition will be to the same superposition. ◀

Without loss of generality assume that the given NFA \mathcal{A} has an explicit “dead” state \emptyset , i.e. if a state is lacking an explicit transition for some symbol, we add this transition to the dead state.

▷ **Claim 16.** NFA \mathcal{A} is universal if and only if every power state \mathcal{Q} in its subset construction \mathcal{A}_{DET} satisfies $\mathcal{Q} \cap F \neq \emptyset$.

Proof. If all power states contain a final state then all states in \mathcal{A}_{DET} are accepting, hence it is universal. Similarly, if there exists a power state \mathcal{Q} which doesn’t contain a final state, then, since all states in \mathcal{A}_{DET} are reachable, there exists some path π with yield \mathbf{y} from \mathcal{Q}_I to \mathcal{Q} , meaning that $\mathbf{y} \notin \mathcal{L}(\mathcal{A}_{\text{DET}})$. ◀

Now we create an automaton \mathcal{A}' over the alphabet $\Sigma' = \{a, b, \#\}$ by connecting \mathcal{A} to \mathcal{A}_{MF} as following (see Figure 3):

1. All non-final states of \mathcal{A} are connected to the starting state p_1 of \mathcal{A}_{MF} using transitions with label $\#$ and The state p_1 is now no longer a starting state for \mathcal{A}' .
2. All final states of \mathcal{A} are connected to all states of \mathcal{A}_{MF} using transitions with label $\#$

Next we consider the run of the subset construction on \mathcal{A}' in two stages: first, we only traverse transitions with symbols a and b , and then, after no new states can be generated we allow the subset construction to finish its run by using all symbols from Σ' and refer to the final output of subset construction on \mathcal{A}' as $\mathcal{A}_{\text{DET}}'$.

We consider the state of the subset construction after the first stage. If \mathcal{A} is not universal, then due to Claim 16 $\mathcal{A}_{\text{DET}}'$ will contain some power state \mathcal{Q} with $\mathcal{Q} \cap F = \emptyset$, and since we have an explicit “dead” state, we know that \mathcal{Q} will be non-empty. This means that there

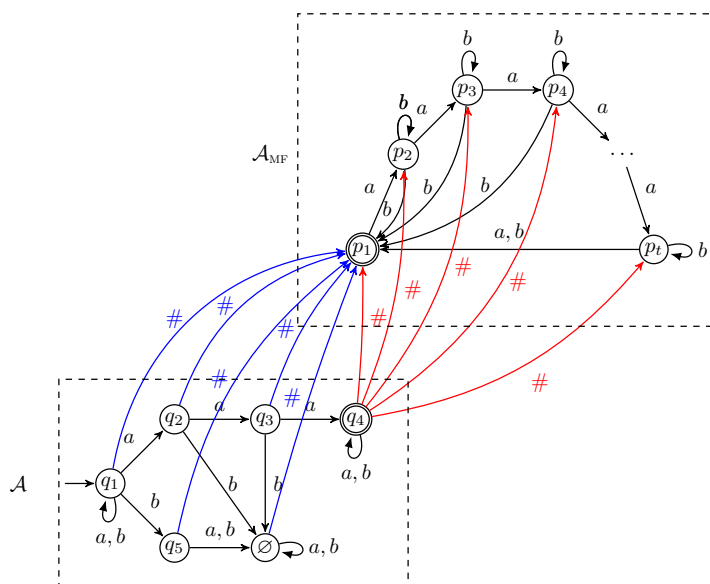


Figure 3 Construction for automaton \mathcal{A}' consisting of a NFA \mathcal{A} (arbitrary) with an explicit “dead” state \emptyset and Meyer-Fischer’s NFA \mathcal{A}_{MF} with $t = n(k + 1)$ states. All non-final states of \mathcal{A} are connected to the starting state p_1 of \mathcal{A}_{MF} using symbol $\#$ and all final states are connected to all states of \mathcal{A}_{MF} using the same symbol $\#$.

exists some $q \in \mathcal{Q}$ non-final, and in the second stage taking the transition with label $\#$ will land us in $\mathcal{Q}' = \{p_1\}$. This will effectively kick-off the run of the subset construction on \mathcal{A}_{MF} , producing $2^{n(k+1)}$ additional power states. On the other hand, if all power states in \mathcal{Q}_{DET} contain at least one final state, then in the second stage following any transition with $\#$ will land us in \mathcal{Q}_1 , where we are destined to remain due to Claim 15 (on $\#$ transition we can also transition into \emptyset power state).

To summarize, if \mathcal{A} is universal, then the subset construction on \mathcal{A}' will have at most 2 more states than the subset construction on \mathcal{A} , while if \mathcal{A} is not universal, it will have at least $2^{n(k+1)}$ more states. Notice, because \mathcal{A} has only n states, the size of \mathcal{A}_{DET} will be at most 2^n . Thus, if \mathcal{A} is universal, the size \mathcal{A}_{DET}' is $\leq 2^n + 2$, where as if it is not universal, the size of \mathcal{A}_{DET}' is $\geq 2^{n(k+1)}$. Thus given a universal \mathcal{A} the p -approximation for \mathcal{A}' satisfies

$$p(m, n(k + 2)) \in \mathcal{O} \left((m + n(k + 2))^k \right) \leq \mathcal{O} \left((2^n + 2 + n(k + 2))^k \right) < 2^{n(k+1)}$$

for sufficiently large values of n , and in case \mathcal{A} is not universal $p \geq 2^{n(k+1)}$. Hence, by comparing the output of the hypothetical approximation algorithm and $2^{n(k+1)}$ we are able to decide universality of \mathcal{A} . \blacktriangleleft

Because of Proposition 14 no “reasonable” approximation for the size of subset construction is possible, the next best thing would be to obtain some easily computable lower and upper bounds. tightness can be expected, hence we focus on simple and intuitive criteria, possible to allow for an application in practice.

4 Breaking down complexity

To bound the running time of subset construction we have to bound the number of states in its output. One approach [2] of accomplishing that is to bound the size of the transition

23:10 Blow-up in Non-Deterministic Automata

monoid $\mathbb{S}(\mathcal{A})$. Since every state in the subset construction is a product of vector with a sequence of matrices, the size of the monoid directly translates into an upper bound on the output from the subset construction.

► **Proposition 17** (Monoid bound [2]). *Given a FSA \mathcal{A} the equivalent deterministic automaton \mathcal{A}_{DET} computed by means of Algorithm 1 will satisfy $|Q_{\text{DET}}| \leq |\mathbb{S}(\mathcal{A})|$.*

While this approach is capable of providing insights into the complexity of subset construction (for example for unary, commutative or “dense” automata [2]), it has some shortcomings:

- In certain cases the monoid size can be exponentially larger than the subset construction
- The monoid size is difficult to estimate

A different way of bounding the output from the subset construction is by looking at the range $\mathcal{R}(T^{(a)})$ for all transition matrices in $\mathcal{T} := \{T^{(a)} \mid a \in \Sigma\}$. Since every vector has to be in the image of some transition matrix, the size of their combined images is an upper bound on the output of subset construction.

► **Proposition 18** (Range bound). *Given a FSA \mathcal{A} with the set of transition matrices \mathcal{T} , and let $\mathcal{R}(T)$ be the range of the matrix T over the Boolean semifield \mathbb{B} . Then the equivalent deterministic automaton \mathcal{A}_{DET} computed by means of Algorithm 1 will satisfy*

$$|\mathcal{A}_{\text{DET}}| \leq 1 + \sum_{a \in \Sigma} |\mathcal{R}(T^{(a)})| \quad (5)$$

Proof. Consider an arbitrary power state $Q_J \in Q_{\text{DET}}$. Its vector representation J can be seen as the product sequence of initial vector I representing Q_I with the matrices from \mathcal{T} i.e.

$$J = I^\top T^{(a_0)} T^{(a_1)} T^{(a_2)} T^{(a_3)} \dots T^{(a_m)}$$

for some selection of (potentially repeating) $a_i \in \Sigma$. Hence $J \in \mathcal{R}(T^{(a_m)^\top})$, and since this holds for any J we have

$$Q_{\text{DET}} \setminus \{Q_I\} \subseteq \bigcup_{a \in \Sigma} \mathcal{R}(T^{(a)^\top})$$

Applying the union bound and utilizing invariance of range cardinality under the transpose operation concludes the proof. We need to add 1 for the starting powerstate Q_I . ◀

► **Remark.** There is a natural way to improve the range bound by increasing the number of terms in the summation formula. For example one can instead consider the sum of range cardinalities of all possible k -symbol combinations. Then the size of the output from the subset construction can be bounded by the corresponding summation on ranges together with $\sum_{i=0}^{k-1} |\Sigma|^i$ (for all words of length less than k).

This bound essentially states that if all range spaces are “small” the blow-up during the subset construction will not occur. However it has some clear shortcomings:

- Large range space doesn’t necessarily imply a blow-up, for example a $Q \times Q$ identity transition has a range space of size $2^{|Q|}$, but its addition/removal doesn’t affect Algorithm 1
- The computation for cardinality of a range space is not straightforward

To address the first shortcoming we make a key observation: both the range and monoid bounds can be used together, allowing a more fine-grained perspective on the non-deterministic blow-up. To capture both of these notions together, we define the concept of subset complexity (as a counterpart to classical state complexity).

► **Definition 19.** Given an automaton $\mathcal{A} = (\Sigma, Q, I, F, \delta)$ we define the **subset complexity** $\|\mathcal{A}\|$ as

$$\|\mathcal{A}\| = \min_{\mathcal{J} \subseteq \Sigma} \left(1 + \sum_{a \in \Sigma \setminus \mathcal{J}} |\mathcal{R}(T^{(a)})| \right) |\mathbb{S}(\mathcal{J})| \quad (6)$$

where we overload the notation for $\mathbb{S}(\mathcal{J})$ to represent a (sub)-monoid of $\mathbb{S}(\mathcal{A})$ generated by transitions $\{T^{(a)} \mid a \in \mathcal{J}\}$.

Essentially subset complexity allows us to “split” \mathcal{A} into subautomata according to \mathcal{J} and $\Sigma \setminus \mathcal{J}$ respectively, and then apply monoid/range bound to each of them. The “best” possible split in terms of multiplication then defines the subset complexity.

► **Theorem 20 (Subset complexity).** For any automaton \mathcal{A} and the output of subset construction on it \mathcal{A}_{DET} we have $|\mathcal{A}_{\text{DET}}| \leq \|\mathcal{A}\|$.

Proof. Let $\mathcal{J} \subseteq \Sigma$ be arbitrary. We show that

$$|\mathcal{A}_{\text{DET}}| \leq \left(1 + \sum_{a \in \Sigma \setminus \mathcal{J}} |\mathcal{R}(T^{(a)})| \right) |\mathbb{S}(\mathcal{J})|$$

Similarly to the proof of Proposition 18 we consider a vector representation J for every power state arising in the subset construction. For clarity we will denote with M transition matrices corresponding to symbols $a_i \in \mathcal{J}$, and with R transition matrices which are corresponding to symbols $a_i \notin \mathcal{J}$. Then, w.l.o.g. J can be written as

$$J = I^\top M^{(a_0)} R^{(a_1)} M^{(a_{j-1})} \dots R^{(a_j)} \underbrace{M^{(a_{j+1})} \dots M^{(a_m)}}_{\text{all symbols } a \text{ are in } \mathcal{J}}$$

where we cut the product sequence from the right as soon as some transition matrix R appears. Thus J can be seen as a product of a some vector $J' \in \mathcal{R}(R^{(a_j)})$ and some matrix $M \in \mathbb{S}(\mathcal{J})$. There are at most $1 + \sum_{a \in \Sigma \setminus \mathcal{J}} |\mathcal{R}(T^{(a)})|$ choices for a vector J' from the range of some matrix R and $|\mathbb{S}(\mathcal{J})|$ choices of M , hence the total number of possibilities is bounded by the corresponding product. ◀

Subset complexity is a direct improvement to both the monoid and the range bounds, since it allows us to “cherry-pick” individual transition matrices according to their properties. Moreover, when compared with state complexity it also shows a number of other advantages.

► **Proposition 21.** Given a FSA \mathcal{A} let \mathcal{A}^R be the reverse of \mathcal{A} . \mathcal{A}^R recognizes the reverse of $\mathcal{L}(\mathcal{A})$ and $\|\mathcal{A}\| = \|\mathcal{A}^R\|$.

Proof. Reversal corresponds to transposing all transition matrices of \mathcal{A} . Notice, if we transpose a Boolean matrix the cardinality of its range is not affected. The monoid size is not affected since for Boolean matrices it holds: $A^\top B^\top = (BA)^\top$. ◀

Similarly the subset complexity stays invariant under the change of starting states I and final states F because it only depends on the transition matrices. Another property worth investigating is how the addition of new transitions to \mathcal{A} affects $\|\mathcal{A}\|$. In case of state complexity there is no visible connection, since adding a single transition to an automaton can lead to an exponential blow-up (as an example, it is sufficient to remove one edge from Moore’s automaton in Figure 1 to make it deterministic).

► **Example 22.** Consider the case where given an NFA \mathcal{A} we are adding a labelled transition to the subautomaton $\Sigma \setminus \mathcal{J}$, i.e. the symbol of the new transition is bounded using the range bound. Since for a Boolean matrix T flipping an arbitrary 0 to 1 at most doubles $\mathcal{R}(T)$ as a consequence $\|\mathcal{A}\|$ will also at most double.

5 Computational aspects

In this section we discuss how to efficiently compute the estimates for the subset complexity from Definition 19. The task boils down to computing the range of transition matrices and estimating the size of the transition monoid. We begin by tackling the latter one. Unsurprisingly, in general the problem of computing the size of the transition monoid is hard, however due to developments in computational semigroup theory, it can be done relatively efficient in practice. Several algorithms which make use of Green's relations are presented in [16] together with empirical results on their running time.

While the computational approach has its strengths, we turn our attention to more descriptive properties. [2] gives a characterization of various classes of automata where the monoid size can be easily bounded: unary automata, commutative automata, automata with strongly connected transition graphs. The bound for unary automata is of particular interest: given a unary automaton \mathcal{A}_1 let A be its unique transition matrix. Then the bound on $|\mathbb{S}(\mathcal{A}_1)|$ relies solely on the cyclicity of the **precedence graph** $\mathcal{G}(A)$, which is a directed graph defined by transition matrix A .

► **Definition 23.** Given a directed graph \mathcal{G} the **cyclicity** of \mathcal{G} , denoted with $c(\mathcal{G})$ is the least common multiple of cyclities of all maximal strongly connected components of \mathcal{G} , where the cyclicity of a strongly connected component \mathcal{C} is the greatest common divisor of all cycles in \mathcal{C} .

► **Lemma 24** (One-letter monoids [2][14]). Let $\mathcal{A}_1 = (\{a\}, Q_1, \delta_1, I_1, F_1)$ be a n -state unary automaton with transition matrix A . Then


$$|\mathbb{S}(\mathcal{A}_1)| \leq c(\mathcal{G}(A)) + n^2 - 2n + 2 \quad (7)$$

For now we leave the monoids and turn our attention to the range of a Boolean matrix and the methods that can be used to bound it.

► **Definition 25.** Given an undirected graph $\mathcal{G} = (V, E)$ we call a set $S \subseteq V$ an **independent set** if no two vertices in S are adjacent according to E . S is called **maximal** if there doesn't exist an independent set S' such that $S \subsetneq S'$. We call a set $M \subseteq E$ a **matching** if no two edges in M share a vertex. M is a **maximum matching** if M is the matching with largest cardinality in \mathcal{G} .

► **Lemma 26** (Theorem 3.5.5 in [32]). Given a $n \times n$ Boolean matrix A , let $\mathcal{G}_{\text{BI}}(A)$ be the undirected bipartite graph with bipartite adjacency matrix A and the node set $V = \{v_1, \dots, v_n\} \uplus \{v'_1, \dots, v'_n\}$. Then $|\mathcal{R}(A)| = \text{MIS}(\mathcal{G}_{\text{BI}}(A))$, where MIS denotes the count of maximal independent sets.

Lemma 26 provides a new perspective on the range of the matrix and its size: the difficulty of counting maximal independent sets. However, the problem of counting maximal independent sets is #P-complete even when restricted to bipartite graphs [28], and in general difficult to approximate. As a direct consequence we have that computing the size of the range space for a Boolean matrix is #P-complete. While several algorithms for counting and

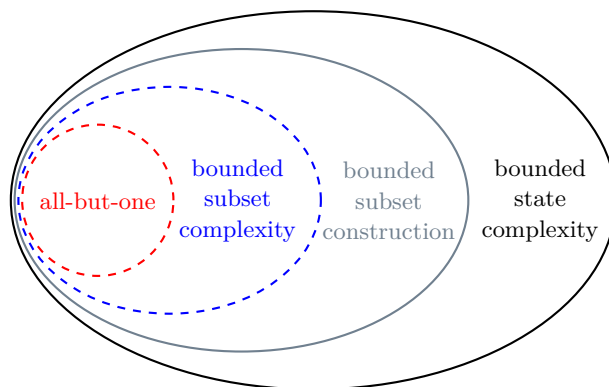

■ **Figure 4** Classification of automata with respect to non-determinism and the presence of “blow-up”. Obtaining a bound on the state complexity and size of subset construction is PSPACE-hard (Propositions 11 and 14), however a large class of “blow-up”-free NFAs can be identified using subset complexity and all-but-one bounds (Theorem 20 and Proposition 28).

listing maximal independent sets exist [31], their running time is parametrized by the number of maximal independent sets MIS. To characterize graphs with small number of maximal independent sets we look for properties allowing us to bound their number. It turns out that the number of maximal independent sets can be related to the size of maximum matching or the rank of the transition matrix over \mathbb{F}_2 (Galois field with 2 elements).

► **Lemma 27** (Lemma 4.2.7 in [32] and Lemma 1 in [11]). *Given a $n \times n$ Boolean matrix A , let $\mathcal{G}_{\text{BI}}(A)$ be the bipartite graph as in Lemma 26, and let MM be the size of the maximum matching in $\mathcal{G}_{\text{BI}}(T)$. Furthermore, let $\text{rank}(A)$ be the rank of A over \mathbb{F}_2 . Then the following statements are both true and tight:*

1. $|\mathcal{R}(A)| \leq 2^{\text{MM}}$
2. $\text{rank}(A) \leq |\mathcal{R}(A)| \leq 2^{\text{rank}(A)^2/4 + \mathcal{O}(\text{rank}(A))}$

The last inequality can be further bounded by $2^{\text{rank}(A)^2}$.

► **Remark.** [11] also discusses in which circumstances it is possible to efficiently count all independent sets by relating this notion to the “Boolean width” parameter.

Now using the simplified bounds for range (from Lemma 27) and monoid size (from Lemma 24) we present a simple upper bound on the subset complexity for any automaton \mathcal{A} .

► **Proposition 28** (All-but-one). *Given a n -state NFA $\mathcal{A} = (\Sigma, Q, I, F, \delta)$ and a **target letter** $a \in \Sigma$ arbitrary we define*

$$\|\mathcal{A}\|_a = (c(\mathcal{G}(T^{(a)})) + n^2 - 2n + 2) \left(1 + \sum_{b \in \Sigma \setminus \{a\}} 2^{\text{rank}(T^{(b)})^2} \right)$$

For any choice of $a \in \Sigma$ it holds $\|\mathcal{A}\| \leq \|\mathcal{A}\|_a$.

Proof. The proof follows from the definition of subset complexity by picking $\mathcal{J} = \{a\}$ and applying aforementioned lemmas. ◀


This bound has an intuitive interpretation: if all but one transition matrices are low-rank then the subset complexity will be polynomially bounded (the cyclicity is exponential

only in very exceptional cases). It comes especially handy for two-symbol automata and characterizes a large class of NFAs which can be converted efficiently to DFAs using subset construction, as summarized in Figure 4.

6 Examples

In this section we look at some examples of “complex” automata through the lens of subset complexity. It turns out that seemingly minor changes to the structure of NFAs can drastically reduce their state complexity, providing intuition and insight towards the underlying nature of the non-deterministic blow-up.

► **Example 29.** Consider n -state Moore’s NFA $\mathcal{A}_{\text{MOORE}}$ from Figure 1 with state complexity of 2^n . Figure 5 shows the modified version $\mathcal{A}'_{\text{MOORE}}$ where we replaced both labels on the transitions from q_n from a to c . The new automaton $\mathcal{A}'_{\text{MOORE}}$ operates over the alphabet $\Sigma = \{a, b, c\}$, and is still non-deterministic.

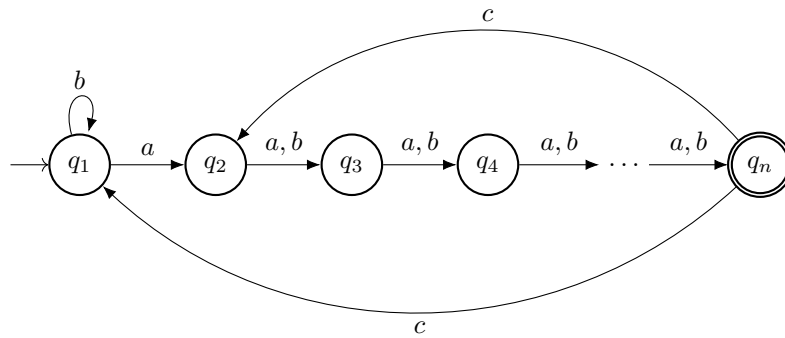

■ **Figure 5** Modification of Moore’s non-deterministic automaton $\mathcal{A}'_{\text{MOORE}}$ with n states with the addition of symbol c

▷ **Claim.** For a n -state modified Moore’s automaton $\mathcal{A}'_{\text{MOORE}}$ it holds: $\|\mathcal{A}'_{\text{MOORE}}\| \leq 3n^2 + 3n$

Proof. We choose $\mathcal{J} = \{a, b\}$ and notice that $T^{(a)}T^{(b)} = T^{(a)}T^{(a)}$, meaning that all matrices in the transition monoid $\mathbb{S}(\mathcal{J})$ can be obtained from a product sequence of the following form

$$T^{(b)}T^{(b)} \dots T^{(b)}T^{(a)}T^{(a)} \dots T^{(a)}$$


Moreover, we have that $(T^{(a)})^n = 0$ and $(T^{(b)})^{n-1} = (T^{(b)})^n$, meaning that there at most $n + 1$ distinct products of $T^{(a)}$ and n distinct products of $T^{(b)}$ (counting the empty set). Hence $|\mathbb{S}(\mathcal{J})| \leq n^2 + n$. Furthermore we have that $\mathcal{R}(T^{(c)}) = 2$ because $T^{(c)}$ is a rank 1 matrix. After applying Theorem 20 we conclude the proof. ◁

► **Example 30.** In this example we examine the previously encountered Meyer-Fischer’s NFA. Now let us consider its modification \mathcal{A}'_{MF} where we remove all but k self-loops with labels b , as shown in Figure 6.

▷ **Claim.** For a n -state modified Meyer-Fischer’s NFA \mathcal{A}'_{MF} it holds:

$$\|\mathcal{A}'_{\text{MF}}\| \leq (2^{k+1} + 1)(2n^2 - 4n + 4)$$

and adding an arbitrary number of a -labeled transitions won’t affect this bound.

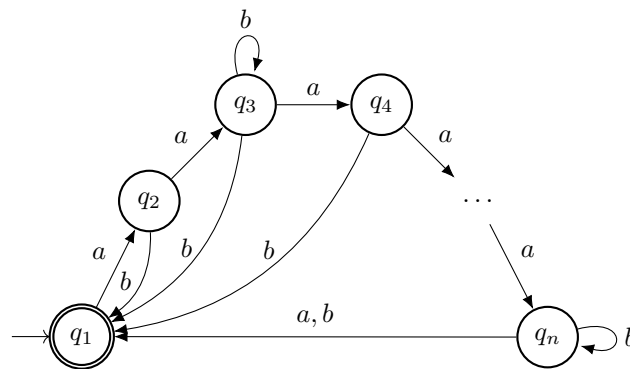

■ **Figure 6** Modified Meyer–Fischer’s non-deterministic automaton \mathcal{A}_{MF}' with n states where all but k self-loop transitions with label b were removed

Proof. To prove the claim we will employ Proposition 28 and select a as the target letter, but use the matching bound from Lemma 26 instead of the rank. It is left to verify that $\|\mathcal{A}_{\text{MF}}'\|_a \leq (2^{k+1} + 1)(2n^2 - 4n + 4)$. We notice that cyclicity of $\mathcal{G}(T^{(a)})$ is n because the precedence graph is one big cycle, and adding any additional edge can only make it smaller. Similarly we observe that $\mathcal{R}(T^{(b)}) \leq 2^{k+1}$ because $T^{(b)}$ has only $k + 1$ non-zero columns, hence the largest matching has the size of at most $k + 1$. The rest follows from the properties of $\|\mathcal{A}_{\text{MF}}'\|_a$. \triangleleft

► **Remark.** In both examples we presented the sets of starting states I and final states F can be chosen arbitrarily, since subset complexity is independent of both I and F .

7 Open questions

While we managed to answer some important questions about the mechanics of subset construction and how to control for the possible blow-up, a number of interesting problems about its operational semantics remains open.

► **Open question 1.** *For which classes of automata besides the ones presented in [8] does subset construction produce an approximately minimal DFA?*

► **Open question 2.** *Can we modify subset construction in such a way that would allow us to estimate the size of its output in polynomial time?*

Another area of open questions is the choice of criteria to bound the size of the subset construction. While no tight bounds can be expected due to Proposition 14, it would be interesting to understand which properties would manifest significant reduction or increase on the number of states.

► **Open question 3.** *What other criteria can be used to create lower and upper bounds for the size of subset construction?*

► **Open question 4.** *Is there some simple property which would capture both the range and monoid parts of subset complexity?*

References

- 1 Cyril Allauzen, Michael Riley, Johan Schalkwyk, Wojciech Skut, and Mehryar Mohri. Openfst: A general and efficient weighted finite-state transducer library: (extended abstract of an invited talk). In *Implementation and Application of Automata: 12th International Conference (CIAA)*, pages 11–23. Springer, 2007. doi:10.1007/978-3-540-76336-9_3.
- 2 Ivan Baburin and Ryan Cotterell. An analysis of on-the-fly determinization of finite-state automata, 2023. URL: <https://arxiv.org/abs/2308.14077>, arXiv:2308.14077.
- 3 Jean Berstel, Luc Boasson, Olivier Carton, and Isabelle Fagnot. Minimization of automata, 2010. URL: <https://arxiv.org/abs/1010.5318>, arXiv:1010.5318.
- 4 Henrik Björklund and Wim Martens. The tractability frontier for nfa minimization. *Journal of Computer and System Sciences*, 78(1):198–210, 2012. JCSS Knowledge Representation and Reasoning. URL: <https://www.sciencedirect.com/science/article/pii/S0022000011000456>, doi:10.1016/j.jcss.2011.03.001.
- 5 Filippo Bonchi and Damien Pous. Hacking nondeterminism with induction and coinduction. *Commun. ACM*, 58(2):87–95, jan 2015. doi:10.1145/2713167.
- 6 Henning Bordihn, Markus Holzer, and Martin Kutrib. Determination of finite automata accepting subregular languages. *Theoretical Computer Science*, 410(35):3209–3222, 2009. Descriptive Complexity of Formal Systems. URL: <https://www.sciencedirect.com/science/article/pii/S0304397509003788>, doi:10.1016/j.tcs.2009.05.019.
- 7 Richard A. Brualdi, Herbert John Ryser, Ángeles Carmona, P. van den Driessche, Stephen Kirkland, and Dragan Stevanović. *Combinatorial Matrix Theory*, volume 39. Springer, 1991. doi:10.1007/978-3-319-70953-6.
- 8 Janusz Brzozowski and Hellis Tamm. Theory of átomata. In Giancarlo Mauri and Alberto Leporati, editors, *Developments in Language Theory*, pages 105–116, Berlin, Heidelberg, 2011. Springer Berlin Heidelberg.
- 9 Janusz A Brzozowski. Canonical regular expressions and minimal state graphs for definite events. In *Proc. Symposium of Mathematical Theory of Automata*, pages 529–561, 1962.
- 10 Janusz A. Brzozowski. Towards a theory of complexity of regular languages. *Journal of Automata, Languages and Combinatorics*, 23(1–3):67–101, 2018. doi:10.25596/jalc-2018-067.
- 11 Binh-Minh Bui-Xuan, Jan Arne Telle, and Martin Vatshelle. Boolean-width of graphs. *Theoretical Computer Science*, 412(39):5187–5204, 2011. URL: <https://www.sciencedirect.com/science/article/pii/S030439751100418X>, doi:10.1016/j.tcs.2011.05.022.
- 12 Sang Cho and Dung T. Huynh. The parallel complexity of finite-state automata problems. *Information and Computation*, 97(1):1–22, 1992. URL: <https://www.sciencedirect.com/science/article/pii/089054019290002W>, doi:10.1016/0890-5401(92)90002-W.
- 13 Keith D. Cooper and Linda Torczon. Chapter 2 - scanners. In Keith D. Cooper and Linda Torczon, editors, *Engineering a Compiler (Second Edition)*, pages 25–82. Morgan Kaufmann, Boston, second edition edition, 2012. URL: <https://www.sciencedirect.com/science/article/pii/B9780120884780000025>, doi:10.1016/B978-0-12-088478-0.00002-5.
- 14 Bart De Schutter and Bart De Moor. On the sequence of consecutive matrix powers of boolean matrices in the max-plus algebra. In *Theory and Practice of Control and Systems* (Proceedings of the 6th IEEE Mediterranean Conference on Control and Systems, Alghero, Italy, June 1998), pages 672–677. Singapore: World Scientific, 1999. doi:10.1142/9789814447317_0111.
- 15 Laurent Doyen and Jean-François Raskin. Antichain algorithms for finite automata. In Javier Esparza and Rupak Majumdar, editors, *Tools and Algorithms for the Construction and Analysis of Systems*, pages 2–22, Berlin, Heidelberg, 2010. Springer Berlin Heidelberg.

- 16 James East, Attila Egri-Nagy, James D. Mitchell, and Yann Péresse. Computing finite semigroups. *Journal of Symbolic Computation*, 92:110–155, 2019. URL: <https://www.sciencedirect.com/science/article/pii/S0747717118300087>, doi:10.1016/j.jsc.2018.01.002.
- 17 M. J. Fischer and A. R. Meyer. Economy of description by automata, grammars, and formal systems. In *2013 IEEE 54th Annual Symposium on Foundations of Computer Science*, pages 188–191, Los Alamitos, CA, USA, oct 1971. IEEE Computer Society. URL: <https://doi.ieeecomputersociety.org/10.1109/SWAT.1971.11>, doi:10.1109/SWAT.1971.11.
- 18 Markus Holzer and Martin Kutrib. Descriptive and computational complexity of finite automata—a survey. *Information and Computation*, 209(3):456–470, 2011. Special Issue: 3rd International Conference on Language and Automata Theory and Applications (LATA 2009). URL: <https://www.sciencedirect.com/science/article/pii/S0890540110001999>, doi:10.1016/j.ic.2010.11.013.
- 19 John Hopcroft. An $n \log n$ algorithm for minimizing states in a finite automaton. In Zvi Kohavi and Azaria Paz, editors, *Theory of Machines and Computations*, pages 189–196. Academic Press, 1971. URL: <https://www.sciencedirect.com/science/article/pii/B9780124177505500221>, doi:10.1016/B978-0-12-417750-5.50022-1.
- 20 John E. Hopcroft, Rajeev Motwani, and Jeffrey D. Ullman. Introduction to automata theory, languages, and computation, 2nd edition. *SIGACT News*, 32(1):60–65, mar 2001. doi:10.1145/568438.568455.
- 21 Juraj Hromkovič. Descriptive complexity of finite automata: Concepts and open problems. *Journal of Automata, Languages and Combinatorics*, 7:519–531, 01 2002. URL: <https://dl.acm.org/doi/abs/10.5555/782466.782475>.
- 22 Stefan Kiefer ([https://csttheory.stackexchange.com/users/64968/stefan kiefer](https://csttheory.stackexchange.com/users/64968/stefan%20kiefer)). Complexity of nfa to dfa minimization with binary threshold. Theoretical Computer Science Stack Exchange. URL: <https://csttheory.stackexchange.com/q/50706>.
- 23 Denis Kuperberg and Anirban Majumdar. Width of Non-deterministic Automata. In Rolf Niedermeier and Brigitte Vallée, editors, *35th Symposium on Theoretical Aspects of Computer Science (STACS 2018)*, volume 96 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 47:1–47:14, Dagstuhl, Germany, 2018. Schloss Dagstuhl – Leibniz-Zentrum für Informatik. URL: <https://drops.dagstuhl.de/entities/document/10.4230/LIPIcs.STACS.2018.47>, doi:10.4230/LIPIcs.STACS.2018.47.
- 24 HING LEUNG. Descriptive complexity of nfa of different ambiguity. *International Journal of Foundations of Computer Science*, 16(05):975–984, 2005. doi:10.1142/S0129054105003418.
- 25 Frank R. Moore. On the bounds for state-set size in the proofs of equivalence between deterministic, nondeterministic, and two-way finite automata. *IEEE Transactions on Computers*, 100(10):1211–1214, 1971. doi:10.1109/t-c.1971.223108.
- 26 Kenichi Morita. *Theory of Reversible Computing*. Springer Publishing Company, Incorporated, 1st edition, 2017.
- 27 Jean-Eric Pin. Syntactic semigroups. *Handbook of Formal Languages: Volume 1 Word, Language, Grammar*, pages 679–746, 1997. doi:10.1007/978-3-642-59136-5_10.
- 28 J. Scott Provan and Michael O. Ball. The complexity of counting cuts and of computing the probability that a graph is connected. *SIAM Journal on Computing*, 12(4):777–788, 1983. arXiv:<https://doi.org/10.1137/0212053>, doi:10.1137/0212053.
- 29 Michael O. Rabin and Dana Scott. Finite automata and their decision problems. *IBM Journal of Research and Development*, 3(2):114–125, 1959. doi:10.1147/rd.32.0114.
- 30 Walter J. Savitch. Relationships between nondeterministic and deterministic tape complexities. *Journal of Computer and System Sciences*, 4(2):177–192, 1970.

23:18 Blow-up in Non-Deterministic Automata

URL: <https://www.sciencedirect.com/science/article/pii/S002200007080006X>,
doi:10.1016/S0022-0000(70)80006-X.

- 31 Shuji Tsukiyama, Mikio Ide, Hiromu Ariyoshi, and Isao Shirakawa. A new algorithm for generating all the maximal independent sets. *SIAM Journal on Computing*, 6(3):505–517, 1977. doi:10.1137/0206036.
- 32 Martin Vatshelle. *New width parameters of graphs*. PhD thesis, University of Bergen, 05 2012.