

---

# OVLW-DETR: OPEN-VOCABULARY LIGHT-WEIGHTED DETECTION TRANSFORMER

---

TECHNICAL REPORT

Yu Wang, Xiangbo Su, Qiang Chen, Xinyu Zhang, Teng Xi,  
Kun Yao, Errui Ding, Gang Zhang, Jingdong Wang

Baidu Inc., China

{wangyu106, suxiangbo, chenqiang13, zhangxinyu14,  
xiteng01, yaokun01, dingerrui, zhanggang03, wangjingdong}@baidu.com

July 16, 2024

## ABSTRACT

Open-vocabulary object detection focusing on detecting novel categories guided by natural language. In this report, we propose Open-Vocabulary Light-Weighted Detection Transformer (OVLW-DETR), a deployment friendly open-vocabulary detector with strong performance and low latency. Building upon OVLW-DETR, we provide an end-to-end training recipe that transferring knowledge from vision-language model (VLM) to object detector with simple alignment. We align detector with the text encoder from VLM by replacing the fixed classification layer weights in detector with the class-name embeddings extracted from the text encoder. Without additional fusing module, OVLW-DETR is flexible and deployment friendly, making it easier to implement and modulate. Improving the efficiency of interleaved attention computation. Experimental results demonstrate that the proposed approach is superior over existing real-time open-vocabulary detectors on standard Zero-Shot LVIS benchmark. Source code and pre-trained models are available at [<https://github.com/Atten4Vis/LW-DETR>].

**Keywords** Object Detection · Real Time · Open Vocabulary

## 1 Introduction

Traditional object detection methods are typically trained on a set of predefined categories, which limits the application in real-world scenarios with open vocabulary. With the development of vision-language model with contrastive image-text training, many recent works [Zhang et al. [2022], Yao et al. [2023], Minderer et al. [2024]] aim to transfer the language capabilities of VLM models [Radford et al. [2021]] to object detection. However, the computation deployment consumption continue to pose challenges for the practical application of ov-detector in real-world scenarios. The key of open-vocabulary detection is on transferring the language knowledge in VLM to object detector. In recent works, Gu et al. [2021] distills the VLM-predictions on image regions, Liu et al. [2023], Zhang et al. [2022] introduce deep fusion module between the image and language encoders. However, these methods suffers from high inference latency. Cheng et al. [2024] propose the first real-time open-vocabulary based on Yolov8 [Jocher et al. [2023]], the text-image fusion module still results in a reduction of the inference speed.

In this report, we introduce Open-Vocabulary Light-Weighted Detection Transformer (OVLW-DETR), a DETR-based real-time OV detector. This work is built upon the recent LW-DETR [Chen et al. [2024]], a light-weight real-time DETR baseline. We validate the effectiveness of generalizing real-time DETR to open-vocabulary task with simple alignment, achieving real-time inference speed and strong open-vocabulary performance. In OVLW-DETR, the language knowledge in VLM is transferred to DETR by replacing the classification layer weights in detector with the class-name embeddings extracted from the text encoder. Without additional fusion module, the model retains its inherent architecture, thereby enhancing its flexibility and facilitating a more efficient deployment.

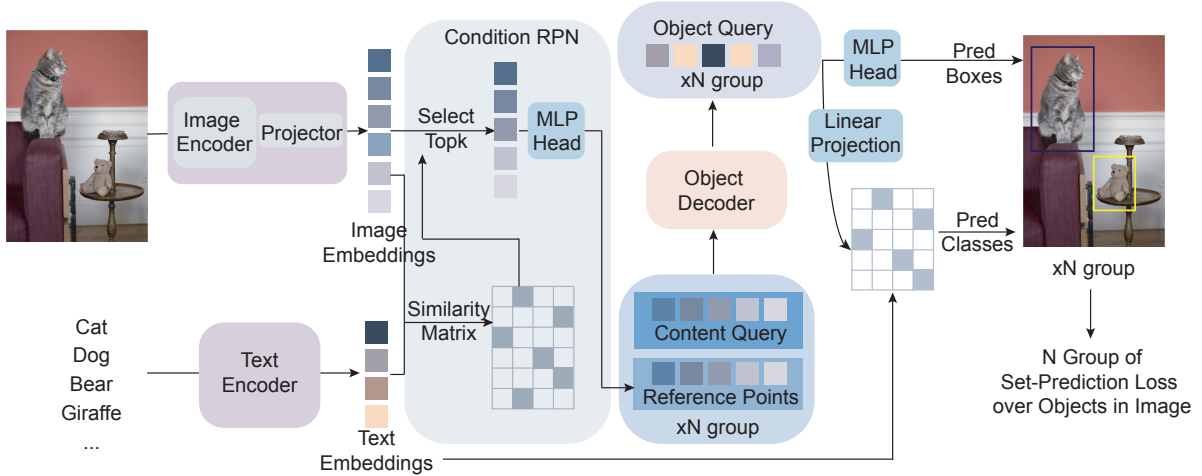


Figure 1: OVLW-DETR framework

Our results show that OVLW-DETR achieves a strong performance and low latency on open-vocabulary task with a simple alignment. It outperforms prior work on both open-vocabulary and long-tail detection benchmarks. On open-vocabulary LVIS benchmark, OVLW-DETR obtains.

## 2 OVLW-DETR

### 2.1 Architecture

The overall framework of OVLW-DETR is presented in Figure 1, which consists of a LW-DETR detector and a text encoder. The detector retains the inherent LW-DETR architecture, consisting of a ViT encoder, a projector, and a DETR decoder. The text encoder is adopted from the text branch of pretrained VLM model. Open-vocabulary classification is enabled by simple alignment between detector and VLM text encoder, modifying the the mixed-query selection scheme and classification layer. The fixed layer weights in both selecting top-K spatial queries scheme and query classification layers are replaced with the text embedding extracted by the text encoder.

### 2.2 Training Scheme

We fine-tune the pre-trained detector on standard LW-DETR training receipt, while the text encoder is frozen during training process to retain the generalization ability. For stable and efficient training, we adopt the IoU-aware classification loss, IA-BCE loss and parallel weight-sharing decoders, Group DETR in training scheme.

## 3 Experiment

### 3.1 Implementation Details

The detector is initialized with pre-trained LW-DETR, and the text encoder is initialized with pre-trained CLIP. We propose a series of S/M/L OVLW-DETR based on LW-DETR S/M/L, and we adopt the text encoder from CLIP ConvNeXt-Large [Harcos et al., 2021].

In training process, we adopt the default LW-DETR training schedule, with AdamW optimizer with an initial learning rate of  $1e-4$  and weight decay of  $1e-4$ . We fine-tune the whole detector for 12 epochs with total batch size of 64, while freeze the text encoder for generalization.

Training dataset consists of GoldG [Kamath et al., 2021] (including Flickr30K [Plummer et al., 2015] and GQA [Hudson and Manning, 2019]) and Object365 [Shao et al., 2019]. We mix GoldG and VG randomly at a ratio of 80% to 20% in our experiments. Specifically, we randomly sample 10% O365 every epoch. During training process, we use the default augmentation of DETR, consisting of random flip, random crop, and resizing the input to  $640 \times 640$  resolution.

### 3.2 Evaluation

We use LVIS v1.0 minival Kamath et al. [2021] as benchmark since this dataset contains 1203 categories, with a long tail of rare categories. We evaluate the standard AP with 300 evaluation queries. We measure the averaged inference latency in an end-to-end manner with fp16 precision and a batch size of 1 on LVIS v1 minival on one T4 GPU, with 1203 categories. The performance and the end-to-end latency are measured for all real-time detectors with official deploying implementations.

### 3.3 Results

The main results are illustrated in Table 1. We mainly compare OVLW-DETR with YOLO-World Cheng et al. [2024], the recent state-of-the-art real-time open-vocabulary method. OVLW-DETR achieves or outperforms on zero-shot LVIS minival benchmark on different scales. Without multi-modal fusion module, OVLW-DETR maintains the low latency in inference while also demonstrating impressive performance.

Table 1: **Zero-Shot Evaluation on LVIS minival.** We report standard AP on LVIS minival. The latency is tested on T4 GPU with FP16 precision on LVIS categories. We test the latency of YOLO-Worldv2 without NMS.

Model	Backbone	Data	AP	APr	APc	APf	Params	Latency
GLIPv2	Swin-T	O365,GoldG,Cap4M	29.0	-	-	-	232M	-
YOLO-World-S	YOLOv8-S	O365,GoldG	24.3	16.6	22.1	27.7	13M	-
YOLO-World-M	YOLOv8-M	O365,GoldG	28.6	19.7	26.6	31.9	29M	-
YOLO-World-L	YOLOv8-L	O365,GoldG	32.5	22.3	30.6	36.1	48M	-
YOLO-World-L	YOLOv8-L	O365,GoldG,CC3M-Lite	33.0	23.6	32.0	35.5	48M	-
YOLO-Worldv2-S	YOLOv8-S	O365,GoldG	22.7	16.3	20.8	25.5	13M	5.58
YOLO-Worldv2-M	YOLOv8-M	O365,GoldG	30.0	<b>25.0</b>	27.2	<b>33.4</b>	29M	9.54
YOLO-Worldv2-L	YOLOv8-L	O365,GoldG	33.0	22.6	32.0	<b>35.8</b>	48M	13.66
YOLO-Worldv2-L	YOLOv8-L	O365,GoldG,CC3M-Lite	32.9	25.3	31.1	35.8	48M	13.66
OVLW-DETR-S	LW-DETR-S	O365,GoldG	<b>27.3</b>	<b>22.8</b>	<b>26.7</b>	<b>28.6</b>	12M	3.23
OVLW-DETR-M	LW-DETR-M	O365,GoldG	<b>30.2</b>	24.0	<b>28.9</b>	32.4	28M	6.09
OVLW-DETR-L	LW-DETR-L	O365,GoldG	<b>33.5</b>	<b>26.5</b>	<b>33.9</b>	34.4	47M	9.90

## 4 Conclusion

In this paper, we propose OVLW-DETR, an open-vocabulary light-weighted DETR detector. With simple alignment, our method validate the generalization of transferring real-time detection transformers to open-vocabulary task. We hope our report can provide insights for building open-vocabulary detector.

## References

- Haotian Zhang, Pengchuan Zhang, Xiaowei Hu, Yen-Chun Chen, Liunian Li, Xiyang Dai, Lijuan Wang, Lu Yuan, Jenq-Neng Hwang, and Jianfeng Gao. Glipv2: Unifying localization and vision-language understanding. *Advances in Neural Information Processing Systems*, 35:36067–36080, 2022.
- Lewei Yao, Jianhua Han, Xiaodan Liang, Dan Xu, Wei Zhang, Zhenguo Li, and Hang Xu. Detclipv2: Scalable open-vocabulary object detection pre-training via word-region alignment. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 23497–23506, June 2023.
- Matthias Minderer, Alexey Gritsenko, and Neil Houlsby. Scaling open-vocabulary object detection. *Advances in Neural Information Processing Systems*, 36, 2024.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- Xiuye Gu, Tsung-Yi Lin, Weicheng Kuo, and Yin Cui. Open-vocabulary object detection via vision and language knowledge distillation. *arXiv preprint arXiv:2104.13921*, 2021.

- Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, et al. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. *arXiv preprint arXiv:2303.05499*, 2023.
- Tianheng Cheng, Lin Song, Yixiao Ge, Wenyu Liu, Xinggang Wang, and Ying Shan. Yolo-world: Real-time open-vocabulary object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16901–16911, 2024.
- Glenn Jocher, Ayush Chaurasia, and Jing Qiu. Ultralytics YOLO, January 2023. URL <https://github.com/ultralytics/ultralytics>.
- Qiang Chen, Xiangbo Su, Xinyu Zhang, Jian Wang, Jiahui Chen, Yunpeng Shen, Chuchu Han, Ziliang Chen, Weixiang Xu, Fanrong Li, et al. Lw-detr: A transformer replacement to yolo for real-time detection. *arXiv preprint arXiv:2406.03459*, 2024.
- Gabriel Ilharco, Mitchell Wortsman, Ross Wightman, Cade Gordon, Nicholas Carlini, Rohan Taori, Achal Dave, Vaishal Shankar, Hongseok Namkoong, John Miller, Hannaneh Hajishirzi, Ali Farhadi, and Ludwig Schmidt. OpenCLIP, July 2021.
- Aishwarya Kamath, Mannat Singh, Yann LeCun, Gabriel Synnaeve, Ishan Misra, and Nicolas Carion. Mdetr-modulated detection for end-to-end multi-modal understanding. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 1780–1790, 2021.
- Bryan A Plummer, Liwei Wang, Chris M Cervantes, Juan C Caicedo, Julia Hockenmaier, and Svetlana Lazebnik. Flickr30k entities: Collecting region-to-phrase correspondences for richer image-to-sentence models. In *Proceedings of the IEEE international conference on computer vision*, pages 2641–2649, 2015.
- Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019.
- Shuai Shao, Zeming Li, Tianyuan Zhang, Chao Peng, Gang Yu, Xiangyu Zhang, Jing Li, and Jian Sun. Objects365: A large-scale, high-quality dataset for object detection. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 8430–8439, 2019.