

LTRL: Boosting Long-tail Recognition via Reflective Learning

Qihao Zhao^{1,2,*}, Yalun Dai^{3,*},
Shen Lin⁴, Wei Hu¹, Fan Zhang^{1,**}, and Jun Liu^{2,5}

Beijing University of Chemical Technology, China
Singapore University of Technology and Design, Singapore
Nanyang Technological University, Singapore
Xidian University, China
Lancaster University, UK

Abstract. In real-world scenarios, where knowledge distributions exhibit long-tail. Humans manage to master knowledge uniformly across imbalanced distributions, a feat attributed to their diligent practices of reviewing, summarizing, and correcting errors. Motivated by this learning process, we propose a novel learning paradigm, called reflecting learning, in handling long-tail recognition. Our method integrates three processes for reviewing past predictions during training, summarizing and leveraging the feature relation across classes, and correcting gradient conflict for loss functions. These designs are lightweight enough to plug and play with existing long-tail learning methods, achieving state-of-the-art performance in popular long-tail visual benchmarks. The experimental results highlight the great potential of reflecting learning in dealing with long-tail recognition. The code will be available at <https://github.com/fistyee/LTRL>.

1 Introduction

Real-world scenarios often exhibit a long-tail distribution across semantic categories, with a small number of categories containing a large number of instances, while most categories have only a few instances [27, 28, 50]. Dealing with Long-Tail Recognition (LTR) is a challenge as it involves not only addressing multiple small-data learning problems in rare classes but also handling highly imbalanced classification across all classes. In addition, the inherent bias towards the high-frequency (head) classes may cause the low-frequency (tail) classes to be neglected, leading to inaccurate classification results.

To tackle this challenge, numerous methods have investigated learning from long-tailed datasets to develop effective models, such as data re-sampling [4, 5], re-weighting [2, 7, 11, 20, 24, 30, 44], decoupling learning [19, 45], contrastive learning [10, 18, 40, 46, 57], Calibration [55], transfer learning [26, 33, 52], and multi-expert ensemble learning [6, 23, 42, 43, 49].

* Equal Contribution

** Corresponding Author, zhangf@mail.buct.edu.cn

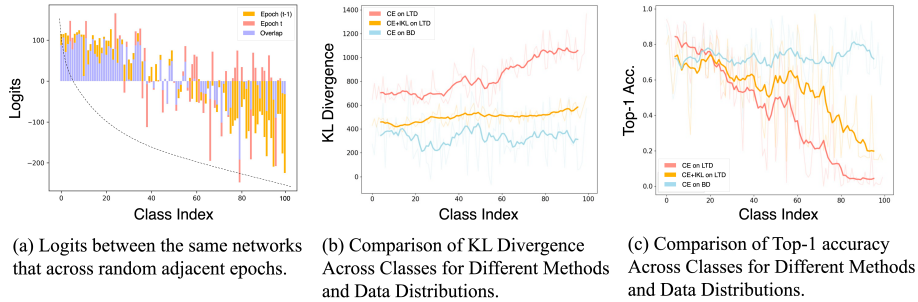


Fig. 1: The comparisons of model outputs (logits) and Kullback–Leibler (KL) distance. The analysis is conducted on CIFAR100-LT dataset with an Imbalanced Factor (IF) of 100. The logits, KL distance, and accuracy are visualized on the basis of the whole test set and then the average results of each category are counted and reported. **(a):** The dashed line represents the direction of the long-tail distribution in data volume, and the prediction consistency (Overlap) of the head class is significantly higher than that of the tail class. **(b) and (c):** The figure compares the per-class KL-Divergence and top-1 accuracy results of Cross-Entropy (CE) on Long-Tail Data (LTD) and Balanced Data (BD), as well as the results on LTD after incorporating our proposed method. Compared to the original Cross-Entropy, our method not only significantly reduces the overall prediction divergence but also alleviates the divergence imbalance caused by the inconsistency in predictions between head and tail classes. Concurrently, our method significantly enhances the model’s accuracy on the test set and mitigates the phenomenon where the head class accuracy substantially surpasses that of the tail class due to data imbalance.

Similarly, knowledge acquisition in the human classroom often exhibits a long-tail distribution, where teachers and textbooks primarily focus on important (majority classes) knowledge. However, top students beings can only do well in exams if they have a balanced knowledge of the subject. These students habitually **review** studied knowledge post-class, **summarize** the connection between knowledge, and **correct** misconceptions after review summarize. Inspired by these effective learning strategies, named **Reflective Learning (RL)**, *we wonder how to help models in a human reflective learning way to improve for long-tail recognition.*

Review. To answer the above question, we first explore what knowledge needs to be reviewed and learned from the past. We visualize the relationship between model predictions (logits) across a random adjacent epoch in Figure 1. As illustrated in Figure 1 (a), the model exhibits less overlap in the tail class compared to the head class. Concurrently, as shown in Figure 1 (b), the KL divergence between predictions across adjacent epochs is larger for the tail class. These observations indicate that the uncertainty in predictions for the tail class across adjacent epochs is more significant compared to the head class. However, a classification model should favor functions that give consistent output for similar data points [39]. Therefore, we facilitate learning by promoting

consistency between past and current predictions. Specifically, we employ a distillation module to enable the model to learn from past accurate predictions to achieve this goal.

Summary. Humans are adept at summarizing connections and distinctions between knowledge. However, under a long-tail distribution training setting, the provided one-hot labels lack the inter-class correlation information, which is crucial. For example, as demonstrated in Figure 2, when the head class "Cygnus olor" shares similar features with the tail class "Pelecanus onocrotalus", one-hot labels during the supervision process strictly categorize all these features under "Cygnus olor". Given the large sample size of the head class in the long-tailed dataset, this supervision can mislead the model to misclassify "Pelecanus onocrotalus" as "Cygnus olor", exacerbating the model's recognition bias towards the head class. To address this issue, we explicitly construct a similarity matrix to model the relationships across classes and convert it as a soft label to provide supervision.

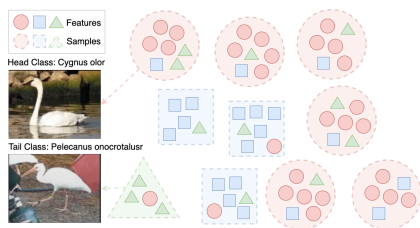


Fig. 2: Correlation of features among different samples in long-tailed data.

Correction. In the knowledge correction part, to emulate the behavior of humans in correcting mistakes, we introduce an effective projection technique to reduce gradient conflicts after ‘reviewing’ and ‘summarizing’. It promptly rectifies erroneous knowledge and prevents the propagation of incorrect gradients.

In conclusion, due to the lightweight design of these modules, our approach can easily integrate with existing long-tail learning methods as a plug-and-play solution, enhancing them to

achieve state-of-the-art performance. Comprehensive experiments were conducted on famous long-tailed datasets such as CIFAR100-LT, ImageNet-LT, Place-LT, and iNaturalist. The results underscore the efficacy and potential of our method in addressing the challenges faced in long-tail recognition tasks. These results also demonstrate that learning in a manner akin to top human students, as embodied in our approach, can broadly enhance the capabilities of various deep learning methods.

2 Related Work

Long-tail recognition. Long-tail recognition methods address the challenge of imbalanced data distributions through various strategies. Re-sampling techniques, such as over-sampling minority classes or under-sampling majority classes, aim to balance the data but come with drawbacks like over-fitting and loss of crucial information, respectively [4, 16]. Re-weighting methods adjust class weights based on loss modification or logits adjustment [1, 7, 11, 20, 24, 29, 30, 41, 44, 51, 54].

However, these methods can potentially hurt representation learning, and it has been observed that decoupling the representation from the classifier can lead to better features [19, 56].

Ensemble methods leverage multiple experts with aggregation techniques to reduce uncertainty and have proven effective for long-tailed recognition [42, 49, 53]. Techniques such as LFME [43], which trains experts on different dataset segments and distills their knowledge into a student model, and RIDE [42], which employs distribution-aware diversity loss and a router for handling hard samples, are noteworthy. Additionally, MDCS [53] aggregates experts for the diversity of recognition. Label space adjustment methods, like label smoothing [38] and Mixup [47], prevent models from over-fitting to head classes. Recent approaches consider category frequencies in reconstruction to achieve better results [8, 12, 25, 53, 55]. However, these methods do not consider inter-class similarity information, and this knowledge is necessary when working with existing long-tail methods, which our method explores.

Knowledge distillation balances predictions between head and tail classes [13, 23, 33, 34, 43]. For instance, [33] transfers feature knowledge from head to tail classes, but does not ensure feature correctness. NCL [23] proposed a nested balanced online distillation method to collaboratively transfer the knowledge between any two expert models. However, previous knowledge distillation long-tail methods do not explore the knowledge in past epochs.

Consistency regularization. Consistency regularization has become a crucial technique in semi-supervised learning since it was first introduced by Bachman [3] and later popularized by Sajjadi [36] and Laine [22]. This method utilizes unlabeled data by enforcing the model to produce consistent outputs for similar inputs. Specifically, the discrepancy between outputs from different perturbations of the same training sample is minimized as a loss during training. Various techniques can be used to create perturbed inputs [17, 31, 39, 50], with a common approach being the application of two different data augmentations on the same image [37]. Unlike these methods, our proposed KR module is tailored for long-tail learning, utilizing consistent knowledge without additional hyper-parameters. It integrates consistency mechanisms that extract and transfer richer information from the predictions of previous epochs, thereby providing enhanced supervision.

3 Method

In this section, we propose a new long-tail learning paradigm, named **Reflecting Learning**, to boost the recognition performance for the existing methods. The proposed reflecting learning contains three phases, which are *knowledge review*, *knowledge induction*, and *knowledge correction*. In the following section, we introduce these methods in detail.

3.1 Preliminaries

Long-tailed recognition involves the learning of a well-performance classification model from a training dataset that is characterized by having a long-tailed

category distribution. For a clear notation, we write a C-classes labeled dataset as $\mathbb{D} = \{(x_i, y_i) | 1 \leq i \leq n\}$, which x_i is the i -th training sample and $y_i = \{1, \dots, C\}$ is its ground-truth label. In this context, we use n_j to represent the number of training samples for class j , while $N = \sum_{j=1}^C n_j$ denotes the total number of training samples. To simplify our discussion, we assume that the classes are arranged in decreasing order, such that if $i < j$, then $n_i \geq n_j$. Furthermore, an imbalanced dataset is characterized by a significant disparity in the number of instances between different classes, with some classes having significantly more samples than others, i.e., $n_i \gg n_j$.

Consider using a Softmax classifier to model a posterior predictive distribution. For a given input x_i , the predictive distribution is represented as follows:

$$p_i(x_i; \Theta) = \frac{e^{(v_i^k/\tau)}}{\sum_c e^{(v_i^c/\tau)}}, \quad (1)$$

where $v_i = \{f(x_i; \Theta), W\}$ denotes the logits of DNNs for instances x_i which are calculated by feature $f(x_i; \Theta)$ and classifier weight W , and $\tau > 1$ is the temperature scaling parameter (a higher τ produces a "softer" probability distribution [14]).

3.2 Knowledge Review

In our reflecting learning paradigm, the goal of knowledge review (KR) is to look back at past knowledge during training and leverage this knowledge to improve recognition performance. From the above analysis 1, we observe that there is a different knowledge of past epochs, i.e., the same model has a different prediction about different augmentations for the same sample in adjacent epochs. However, when a percept is changed slightly, a human typically still considers it to be the same object. Correspondingly, a classification model should favor functions that give consistent output for similar data points [39]. Consequently, to learn the consistent knowledge of prediction from the previous epochs, we employ KL divergence of the previous and current epoch's prediction distribution as the minimization object function. As demonstrated in Figure 3, at every epoch, our KR module optimizes the current prediction to be closer to the previous prediction to distill different and richer knowledge for the current instances. We formulate the KR module denoted as:

$$\mathcal{L}_{KR} = \sum_{x_i \in \mathbb{D}} KL(p_{i,t-1}(x_i; \Theta_{t-1}) || p_{i,t}(x_i; \Theta_t)) \quad (2)$$

In detail, our KR employs the KL divergence function to perform optimization following soft distillation [14] for instances, which can be formulated as:

$$KL(p_{i,t-1} || p_{i,t}) = \tau^2 \sum_{i=1}^n p_{i,t-1}(x_i; \Theta_{t-1}) \log \frac{p_{i,t-1}(x_i; \Theta_{t-1})}{p_{i,t}(x_i; \Theta_t)}. \quad (3)$$

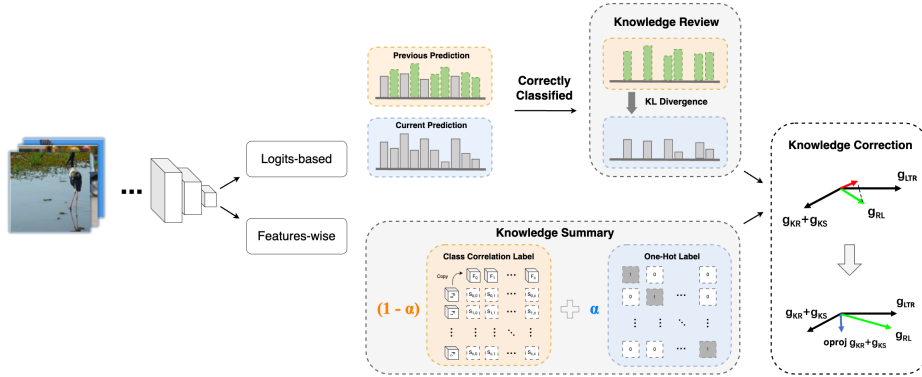


Fig. 3: The framework of our method. The prediction of the previous epoch ($t-1$) serves as a soft label to regularize the prediction of the current epoch (t). During the regularization process, we first use Correctly Classified Instances (CCI) to filter out correctly predicted samples (indicated in green). Then, we employ the Knowledge Review module to regularize the uncertainty between the logits-based prediction from past and current epochs. Meanwhile, we compute the median of the features from the previous epoch to represent the characteristic features. Then the inter-class features-wise correlations are characterized using cosine similarity, resulting in a similarity matrix that serves as soft class-correlation labels for each category. By integrating these soft labels with one-hot labels in a weighted manner, we derive the ultimate supervisory labels for the model’s learning process, a method we term Knowledge Summary. Finally, the proposed Knowledge Correction module is used to rectify gradient conflicts during training.

However, blindly transferring and distilling knowledge of past predictions does not yield satisfactory results. For example, if the model misses the ground truth prediction for instance x , then the wrong knowledge is not suitable to be transferred. Therefore, to prevent our method from introducing wrong knowledge, we only transfer and distill the knowledge that is **correctly classified**. Although this method is a general variant of consistency learning employed in semi-supervised learning [37], it experimentally proved to be very useful in our strategy. We define a correctly classified instances (CCI) set containing all correctly classified instances as:

$$\mathbb{D}_{CCI} = \{x_i \in \mathbb{D} | \operatorname{argmax}(p_i(x_i; \Theta)) == y_i\}, \quad (4)$$

where y_i denotes the ground-truth label of instance x_i . With the correct predictions of the previous epoch ($t-1$), we re-write the KR with CCI set as:

$$\mathcal{L}_{KR} = \frac{1}{\|\mathbb{D}_{CCI}^{t-1}\|} \sum_{x_i \in \mathbb{D}_{CCI}^{t-1}} KL(p_{i,t-1}(x_i; \Theta_{t-1}) || p_{i,t}(x_i; \Theta_t)) \quad (5)$$

3.3 Knowledge summary

During the knowledge review process, we designed the objective function to facilitate the model by learn consistent information about each instance from past predictions. However, inspired by the process of human summarising knowledge, it is also important to learn the correlations between knowledge. Correspondingly, in long-tail recognition, we find that the traditional one-hot label lacks information on correlations. When the head category contains feature similarity information of the tail category, all these features are supervised as the head category using one-hot labels during training, and the tail category will be more inclined to be judged as the head category during prediction. To this end, we reconstruct the labeling space by looking for correlations of category features in the model. Specifically, the bias of the long tail stems mainly from the classifiers rather than the backbone and the cosine distances lead to more unbiased feature boundaries [19, 32, 50]. Therefore, the features extracted by the backbone are less biased and cosine similarity for these features is a choice for learning relationships under long-tail distribution. Further to this, for C -th class, we calculate the class center of f_c by the median of all features across the C -th class, which is denoted as:

$$f_c = \text{Median}_{x_i \in \mathbb{D}}(f(x_i; \Theta_{t-1})) \quad (6)$$

which Median is a function that calculates the median of the features for category C . We use the median rather than the mean to avoid outliers of the features produced by data augmentation. Then, we calculate the correlation feature label by cosine similarity and reconstruct the label \hat{y} :

$$M = \frac{f \cdot f^T}{\|f\| \cdot \|f\|}, \hat{y} = \alpha \cdot Y + (1 - \alpha) \cdot M \quad (7)$$

where α is a hyperparameter, $M \in (0, 1)$ is the feature similarity matrix, and Y is the label y after extending to the label matrix. Finally, the KS loss is denoted as:

$$\mathcal{L}_{KS} = \frac{1}{\|\mathbb{D}\|} \sum_{x_i \in \mathbb{D}} \text{CrossEntropy}(p(x_i; \Theta_t), \hat{y}) \quad (8)$$

3.4 Knowledge correction

During the training process, our proposed KR and KS modules can easily combine with the existing LTR methods. Therefore, the overall loss (\mathcal{L}_{RL}) for implementation consists of two parts, the existing \mathcal{L}_{LTR} loss for long-tailed recognition and our \mathcal{L}_{KR} , \mathcal{L}_{KS} for KR and KS modules, respectively.

It is expressed as:

$$\mathcal{L}_{RL} = \mathcal{L}_{LTR} + (\mathcal{L}_{KR} + \mathcal{L}_{KS}) \quad (9)$$

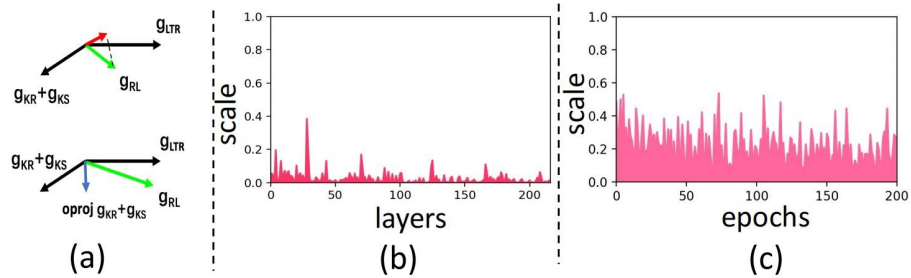


Fig. 4: (a) Illustration of gradient conflicts. (Top) Optimizing according to Eq. 5. (Bottom) Optimizing according to ours. (b) The proportion of conflict gradients contained in each layer of the model (total 216 layers for Resnet-32). (c) The proportion of layers in the network containing gradient conflicts at every epochs.

Typically, humans review and summarise knowledge by making corrections to what they are currently learning. Inspired by this, we would like to revise the model by reviewing and summarising the knowledge currently being learned from a gradient perspective.

Given that α_{ij} represents the angle between the gradients g_i and g_j of the i -th and j -th gradients, direction conflicts between the two gradients occur when $\cos \alpha_{ij} < 0$. Using this definition, we calculate the percentage of instances where $\cos \alpha_{ij}$ is negative for each pair, as shown in Figure 4. (b) and (c). From observation, the pairs of $(\mathcal{L}_{LTR}, \mathcal{L}_{KR} + \mathcal{L}_{KS})$ maintain high direction conflicts during training, not only in each layer of the model (shown in Figure 4. (b)), but also persist during the training process (Figure 4. (c)).

To address this issue, we introduce knowledge correction (KC) to mitigate conflicts by projecting gradients when negative transfer occurs. Negative transfer between two gradients g_i and g_j is identified when $\cos \alpha(g_i, g_j) < 0$. Following this identification, each gradient is projected onto the orthonormal plane of the other gradients to eliminate harmful conflicts. Therefore, we have the formula for projecting the gradient \mathcal{L}_{LTR} onto the orthonormal plane of gradient $\mathcal{L}_{KR} + \mathcal{L}_{KS}$ as:

$$\hat{g}_{KR+KS} := g_{KR+KS} - \frac{\cos(g_{KR+KS}, g_{LTR})}{\|g_{LTR}\|^2} \cdot g_{LTR} \quad (10)$$

Eventually, as shown in Figure 4. (a), we have the following gradient update formula for g_{RL} :

$$g_{RL} = \begin{cases} \hat{g}_{KR+KS} + g_{LTR}, & \text{if } \cos(g_{KR+KS}, g_{LTR}) < 0 \\ g_{KR+KS} + g_{LTR}, & \text{otherwise} \end{cases} \quad (11)$$

4 Experiments

We present the experimental outcomes on five widely adopted datasets for long-tailed recognition, which include CIFAR-100/10-LT [21], ImageNet-LT [29],

Places-LT [29], and iNaturalist 2018 [15]. Additionally, we conduct ablation studies specifically on the CIFAR-100-LT dataset to gain more comprehensive insights into the efficacy of our method.

4.1 Implementation details.

Evaluation Setup. For classification tasks, we assess our models after training on the long-tailed dataset by evaluating their performance on a balanced test/validation dataset, where we present the Top-1 test accuracy results. Additionally, we categorize the classes into three segments and report accuracy for each: Many-shot classes with over 100 images, Medium-shot classes containing 20 to 100 images, and Few-shot classes with fewer than 20 images.

Architecture and Settings. Our experimental configuration remains consistent across all baselines and our proposed method. Following established protocols in prior research [23, 42, 48], we deploy specific backbone architectures tailored to each dataset: ResNet-32 for CIFAR100/10-LT, ResNeXt-50/ResNet-50 for ImageNet-LT, ResNet-152 for Places-LT, and ResNet-50 for iNaturalist 2018. Standard training parameters include the use of SGD with a momentum of 0.9 and an initial learning rate of 0.1, which is reduced linearly over the training period.

Others. The results from the comparative methods were sourced from their respective original publications, while our findings represent the average outcomes from three separate trials. When integrating our technique with other long-tail algorithms, we employ the optimal hyper-parameters as specified in their foundational papers. Additional details on our implementation and the statistics for hyper-parameters can be found in the Appendix.

4.2 Comparisons with SOTA on benchmarks.

Baselines. The proposed RL method, designed to address tail class bias through consistency regularization, can be integrated with various prevalent LT algorithms. Following previous works [50], we categorize LT algorithms into three types: re-balancing, augmentation, and ensemble learning methods. For re-balancing approaches, we examined two-stage re-sampling methods such as cRT and LWS [19], multi-branch models with diverse sampling strategies like BBN [56], and reweight loss functions including Balanced Softmax (BSCE) [30, 35] and LDAM [7]. For augmentation approaches, we found that general data augmentation techniques like Random Augmentation (RandAug) [9] are more effective than specialized long-tailed transfer learning methods. For ensemble learning methods, we followed recent trends using models like NCL [23], SADE [49], RIDE [42], and MDCS [53], which have proven to be state-of-the-art in improving performance across both head and tail categories.

Method	CIFAR-100-LT		
IF	10	50	100
Softmax	59.1	45.6	41.4
BBN	59.8	49.3	44.7
BSCE	61.0	50.9	46.1
RIDE	61.8	51.7	48.0
SADE	63.6	53.9	49.4
Softmax+RL	59.6	46.2	41.9
BSCE+RL	64.5	52.2	47.9
RIDE+RL	62.4	53.1	48.8
SADE+RL	64.5	55.4	50.7
BSCE†	63.0	-	50.3
PaCo†	64.2	56.0	52.0
SADE†	65.3	57.3	53.2
MDCS†	-	-	56.1
BSCE+RL†	64.6	-	51.2
PaCo+RL†	65.1	57.1	52.8
SADE+RL†	66.8	59.1	54.7
MDCS+RL†	-	-	57.3

Table 1: Comparisons on CIFAR100-LT datasets with the IF of 10, 50, and 100. †denotes models trained with RandAugment [9] for 400 epochs.

Method	Many	Medium	Few	All
Softmax	68.1	41.5	14.0	48.0
Decouple-LWS	61.8	47.6	30.9	50.8
BSCE	64.1	48.2	33.4	52.3
LADE	64.4	47.7	34.3	52.3
PaCo	63.2	51.6	39.2	54.4
RIDE	68.0	52.9	35.1	56.3
SADE	66.5	57.0	43.5	58.8
Softmax+RL	68.6	42.0	14.7	48.6
BSCE+RL	65.6	49.7	37.9	54.8
PaCo+RL	64.0	52.5	42.1	56.4
RIDE+RL	68.9	54.1	38.6	59.0
SADE+RL	66.3	58.3	47.8	60.2
PaCo†	67.5	56.9	36.7	58.2
SADE†	67.3	60.4	46.4	61.2
MDCS†	72.6	58.1	44.3	61.8
PaCo+RL †	67.4	57.3	37.8	58.8
SADE+RL †	67.9	61.2	47.8	62.0
MDCS+RL†	72.7	59.5	46.0	62.7

Table 2: Comparisons on ImageNet-LT. † denotes models trained with RandAugment [9] for 400 epochs.

Superiority on Long-tailed Benchmarks. This subsection compares RL with state-of-the-art long-tailed methods on vanilla long-tailed recognition. Table 1, 2, 3, and 4 lists the Top-1 accuracy of SOTA methods on CIFAR-100-LT, ImageNet-LT, Places-LT, and iNaturalist 2018, respectively. Our approach seamlessly integrates with existing methods, yielding performance improvements across all long-tail benchmarks. Notably, when applied to the SADE method on the ImageNet-LT dataset, our approach achieves a maximum performance boost of 4.3% in few-shot. In the Appendix, RL also outperforms baselines in experiments on long-tail CIFAR-10.

RL contributes to different sample size results. To explore the reasons why RL works for long-tail scenarios, we provide a more detailed and comprehensive evaluation. Specifically, we divide the classes into multiple categories based on their sample size, namely, Many (with more than 100 images), Medium (with 20 to 100 images), and Few (with less than 20 images). Softmax trains the model using cross-entropy and performs well on many-shot classes by mimicking the long-tailed training distribution. However, it fails to perform effectively on medium-shot and few-shot classes, resulting in poor overall performance. In contrast, re-balanced long-tailed methods such as Decouple and Causal strive to achieve a uniform class distribution for better average performance, but this comes at the cost of reduced performance on many-shot classes.

Method	Many	Medium	Few	All
Softmax	46.2	27.5	12.7	31.4
BLS	42.6	39.8	32.7	39.4
LADE	42.6	39.4	32.3	39.2
RIDE	43.1	41.0	33.0	40.3
SADE	40.4	43.2	36.8	40.9
Softmax+RL	46.1	28.0	15.6	32.8
BLS+RL	43.0	40.3	34.8	41.1
LADE+RL	42.8	39.7	35.5	41.8
RIDE+RL	43.1	41.9	36.9	42.1
SADE+RL	41.0	44.3	38.7	42.2
PaCo†	36.1	47.2	33.9	41.2
PaCo+RL †	36.4	47.7	36.6	42.8

Table 3: Comparisons on Places-LT, starting from an ImageNet pre-trained ResNet-152. †denotes models trained with RandAugment [9] for 400 epochs.

Method	Many	Medium	Few	All
Softmax	74.7	66.3	60.0	64.7
BLS	70.9	70.7	70.4	70.6
LADE†	64.4	47.7	34.3	52.3
MiSLAS	71.7	71.5	69.7	70.7
RIDE	71.5	70.0	71.6	71.8
SADE	74.5	72.5	73.0	72.9
Softmax+RL	75.4	67.1	61.1	65.5
BLS+RL	68.8	72.5	75.9	73.1
LADE+RL	64.8	48.9	36.6	73.6
RIDE+RL	71.4	70.9	74.8	73.6
SADE+RL	74.7	73.1	77.8	74.2
PaCo†	69.5	73.4	73.0	73.0
SADE†	75.5	73.7	75.1	74.5
NCL†	72.7	75.6	74.5	74.9
PaCo+RL†	69.6	73.4	75.9	73.6
SADE+RL†	75.7	74.1	77.8	75.3
NCL+RL†	72.5	76.7	77.8	76.5

Table 4: Comparisons on iNaturalist 2018. † denotes models trained with RandAugment [9] for 400 epochs.

Table 2, 4 and 6 demonstrates the significant enhancement in the performance of few- and medium-shot classes achieved by the proposed RL, while maintaining high accuracy for many-shot classes. Moreover, there is a slight improvement observed in the performance of many-shot classes. **RL with different backbone results.** Table 2 shows that RL obtains consistent performance improvements on various backbones. Whether the backbone is CNN-based networks (ResNet, ResNext) or Transformer-based networks (Swin Tiny and Small), RL delivers consistent accuracy gains.

Comparison with other regularization-based methods. Additional experiments were conducted to evaluate and integrate our method with regularization-based methods such as Mixup [47], Weight Balance [2], and MiSLAS [55]. The Mixup stands as a representative method for data augmentation regularization, enhancing model generalization by interpolating between samples. The Weight Balance directly constrains the weights from the classifier through a regularization term, addressing the imbalance by modulating the impact of more frequent classes. The MiSLAS introduces label-aware smoothing as a regularization strategy, aimed at mitigating varying degrees of over-confidence across different classes. Unlike these methods above, our method designs a regularization loss to reduce the uncertainty of the predictions during training

and provide class correlation labels for boosting existing long-tailed methods.

Method	Resnet-50	ResNeXt-50	Swin-T	Swin-S
Softmax	41.6	44.4	42.6	42.9
OLTR	-	46.3	-	-
τ -norm	46.7	49.4	-	-
cRT	47.7	49.9	-	-
LWS	47.3	49.6	-	-
LDAM	-	-	50.6	49.5
RIDE	54.9	56.4	56.3	54.2
Softmax+RL	45.8	47.3	43.7	43.6
τ -norm+RL	47.3	50.5	-	-
cRT+RL	48.5	51.2	-	-
LWS+RL	48.5	50.5	-	-
LDAM+RL	-	-	52.1	50.3
RIDE+RL	56.8	58.7	59.1	55.6

Table 5: Comparisons on ImageNet-LT with different backbones.

Both MiSLAS and Weight Balance, the two regularization methods designed for long-tail distribution, employ a decoupled two-stage training approach. Therefore: a) We compared these methods with a baseline decoupled training method designed for long-tail distribution [19], termed as **Decouple**. b) For a fair comparison, we also combined the decoupled training approach with RL (Decouple + RL), to compare it against MiSLAS and Weight Balance methods. c) For the Mixup results presented in the tables, we also utilized a decoupled training implementation.

Tab. 7 above illustrates that our method outperforms other regularization-based methods under a decoupled two-stage training setting. Additionally, the integration of other regularization-based methods into our method results in further enhancements to performance. This improvement substantiates the orthogonality and potential synergistic relationship between our approach and other regularization-based methods.

Method	CIFAR100-LT	ImageNet-LT	iNaturalist 2018
Decouple	43.8	47.9	67.7
Mixup	45.1	51.5	70.0
MiSLAS	47.0	52.7	71.6
WD + WD & Max	53.6	53.9	70.2
Decouple + RL	50.9	54.5	72.8
MiSLAS & RL	53.1	56.0	74.2
WD & RL + WD & Max & RL	56.8	56.7	73.5

Table 7: Results of comparing and combining our method with other regularization-based methods.

Method	Many	Med	Few	All
Softmax	66.1	37.3	10.6	41.4
OLTR	61.8	41.4	17.6	-
τ -norm	65.7	43.6	17.3	43.2
cRT	64.0	44.8	18.1	43.3
LDAM	61.5	41.7	20.2	42.0
RIDE	69.3	49.3	26.0	48.0
SADE	60.3	50.2	33.7	49.4
Softmax+RL	66.8	37.9	11.2	41.9
LDAM+RL	62.4	42.4	28.3	49.2
RIDE+RL	69.9	50.4	28.1	49.2
SADE+RL	60.4	50.8	35.5	50.7

Table 6: Comparisons on CIFAR-100-LT (IF=100) with different sample sizes.

5 Component Analysis and Ablation Study

The effective of temperature τ . The temperature parameter τ is introduced to soften the previous predictions, allowing the current model to learn from a smoother, more generalized distribution. By adjusting the temperature parameter during training, we can control the trade-off between accuracy and generalization to optimize the current prediction. Higher temperature values lead to better generalization but lower accuracy, while lower temperature values lead to better accuracy but less generalization. In Figure. 5 (a), we show several settings of τ on the CIFAR-100LT (IF=100) and ImageNet-LT, we observe that when the τ set to 2, the models achieve the best performance.

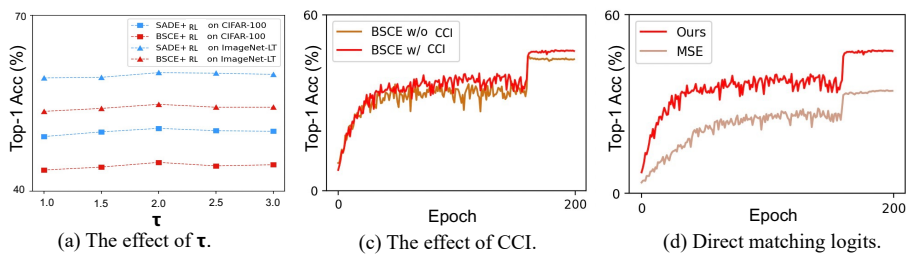


Fig. 5: Figure (a): The effect of temperature τ for different methods and datasets. Figure (b): The effect of our CCI. Figure (c): The effect of directing matching logits.

The effectiveness of our components KR, KS and KC. Our proposed method is fundamentally composed of two primary components: Knowledge Review (KR) and Knowledge Summary (KS). As shown in Tab 8, the KR component is designed to enforce consistency across all categories. As a result, it notably enhances the accuracy of the tail classes, but this comes at the expense of a slight reduction in the accuracy of the head classes. In contrast, KS facilitates learning across all categories by leveraging the inherent feature correlations, compensating for the minor drawbacks introduced by KS, and ensuring an overall improved performance.

Method		ImageNet-LT				iNaturalist 2018	
KR	KS	KC	RIDE	SADE	RIDE	SADE	
-	-	-	56.3	58.8	71.8	72.9	
✓	-	-	58.0	59.7	72.4	73.3	
-	✓	-	58.4	59.3	72.7	73.6	
✓	✓	-	58.6	60.0	72.9	73.8	
✓	✓	✓	59.0	60.2	73.6	74.2	

Table 8: Ablation study on the components of our methods. Comparisons with different component combinations.

The effect of our CCI. The component CCI also plays a key role in the training process. During the learning process, the CCI filters out the probability distribution of incorrect predictions from the output of the previous epoch. It

ensures the distribution of our current prediction to avoid wrong information. In Figure 5 (c), we show top-1 test accuracy of BSCE+RL w/ our CCI and BSCE+RL w/o our CCI on CIFAR-100LT (IF=100). The results demonstrate that our RL with CCI leads to a significant improvement.

Direct matching logits. There is another approach in the KR module to regularize the consistency, such as using Mean Square Error (MSE) to direct matching logits. The object function denotes:

$$\mathcal{L}_{MSE} = \frac{1}{2}(v_{i,t-1} - v_{i,t})^2 \quad (12)$$

If we are in the high-temperature limit, our KR process is equivalent to minimizing Eq. 12, provided the logits are zero-meaned separately for each transfer case [14]. In Figure 5, we visualize the test accuracy based on BSCE with \mathcal{L}_{MSE} on CIFAR-100LT (IF=100). However, we observe it has a rapid decline in results compared with our KR module. Because at lower temperatures, the KR module pays much less attention to matching logits that are much more negative than the average. This has the potential advantage that these logits are almost completely unconstrained by the cost function used to train the model, so they can be very noisy [14].

6 Conclusion

In this paper, we propose Reflective Learning, which is a plug-and-play method for improving long-tailed recognition. It contains three phrases including Knowledge Review: reviewing past predictions during training, Knowledge Summary: summarizing and leveraging the feature relation across classes, and Knowledge Correction: correcting gradient conflict for loss functions. Experimental results on popular benchmarks demonstrate the effectiveness of our approach, consistently outperforming state-of-the-art methods by 1% to 5%. RL seamlessly integrates with existing LTR methods and is compatible with various backbone architectures, making it a practical and versatile solution for improving LTR performance.

Limitation and Future Work. For our proposed reflective learning, the predictions from the model at (t-1)-th epoch are necessary for training at the t-th epoch. When working with large datasets, such as tens of thousands of categories, this can lead to additional memory consumption.

Moreover, In this paper, we have only focused on the application of reflective learning in the domain of long-tail recognition, this idea can be used in other domains (such as large language model, object or action detection, and content generation), but it needs to be combined with the characteristics of the domain to make some unique design with reflective learning, which is also our future research work.

Acknowledgement

This work was supported by the National Natural Science Foundation of China under Grant No.62271034.

References

1. Aimar, E.S., Jonnarth, A., Felsberg, M., Kuhlmann, M.: Balanced product of calibrated experts for long-tailed recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 19967–19977 (2023)
2. Alshammari, S., Wang, Y.X., Ramanan, D., Kong, S.: Long-tailed recognition via weight balancing. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 6897–6907 (2022)
3. Bachman, P., Alsharif, O., Precup, D.: Learning with pseudo-ensembles. *Advances in Neural Information Processing Systems* **27** (2014)
4. Buda, M., Maki, A., Mazurowski, M.A.: A systematic study of the class imbalance problem in convolutional neural networks. *Neural Networks* **106**, 249–259 (2018)
5. Byrd, J., Lipton, Z.: What is the effect of importance weighting in deep learning? In: International Conference on Machine Learning. pp. 872–881. PMLR (2019)
6. Cai, J., Wang, Y., Hwang, J.N.: Ace: Ally complementary experts for solving long-tailed recognition in one-shot. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 112–121 (2021)
7. Cao, K., Wei, C., Gaidon, A., Arechiga, N., Ma, T.: Learning imbalanced datasets with label-distribution-aware margin loss. arXiv preprint arXiv:1906.07413 (2019)
8. Chou, H.P., Chang, S.C., Pan, J.Y., Wei, W., Juan, D.C.: Remix: rebalanced mixup. In: Computer Vision–ECCV 2020 Workshops: Glasgow, UK, August 23–28, 2020, Proceedings, Part VI 16. pp. 95–110. Springer (2020)
9. Cubuk, E.D., Zoph, B., Shlens, J., Le, Q.V.: Randaugment: Practical automated data augmentation with a reduced search space. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops. pp. 702–703 (2020)
10. Cui, J., Zhong, Z., Liu, S., Yu, B., Jia, J.: Parametric contrastive learning. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 715–724 (2021)
11. Cui, Y., Jia, M., Lin, T.Y., Song, Y., Belongie, S.: Class-balanced loss based on effective number of samples. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 9268–9277 (2019)
12. Gao, J., Chen, J., Fu, H., Jiang, Y.G.: Dynamic mixup for multi-label long-tailed food ingredient recognition. *IEEE Transactions on Multimedia* **25**, 4764–4773 (2022)
13. He, Y.Y., Wu, J., Wei, X.S.: Distilling virtual examples for long-tailed recognition. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 235–244 (2021)
14. Hinton, G., Vinyals, O., Dean, J.: Distilling the knowledge in a neural network. arXiv preprint arXiv:1503.02531 (2015)
15. Horn, G.V., Aodha, O.M., Song, Y., Shepard, A., Adam, H., Perona, P., Belongie, S.J.: The inaturalist challenge 2017 dataset. CoRR **abs/1707.06642** (2017), <http://arxiv.org/abs/1707.06642>
16. Japkowicz, N., Stephen, S.: The class imbalance problem: A systematic study. *Intelligent Data Analysis* **6**(5), 429–449 (2002)
17. Jie, Z., Wang, P., Ling, Y., Zhao, B., Wei, Y., Feng, J., Liu, W.: Left-right comparative recurrent model for stereo matching. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition. pp. 3838–3846 (2018)
18. Kang, B., Li, Y., Xie, S., Yuan, Z., Feng, J.: Exploring balanced feature spaces for representation learning. In: International Conference on Learning Representations (2020)

19. Kang, B., Xie, S., Rohrbach, M., Yan, Z., Gordo, A., Feng, J., Kalantidis, Y.: Decoupling representation and classifier for long-tailed recognition. In: 8th International Conference on Learning Representations, ICLR 2020 (2020)
20. Khan, S.H., Hayat, M., Bennamoun, M., Sohel, F.A., Togneri, R.: Cost-sensitive learning of deep feature representations from imbalanced data. *IEEE Transactions on Neural Networks and Learning Systems* **29**(8), 3573–3587 (2017)
21. Krizhevsky, A., Hinton, G., et al.: Learning multiple layers of features from tiny images (2009)
22. Laine, S., Aila, T.: Temporal ensembling for semi-supervised learning. In: International Conference on Learning Representations (2022)
23. Li, J., Tan, Z., Wan, J., Lei, Z., Guo, G.: Nested collaborative learning for long-tailed visual recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 6949–6958 (2022)
24. Lin, T.Y., Goyal, P., Girshick, R., He, K., Dollár, P.: Focal loss for dense object detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence* (2018)
25. Liu, J., Li, W., Sun, Y.: Memory-based jitter: Improving visual recognition on long-tailed data with diversity in memory. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 36, pp. 1720–1728 (2022)
26. Liu, J., Sun, Y., Han, C., Dou, Z., Li, W.: Deep representation learning on long-tailed data: A learnable embedding augmentation perspective. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 2970–2979 (2020)
27. Liu, Y., Yan, G., Ma, F., Zhou, Y., Zhang, F.: SAR ship detection based on explainable evidence learning under intraclass imbalance. *IEEE Transactions on Geoscience and Remote Sensing* **62**, 1–15 (2024)
28. Liu, Y., Zhang, F., Ma, L., Ma, F.: Long-tailed SAR target recognition based on expert network and intraclass resampling. *IEEE Geoscience and Remote Sensing Letters* **20**, 1–5 (2023)
29. Liu, Z., Miao, Z., Zhan, X., Wang, J., Gong, B., Yu, S.X.: Large-scale long-tailed recognition in an open world. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 2537–2546 (2019)
30. Menon, A.K., Jayasumana, S., Rawat, A.S., Jain, H., Veit, A., Kumar, S.: Long-tail learning via logit adjustment. In: International Conference on Learning Representations (2020)
31. Miyato, T., Maeda, S.i., Koyama, M., Ishii, S.: Virtual adversarial training: a regularization method for supervised and semi-supervised learning. *IEEE Transactions on Pattern Analysis and Machine Intelligence* **41**(8), 1979–1993 (2018)
32. Nam, G., Jang, S., Lee, J.: Decoupled training for long-tailed classification with stochastic representations. In: The Eleventh International Conference on Learning Representations. International Conference on Learning Representations (2023)
33. Parisot, S., Esperança, P.M., McDonagh, S., Madarasz, T.J., Yang, Y., Li, Z.: Long-tail recognition via compositional knowledge transfer. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 6939–6948 (2022)
34. Park, C., Yim, J., Jun, E.: Mutual learning for long-tailed recognition. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision. pp. 2675–2684 (2023)
35. Ren, J., Yu, C., Ma, X., Zhao, H., Yi, S., et al.: Balanced meta-softmax for long-tailed visual recognition. *Advances in Neural Information Processing Systems* **33**, 4175–4186 (2020)

36. Sajjadi, M., Javanmardi, M., Tasdizen, T.: Regularization with stochastic transformations and perturbations for deep semi-supervised learning. *Advances in Neural Information Processing Systems* **29** (2016)
37. Sohn, K., Berthelot, D., Carlini, N., Zhang, Z., Zhang, H., Raffel, C.A., Cubuk, E.D., Kurakin, A., Li, C.L.: Fixmatch: Simplifying semi-supervised learning with consistency and confidence. *Advances in Neural Information Processing Systems* **33**, 596–608 (2020)
38. Szegedy, C., Vanhoucke, V., Ioffe, S., Shlens, J., Wojna, Z.: Rethinking the inception architecture for computer vision. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. pp. 2818–2826 (2016)
39. Tarvainen, A., Valpola, H.: Mean teachers are better role models: Weight-averaged consistency targets improve semi-supervised deep learning results. *Advances in Neural Information Processing Systems* **30** (2017)
40. Wang, P., Han, K., Wei, X.S., Zhang, L., Wang, L.: Contrastive learning based hybrid networks for long-tailed image classification. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 943–952 (2021)
41. Wang, P., Han, K., Wei, X.S., Zhang, L., Wang, L.: Contrastive learning based hybrid networks for long-tailed image classification. In: *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 943–952 (2021)
42. Wang, X., Lian, L., Miao, Z., Liu, Z., Yu, S.: Long-tailed recognition by routing diverse distribution-aware experts. In: *International Conference on Learning Representations* (2021)
43. Xiang, L., Ding, G., Han, J.: Learning from multiple experts: Self-paced knowledge distillation for long-tailed classification. In: *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part V 16*. pp. 247–263. Springer (2020)
44. Xie, C., Yuille, A.: Intriguing properties of adversarial training at scale. *arXiv preprint arXiv:1906.03787* (2019)
45. Xu, Y., Li, Y.L., Li, J., Lu, C.: Constructing balance from imbalance for long-tailed image recognition. In: *European Conference on Computer Vision*. pp. 38–56. Springer (2022)
46. Yang, Y., Xu, Z.: Rethinking the value of labels for improving class-imbalanced learning. *Advances in Neural Information Processing Systems* **33**, 19290–19301 (2020)
47. Zhang, H., Cisse, M., Dauphin, Y.N., Lopez-Paz, D.: mixup: Beyond empirical risk minimization. In: *International Conference on Learning Representations* (2018)
48. Zhang, Y., Hooi, B., Hong, L., Feng, J.: Test-agnostic long-tailed recognition by test-time aggregating diverse experts with self-supervision. *arXiv preprint arXiv:2107.09249* (2021)
49. Zhang, Y., Hooi, B., Hong, L., Feng, J.: Self-supervised aggregation of diverse experts for test-agnostic long-tailed recognition. *Advances in Neural Information Processing Systems* **3** (2022)
50. Zhang, Y., Kang, B., Hooi, B., Yan, S., Feng, J.: Deep long-tailed learning: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence* **45**(9), 10795–10816 (2023)
51. Zhang, Z., Xu, L., Peng, D., Rahmani, H., Liu, J.: Diff-tracker: Text-to-image diffusion models are unsupervised trackers. In: *European Conference on Computer Vision*. Springer (2024)
52. Zhao, Q., Dai, Y., Li, H., Hu, W., Zhang, F., Liu, J.: LTGC: Long-tail recognition via leveraging llms-driven generated content. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 19510–19520 (2024)

53. Zhao, Q., Jiang, C., Hu, W., Zhang, F., Liu, J.: MDCS: More diverse experts with consistency self-distillation for long-tailed recognition. In: Proceedings of the IEEE/CVF International Conference on Computer Vision. pp. 11597–11608 (2023)
54. Zhao, Q., Zhang, F., Hu, W., Feng, S., Liu, J.: OHD: An online category-aware framework for learning with noisy labels under long-tailed distribution. IEEE Transactions on Circuits and Systems for Video Technology pp. 3806 – 3818 (2023)
55. Zhong, Z., Cui, J., Liu, S., Jia, J.: Improving calibration for long-tailed recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 16489–16498 (2021)
56. Zhou, B., Cui, Q., Wei, X.S., Chen, Z.M.: BBN: Bilateral-branch network with cumulative learning for long-tailed visual recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 9719–9728 (2020)
57. Zhu, J., Wang, Z., Chen, J., Chen, Y.P.P., Jiang, Y.G.: Balanced contrastive learning for long-tailed visual recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 6908–6917 (2022)