

# Do Text-to-Vis Benchmarks Test Real Use of Visualisations?

Hy Nguyen<sup>1\*</sup>, Xuefei He<sup>1</sup>, Andrew Reeson<sup>2</sup>, Cécile Paris<sup>2</sup>, Josiah Poon<sup>1</sup>,  
and Jonathan K. Kummerfeld<sup>1</sup>

The University of Sydney<sup>1</sup> CSIRO's Data61<sup>2</sup>  
nngu0448@uni . sydney . edu . au\*

## Abstract

Large language models are able to generate code for visualisations in response to user requests. This is a useful application, and an appealing one for NLP research because plots of data provide grounding for language. However, there are relatively few benchmarks, and it is unknown whether those that exist are representative of what people do in practice. This paper aims to answer that question through an empirical study comparing benchmark datasets and code from public repositories. Our findings reveal a substantial gap in datasets, with evaluations not testing the same distribution of chart types, attributes, and the number of actions. The only representative dataset requires modification to become an end-to-end and practical benchmark. This shows that new, more benchmarks are needed to support the development of systems that truly address users' visualisation needs. These observations will guide future data creation, highlighting which features hold genuine significance for users.

## 1 Introduction

Text-to-Vis is the task of receiving a request for a visualisation expressed in human language and some data as input and generating code that will produce the visualisation. A system with this ability would enable faster and more complex data analysis, but there are relatively few benchmark datasets. Those that do exist either focus on generating a single response (Luo et al., 2021; Srinivasan et al., 2021; Chen et al., 2021), or consider dialogue, but with limited flexibility in code (Shao and Nakashole, 2020; Song et al., 2023). Most of these datasets used generated data. The space of code variation was defined by researchers, and researchers were only involved in verifying the data. This raises the question of whether these datasets are representative of real-world use of data visualisations.

In this study, we gathered publicly available code

from the Stack<sup>1</sup> to analyse human preferences in making visualisations using libraries across four programming languages: Python, R, Javascript, and Vega. Since each library has different names for the same visualisation types and properties, we extracted key visualisation code and developed a cross-language mapping for several hundred functions and arguments.<sup>2</sup>

Using this aligned data, we analysed to discover user behaviours when making visualisation and identified similarities and differences between real-world and benchmark datasets. Our analysis considered the chart types, functions called to define properties, and the arguments that modify how those functions behave. We observed that existing benchmarks tend to focus on one aspect of the text-to-vis challenge, including code synthesis, data presentation, or aesthetic attribute adjustment. Additionally, while one dataset shows potential for advancing an end-to-end benchmark, the remaining two diverge significantly from real-world scenarios. This underscores the necessity for new benchmarks that not only reflect the trends identified in our study but also encompass all dimensions of the problem. Only then will we be able to measure our progress on this valuable and challenging task.

## 2 Related Work

Recently, a common approach to creating text-to-visualisation datasets involves the automatic synthesis of visualisations followed by human intervention for annotation (Luo et al., 2021; Shao and Nakashole, 2020; Srinivasan et al., 2021; Song et al., 2023; Chen et al., 2021). Although this approach is straightforward, datasets produced using this method often contain inherent problems. For

<sup>1</sup>A 6TB collection of open source code from GitHub (Kocetkov et al., 2022)

<sup>2</sup>For example, a bar plot is produced with `bar()` and `barh()` in Python, but `barplot()` in R. Our data, code, and mappings are published at <https://github.com/giahy2507/text-to-vis-benchmarks-assessment>.

instance, `nvBench`, the largest benchmark dataset for this task, was synthesized from `Spider` (Yu et al., 2018), a text-to-SQL dataset containing several limitations (Suhr et al., 2020), and was only partially reviewed by novices and experts for quality assurance, resulting in numerous issues (Li et al., 2024). Similarly, `ChartDialog` contains limitations as the data for visualisation were automatically generated. These shortcomings underscore the need for improved methodologies in dataset creation to ensure their validity and usability.

Recent research has prioritized ecological validity to enhance benchmark dataset quality across various domains, aiming to align them with real-world applications (De Vries et al., 2020; Qi et al., 2023; Lu et al., 2023). Ensuring that the data used to train and test models accurately reflects users’ objectives in practical scenarios is crucial. However, achieving ecological validity remains challenging in text-to-vis. Despite efforts in benchmark creation, such as involving humans in the process for `nvBench` and `ChartDialog`, their effectiveness in representing real-world visualisation tasks and user objectives is still being explored.

### 3 Data Collection

Instead of examining user preferences through chart images or relying on experts to comprehend how visualisations are made, our approach involves the analysis of publicly available programming codes specifically designed for creating visualisations such as line, bar, and scatter charts. It means we can have a wide range of samples from different programmers and their preferences when making visualisations. We believe that the analysis can provide a broad understanding of the essential components that are widely used.

We used code files from The Stack<sup>3</sup> to conduct our investigation on four diverse and widely used visualisation libraries. They include `Matplotlib`<sup>4</sup>, `Graphics`<sup>5</sup>, `ChartJS`<sup>6</sup>, and `Vega-Lite`<sup>7</sup>, which were built on top of Python, R, Javascript, and JSON schema, respectively. After downloading, we only selected files containing the initial codes indicative of visualisation library usage (e.g., `import matplotlib.pyplot as plt`). Finally, we used abstract syntax tree (AST) parsers and

<sup>3</sup><https://huggingface.co/datasets/bigcode/the-stack-dedup>

<sup>4</sup><https://matplotlib.org/>

<sup>5</sup><https://www.rdocumentation.org/packages/graphics>

<sup>6</sup><https://www.chartjs.org/docs/latest/>

<sup>7</sup><https://vega.github.io/vega-lite/>

	# samples	Proportion (%)	# functions
<code>nb-Matplotlib</code>	385,338	35.89	6,443,220
<code>py-Matplotlib</code>	464,463	3.5	4,484,368
<code>Graphics</code>	6,721	17.15	53,325
<code>ChartJS</code>	2,714	0.0128	8,847
<code>Vega-Lite</code>	1,093	0.0013	15,664
<code>nvBench</code>	7,241		40,478
<code>ChartDialog</code>	3,284		14,690
<code>PlotCoder</code>	97,706		254,251

Table 1: Statistics of real-world and benchmark data. “Proportion” indicates the proportion of the library’s code in the investigated programming languages. “nb-Matplotlib” indicates code from Jupyter notebooks, while “py-Matplotlib” indicates code from Python files.

Benchmark	Input	Output	Annotation note
<code>nvBench</code>	prompt, data	code, vis	Auto-generated based on a text-to-SQL benchmark
<code>ChartDialog</code>	prompt, data, vis	code, vis	Manually annotated
<code>PlotCoder</code>	prompt, code	code	Auto-extracted

Table 2: Description of benchmark datasets.

heuristics to accurately extract library-related variables, function names, arguments, and explicit values. The details are described in Appendix A, while Table 1 (upper) presents their statistics.

As for benchmark datasets, we examined three publicly available ones, including `nvBench` (Luo et al., 2021), `ChartDialog` (Shao and Nakashole, 2020), and `PlotCoder` (Chen et al., 2021). They vary in settings and scales, as described in Table 1 and 2. While `nvBench` and `ChartDialog` serve as end-to-end text-to-vis benchmarks, involving prompts and plotted data as input as well as visualisation as output, `PlotCoder` is purely a code synthesis dataset, lacking two of these essential components. Appendix B illustrates examples for these datasets.

### 4 Cross-language Mapping Table

To compare the data described in previous sections, we established a cross-language mapping table, based on frequently used parameters. This involved selecting the top 500 frequently used parameters, identifying categories and attributes, and finally, clarifying correctness based on the libraries’ documentation and code execution. Ultimately, it took 40 hours to make the table, comprising 8 categories, 62 attributes, and around 850 parameters across 4 visualisation languages. Figure 1 briefly shows an attribute named “x-axis title,” while details can be found in Appendix C.

Category	axes	
Attribute	x-axis title	
Matplotlib	xlabel   xlabel set_xlabel   xlabel	For a given parameter "A   B", A indicates the function name while B indicates the keyword argument.
Graphics	plot   xlab hist   xlab	
ChartJS	options.scales.x.title   text	A called function plot(xlab="X") containing a parameter "plot xlab"
Vega-lite	encoding.x   title encoding.x.axis   title	
ChartDialog	Not found	

Figure 1: A sample in the cross-language mapping

## 5 Analysis & Discussion

### 5.1 Comparison of chart types

Figure 2 (upper) depicts the distribution of four common plot types across real-world datasets and nvBench<sup>8</sup>. Each dataset shows distinct preferences for specific plot types. The distribution of nvBench, a benchmark based on Vega-Lite grammar, is significantly misaligned with that of Vega-Lite, where the bar chart dominates other types, accounting for over 80%, while the remaining are around 7%.

Figure 2 (lower) depicts the distribution of seven plot types across four Python-based datasets. Generally, the distribution between Matplotlib and PlotCoder shows notable similarity. This trend is attributable to the source for data collection, GitHub. In contrast, ChartDialog showcases a varied array of plot types; however, its distribution differs from that of Matplotlib. Specifically, ChartDialog witnesses a scarcity of scatter plots and an overabundance of pie charts, contours, and stream plots.

These findings imply that nvBench and ChartDialog are not testing the same distribution with real-world data in terms of plot types. As suggestions for future dataset makers, it is crucial to tailor the distribution of chart types according to the specific needs and domains of the intended users. Moreover, given the imbalance in both real-world data and benchmarks, a critical consideration is to conduct separate evaluations focusing specifically on plot types, acknowledging their distinct roles.

### 5.2 Comparison of attributes

Using the cross-language mapping table and parsed data (function names and arguments), we computed the normalized frequency for 62 attributes within each dataset, as shown in Figure 8 located in the

<sup>8</sup>We categorize histograms as bar charts, while polar pie and doughnut charts are grouped as pie charts

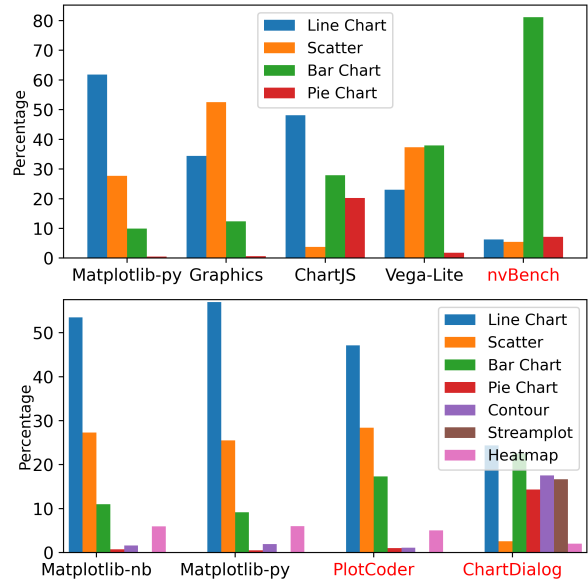


Figure 2: Plot type distribution over 8 datasets.

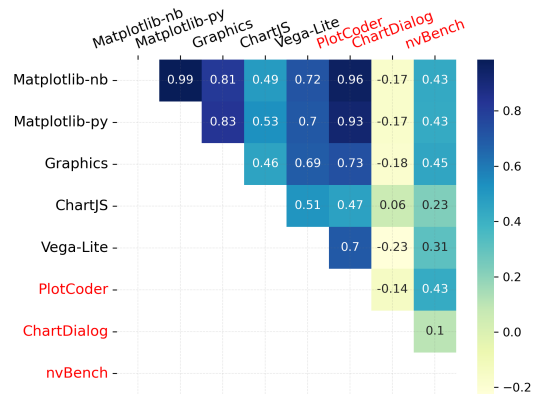


Figure 3: Spearman's rank correlation coefficient in terms of frequent attributes

appendix section. We used these frequencies to determine the Spearman's rank correlation coefficient across eight datasets, as illustrated in Figure 3.

The real-world datasets have a significant correlation, with Spearman's values surpassing 0.7, except for ChartJS, which displays a moderate correlation with coefficients hovering around 0.5. As for the benchmarks, ChartDialog and nvBench show a weak correlation with their direct counterparts, Matplotlib and Vega-Lite, respectively. This means many attributes that were frequently used by end users have not been tested in these benchmarks. These include titles, axes-scale limits, tick labels, opacity, histogram bins, legend visibility, and multiple plots handling, as visualized in Figure 8.

Conversely, PlotCoder demonstrates a strong alignment with real-world data, with Spearman's

values ranging from 0.7 to 0.9. The correlation highlights PlotCoder’s potential as a resource for crafting end-to-end text-to-vis benchmarks. This extension is necessary because PlotCoder lacks plotted data in the input as well as visual output. Moreover, it is an automatically extracted dataset focusing on visualization code. This raises questions about the executability of the code and whether the visual output aligns with the user’s intention after execution.

### 5.3 Comparison of attributes when permitted

Some attributes can only be activated (or permitted) if specific preconditions are met. For instance, the "bar thickness" attribute can be set if the user plots data on a bar chart and adjusts the width parameter. Consequently, these attributes may appear infrequently in the dataset, but users often specify their preferred values. Therefore, analyzing these attributes is crucial for a deeper understanding of end users’ preferences.

In this analysis, we computed the frequency of attributes for a given visualization type or action (e.g. `plt.bar()`). This calculation is applied to each attribute in the mapping table and visualized as a heat map in Figure 9 located in Appendix D. We focus solely on examining this behaviour in Python-based datasets, including Matplotlib-nb, Matplotlib-py, PlotCoder, and ChartDialog. This is because nvBench does not prioritize user intention for modifying aesthetic attributes while others have different characteristics.

The Spearman’s coefficient calculation among these datasets reinforces our previous findings in Section 5.2. Matplotlib-nb, Matplotlib-py, and PlotCoder show significant correlations with Spearman’s scores above 0.8, whereas ChartDialog lacks correlation with scores below 0.1. While attributes such as axes’ scales, edge color, marker size, pie chart characteristics, legend labels, and grid line attributes receive considerable attention in ChartDialog, end users less frequently specify them and often rely on the library’s automatic assignment. Additionally, dataset creators should consider attributes such as histogram bins, pie precision digits, error-bar visibility, and annotation attributes, which are highly demanded by end users.

### 5.4 Comparison of program complexity?

To answer this question, we calculate the average count of distinct visualisation functions and parameters within each code file and present the findings

	No. Funcs	No. Params
py-Matplotlib	6.40	10.61
nb-Matplotlib	6.19	10.54
PlotCoder	4.05	6.03
Graphics	3.20	13.82
ChartJS	6.51	12.08
Vega-Lite	10.73	19.27
nvBench	4.59	10.02

Table 3: Average number of functions and parameters

in Table 3. In this section, we omit ChartDialog because it is a slot-filling dataset, which can not be counted for the number of functions or parameters.

Regarding benchmarks, they differ significantly from their direct counterparts by employing much fewer functions and parameters, around half of the numbers. Across most real-world data, users typically employ a sufficient number of functions and parameters, ranging from 3 to 7 functions and 10 to 14 parameters. The top 7 functions used in Matplotlib-py exemplify this, aiming to plot the data, save figures, assign titles, and adjust legends. The higher figures in the Vega-Lite dataset can be justified by its nature as a visualisation language (not a library built on top of a programming language). These findings can be attributed to the development of benchmark datasets, considering the complexity of the visualisation program.

## 6 Conclusion

In this paper, we analyzed whether text-to-vis benchmarks accurately reflect real-world usage by presenting several analyses on chart types, frequent attributes, and program complexity. Our results show that only one of the three benchmarks is significantly aligned with real-world applications. However, this dataset needs significant modification to be an end-to-end benchmark, which receives prompt and plotted data as input and produces visualization as output. This entails additional efforts such as collecting input data, ensuring code executability, and reviewing visual output, as discussed in Section 5.2. Moreover, we provided insights for future benchmark development, suggesting the evaluation of relevant attributes and challenging charts that better reflect end users’ preferences. We believe that if a system can perform successfully on a benchmark that includes all the cases we observed, it will likely perform well in most real-world scenarios.

## Limitations

This study offers analyses of datasets and acknowledges several limitations. Firstly, our examination was restricted to only four visualisation libraries, each corresponding to a different programming language. This narrow scope may not adequately capture the diversity of applications and use cases within the field. Although we attempted to analyse MatLab code files in The Stack dataset, they are miscategorized in The Stack, processed with the wrong extension.<sup>9</sup> Despite our efforts to clarify this issue by reaching out to the project authors, we have yet to receive a response. Secondly, our investigation is based on public code, mainly representing programmers with different visualisation levels, including novices, practitioners, and experts. If the target users in a visualisation application like Tableau<sup>10</sup>, the level of validity of our research will decrease. Lastly, this study concludes with an analysis and assessment of existing benchmark datasets without proposing solutions. Nevertheless, we believe that the insights and recommendations provided in this work are valuable for any dataset maker and future studies.

## Ethics Statement

The data used in this research can be found publicly in the repositories of the cited papers, GitHub, or HuggingFace. Those who want to use the processed data in our repository will need to follow the terms and conditions of The Stack dataset<sup>11</sup>.

## Acknowledgments

This material is partially supported by the Australian Research Council through a Discovery Early Career Researcher Award and the Commonwealth Scientific and Industrial Research Organisation (CSIRO). We extend our gratitude to the anonymous reviewers for their constructive feedback and valuable advice on our submissions.

## References

Xinyun Chen, Linyuan Gong, Alvin Cheung, and Dawn Song. 2021. Plotcoder: Hierarchical decoding for synthesizing visualization code in programmatic context. In *Proceedings of the 59th Annual Meeting of*

<sup>9</sup><https://huggingface.co/datasets/bigcode/the-stack-dedup/blob/main/programming-languages.json>

<sup>10</sup><https://www.tableau.com/>

<sup>11</sup><https://huggingface.co/datasets/bigcode/the-stack-dedup>

*the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 2169–2181.

Harm De Vries, Dzmitry Bahdanau, and Christopher Manning. 2020. Towards ecologically valid research on language user interfaces. *arXiv preprint arXiv:2007.14435*.

Denis Kocetkov, Raymond Li, LI Jia, Chenghao Mou, Yacine Jernite, Margaret Mitchell, Carlos Muñoz Fernández, Sean Hughes, Thomas Wolf, Dzmitry Bahdanau, et al. 2022. The stack: 3 tb of permissively licensed source code. *Transactions on Machine Learning Research*.

Guozheng Li, Xinyu Wang, Gerile Aodeng, Shunyuan Zheng, Yu Zhang, Chuangxin Ou, Song Wang, and Chi Harold Liu. 2024. Visualization generation with large language models: An evaluation. *arXiv preprint arXiv:2401.11255*.

Xing Han Lu, Siva Reddy, and Harm De Vries. 2023. The statcan dialogue dataset: Retrieving data tables through conversations with genuine intents. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 2791–2821.

Yuyu Luo, Nan Tang, Guoliang Li, Chengliang Chai, Wenbo Li, and Xuedi Qin. 2021. Synthesizing natural language to visualization (nl2vis) benchmarks from nl2sql benchmarks. In *Proceedings of the 2021 International Conference on Management of Data*, pages 1235–1247.

Peng Qi, Nina Du, Christopher D Manning, and Jing Huang. 2023. Pragmaticqa: A dataset for pragmatic question answering in conversations. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 6175–6191.

Yutong Shao and Ndapa Nakashole. 2020. *ChartDialogs: Plotting from Natural Language Instructions*. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3559–3574, Online. Association for Computational Linguistics.

Yuanfeng Song, Xuefang Zhao, and Raymond Chi-Wing Wong. 2023. Marrying dialogue systems with data visualization: Interactive data visualization generation from natural language conversations. *arXiv preprint arXiv:2307.16013*.

Arjun Srinivasan, Nikhila Nyapathy, Bongshin Lee, Steven M Drucker, and John Stasko. 2021. Collecting and characterizing natural language utterances for specifying data visualizations. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, pages 1–10.

Alane Suhr, Ming-Wei Chang, Peter Shaw, and Kenton Lee. 2020. [Exploring unexplored generalization challenges for cross-database semantic parsing](#). In

*Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8372–8388, Online. Association for Computational Linguistics.

Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. 2018. *Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-SQL task*. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3911–3921, Brussels, Belgium. Association for Computational Linguistics.

## A Code Parsing

After obtaining code files for Python and R, we used abstract syntax tree (AST) parsers and heuristics to accurately extract variables, function names, arguments, and explicit values. Subsequently, we tracked the assigned variables to correctly select the functions used in Matplotlib while a list of Graphics’ functions was used to filter for this library.

To extract ChartJS specifications, we initially used an AST parser to extract all JSON data from the Javascript code files. Subsequently, a heuristic selection method was applied to filter JSON containing the three essential components of this library, namely "type," "data," and "options." This is because ChartJS relies on the JSON format as its foundation, serving as the input for executing functions in Javascript.

Vega-Lite can appear in both JSON and Javascript files, as it is a JSON schema visualisation language. Therefore, we utilized the above methods for extraction. In detail, after extracting JSON data from code files, we exclusively extracted snippets containing Vega-Lite schema<sup>12</sup>, which is a mandatory field of vega-lite specification.

After achieving functions, arguments, assigned values, and JSON specifications, targeting the visualisation libraries, we transformed them into a universal format to facilitate more accessible analysis and further processing. For instance, a command in Python `ax.plot(x, color='green', marker='o')`, which plots a line graph of 'x', with marker 'o' and colour 'green', can be parsed into a JSON as `{"func_name": "plot", "args": ["x"], "kargs": {"color": "green", "marker": "o"}}`. An example of translating JSON to universal format can be seen in Figure 4.

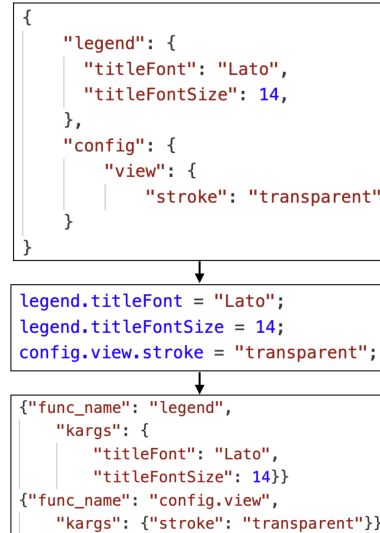


Figure 4: The process of converting JSON to universal format

Regarding `nvBench` and `PlotCoder`, they contain visualisation code in Vega-Lite and Python, so the process was the same as described above. When it comes to `ChartDialog`, a slot-filling dataset, we converted each user’s intent to a function with changed slots as keyword parameters. For example, a user’s intent "smaller radius, increase text size" modifying a pie chart is transformed as universal JSON format `{'func_name': 'pie', 'kargs': {'radius': 'small', 'font_size': 'large'}}`.

## B Benchmarks’ Examples

Figures 5, 6, and 7 illustrate examples for `nbBench`, `ChartDialog`, and `PlotCoder`, respectively.

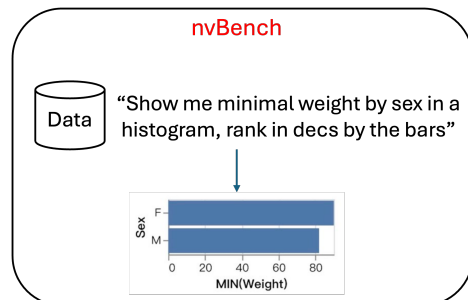


Figure 5: A sample in `nvBench` dataset

## C Cross-language Mapping Table

The procedure for making the cross-language table is as follows. Initially, we compiled the top 100 frequent parameters from the real-world dataset in 4 languages: Matplotlib, Graphics, ChartJS, and

<sup>12</sup>Vega-Lite schema: [v1](#), [v2](#), [v3](#), [v4](#), [v5](#),

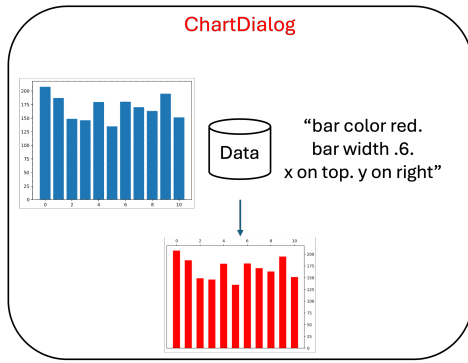


Figure 6: A sample in ChartDialog dataset

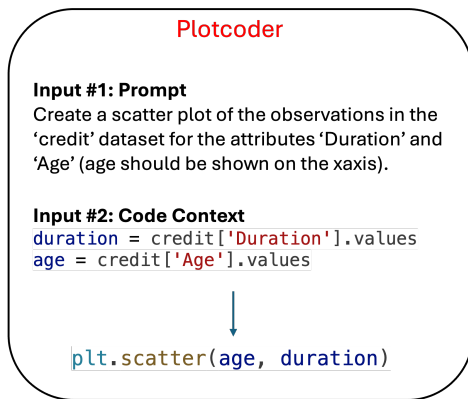


Figure 7: A sample in PlotCoder dataset

Vega-Lite. Subsequently, the parameters were identified into different categories and attributes in a mapping table. The table was further expanded by investigating relevant parameters within the top 500. If a specific language lacked relevant parameters for a given attribute in the top 500 (resulting in a blank cell), we persistently searched through the remaining list until a match was found. Cells where no relevant parameter was identified led to the annotation of “not found.” This identification and verification process includes understanding plotting parameters, identifying them in API documents, asking ChatGPT<sup>13</sup> for explanations and relevant parameters, and executing example codes.

Due to the length, we only include a part of the table in Table 4. The whole one can be found in our repository at <https://github.com/giahy2507/text-to-vis-benchmarks-assessment>.

## D Calculation for heat map figures

Figure 8 shows heat maps of the most common visualization attributes over 7 datasets, where the more intense green colour indicates a higher per-

<sup>13</sup><https://chat.openai.com> <https://bard.google.com/chat>

Category	Attribute
Axes	x-title, y-title, x-y-title-fontsize, x-y-title-color, x-y-lim, x-y-ticks-labels, x-y-ticks-labels-color, x-y-ticks-labels-rotation, x-y-scale, x-y-ticks-fontsize, x-axis-ticks-visible, y-axis-ticks-visible, x-y-scale-position, invert-x-y-axis
Data Appearance	filled-color, edge-color, opacity, linewidth, markersize, linestyle, line-capstyle, markerstyle, bar-thickness, bar-data-stacking, hist-bins, pie-explode, pie-label-distance, pie-percentage-distance, pie-precision-digits, pie-radius, errbar-cap-size, errbar-cap-thick, errbar-color, errbar-visible
Annotation	ann-text/label, ann-fontsize, ann-possition, ann-font
Main title	title, title-fontsize, title-color, title-position, subtitle, subtitle-fontsize
Legend	legend-title, legend-fontsize, legend-position, legend-labels, legend-labels-color, legend-is-display
Grid	grid-visible, grid-color, grid-linestyle, grid-linewidth
Format	size, dpi, saving-format
Other	bounding-box/border, background, margin/padding, multiple-plots

Table 4: Categories and Attributes in cross-language mapping table

centage of usage within the dataset. The calculation for each attribute is  $k/n$ , where:

- $k$  is the number of times that attribute’s arguments are specified
- $n$  is the number of times that all arguments are specified

As for the heat map in Figure 9, there are two cases influencing different levels. For attributes impacting the program level, such as title, x-axis title, and x-y tick labels, the percentage is derived from how frequently a program includes arguments for a specific attribute. Conversely, for local attributes affecting the function level, like filled colour, opacity, and bar thickness, the percentage is calculated based on the frequency of functions containing arguments for the given attribute. The calculation is as follows. Let

- $k$  is the number of times that attribute’s arguments are specified.  $p$  is the number of times that attribute’s functions are used
- $z$  represents the total number of programs in the dataset, while  $g$  denotes the number of programs in which the attribute is utilized (any of the attribute arguments is used).

While a figure for a given program-level attribute is  $g/z$ , that for function-level one is  $k/p$ .

Attribute	Matplotlib-nb	Matplotlib-py	PlotCoder	ChDialog	Graphics	CharUS	Vega-Lite	nbBench
x-title	8.2	6.9	12.8	0.0	5.9	1.5	6.3	45.8
y-title	8.3	7.2	12.7	0.0	5.6	1.8	6.4	45.8
x-y-title-fontsize	2.6	2.2	2.4	0.0	0.7	0.3	0.5	0.0
x-y-title-color	0.1	0.2	0.1	0.0	0.0	0.5	0.2	0.0
x-y-lim	2.3	3.5	1.5	0.0	5.6	6.4	6.0	0.0
x-y-ticks-labels	3.0	3.4	2.4	0.0	3.3	1.3	2.5	0.0
x-y-ticks-labels-color	0.1	0.1	0.0	0.0	0.1	0.6	0.3	0.0
x-y-ticks-labels-rotation	0.7	0.5	0.9	0.0	1.3	0.4	1.3	0.0
x-y-scale	0.3	0.4	0.3	11.4	0.3	1.9	0.8	0.0
x-y-ticks-fontsize	0.8	1.0	0.4	0.0	1.1	0.8	0.6	0.0
x-axis-ticks-visible	0.9	1.3	0.7	0.0	0.9	1.4	0.5	0.0
y-axis-ticks-visible	0.6	1.0	0.4	0.0	0.6	1.6	0.5	0.0
x-y-scale-position	0.2	0.3	0.1	13.4	1.8	0.3	0.5	0.0
invert-x-y-axis	0.1	0.1	0.0	7.9	0.0	0.1	0.2	0.0
filled-color	11.2	11.7	10.2	6.1	15.3	21.5	22.8	4.4
edge-color	0.6	0.7	0.6	3.5	1.2	13.9	1.5	0.0
opacity	2.4	2.4	2.3	0.0	0.0	0.0	4.6	0.0
linewidth	2.5	3.2	2.3	6.7	5.9	5.5	3.3	0.0
markersize	1.7	1.9	2.0	3.0	2.0	2.3	1.6	0.0
linestyle	2.9	3.3	2.2	2.9	4.9	0.8	0.7	3.1
line-capstyle	0.0	0.0	0.0	0.0	0.0	0.4	0.0	0.0
markerstyle	3.5	3.6	3.0	1.8	5.3	0.2	0.4	0.9
bar-thickness	0.4	0.5	0.5	3.1	0.1	0.5	0.1	0.0
bar-data-stacking	0.0	0.1	0.0	0.0	0.2	1.2	0.4	0.0
hist-bins	1.0	0.6	2.7	0.4	0.8	0.0	1.5	0.0
pie-explode	0.1	0.0	0.1	1.4	0.0	0.0	0.0	0.0
pie-label-distance	0.0	0.0	0.0	2.5	0.0	0.0	0.0	0.0
pie-percentage-distance	0.0	0.0	0.0	2.6	0.0	0.0	0.0	0.0
pie-precision-digits	0.1	0.1	0.3	1.4	0.0	0.0	0.0	0.0
pie-radius	0.0	0.0	0.0	2.9	0.0	0.0	0.1	0.0
errbar-cap-size	0.1	0.1	0.0	3.0	0.3	0.0	0.0	0.0
errbar-cap-thick	0.0	0.0	0.0	2.4	0.0	0.0	0.0	0.0
errbar-color	0.0	0.1	0.0	1.8	0.2	0.0	0.0	0.0
errbar-visible	0.4	0.5	0.1	1.6	0.3	0.0	0.0	0.0
ann-text-label	0.5	0.5	0.2	0.0	3.9	0.2	2.0	0.0
ann-fontsize	0.7	1.0	0.2	0.0	2.8	0.1	0.8	0.0
ann-position	0.9	1.6	0.3	0.0	2.9	0.2	3.2	0.0
ann-font	0.1	0.2	0.0	0.0	0.7	0.1	0.7	0.0
title	8.5	6.7	11.5	0.0	5.6	5.7	3.4	0.0
title-fontsize	1.2	0.8	1.1	0.0	0.5	1.0	0.6	0.0
title-color	0.0	0.0	0.0	0.0	0.0	0.5	0.4	0.0
title-position	0.1	0.1	0.0	0.0	0.0	0.1	0.4	0.0
subtitle	0.4	0.7	0.5	0.0	0.3	0.0	0.4	0.0
subtitle-fontsize	0.2	0.2	0.2	0.0	0.1	0.0	0.1	0.0
legend-title	0.1	0.1	0.0	0.0	0.2	0.0	1.1	0.0
legend-fontsize	0.5	0.5	0.2	0.0	0.8	0.8	0.5	0.0
legend-position	2.3	2.4	1.9	0.0	3.0	1.6	1.5	0.0
legend-labels	7.9	7.3	5.8	3.9	1.5	9.5	1.0	0.0
legend-labels-color	0.0	0.0	0.0	0.0	0.1	0.6	0.2	0.0
legend-is-display	5.0	4.5	4.4	0.0	2.0	4.3	0.0	0.0
grid-visible	0.7	0.8	0.7	0.0	0.2	3.5	1.8	0.0
grid-color	0.1	0.2	0.1	5.0	0.0	1.8	0.0	0.0
grid-linestyle	0.2	0.2	0.1	4.9	0.0	1.7	0.1	0.0
grid-linewidth	0.1	0.1	0.0	6.4	0.0	0.2	0.0	0.0
size	8.3	5.1	7.2	0.0	2.6	0.0	14.7	0.0
dpi	0.9	1.6	0.3	0.0	0.5	0.0	0.0	0.0
saving-format	0.2	0.5	0.1	0.0	1.8	0.0	0.0	0.0
bounding-box-border	0.1	0.3	0.2	0.0	1.2	0.0	0.0	0.0
background	0.1	0.1	0.0	0.0	0.8	0.0	0.6	0.0
margin-padding	3.0	5.1	1.7	0.0	3.0	2.9	0.9	0.0
multiple-plots	2.8	2.6	2.4	0.0	1.8	0.0	2.0	0.0

Figure 8: Heat map of the most frequent aesthetic attributes over 7 datasets. The attributes are classified by different categories with colours, such as x and y axes, data appearance, annotation, title and subtitle, legend, grid, figure format, and others.

Attribute	Matplotlib-nb	Matplotlib-py	PlotCoder	ChDialog
x-title	46.3	29.9	15.0	0.0
y-title	46.0	30.0	15.0	0.0
x-y-title-fontsize	7.8	4.7	1.5	0.0
x-y-title-color	0.8	0.5	0.1	0.0
x-y-lim	7.2	6.9	0.9	0.0
x-y-ticks-labels	12.4	8.7	1.9	0.0
x-y-ticks-labels-color	0.4	0.4	0.0	0.0
x-y-ticks-labels-rotation	5.6	2.5	1.1	0.0
x-y-scale	2.3	1.8	0.4	27.6
x-y-ticks-fontsize	3.3	2.7	0.3	0.0
x-axis-ticks-visible	0.0	12.0	0.0	0.0
y-axis-ticks-visible	0.0	8.6	0.0	0.0
x-y-scale-position	0.9	1.5	0.0	21.2
invert-x-y-axis	0.0	0.7	0.0	38.2
filled-color	33.6	39.3	23.5	29.5
edge-color	2.3	2.7	1.5	13.2
opacity	8.7	9.1	6.2	0.0
linewidth	10.8	14.5	6.7	20.4
markersize	9.5	11.7	7.3	26.4
linestyle	6.3	7.6	5.4	16.6
line-capstyle	0.0	100.0	0.0	0.0
markerstyle	7.6	6.6	5.3	16.1
bar-thickness	40.2	55.0	31.2	36.4
bar-data-stacking	5.1	9.5	1.9	0.0
hist-bins	72.8	77.9	62.1	44.0
pie-explode	36.3	29.7	44.6	23.2
pie-label-distance	4.0	5.1	3.1	41.1
pie-percentage-distance	6.3	7.5	1.4	43.1
pie-precision-digits	74.2	65.1	77.1	22.6
pie-radius	7.8	9.4	5.4	47.4
errbar-cap-size	24.5	23.5	6.0	15.9
errbar-cap-thick	7.4	7.2	0.9	12.8
errbar-color	11.3	15.3	6.9	9.7
errbar-visible	100.0	38.1	100.0	8.4
ann-text-label	33.6	26.1	34.9	0.0
ann-fontsize	51.1	47.4	36.4	0.0
ann-position	63.6	76.7	43.8	0.0
ann-font	13.2	14.0	6.9	0.0
title	44.2	26.6	12.5	0.0
title-fontsize	6.7	3.3	1.2	0.0
title-color	0.3	0.1	0.0	0.0
title-position	0.3	0.2	0.0	0.0
subtitle	3.7	3.7	0.5	0.0
subtitle-fontsize	1.6	1.2	0.2	0.0
legend-title	0.7	0.5	0.1	0.0
legend-fontsize	3.4	2.2	0.2	0.0
legend-position	14.9	2.1	2.5	0.0
legend-labels	36.0	16.8	16.9	53.2
legend-labels-color	0.0	0.0	0.0	0.0
legend-is-display	79.5	40.3	8.8	0.0
grid-visible	4.5	3.1	0.9	0.0
grid-color	0.7	0.8	0.1	43.3
grid-linestyle	1.0	0.8	0.1	43.2
grid-linewidth	0.5	0.5	0.0	58.3
size	50.1	24.2	8.7	0.0
dpi	5.5	6.4	0.4	0.0
saving-format	1.1	1.2	0.1	0.0
bounding-box-border	0.1	0.1	0.0	0.0
background	0.5	0.3	0.0	0.0
margin-padding	6.7	8.6	0.6	0.0
multiple-plots	70.2	22.9	8.4	0.0

Figure 9: Heat map of attributes that the user often specifies values when permitted.



Category	Attribute	Matplotlib	R	ChartJS	Vega-Lite	ChartDialog
x-y-axis	lim	add_subplotxlim setxlim axesxlim set_xlimleft set_xlimright xlimleft xlimright xlimxmin xlimxmax set_xlimxmin set_xlimxmax add_subplotylim setylim axesylim set_ylimbottom set_ylimtop ylimbottom ylimtop ylimlymin ylimlymax set_ylimlymin set_ylimlymax	plotxlim histxlim barplotxlim plot.windowxlim plot.defaultxlim matplotxlim boxplotxlim curvelxlim pointxlim linesxlim barplotylim boxplotylim histylim linesylim matplotylim pointylim plot.windowylim plot.defaultylim	options/scales/xAxes/ticks/beginAtZero options/scales/xAxes/ticks/suggestedMax options/scales/xAxes/ticks/lmin options/scales/xAxes/ticks/lmax options/scales/x/beginAtZero options/scales/x/lmin options/scales/x/lmax options/scales/yAxes/ticks/beginAtZero options/scales/yAxes/ticks/suggestedMax options/scales/yAxes/ticks/lmin options/scales/yAxes/ticks/lmax	encoding/x/scale/domain encoding/x/scale/domain/selection encoding/y/scale/domain encoding/y/scale/domain/selection encoding/y/scale/domain/param	Not found
		xscalevalue set_xscalevalue yscalevalue	plotlog lineslog boxplotlog	options/scales/xAxes/type options/scales/x/type options/scales/yAxes/type options/scales/y/type	encoding/x/scale/type encoding/y/scale/type	plotx_axis_scale contourlx_axis_scale barx_axis_scale scatterlx_axis_scale plotly_axis_scale contourly_axis_scale barly_axis_scale scatterly_axis_scale
data appearance	color	plotcolor plotc scattercolor scatterc plotfmt=color axvlinecolor axhlinecolor barcolor barhcolor fill_betweencolor histcolor errorbarcolor contourcolors set_facecolorcolor vlinescolor hlinescolor Circlecolor Line2Dcolor axvspancolor quivercolor pielcolors arrowcolor textcolor annotatecolor	linescol plotcol pointscolor ablinecolor barplotcol histcol polygoncolor barplotcol rectcol segmentscolor boxplotcol imagecolor curvelcolor pielcolor matplotcol contourcolor stripchartcol textcolor mtextcolor	data/datasets/background/Color data/datasets/point/Background/Color options/plugins/data/labels/color data/datasets/point/Color data/datasets/stroke/Color options/elements/line/background/Color options/plugins/crosshair/line/color options/elements/point/background/Color data/datasets/point/Stroke/Color options/plugins/data/labels/color	encoding/color/scale/range encoding/color/value encoding/color/aggregate markfill markcolor encoding/color/scale/scheme encoding/color/sort config/markcolor markcolor/stops/offset markcolor/stops/color encoding/color/type	barbar_face_color histbar_face_color plotline_color plotmarker_face_color scattermarker_face_color
		plotfmt=markerstyle plotmarker scattermarker errorbarmarker	points/pch plotpch legendpch lines/pch pairs/pch matplotpch stripchartpch par/pch	data/datasets/point/Style	encoding/shape/type encoding/shape/value	plotmarker_type scattermarker_type
data appearance	bar-thickness	barwidth barheight	barplotwidth	data/datasets/bar/Percentage data/datasets/maxBarThickness data/datasets/bar/Thickness data/datasets/bar/Width options/barThickness	markwidth markheight	barbar_height barbar_width
data appearance	hist-bins	histbins	histbreaks	Not found	encoding/x/bin encoding/x/bin/step encoding/x/bin/maxbins encoding/y/bin/maxbins encoding/x/bin/step	histnumber_of_bins
title	title	titellabel set_titellabel settitle set_titellabel	plotmain hist/main title/main barplotmain boxplotmain pielmain image/main matplotmain pairs/main plot.default/main curvelmain	options/title/display options/title/text options/plugins/title/display options/plugins/title/text options/title	title/title title/text	Not found

Table 5: Details of the cross-language mapping table for 7 attributes over 3 categories. Each parameter in attributes comprises two parts, function name and argument name, separated by “|”.