

Self-Supervised Learning for Text Recognition: A Critical Survey

Carlos Penarrubia, Jose J. Valero-Mas[†] and Jorge Calvo-Zaragoza[†]

Pattern Recognition and Artificial Intelligence Group, University of Alicante, Alicante, Spain.

*Corresponding author(s). E-mail(s): carlos.penarrubia@ua.es;

Contributing authors: jjvalero@dlsi.ua.es; jcalvo@dlsi.ua.es;

[†]These authors contributed equally to this work.

Abstract

Text Recognition (TR) refers to the research area that focuses on retrieving textual information from images, a topic that has seen significant advancements in the last decade due to the use of Deep Neural Networks (DNN). However, these solutions often necessitate vast amounts of manually labeled or synthetic data. Addressing this challenge, Self-Supervised Learning (SSL) has gained attention by utilizing large datasets of unlabeled data to train DNN, thereby generating meaningful and robust representations. Although SSL was initially overlooked in TR because of its unique characteristics, recent years have witnessed a surge in the development of SSL methods specifically for this field. This rapid development, however, has led to many methods being explored independently, without taking previous efforts in methodology or comparison into account, thereby hindering progress in the field of research. This paper, therefore, seeks to consolidate the use of SSL in the field of TR, offering a critical and comprehensive overview of the current state of the art. We will review and analyze the existing methods, compare their results, and highlight inconsistencies in the current literature. This thorough analysis aims to provide general insights into the field, propose standardizations, identify new research directions, and foster its proper development.

Keywords: Text Recognition, Self-Supervised Learning, Scene Text Recognition, Handwritten Text Recognition.

1 Introduction

Text Recognition (TR) is the research area within computer vision that involves automatically recognizing the text present in a given image (Sharma et al, 2020). This field is crucial for automatically retrieving textual information from our environment through optical systems and digital image processing. Considering the nature of the images, TR is broadly divided into two main branches: Scene Text Recognition (STR) and Handwritten

Text Recognition (HTR). STR focuses on recognizing text in natural scenes (Chen et al, 2021a), such as logo texts (Li et al, 2022; Hubenthal and Kumar, 2023), billboards (Yu and Zhang, 2021), or shop fronts (Zhang et al, 2020), while HTR deals with recognizing text from handwritten documents, such as historical manuscripts (Narang et al, 2020; AlKendi et al, 2024) and personal notes in electronic devices (Bezerra et al, 2017; Ghosh et al, 2022).

In the last decade, with the emergence of Deep Neural Networks (DNN) (Krizhevsky et al, 2012; Dong et al, 2021), there has been significant development and enhancement of capabilities in TR (Khan et al, 2021; Long et al, 2021; Ansari et al, 2022). This increase has also been possible thanks to the creation of large labeled datasets (Nikitha et al, 2020). However, obtaining manually labeled data requires significant resources and time (Nikolaidou et al, 2022), considering that each specific domain typically requires several datasets for training and benchmarking (Zhou et al, 2022). As an alternative, tools for synthetic data generation have been developed, but this kind of data is not as effective as the real one, since there is always a domain shift that limits the performance of models in real environments (Zhang et al, 2019c; Kang et al, 2020b; Baek et al, 2021).

To alleviate these problems, different solutions have emerged such as data augmentation (Luo et al, 2020; Atienza, 2021), Semi-Supervised Learning (Liu et al, 2020; Gao et al, 2021; Aberdam et al, 2022), or Self-Supervised Learning (SSL), which constitutes the focus of this work. SSL represents an unsupervised learning paradigm that has gained much attention and popularity due to its ability to learn general and meaningful representations from unlabeled data (Ozbulak et al, 2023). This is achieved by employing what is termed a “pretext task”, which consists of leveraging collections of unlabeled data to train DNN in a supervised manner (Balestriero et al, 2023). This supervision is done by automatically creating labels for the originally unlabeled data (Jing and Tian, 2020).

Due to its remarkable success in the related field of natural language processing (Qiu et al, 2020), SSL has been increasingly applied in the area of computer vision. There, the main research area has been that of image classification, where SSL has led to great advances in the recognition capabilities (Balestriero et al, 2023). However, SSL took longer to be explored in TR mainly because of its particular formulation: the output is a sequence and not a single category, which prevents, or limits to some extent, the application of many SSL methods developed for image classification. This can be supported by the fact that, while for image classification there is a sustained development of methods from 2015 (Agrawal et al, 2015; Wang and Gupta, 2015; Doersch et al, 2015;

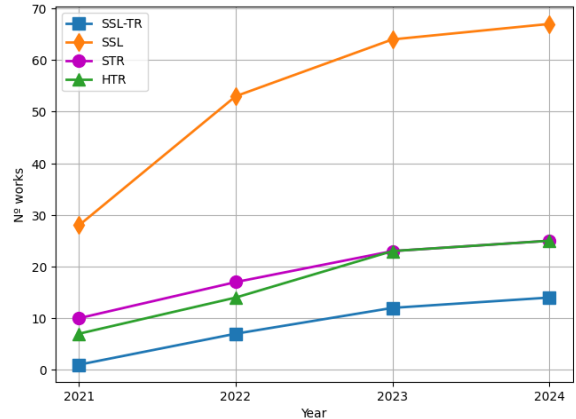


Fig. 1: Cumulative number of methodological contributions for SSL, HTR, STR and SSL-TR (from the first SSL-TR method (Aberdam et al, 2021)).

Radford et al, 2015), the first SSL method for TR was proposed in 2021 (Aberdam et al, 2021), as shown in Fig. 2.

More recently, there has been an explosion of development of SSL for TR. As shown in Fig. 1, since the first SSL-TR method, the development of new ones shows a similar pace to that of SSL, STR and HTR fields. However, this rapid development in an emerging field has caused many strategies to have been explored in parallel, without taking into account previous or simultaneous efforts, and making it difficult to establish an appropriate comparison to determine the state of the art of the field. Furthermore, recent surveys of both TR (Chen et al, 2021a; Long et al, 2021; Naiemi et al, 2022; Gupta and Jalal, 2022; Ansari et al, 2022; Wang et al, 2023; AlKendi et al, 2024) and SSL (Liu et al, 2021b; Albelwi, 2022; Balestriero et al, 2023; Ozbulak et al, 2023) do not collect these, thereby preventing the research community to leverage the contributions and benefits demonstrated in works exploring SSL for TR.

This article arises from the need to compile and organize all the SSL methodologies devised for TR. We aim to summarize the development of this field, describing the main rationale behind each method, highlighting the strengths and weaknesses, and properly organizing the field within a modern SSL taxonomy. Furthermore, another key contribution of this work is that it compares the performance of all strategies and points out

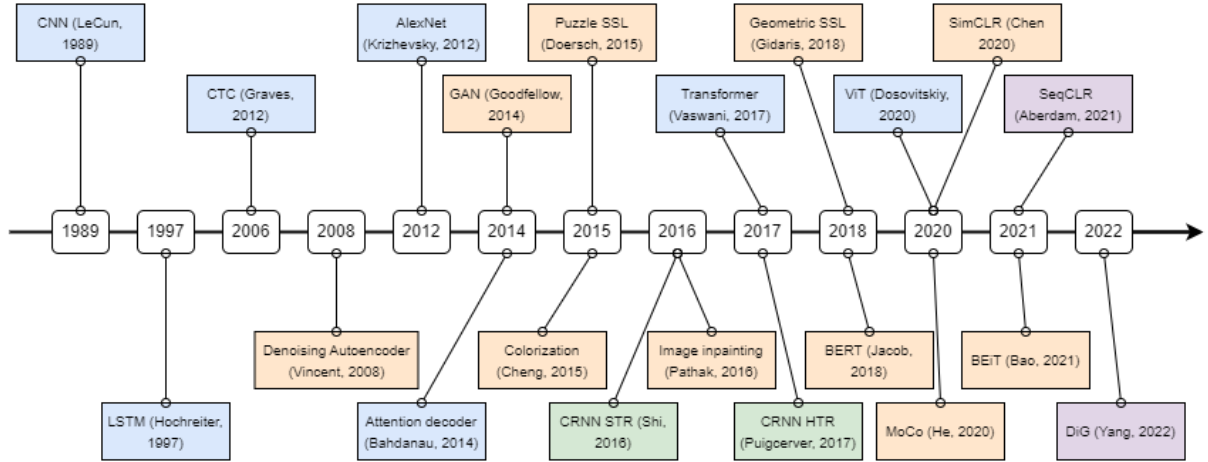


Fig. 2: Timeline with relevant contributions within the context of this survey, including milestones related to Deep Learning (blue boxes), Text Recognition (green boxes), Self-Supervised Learning (orange boxes), and Self-Supervised Learning in Text Recognition (purple boxes).

the existing inconsistencies, exposing the differences and allowing a better understanding of these comparisons. Therefore, as this field is still in its early stages, this paper also highlights the inconsistencies and errors resulting from the lack of standardizations. These issues, accentuated by the rapid development, indicate that such protocols have not been properly established and may lead to partial or misleading conclusions. This analysis will serve to draw precise conclusions about SSL for TR, study solutions and standardizations for this emerging field, and identify new lines of research that address the needs discussed throughout the article. In short, the present work provides an integral and critical view of the current state of SSL for TR, facilitating a better understanding and encouraging the formal development of this field to create more robust and effective methods in the future.

The remainder of the work continues as follows: a general formulation of TR is provided in Section 2, along with an outline of the most common DNN architectures considered for this purpose; the existing SSL methodologies for TR are categorized and explained in detail in Section 3; then, Section 4 introduces the different approaches for both training and evaluating these models; after that, Section 5 compares and deeply analyzes the results obtained by the existing works in the related literature; finally, we conclude the work in

Section 6, identifying current trends and future directions for SSL in TR.

2 Fundamentals of Text Recognition

Before delving into the main use of SSL for TR, we first outline in this section the core principles behind TR approaches. More precisely, we will provide a formal definition of the task and describe the common DNN employed to address it.

2.1 Problem Formulation

Text recognition, whether for STR or HTR, involves decoding text images into their corresponding symbolic representations. Typically, these are sequences of characters (strings).

Formally, for an image $i \in \mathcal{I}$ with $\mathcal{I} \in \mathbb{R}^{c \times H \times W}$, where c is the number of channels, H is the height, and W is the width, the goal is to retrieve the sequence $\mathbf{s} = [s_1, \dots, s_{|\mathbf{s}|}] \in \Sigma^*$, with Σ representing the alphabet. Then, the recognition problem can be formalized as predicting the most probable string $\hat{\mathbf{s}}$ given the image i :

$$\hat{\mathbf{s}} = \arg \max_{\mathbf{s} \in \Sigma^*} P(\mathbf{s}|i) \quad (1)$$

Finding $\hat{\mathbf{s}}$ according to Eq. 1 is known to be NP-hard (De la Higuera and Oncina, 2014). Instead, practical solutions to TR approximate this probability. While historically addressed in

different ways, the current state of the art for this challenge is defined by the so-called *end-to-end* formulation, which does not break it down into several steps. Instead, there is a single model that directly decodes a string from a given input image (Shi et al, 2016a). It must be noted, however, that TR pipelines often comprise pre-processing (e.g., image enhancement, distortion correction, etc.) and/or post-processing (e.g., rescoring based on language models) stages to improve overall performance. Nevertheless, these processes are not discussed in this survey as they are outside the scope of the SSL perspective.

To approximate Eq. 1, modern approaches for TR are mostly based on DNN, which learn from a dataset $\mathcal{D} \subset \mathcal{I} \times \Sigma^*$. The neural architectures considered state-of-the-art for this purpose are described below.

2.2 Neural architectures for TR

In order to better understand how the reviewed SSL methods operate, it is necessary to know the basic approach of TR methods. In this section, we specifically focus on the set of approaches for TR that are considered in the SSL-TR literature. We refer the reader to STR and HTR literature for more specific architectures of each task (Ansari et al, 2022; Wang et al, 2023).

Broadly speaking, the state of the art for TR considers the use of encoder-decoder architectures (see Fig. 3). Next, we break down this architecture into the encoder and decoder modules.

2.2.1 Encoder

Given an input image i , the encoder $f(\cdot)$ is responsible for extracting the sequence of features $\mathbf{r} = [r_1, \dots, r_{|\mathbf{r}|}]$, where $r \in \mathbb{R}^T$ and T is the feature embedding size. In the literature two main architectures are typically used: (i) those based on Convolutional Recurrent Neural Networks (CRNN) (Shi et al, 2016a; Puigcerver, 2017); and (ii) those based on the Vision Transformers (ViT) (Dosovitskiy et al, 2020):

- **CRNN.** In this type of encoder, a Convolutional Neural Network (CNN) visual feature extractor (LeCun et al, 1989) $\text{cnn} : \mathbb{R}^{c \times H \times W} \rightarrow \mathbb{R}^{c' \times H' \times W'}$ learns the visual characteristics of the images, where c' is the number of feature maps of size $H' \times W'$. Thrn, a map-to-sequence

operation $\text{mts} : \mathbb{R}^{c' \times H' \times W'} \rightarrow \mathbb{R}^{W' \times (c' \cdot H')}$ reshapes the features into a sequence of so-called frames. Finally, a Recurrent Neural Network (RNN) (Sherstinsky, 2020) $\text{rnn} : \mathbb{R}^{W' \times (c' \cdot H')} \rightarrow \mathbb{R}^{W' \times T}$, where T is the output feature size, interprets the sequence of frames, leading to the final representation $\mathbf{r} = [r_1, \dots, r_{W'}]$. In this case, the encoder can be expressed as $f(\cdot) = \text{rnn}(\text{mts}(\text{cnn}(\cdot)))$

- **ViT.** This encoder is based on the Transformer architecture (Vaswani et al, 2017). It splits the input image into a sequence of non-overlapping patches of size $H' \times W'$, then linearly embeds and adds a positional embedding to each, leading to $\mathbf{p}_0 = [p_{0_1}, \dots, p_{0_n}]$, where $n = (W \cdot H)/(W' \cdot H')$ and $p \in \mathbb{R}^T$. This series of embedded patches are processed by L Transformer blocks. Each block consists of a Normalization Layer (NL) (Ba et al, 2016), Multi-Head Self-Attention (MSA), Multi-Layer Perceptron (MLP), and residual connections (He et al, 2016). Then, the final representation $\mathbf{r} = [r_1, \dots, r_n]$ is computed as:

$$\begin{aligned} \mathbf{a}_l &= \text{MSA}(\text{NL}(\mathbf{p}_{l-1})) + \mathbf{p}_{l-1}, & l = 1, \dots, L \\ \mathbf{p}_l &= \text{MLP}(\text{NL}(\mathbf{a}_l)) + \mathbf{a}_l, & l = 1, \dots, L \\ \mathbf{r} &= \mathbf{p}_L \end{aligned} \tag{2}$$

2.2.2 Decoder

As depicted in Fig. 3, given a sequence of feature representation \mathbf{r} , the decoder $d(\cdot)$ must retrieve the sequence of characters $\mathbf{s} = [s_1, \dots, s_{|\mathbf{s}|}] \in \Sigma^*$. In the literature, there are three main decoders: that based on the Connectionist Temporal Classification (CTC) function (Graves et al, 2006), the Attention decoder (Att) (Bahdanau et al, 2014; Shi et al, 2016b; Cheng et al, 2017), and the Transformer Decoder (TD) (Vaswani et al, 2017). Typically, CTC and Att are the common decoders for the CRNN encoder, with TD more typically employed with ViT. However, there have been recent works that hybridize these architectures (Lee et al, 2020; Diaz et al, 2021), showing the effectiveness of the different combinations. Each of these decoders works as follows:

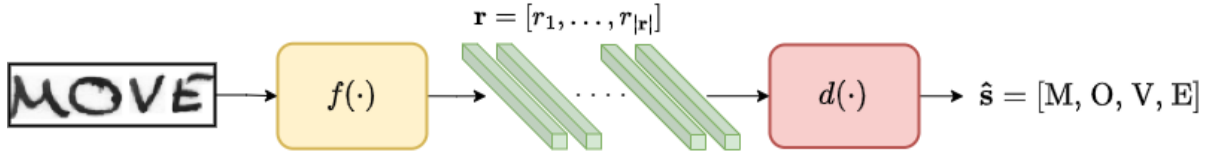


Fig. 3: Encoder-decoder pipeline for TR. The encoder $f(\cdot)$ produces the sequence of features representations \mathbf{r} , while the decoder $d(\cdot)$ produces the sequence of predicted symbols $\hat{\mathbf{s}}$.

- **CTC.** Although in the literature CTC is often referred to as a decoder, strictly speaking it is a training procedure (Graves et al, 2006). CTC addresses the challenge of aligning variable-length input sequences (\mathbf{r}) with variable-length output sequences (\mathbf{s}), without requiring explicit alignment information during training. This is achieved by allowing the network to output a special “*blank*” symbol along with the other symbols—i.e. $\Sigma' = \Sigma \cup \{\textit{blank}\}$ —subsequently enabling the production of sequences with repeated symbols and arbitrary lengths. During prediction, CTC is no longer used. Instead, a certain heuristic is followed to produce the actual output sequence $\hat{\mathbf{s}}$. For instance, the greedy policy selects the most probably character of each frame for then merging consecutive repeated symbols and removing all “*blank*” symbols, leading to $\hat{\mathbf{s}}$.
- **Att.** This decoder is autoregressive, i.e., it produces the next token \hat{s}_j iteratively taking as input the encoded representations \mathbf{r} from the input sequence and the previous predictions $\hat{\mathbf{s}} = [\hat{s}_1, \dots, \hat{s}_{j-1}]$. At each step, the decoder computes attention scores between its current state and the input representations, yielding a context vector that captures the most relevant information from the input. This context vector, along with the decoder’s current state, guides the generation of the next token. To implement this type of decoder a Long Short-Term Memory (LSTM) cell (Hochreiter and Schmidhuber, 1997) is typically used.
- **TD.** This decoder is also auto-regressive. However, it employs the Transformer architecture to compute the cross attention between the encoded feature sequence \mathbf{r} and the previous generated sequence prediction $\hat{\mathbf{s}} = [\hat{s}_1, \dots, \hat{s}_{j-1}]$.

3 Taxonomy of SSL methodologies for TR

In the field of SSL, the methods can be broadly categorized into two general approaches (Ozbulak et al, 2023):

1. **Discriminative:** Paradigm that aims to obtain the meaningful representations by discriminating between different possible categories associated to an input (Smys et al, 2020). Note that, since in SSL there is no annotated data, the supervision signal comes from the data itself, proposing different pretext tasks for the encoder to solve.
2. **Generative:** Family of approaches that consists in learning a generative distribution from the given data collection. By means of this task, the model learns fundamental and characteristic patterns and structures of the data, thus achieving meaningful embeddings (Harshvardhan et al, 2020).

The rest of this section we describes, in a detailed manner, the different categories of SSL and explains, in chronological order, the different existing proposals for TR. For each method, we will emphasize the problems that the respective authors detected in the state of the art, how they proposed to solve them, and the conclusions drawn. A summary of the strategies to be reviewed is provided in Table 1. Note that, since the development of SSL in the field of TR is still recent, not all subcategories of general SSL methods have been explored. These missing categories will be explicitly discussed in Section 6.

3.1 Discriminative approaches

Despite leveraging the same underlying assumption, discriminative SSL can be further divided into the following subcategories according to their

Table 1: List of the methods reviewed in this survey, organized by SSL category and working principle. Methods that belong to the same set are ordered chronologically.

<p>Discriminative</p> <p><i>Contrastive</i></p> <ul style="list-style-type: none"> Sequence-to-sequence Contrastive Learning (SeqCLR) (Aberdam et al, 2021) Perceiving stroke-semantic context (PerSec) (Liu et al, 2022) Scene Text Recognition with Contrastive Predictive Coding (STR-CPC) (Jiang et al, 2022) Character Contrastive Learning (ChaCo) (Zhang et al, 2022e) Character Movement Task to assist Contrastive Learning (CMT-Co) (Zhang et al, 2022d) Relational Contrastive Learning for Scene Text Recognition (RCLSTR) (Zhang et al, 2023) <p><i>Geometric</i></p> <ul style="list-style-type: none"> Flip (Penarrubia et al, 2024) <p><i>Puzzle</i></p> <ul style="list-style-type: none"> Sorting (Penarrubia et al, 2024) <p><i>Distillation</i></p> <ul style="list-style-type: none"> Character-to-Character Distillation (CCD) (Guan et al, 2023)
<hr/> <p>Generative</p> <p><i>Colorization</i></p> <ul style="list-style-type: none"> Similarity-Aware Normalization (SimAN) (Luo et al, 2022) <p><i>Masked Image Modeling</i></p> <ul style="list-style-type: none"> Text-Degradation Invariant Autoencoder (Text-DIAE) (Souibgui et al, 2023) Dual Masked Autoencoder (Dual-MAE) (Qiao et al, 2023) MaskOCR (Lyu et al, 2023)
<hr/> <p>Hybrid</p> <ul style="list-style-type: none"> Discriminative and Generative (DiG) (Yang et al, 2022a) Symmetric Superimposition Modeling (SSM) (Gao et al, 2024) <hr/>

working principle (Ozbulak et al, 2023): contrastive learning, geometric and puzzle solvers, distillation, clustering, and information maximization. As aforementioned, not all this principles have been considered in the task of TR. Below, we describe, in chronological order of publication, those subcategories for which SSL methods have been posed for this domain.

3.1.1 Contrastive learning

The contrastive learning framework aims to pull closer embeddings of similar samples and push away those of dissimilar elements inside the representation space (Jaiswal et al, 2020). This learning paradigm dates back to the early works of Bromley et al (1993); Hadsell et al (2006). These works, by employing siamese neural networks and labeled

data, enforce representations of negative pairs to exceed a distance threshold between them. Since then, this idea has been considered in other works (Valero-Mas et al, 2024).

In SSL, where labeled data is not used, the models are trained using the Information Noise Contrastive Estimation (InfoNCE) loss (Oord et al, 2018), which is a modification of the NCE loss (Gutmann and Hyvärinen, 2010), defined as:

$$\text{InfoNCE}_{z, z^+, \{z^-\}} = -\log \left(\frac{\exp(\text{sim}(z, z^+)/\tau)}{\sum_{z^-} \exp(\text{sim}(z, z^-)/\tau)} \right) \quad (3)$$

where z denotes the representation of a sample, z^+ one positive (similar) pair, $\{z^-\}$ a set

of negative (dissimilar) samples, τ a temperature hyperparameter, and $\text{sim}(\cdot, \cdot)$ is a similarity function (typically, dot product or cosine similarity). This loss function was proposed for the first time in the Contrastive Predictive Coding (CPC) method (Oord et al, 2018), which is developed for audio and uses InfoNCE loss to discern the prediction of future latent representation of the same signal from those coming from different signals.

In the field of computer vision, and more specifically in the area of image classification, positive pairs are composed of different views of a same image created by stochastic data augmentation and negative pairs belong to past views from other images. As shown in Fig. 4, this idea was exploited by the general Momentum Contrast (MoCo) method (He et al, 2020), which employs a teacher-student architecture and a queue to collect negative pairs. Note that, teacher-student refers to a dual-branch architecture in which the student side is updated via backpropagation and the teacher branch directly draws the parameters in the student one using an exponential moving average.

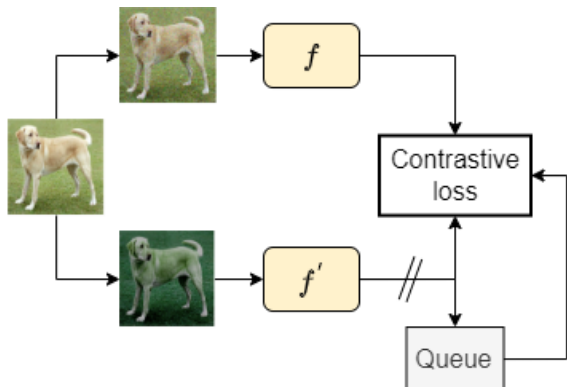


Fig. 4: Example of a common contrastive learning framework (MoCo (He et al, 2020)) where two augmented views from the same image are created and the negative views are taken from a collected queue.

Later, SimCLR (Chen et al, 2020a) proposed the use of a siamese network, a projection head that performs nonlinear transformations on the encoded features, the batch itself as the set of negative samples, and the cosine distance as similarity measure. Authors demonstrated that the

projection head heavily helps the model to extract higher-level abstract representations that capture complex patterns in the input data (Gupta et al, 2022; Bordes et al, 2023). Actually, the idea of the projection head is later incorporated in an improved version of the MoCo method, known as MoCo v2 (Chen et al, 2020b).

It is also worth highlighting the works of Wei et al (2020); Zheng et al (2021), termed as Relational Contrastive Learning which, in addition to InfoNCE, they use the Kullback-Leibler (KL) divergence to capture higher-order relationships among multiple entities in data. Mathematically, the KL divergence is a measure of how a probability distribution P diverges from a second reference probability distribution Q , and is computed as:

$$D_{KL}(P||Q) = \sum_x P(x) \log \left(\frac{P(x)}{Q(x)} \right) \quad (4)$$

While the aforementioned ideas were applied for CNN-based encoders, MoCo v3 (Chen et al, 2021b) adapts previous contrastive learning frameworks—i.e. MoCo and MoCo v2—for ViT encoders, also incorporating the query head proposed by Grill et al (2020) to the framework. This is a head that only exists in the student branch and performs nonlinear transformations, which leads to better representations.

Within the previous context, the first method that applied SSL to TR is *Sequence-to-sequence Contrastive Learning* (SeqCLR) (Aberdam et al, 2021), which adapts the idea of SimCLR for pre-training CRNN architectures. Unlike in image classification, this work considers that the input image cannot be treated as an atomic input, but the sequential nature of TR must be taken into account. Through an instance mapping function, SeqCLR establishes the instance level as the unit to perform the contrastive loss, which can be a frame (frame level), an average of several frames (subword level), or the average of all frames (word level) produced by a CRNN encoder. Therefore, the contrastive loss is applied at the considered instance level, as shown in Fig. 5. In addition, they also investigate the use of different types of projection heads (MLP, LSTM, or none) and the influence of horizontal cropping inside contrastive learning.

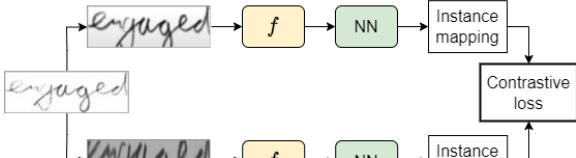


Fig. 5: Graphical overview of SeqCLR (Aberdam et al, 2021). Two different augmentations are performed for a given image. The views are embedded by the encoder f and a NN projection head. Once the instance mapping function groups frames into instances, the contrastive loss is applied.

SeqCLR demonstrated for the first time that contrastive learning is applicable to the field of TR. In more specific terms, authors showed that the best results are obtained when considering subwords as instances, yet there is no clear trend in the rest of the setting (projection head or decoder). They also devised that the use of aggressive horizontal croppings can lead to misalignment problems between positive and negative pairs that perturbs the contrastive learning.

Subsequently, *Perceiving stroke-semantic context* (PerSec) (Liu et al, 2022) identifies three fundamental problems in SeqCLR: (i) the positive pair, formed by two augmentations at the same location, can suffer from instance misalignment; (ii) negative pairs are selected across different samples, disrupting semantic continuity within an image; and (iii) all contrastive operations are performed on high-level features. Based on these assumptions, they develop a *context perceiver*, which consists of a context aggregator and a quantizer. In the context aggregator, a masking strategy and a windowed MSA are used, which forces to learn the value of each masked patch by its local context (Baeviski et al, 2020). Furthermore, the quantizer operates in a similar way to a Discrete Variational Autoencoder (Rolfe, 2016), making each patch represented by an embedding from a discrete codebook, thus providing higher abstraction of the features. Finally, contrastive learning is applied within the same image, both reducing the distance between masked patches and their respective quantized representations as well as maximizing the distance to these latter elements of other masked patches. Following a hierarchy in the contrastive learning, this framework is applied to both the output of the encoder

f_{sem} and the representations produced in the middle of the encoder f_{stroke} , as depicted in Fig. 6.




Fig. 6: Graphical overview of PerSec (Liu et al, 2022). The entire encoder is composed of f_{stroke} and f_{sem} . Then, PerSec applies its methodology to both levels of representation.

Evaluations on CNN-based and ViT-based encoders demonstrate the importance of considering both visual and semantic information, which is provided in this case by hierarchical contrastive learning. Additionally, it is shown that, in general terms, ViT yields better performance, demonstrating the high capacity of this type of architecture for feature learning in SSL methods.

The *Scene Text Recognition with Contrastive Predictive Coding* (STR-CPC) (Jiang et al, 2022) method points out that existing contrastive learning methods focus on instance discrimination but neglect the correlation of the visual sequence within text instances, thus losing such sequential information. To mitigate this issue, they propose the use of CPC (Oord et al, 2018). However, authors demonstrate that its direct use is not possible, since the use of deeper CNN for TR results in the information overlap problem within adjacent frames in the feature map as each frame incorporates information about adjacent ones, and so the prediction becomes trivial. To solve this problem, they propose a Widthwise Causal Convolution Neural Network, which decreases information overlap, and a progressive training strategy to solve the architectural discrepancy between the CNN used for pre-training and the eventual CNN used for TR. Therefore, they demonstrate the importance of taking into account the inherent sequentiality of TR.

Zhang et al (2022e) argue that the fundamental unit of recognition in TR is the character and, therefore, contrastive learning must be done taking this assumption into account. To do so, they propose *Character Contrastive Learning* (ChaCo), which uses the Character Unit Crop module to generate two random crops of an image ensuring that they contain overlapping parts. By

adjusting some hyperparameters, the size of the crops is made similar to the average size of a letter, as shown in Fig. 7. As a contrastive learning framework, they use MoCo v2 to pretrain the visual feature extractor—i.e., a CNN. Their experimentation reveals the importance of information at the character level, especially focusing on the fact that the overlap between positive pairs should not be high so that the encoder learns to distinguish between common and uncommon parts.




Fig. 7: Character Unit Crop module in ChaCo (Zhang et al, 2022e). From a handwritten text image, two overlapped crops are considered.

More recently, Zhang et al (2022d) claim that performing contrastive learning at the frame or subword levels may lead to errors. Given that each frame might contain information from several consecutive characters or an over-segmented sub-character, the model may be somehow misled by perceiving information from these semantic cues. To address this problem, they propose *Character Movement Task to assist Contrastive Learning (CMT-Co)*, which builds upon a character-level pretext task called *Character Movement Task* to assist word-level contrastive learning (semantic information). The first task is to move a character by a certain number of pixels, being the model meant to estimate this displacement. The characters to be moved are located using the vertical projection distribution. As contrastive learning, MoCo v2 is employed. The final loss function is a weighted sum of the two tasks with which the visual feature extractor (CNN) is pre-trained. Furthermore, they also propose a data augmentation strategy suitable for handwritten text. This work, therefore, highlights the importance of using data augmentation techniques that best fit the nature of the data and reinforces the importance of focusing on both visual features (at the character level) and semantic features (at the word level).

Finally, Zhang et al (2023) point out that textual relations are restricted to the finite size of the dataset, which usually causes the problem of overfitting because of lexical dependencies. To address this problem, they propose *Relational Contrastive Learning for Scene Text Recognition (RCLSTR)*, which enriches textual relations through “rearrangement”, “hierarchy”, and “interaction”, resulting in a richer contrastive mechanism. For “rearrangement”, images are horizontally divided and blended to compute their embeddings with different context relations. For “hierarchy”, relational contrastive loss is computed in frame, subword, and word levels. For “interaction”, they employ the symmetric KL divergence to ensure a correlation between the different levels. This divergence is a modification of the standard KL divergence that addresses its asymmetry by computing:

$$D_{\text{SymKL}}(P||Q) = \frac{1}{2}D_{KL}(P||Q) + \frac{1}{2}D_{KL}(Q||P) \quad (5)$$

The experiments carried out demonstrate that it is important not only to take into account the different levels that encapsulate visual and contextual information, but also to maintain a correlation and coherence between these levels, as shown in Fig. 8.

Throughout this subsection, it has been evident that contrastive learning for TR significantly differs from its application in image classification. In this latter task, the unit for performing the contrastive process is straightforward, the image itself. However, in TR, identifying the appropriate unit for contrastive learning remains an open question. Various approaches have been explored: some studies use subwords (Aberdam et al, 2021), others use characters (Zhang et al, 2022e), patches (Liu et al, 2022), or a combination of different levels (Zhang et al, 2022d, 2023). Consequently, this subcategory within TR faces unique issues, such as misalignment between positive and negative pairs, determining the correct instance level, and integrating different levels of information such as visual, sequential or semantic.

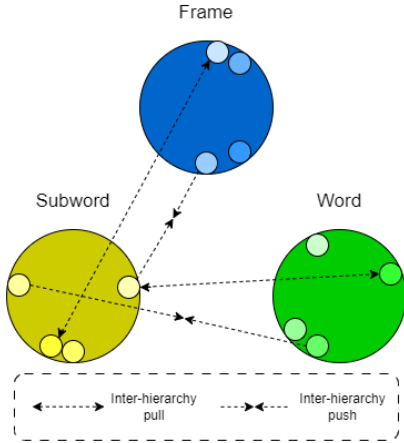


Fig. 8: Cross-hierarchy consistency in RCLSTR (Zhang et al, 2023). Contrastive learning is performed in each level (frame, subword and word) and between them the correlation is maintained thanks to the Symmetric KL divergence.

3.1.2 Geometric transformation

Geometric self-supervised learning is a family of approaches that learn useful representations by leveraging the geometric properties and structures inherent in the data (Jing and Tian, 2020). The pretext task typically consists in predicting a geometric transformation, such as rotations (Gidaris et al, 2018), applied to the input image (see Fig. 9). In this way, the encoder learns to understand the underlying spatial and structural relationships of the data. Despite its simplicity, this approach has been demonstrated to be very effective in different scenarios (Novotny et al, 2018; Zhang et al, 2019a; Chen et al, 2019; Feng et al, 2019; Yamaguchi et al, 2021; Liang et al, 2021).

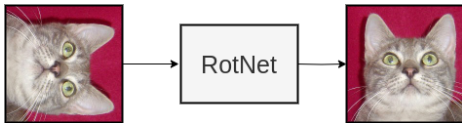


Fig. 9: RotNet (Gidaris et al, 2018). The task consists in predicting the rotation performed to a given image.

Penarrubia et al (2024) discuss that HTR is rich in spatial information due to the font as well as the stroke style. Given that text is neither

horizontally nor vertically symmetric, they propose **Flip** as a geometric transformation, which is more meaningful in this context. Then, the pretext task consist in predicting which flip transformation has been performed among the possibilities {nothing, horizontal, vertical, both} applied to a text image. They experimentally demonstrate that this transformation helps the CNN focus on the intrinsic features of characters and words, thereby resulting more effective than the common rotation transformation.

3.1.3 Puzzle solvers

In computer vision, the “puzzle” pretext task relates to predicting the relative positions of some disordered patches in which a given image has been divided (Doersch et al, 2015; Noroozi and Favaro, 2016) (see Fig. 10). This task has shown its effectiveness in the early attempts of SSL, since the relative position among patches of an image encompasses rich spatial and contextual information. Note that, despite being one of the earliest pretext tasks of this type, its use is still common by state-of-the-art approaches (Carlucci et al, 2019; Pang et al, 2020; Misra and Maaten, 2020; Yang et al, 2022b; Baykal et al, 2022).

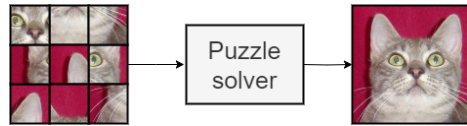


Fig. 10: Diagram of Jigsaw puzzle in computer vision. The task consist in predicting the original arrangement among disordered patches.

Considering the work of Penarrubia et al (2024), the **Sorting** method forces a model to infer the correct order of a shuffled set of vertical patches (see Fig. 11). This method underscores the sequential nature of text. However, the experiments showed that, among the proposed methods based on spatial context—i.e. geometric and puzzle solvers—, this proposal showed to be the least effective.




Fig. 11: Diagram of Sorting method for HTR (Penarrubia et al, 2024). For a given shuffled input image, the networks must predict the correct order of patches.

3.1.4 Distillation

In dual-branch architectures, neural collapse refers to the problem where an encoder produces constant or dummy (non-informative) representations. While contrastive learning prevents neural collapse by means of negative examples, the works of BYOL (Grill et al, 2020) and SimSiam (Chen and He, 2021) demonstrated that there are other ways to avoid this issue. These works rely on two main aspects, as shown in Fig. 12: (i) a teacher-student framework, that employs the stop gradient operation on the teacher branch; and (ii) the use of a prediction head to produce asymmetry between the two branches. Both works proved that the combination of these aspects prevents the network collapse. Moreover, the work of DINO (Caron et al, 2021) extended these ideas to the application in ViT, also proposing a local-to-global feature alignment and a more complex loss function. In this case, the collapse is avoided using the so-called centering operation, which consists in adding a bias term to the teacher’s prediction branch.

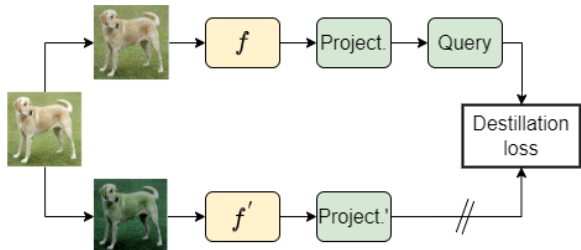


Fig. 12: Diagram of the distillation framework for SSL. The framework consists of a teacher-student architecture and a query head that helps preventing neural collapse and leads to better performance.

The work of *Character-to-character distillation* (CCD) (Guan et al, 2023) studied the use of this distillation framework in STR. Authors

argue that dividing the images horizontally for instance discrimination limits the aggressiveness of the data augmentation, such as hard geometric augmentations. Furthermore, it does not take into account the structure of the characters since their semantic information is lost when subdividing or mixing characters. To avoid these problems, Guan et al (2023) propose using a distillation framework—using the loss function proposed by DINO. Furthermore, to enhance character alignment, they propose the use of a self-supervised character segmentation head to compute the patch heads, thus highlighting the character structure. Note that patch head is a neural scheme that performs nonlinear transformations in the embedded patches. Overall, CCD demonstrates the benefit of employing distillation by itself, the benefit of hard geometric augmentations during training (successful because of the distillation framework), and the enhancement of using their character segmentation head, not only for TR but for other related tasks such as text segmentation.

3.2 Generative approaches

With the emergence of ViT architectures, the recent years have seen an increasing interest in generative approaches. Actually, image generation learning has a broader scope (Vincent et al, 2008) and has shown high capacity for training DNN for a disparate set of tasks such as denoising (Zhang et al, 2022a; Chen and Guo, 2023), image enhancement (Ali et al, 2023), or segmentation (Minaee et al, 2021), among many others.

We divide the methods of this paradigm into four subcategories: image colorization, Masked Image Modelling, image inpainting, and Generative Adversarial Networks (GAN). Below we describe each subcategory in which an SSL method for TR has been developed, and in turn, presenting these methods in chronological order.

3.2.1 Image colorization

The image colorization is one of the oldest generative pretext task. It consists in predicting the original colored image of a grayscale input (Cheng et al, 2015; Larsson et al, 2016, 2017), as shown in Fig. 13. This leads to meaningful representations because, in natural images, objects and entities are usually associated with specific coloring (Zhang et al, 2016). Therefore, the model must

capture the underlying semantics and structure of the visual content, which helps understanding and distinguishing different parts of the image (Caron et al, 2020; Anwar et al, 2020).

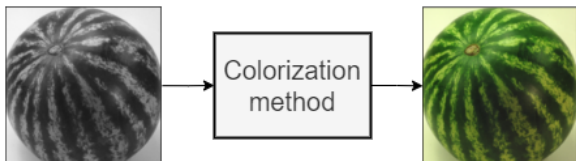


Fig. 13: Diagram of the colorization framework. Given a gray scale image, the task is to compute its colored version.

Luo et al (2022) analyze that some constant properties are maintained for the entire image in STR, such as color, texture, stroke width, etc. Based on these assumptions, they propose *Similarity-Aware Normalization (SimAN)*, whose pretext task is to recover the original format of an augmented crop of an image by means of another non-overlapped crop from the same image before augmentations (see Fig. 14). This makes the task more complex than simple colorization, leading to richer representations in the context of TR. To achieve this, SimAN employs a Similarity-Aware Normalization module in which the local style information of the non-augmented crop is extracted and that of the augmented crop is removed. Then, the original image is reconstructed by using an attention procedure. In addition, this method also takes advantage of the field of GAN (Creswell et al, 2018; Aggarwal et al, 2021; Gui et al, 2021) since, by using a discriminator with adversarial loss, SimAN increases the quality of the reconstruction. This work demonstrates that the Similarity-Aware Normalization module, in addition to extracting adequate features for TR, is capable of handling other tasks such as data synthesis, text image editing, and font interpolation.

3.2.2 Masked Image Modeling

Within the generative SSL paradigm, Masked Image Modeling (MIM) comes to the fore in the last few years. As shown in Fig. 15, this framework predicts the masked patches of an input image. Since this paradigm was initially proposed for Natural Language Processing (i.e., Masked

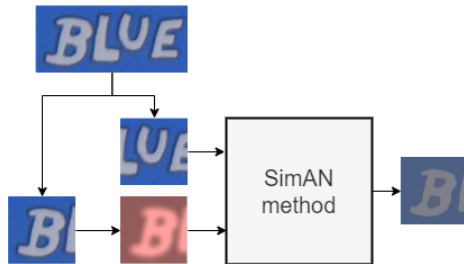


Fig. 14: Diagram of SimAN method (Luo et al, 2022). The original format of an augmented crop is recovered using a non-overlapped and non-augmented one from the same image.

Language Modeling (Qiu et al, 2020)), it is not surprising that Bidirectional Encoder representation from Image Transformers (BEiT) (Bao et al, 2021), first SSL task within this category, imitated the well-known Bidirectional Encoder Representations from Transformers (BERT) (Devlin et al, 2018). BEiT proposes to predict the category of discrete visual tokens that are masked. The discrete visual tokens are generated by a pre-trained discrete variational autoencoder (Ramesh et al, 2021). Later, Simple Framework for Masked Image Modeling (SimMIM) (Xie et al, 2022) proposed to predict directly on pixels, showing competitive results without the need for an offline tokenizer. Furthermore, Masked Autoencoder (MAE) (He et al, 2022), an asymmetric autoencoder framework, showed that such architectures are also efficient feature learners. Context Autoencoder (CAE) (Chen et al, 2024) also showed the enhancement of using a contextual regressor and aligning the representation given by this unit of the masked patches with those produced by the encoder itself.

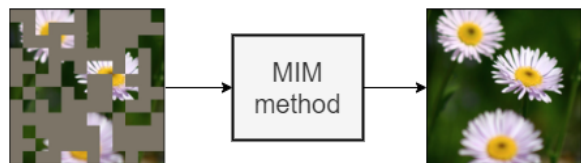


Fig. 15: MIM framework that consists in predicting the masked patches of an input image.

Text-Degradation Invariant Autoencoder (Text-DIAE) (Souibgui et al, 2023) is the first method that fully relies on MIM to pre-train

a ViT encoder for TR. It leverages a denoising autoencoder for different perturbations: masking, blur, and noise. The method reconstructs at pixel level the degraded input images with an encoder-decoder pipeline (see Fig. 16). It should be noted that, after pre-training, the decoder is discarded and only the encoder is kept for the downstream task. In their experiments, authors show that the degradation that provides the greatest benefit for TR is masking; however, they also report that other degradations are useful for other tasks such as image enhancement.


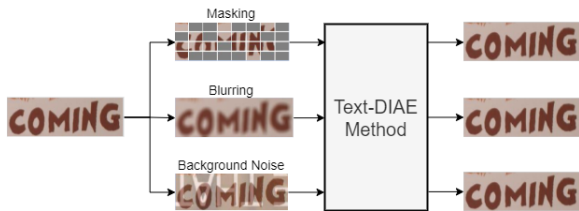


Fig. 16: Diagram of the Text-DIAE method (Souibgui et al, 2023), which focuses on reconstructing the degraded input images.

Later, (Qiao et al, 2023) argue that MIM is more suitable for TR since the instance discrimination used in contrastive learning is not flexible for this task. Instead, MIM helps the model build the intra-characters and inter-character dependencies, as a character can be recognized by the corresponding visual clues and context information from other characters. Based on the last assumptions, they propose the *Dual Mask Autoencoder* (**Dual-MAE**) method, which employs two new masking strategies: (i) the intra-window masking (Fig. 17a), that limits the self-attention to each windows a masks a percentage of patches inside it; and (ii) the window masking (Fig. 17b), that masks entire windows. The former one is intended to obtain the information from the visual content, whereas the latter one takes it from the context. In addition, authors propose two neural architectures based on MAE to leverage the masking strategies: one that uses Siamese networks and another that uses distillation. Their experiments demonstrate the clear benefit of combining both types of masking strategies. It is then again highlighted that it is important to take into account both visual and semantic information for TR.



(a) Intra-window masking.



(b) Window masking.

Fig. 17: Diagram of Dual-MAE masking strategies. Figure taken from Qiao et al (2023).

Up to this point, all methods have focused on just pre-training the encoder. **MaskOCR** (Lyu et al, 2023) represents a framework that addresses this limitation, i.e., it pre-trains both the encoder and the decoder to improve the overall performance of the model on TR tasks. The strategy first pre-trains the encoder using CAE. In a second step, the encoder is frozen and, by means of synthetic generation, words with missing characters are generated, for which the encoder-decoder must fill such gaps. It is worth noting that the proposed method to pre-train the decoder is not completely self-supervised, since it requires synthetically-generated labeled data. However, they showed that incorporating a pre-trained decoder increases the performance of the model, especially for fine-tuning scenarios with scarce labeled data.

3.3 Hybrid approaches

In this section we describe those methods that address the self-supervised challenge from several perspectives, instead of relying on a single working principle.

The *Discriminative and Generative* (**DiG**) method (Yang et al, 2022a) combines both generative and contrastive learning into a unified framework. Authors choose SimMIM and MoCo v3 as MIM and contrastive frameworks, respectively, and consider a weighted sum of their loss functions. The benefit of combining both methods is reported experimentally.

Gao et al (2024) point out that existing methods focus primarily on learning robust visual features of characters, overlooking the linguistic relationship between characters such as spelling.

Then, they propose *Symmetric Superimposition Modeling (SSM)*, which forces the model to reconstruct two images (original and distorted) from a superimposed input (see Fig. 18). They consider different ways of generating the distortion, such as horizontal flip, vertical flip, or 180° rotation. Furthermore, inspired by the work of Tao et al (2023), they perform both contrastive learning and mean squared error loss between the patches generated by the ViT. Therefore, the final loss function is a weighted sum of these three individual components. This way, authors demonstrate the benefit of combining different categories of SSL.

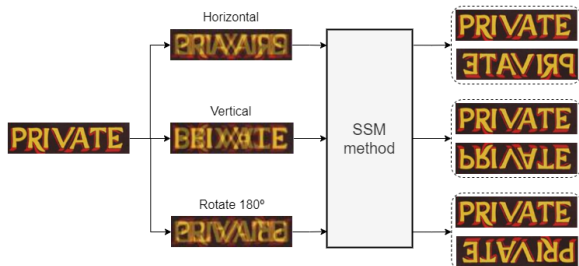


Fig. 18: Diagram of SSM method (Gao et al, 2024). From a symmetrically superimposed image, the model must reconstruct both the original image and the imposed one.

4 Benchmarking

Once the different SSL approaches for TR have been reviewed, this section delves into how their evaluation is addressed. This involves describing the most common datasets for STR and HTR in the literature, as well as the evaluation protocols and metrics considered.

4.1 Datasets

The datasets considered, and the way of using them, are quite different depending on the specific task (STR or HTR), and so we elaborate on this issue in different sections. In all cases, it is important to emphasize that we are intentionally not describing all the possible datasets for each task but rather those that have been considered in the SSL-TR literature. We encourage the reader to look for more specific references to learn about more datasets.

4.1.1 Datasets for STR

As a field, STR has a particular way of employing existing datasets. The common pipeline of supervised learning for STR consists in training the model on a large synthetic dataset and then evaluating the trained model on several benchmark datasets (Baek et al, 2019). Analogously, SSL methods first pre-train the encoder on one dataset and then fine-tune the whole model in another one. The idea is that the pre-trained model should be able to obtain more discriminative representations. Then, just like in the supervised scenario, the model is evaluated in a set of benchmarks.

In the first proposed methods, the datasets for pre-training and fine-tuning are the same synthetic dataset (Aberdam et al, 2021; Luo et al, 2022; Liu et al, 2022; Souibgui et al, 2023). Later, the same procedure is extended to the use of real unlabeled datasets for pre-training and real labeled datasets for fine-tuning (Yang et al, 2022a; Qiao et al, 2023; Lyu et al, 2023; Gao et al, 2024). Figure 19 illustrates both synthetic and real datasets for STR, while Table 2 provides a summary. We describe below their most important characteristics:

- **SynthText (ST)** (Gupta et al, 2016) is a synthetically generated dataset, originally designed for scene text detection. It comprises over 8M text boxes, of which 5.5M do not contain non-alphanumeric characters.
- **MJSynth (MJ)** (Jaderberg et al, 2014) is a synthetic dataset containing 8.9M images each containing a single word rendered with various fonts, sizes, colors, orientations, backgrounds and distortions to simulate real-world conditions.
- **Synthetic Text Data (STD)** is an established combination of ST and MJ, resulting in a dataset of approximately 17M of samples.
- **Modified-SynthText (Mod-ST)** is a modified version of ST employed by Gómez et al (2018). It contains 4M cropped scene text images generated synthetically. The main difference with the previous ones is that Mod-ST avoids random flipping and rotation of text images, which can disrupt the sequential order of characters.
- **UTI-100M** is a real unlabeled dataset proposed by Liu et al (2022). It contains 100M

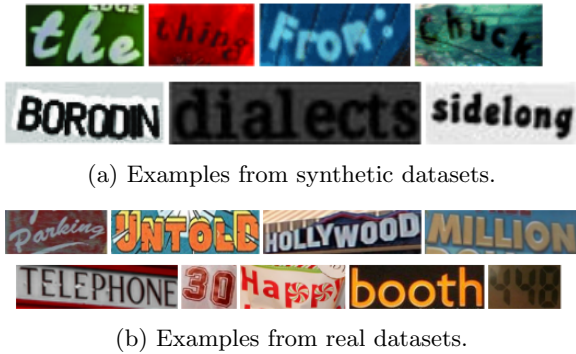


Fig. 19: Comparison of synthetic and real STR datasets for STR.

images captured by mobile camera devices, covering 5 scenes: street view, receipt, product package, book, and poster, which are mainly written in English, Chinese, Japanese, and Korean.

- **Unlabeled Real Data (URD)** (Yang et al, 2022a) consists of 15.77M unlabeled text images (termed CC-OCR) from Conceptual Captions Dataset (CC) (Yang et al, 2021), which are exclusively used for self-supervised learning in the STR domain.
- **Annotated Real Data (ARD)** consists of 2.78M annotated text images from TextOCR (Singh et al, 2021) (0.71M) and Open Images Dataset v5 (2.07M).
- **Real-U** (Baek et al, 2021) is real unlabeled dataset containing 4.2M of text images collected from Book32 (Iwana et al, 2016), TextVQA (Singh et al, 2019), and ST-VQA (Biten et al, 2019).
- **Real-L** (Baek et al, 2021) includes 276K training images and 63K validation images gathered from several datasets: SVT (Wang et al, 2011), IIT (Mishra et al, 2012), IC13 (Karatzas et al, 2013), IC15 (Karatzas et al, 2015), COCO-Text (Veit et al, 2016), RCTW (Shi et al, 2017), Uber (Zhang et al, 2017), ArT (Chng et al, 2019), LSVT (Sun et al, 2019), MLT19 (Nayef et al, 2019), ReCTS (Zhang et al, 2019b).

In terms of evaluation, the STR literature generally uses 6 reference datasets to measure and compare the effectiveness of the trained models. Note that in this paper we focus on those benchmark datasets that have been established as the standard for evaluation in SSL-TR literature,

Table 2: Summary of the STR datasets for training in the related SSL literature.

Name	Type	Labeled	Images
ST	synthetic	✓	8M
MJ	synthetic	✓	8.9M
STD	synthetic	✓	17M
Mod-ST	synthetic	✓	4M
UTI-100M	real	✗	100M
URD	real	✗	17.77M
ARD	real	✓	2.78M
Real-U	real	✗	4.2M
Real-L	real	✓	276K

and we have left out those more specific to certain works or areas—i.e. Chinese datasets, Arabic datasets, occluded scene text etc. Depending on the difficulty and geometric layout of the texts, the SSL-TR benchmark datasets are classified as *regular* or *irregular*.

The *regular* datasets are those whose images contain the letters arranged horizontally with regular spaces between them, as depicted in Fig. 20a. Due to these regularities, it is usually easier to attain high recognition rates. The regular datasets considered in the literature are the following:

- **IIT5K-Words (IIT)** (Mishra et al, 2012) contains 5K word images collected from the web, with a split of 2K for training and 3K for evaluation. The dataset includes a variety of fonts, colors, and backgrounds.
- **Street View Text (SVT)** (Wang et al, 2011) includes 257 images for training and 647 images for evaluation, extracted from street view photos, focusing on challenging scenarios like low resolution, blurriness, and varying lighting conditions.
- **ICDAR 2013 (IC13)** (Karatzas et al, 2013) is an updated version of the ICDAR 2003 dataset Lucas et al (2005) with more challenging text samples and annotations. It contains 848 images for training and 1095 images for evaluation, out of them 1015 and 857 respectively stand for words with non-alphanumeric characters and with less than 3 characters.

The *irregular* datasets are those that contain letters arranged in different geometric shapes, such as curved and arbitrarily rotated or distorted texts, as illustrated in Fig. 20b. As a result, these datasets tend to be more challenging for STR. The common irregular datasets are the following:

- **ICDAR 2015 (IC15)** (Karatzas et al, 2015), which is known for its complex images. This dataset includes incidental scene text images taken by Google Glass. It has 4468 images for training and 2077 images for evaluation, of which 1811 do not contain non-alphanumeric characters and are not extremely rotated, perspective-shifted, or curved images.
- **SVT Perspective (SP)** (Phan et al, 2013) is created from Google Street View and contains 645 images for evaluation.
- **CUTE80 (CT)** (Risnumawan et al, 2014) is collected from natural scenes and contains 288 cropped text images for evaluation.

Table 3: Summary of the STR datasets used for evaluation in the related SSL literature.

Benchmark	Test images	Description
IIT	3000	Regular
SVT	647	Regular
IC13	1095/1015/857	Regular
SP	645	Irregular
IC15	2077/1811	Irregular
CT	288	Irregular

A summary of the datasets considered for STR evaluation is shown in Table 3. Given that these datasets are considered for evaluating the SSL mechanisms, the training partitions are either used for validation or simply discarded, unless mentioned otherwise.

4.1.2 Datasets for HTR

The way of using datasets for HTR is usually simpler. Typically, in the classic supervised learning scenario, there is a labeled dataset with predefined partitions, which makes comparisons easier. Therefore, the model is just trained with the training set and evaluated with the test set. Figure 21 provides examples from HTR datasets.

In the case of employing SSL, the model is first pre-trained and then fine-tuned with the training set. Quite often, fine-tuning is considered only with a reduced percentage of the training set, in order to see how the pre-trained model is able to take better advantage of limited data. In this sense, there is currently no standardized protocol, and this issue will be further discussed in Section 5.2.1.



(a) Examples from *regular* STR benchmark datasets.



(b) Examples from *irregular* STR benchmark datasets.

Fig. 20: Examples of both *regular* and *irregular* STR benchmark datasets.

Below we describe the HTR datasets that are most frequently used in the context of SSL:




(a) Examples from IAM dataset.



(b) Examples from CVL dataset.



(c) Examples from RIMES dataset.



(d) Examples from G.W. dataset.

Fig. 21: Examples of datasets typically considered in SSL.

- **IAM dataset** (Marti and Bunke, 2002) is one of the most widely used benchmarks for HTR. This dataset contains 115,320 isolated and

labeled words from 1,539 scanned handwritten English pages from 657 different writers.

- **CVL** dataset (Kleber et al, 2013) is a comprehensive collection of modern handwritten text. The dataset consists of 1 German and 6 English texts. In total, 310 writers appear in the dataset, 27 of which wrote 7 texts and 283 writers who write 5 texts.
- **RIMES** dataset (Grosicki and El Abed, 2009) is primarily used for the recognition of French handwritten text. It contains 12,723 annotated pages from a total of 1,300 writers.
- **George Washington (G.W.)** dataset (Fischer et al, 2012) is a collection of 18th-century handwritten documents, primarily consisting of correspondence to and from George Washington (only two writers). It consists of 4,894 word images.

It is important to remark that these datasets are used for SSL at the word level, unlike the conventional case of HTR where it may be more common at the line level. A quantitative summary of the datasets is shown in Table 4.

Table 4: Summary of the HTR datasets in the related SSL literature.

Name	Images	Writers	Language
IAM	79275	657	Eng
CVL	99904	310	Eng, Ger
RIMES	66480	1300	Fr
G.W.	4894	2	Eng

4.2 SSL evaluation protocols

SSL is originally devised to pre-train the encoder with unsupervised data, and then fine-tune it together with a prediction head (in our case a decoder) for any target downstream task with labeled data (Balestrierio et al, 2023). Following this original approach, two main protocols are established in the SSL-TR literature, graphically illustrated in Fig. 22:

- **Quality evaluation** in SSL involves a key protocol where pre-trained layers are frozen and only the remaining parts of the model are fine-tuned, as shown (see Fig. 22a). Widely acknowledged in the literature, this protocol

directly assesses the quality of the learned representations from unlabeled data. Effective SSL methods are expected to produce representations that accurately capture significant and discriminative features of the data. Under this protocol, SSL techniques showcase their capability to generalize across diverse datasets and tasks, reducing reliance on labeled data. Moreover, quality evaluation offers insights into the underlying mechanisms of the SSL models, promoting a deeper comprehension of their behavior and guiding the development towards more robust techniques. Note that here we refer to “pre-trained layers” and not to the encoder. This is because, as explained above, there are different architectures in TR, and these in turn are made up of different parts. Therefore, not all SSL methods pre-train and freeze the same layers. For example, there are methods that only pre-train the CNN for a CRNN encoder (Zhang et al, 2022e, 2023), whereas others pre-train both the CNN and the RNN (Aberdam et al, 2021). Similarly, instead of pre-train only the ViT encoder in a fully transformer architecture (Yang et al, 2022a; Qiao et al, 2023), some authors choose to pre-train both the encoder and the decoder (Lyu et al, 2023). So far there is no clear and specific guide in this protocol due to the great heterogeneity of the architectures and approaches. Unfortunately, this makes a generic benchmarking for quality evaluation difficult because it is unfair to compare models with different frozen layers.

- **Semi-supervised evaluation** consists in fine-tuning the whole DNN using the pre-training as initial weights, as illustrated in Fig. 22b. This protocol leverages the transfer learning capacity of the pre-trained layers. In addition, it is also intended to demonstrate how the rest of the untrained layers, or directly the decoder, benefit from starting with significant and meaningful representations, greatly reducing the need for large volumes of data and showcasing the ability to leverage both unlabeled and labeled data. Precisely for this reason, this protocol is especially useful to demonstrate the ability of SSL methods to address tasks in which there is a scarcity of data. Furthermore, due to the heterogeneity in architectures and pre-training strategies, this protocol is the one that provides the fairest benchmarking. This is because

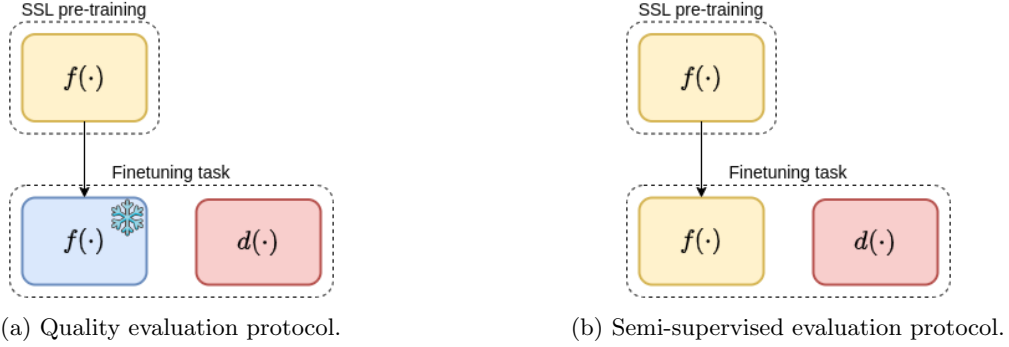


Fig. 22: SSL evaluation protocols. The quality evaluation freezes the pre-trained part while the semi-supervised evaluation fine-tuned the whole DNN starting from the pre-trained parts. Note that in this case the pre-trained part is the full encoder, but it does not have to. Perhaps it can be only the CNN in a CRNN architecture or both the encoder and decoder.

each method decides which parts to pre-train and which parts to initialize randomly for the downstream task. Ultimately, this allows showing which method is able to take the most from the available data.

4.3 Evaluation Metrics

Once the TR models have been trained, it is necessary to evaluate them in the downstream task (HTR or STR). It is important to note that these evaluation metrics are primarily derived from the HTR and STR fields. The implementation of SSL does not alter how the eventual TR models are evaluated but rather affects the training protocols used to develop these models (previous section). In the literature, three main metrics are considered for this purpose:

- **Character Error Rate (CER):** This metric is defined as the average number of editing operations (insertions, deletions, or substitutions)—i.e., Levenshtein distance—needed to align the model’s predicted string with the ground truth, normalized by the length of the latter. Therefore, this metric does not treat the prediction as a binary outcome (correct or incorrect), but rather considers the specific errors made within that sequence. Note that the lower the value, the better. Formally, it is defined as:

$$\text{CER} (\%) = \frac{\sum_{i=1}^{|S|} \text{ED}(\hat{\mathbf{s}}_i, \mathbf{s}_i)}{\sum_{i=1}^{|S|} |\mathbf{s}_i|} \quad (6)$$

where $\text{ED}(\cdot, \cdot)$ is the Levenshtein distance, S is the test set of data, and \mathbf{s}_i and $\hat{\mathbf{s}}_i$ are the ground-truth and predicted sequences, respectively.

- **Word Accuracy (WAcc):** This metric evaluates the recognition accuracy at the word level. It measures the proportion of correctly recognized words out of the total number of words in the ground truth. Formally, it is defined as:

$$\text{WAcc} (\%) = \frac{\sum_{i=1}^{|S|} \llbracket \text{ED}(\hat{\mathbf{s}}_i, \mathbf{s}_i) = 0 \rrbracket}{|S|} \quad (7)$$

where $\llbracket \cdot \rrbracket \rightarrow \{0, 1\}$ is the Iverson bracket, which returns 1 when the condition is met and 0 otherwise.

- **Single Edit Distance (ED1):** This metric is somewhat placed between CER and WAcc. It measures the accuracy of word recognition by allowing for a single edit operation, making it more lenient than WAcc but stricter than CER. This metric treats the output as a binary outcome, distinguishing between words that are nearly correct from those that clearly incorrect, providing a nuanced evaluation of recognition performance. Formally, it is defined as:

$$\text{ED1} (\%) = \frac{\sum_{i=1}^{|S|} \llbracket \text{ED}(\hat{\mathbf{s}}_i, \mathbf{s}_i) \leq 1 \rrbracket}{|S|} \quad (8)$$

5 Comparative analysis of performance


In this section, we describe, compare, and analyze the results obtained by the different SSL methods reviewed. In order to provide a global vision, Table 5 provides a summary of the architectural details and pre-trained parts of the methods to be compared. Moreover, we point out the inconsistencies found with the aim of providing clearer conclusions and encouraging fairer comparisons. Despite the great similarities between HTR and STR, such as architectures or problem formulation, the datasets and the evolution of each field are different. Therefore, we will separately elaborate on the comparative issue.

5.1 Analysis of SSL performance for STR


Although the use of SSL for TR is relatively recent, the emergence of new approaches has been increasing especially for the task of STR. Unfortunately, many of the existing methods are not compared or referenced among themselves. In this section we fill that gap with a quantitative comparison of the reported performances. Note that the results and number of parameters are taken from the original papers. In the cases where the number of parameters is not reported, we carefully followed the description from the paper. In the cases where the number of parameters is not reported, we carefully followed the description from the paper. In the case that not enough hyperparameters are reported, then the SSL-TR method has not been included in the Figures and analysis.

In order to enable a comprehensive comparison, Fig. 23a shows the performance of all methods for the regular dataset IIIT, while Fig. 23b reports the performance of (most of) the methods for IC15. It can be observed that for IIIT, an earlier and simpler dataset, the modern techniques often achieve near-perfect accuracy. Furthermore, substantial improvements over the years are observed for IC15, which is known for its challenging nature due to irregular image complexities. Note that the training data for each method’s model is reported in Table 6.

The results report a clear dominance of methods that are developed for ViT architectures over those that use CNN. This dominance is heavily attributed to the low inductive bias of ViT architectures, especially useful in SSL, that allow them

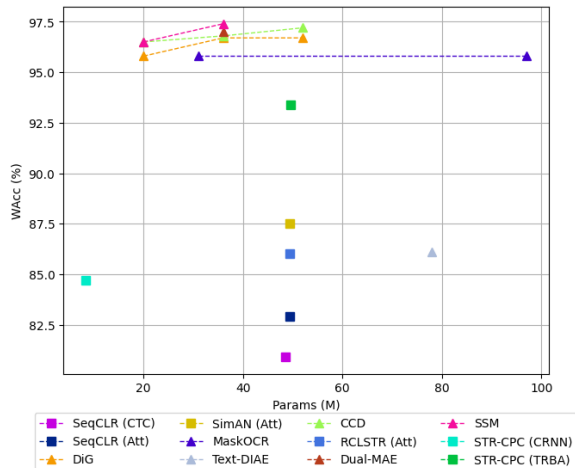

(a) Results for the IIIT (regular dataset).

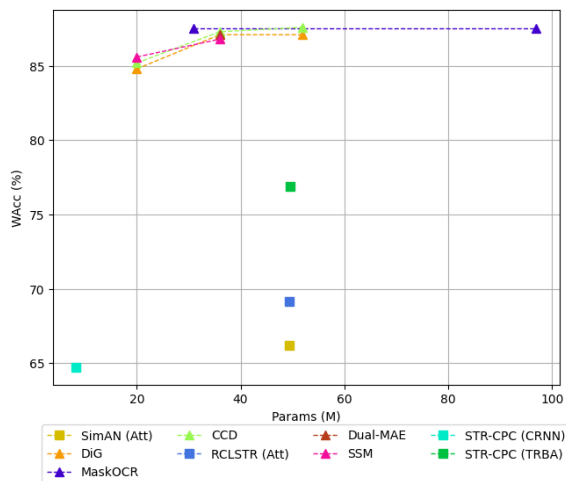

(b) Results for IC15 (irregular dataset).

Fig. 23: Comparison of methods presenting results under semi-supervised settings for IIIT and IC15 datasets. All method’s models are fine-tuned with synthetic data except STR-CPC that only considers real data. More specific details about data configurations is found in Table 6. The triangle marker indicates fully Transformer-based architectures, while the square marker indicates those based on CNN. Dashed lines connect different sizes of the same model. For CNN-based models, markers also indicate whether the decoder is Att or CTC. In STR-CPC, CRNN and TRBA (Baek et al, 2019) indicate their different architectural configurations.

Table 5: Implementation details of the methods compared, along with their pre-trained parts and whether they present STR or HTR results. In IC13 and IC15 datasets is included as super index the test size if specified in the original papers.

Method	Encoder	Decoder	Pre-trained	Datasets	
				STR	HTR
SeqCLR	CRNN	CTC, Att	CRNN	IIIT IC03 IC13 ¹⁰¹⁵	IAM CVL RIMES
SimAN	CRNN	CTC, Att	CNN	IIIT IC13 ¹⁰¹⁵ SVT IC15 CT SP	-
PerSec	CNN, ViT	CTC, Att	CNN, ViT	IIIT IC13 SVT IC15 CT SP	IAM CVL
DiG	ViT	TD	ViT	IIIT IC13 ¹⁰¹⁵ SVT IC15 ¹⁸¹¹ CT SP	IAM CVL
STR-CPC	CRNN	CTC, Att	CNN	IIIT IC13 SVT IC15 CT SP	-
ChaCo	CRNN	CTC, Att	CNN	-	IAM CVL RIMES
CMT-Co	CRNN	CTC, Att	CNN	-	IAM CVL RIMES
Text-DIAE	ViT	TD	ViT	IIIT IC13 ¹⁰¹⁵	IAM CVL
CCD	ViT	TD	ViT	IIIT IC13 ¹⁰¹⁵ SVT IC15 ¹⁸¹¹ CT SP	-
Dual-MAE	ViT	TD	ViT	IIIT IC13 ^{857,1015} SVT IC15 ^{1811,2077} CT SP	-
MaskOCR	ViT	TD	ViT+TD	IIIT IC13 SVT IC15 CT SP	-
RCLSTR	CRNN	CTC, Att	CNN	IIIT IC13 ¹⁰¹⁵ SVT IC15 ²⁰⁷⁷ CT SP	-
Flip	CRNN	CTC, TD	CNN	-	IAM CVL G.W.
Sorting	CRNN	CTC, TD	CRNN	-	IAM CVL G.W.
SSM	ViT	TD	ViT	IIIT IC13 ¹⁰¹⁵ SVT IC15 ²⁰⁷⁷ CT SP	-

to capture dependencies and contextual information more effectively than CNN. Although ViT are known to be more data-demanding, this is in turn palliated by the use of SSL. Moreover, ViT’s self-attention mechanisms allows processing and understanding global patterns within the data, which is particularly beneficial for tasks requiring high-level semantic understanding, such as TR.

Concerning methodologies, from the first method (SeqCLR) to the latest included in this review (SSM), WAcc has been increasing in a very pronounced way in a short period of time.

For instance, there has been an improvement of around 15 units of WAcc in the IIIT dataset (Fig. 23a). This rapid evolution might be explained by the fact that the research line of SSL for STR greatly benefits from all the previous and current developments that appear for image classification (already reflected in Section 3).

5.1.1 Synthetic vs. real data

One of the main purposes of SSL is to leverage large amounts of unlabeled real data in order to avoid the intensive labor of annotation or resorting to alternatives such as synthetic data. This is first discussed in the work of Baek et al (2021), which claims that synthetic data often lacks the variability and complexity present in real STR data. Figure 24 illustrates that this idea is supported by the operation of all SSL methods, for which a better performance is clearly attained by using real data, even at the expense of using much less data.

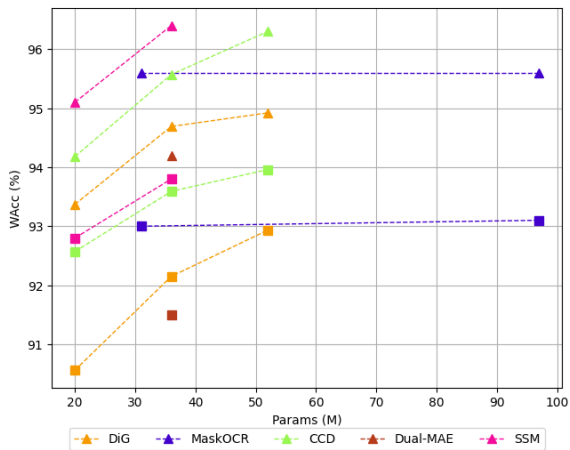


Fig. 24: Comparison of methods presenting results under semi-supervised settings for the average of the STR benchmark datasets, using either real or synthetic data for fine-tuning. More specific details about data configurations is found in Table 6. Square and triangle markers respectively indicate models fine-tuned with synthetic and real data. Dashed lines connect different sizes of the same model.

As can be observed, the use of SSL for STR effectively achieves the goal of improving the

models’ ability to generalize under real-world conditions, while also reducing the need for annotated data, which is expensive and difficult to obtain.

5.1.2 Reaching a performance ceiling

Despite the remarkable progress achieved in the field, it appears that results are approaching a performance glass ceiling concerning the six traditional benchmarks. The datasets, once considered highly challenging a decade ago, now seem somewhat easy to address. This might be explained by the appearance of new architectures such as the Transformer and the development and application of SSL, which allows to take advantage of real unlabeled data. Therefore, these benchmarks may no longer sufficiently represent the evolving complexities of real-world text recognition tasks (Jiang et al, 2023a). For example, considering the most recent methods in Fig. 24, there is hardly any difference in performance when fine-tuning with real data.

Given the advancements and the saturation in performance on existing benchmarks, one take-away of our analysis is that the focus must be shifted towards more comprehensive and challenging datasets, such as Union14M-Benchmark (Jiang et al, 2023a). Union14M-Benchmark offers a broader spectrum of TR challenges, capturing a wider variety of real-world scenarios and complexities. This shift is essential to continue pushing the boundaries of what STR systems can achieve, ensuring models that remain robust and effective in increasingly diverse and unpredictable environments.

5.1.3 What is wrong when comparing SSL methods for STR?

So far, the comparison and analysis of the methods has focused specifically on the results and architectural details provided by the different method’s models. Therefore, certain differences with respect to the data used during training have been omitted. In order to give a much more complete and realistic picture, in this section we highlight the inconsistencies in comparing different SSL methodologies for STR. It is worth noting that this section is not intended to dismiss the conclusions drawn above, but rather to nuance and provide much more complete conclusions that

allow us to reach a greater degree of understanding and also promote more accurate benchmarking.

It is well known that errors can arise when comparing models due to data issues in STR (Baek et al, 2019), and the case of SSL is no exception. From the earliest methods to the most recent ones, the use of training data has evolved and expanded, leading to distorted comparisons between different models. For instance, Table 6 presents the data used in each method for pre-training and fine-tuning, as reflected in the result comparisons shown in Fig. 23. Early works, such as SeqCLR and SimAN, use 8M of synthetic data for both pre-training and fine-tuning, while later methods like DiG, CCD, Dual-MAE, MaskOCR, and SSM employ larger datasets, utilizing unlabeled real data for pre-training and larger amounts of synthetic data for fine-tuning. This variation in data usage complicates direct comparisons and highlights the need for standardized evaluation protocols.

It is not surprising that larger amounts of training data favor higher performance. A clear example of this is Text-DIAE. Its performance is more limited, as shown in Fig. 23a, despite being a ViT trained with a similar method (MIM) to the other ViT. One possible cause for this is that it has been trained with only 4M data, compared to the 32.77M of pre-training data and 17M of fine-tuning data used in the DiG, MaskOCR, or CCD methods. Furthermore, the lower performance of CNN architectures may also be influenced by the fact that they have generally been trained with smaller amounts of data. This disparity in training data volume further emphasizes the need for standardized evaluation protocols to ensure fair comparisons across different models and methodologies.

Our analysis reveals that, although the most recent methods define the current state of the art, they benefit from larger amounts of data, resulting in more robust and generalizable models. Therefore, older methods should not be overlooked, as they offer very competitive performances and provide valuable knowledge and insights that contribute to the development and understanding of SSL in STR. Recognizing the contributions of these earlier methods is essential for advancing the field and ensuring a comprehensive understanding of its evolution.

5.2 Analysis of SSL performance for HTR

Although to a lesser extent, the development of SSL also impacted the field of HTR significantly. In Fig. 25 is shown the SSL-TR methods presenting results for IAM and CVL datasets. For instance, it can be appreciated that the performance on the well-known IAM dataset ranges from the first model (SeqCLR) to the best-performing one (DiG) by approximately 14 units of WAcc.

Furthermore, unlike in STR, the current HTR datasets are still challenging, since they present considerable room for improvement. When using a small percentage of the data for fine-tuning, this is even more pronounced. Figure 26 shows the methods that present the results when using 5% and 10% of labeled data from the IAM dataset, barely exceeding a performance of 50%.

The results from Fig. 25 report a dominance of architectures that use Att or TD as decoders. Incorporating a language model for these can be especially beneficial since it allows a more explicit understanding of the word being recognized as a whole. This is evidenced in the work of Penarrubia et al (2024), where simply replacing CTC with TD considerably increases the WAcc.

5.2.1 What is wrong when comparing SSL methods for HTR?

Once again, strict comparison in HTR can lead to erroneous conclusions due to the disparity data conditions in which the different proposals are trained. In SeqCLR, the first SSL method for HTR, the data settings are not explicitly provided, either in PerSec and Text-DIAE. This leads to other methods using different data conditions for training. For example, DiG mentions that it merges the IAM and CVL sets for training the model. However, ChaCo mentions that, after consulting the authors of SeqCLR, only the training sets corresponding to each evaluated dataset are used for pre-training. Therefore, they reproduce that configuration. This is followed by the works of Zhang et al (2022d); Penarrubia et al (2024).

It is obvious that merging different datasets for pre-training has a significant impact on the performance of the model. While DiG uses 146,805 images for training, in works such SeqCLR and such ChaCo around 74000 are used for the IAM

Table 6: Datasets used for pre-training and fine-tuning by the different SSL-TR methods. This data configurations are the considered for the results illustrated in Figs. 23 and 24. The differences between data configurations give rise to unfair comparisons and these are addressed in Section 5.1.3.

Method	Pre-training (SSL)	Fine-tuning	
		Synthetic	Real
SeqCLR	ST (8M)	ST (8M)	-
SimAN	ST (8M)	ST (8M)	-
PerSec	STD (17M)	STD (17M)	-
DiG	STD+URD (32.77M)	STD (17M)	ARD (2.78M)
Text-DIAE	Mod-ST (4M)	Mod-ST (4M)	-
RCLSTR	ST (5.5)	ST (5.5)	-
STR-CPC	Real-U (4.2M)	-	Real-L (276K)
MaskOCR	STD+URD (32.77M)	STD (17M)	ARD (2.78M)
CCD	STD+URD (32.77M)	STD (17M)	ARD (2.78M)
Dual-MAE	STD+ARD (19.78M)	STD (17M)	ARD (2.78M)
SSM	URD (15.77)	STD (17M)	ARD (2.78M)

and CVL models. This makes the comparison with available results unfair, since merging datasets introduces a greater diversity and amount of data, thus allowing a model to learn better. Therefore, it is not known how much of the improvement offered by DiG is due to the use of ViT and the SSL method itself and how much is due to the greater amount of data, so the current method that defines the baseline to be outperformed is not so indicative. It is, therefore, crucial that future research efforts explicitly detail their training configurations. Furthermore, a standard protocol describing how to use the datasets should be established to ensure a fair and reproducible evaluation.

6 Conclusions


We have reviewed the existing literature as regards Self-Supervised Learning (SSL) applied to Text Recognition (TR) with the aim of describing, analyzing, and comparing the different existing alternatives in the field. Additionally, we have highlighted inconsistencies in the comparisons of these methods to promote more precise benchmarking and enable the scientific community to more clearly identify the real improvements provided by new approaches. Below we discuss different topics that are yet to be highlighted.

6.1 Current trends


In this subsection, we review the historical development of SSL, highlighting significant milestones and trends that have shaped the field. We also discuss how these trends are reflected in the evolution of SSL methods for TR.

SSL has a long history of development. In its early days, discriminative learning was primarily used, such as those based on spatial context (Doersch et al, 2015; Noroozi and Favaro, 2016) or geometric pretext tasks (Gidaris et al, 2018). Generative tasks like inpainting also emerged early and demonstrated their effectiveness (Pathak et al, 2016; Xiang et al, 2023). Then, there was a convergence towards joint-embedding architectures that search for similarities between views of the same image, avoiding the collapse problem in various ways, such as using negative pairs in contrastive learning (He et al, 2020; Chen et al, 2020a), regularizing terms in information-maximization (Zbontar et al, 2021; Bardes et al, 2021, 2022; Tong et al, 2023), or different architectures in distillation (Grill et al, 2020; Chen and He, 2021; Caron et al, 2021). Recently, with the emergence of Vision Transformers (ViT), Masked Image Modeling (MIM) has gained considerable attention (Zhang et al, 2022a), also in combination with other paradigms (Ozbulak et al, 2023).

This evolution of SSL is also reflected in the field of TR. Early methods, such as SeqCLR (Aberdam et al, 2021) or PerSec (Liu et al, 2022),

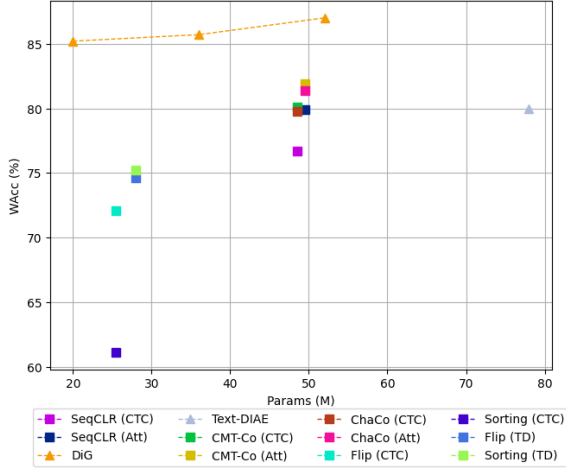


(a) Results for IAM dataset

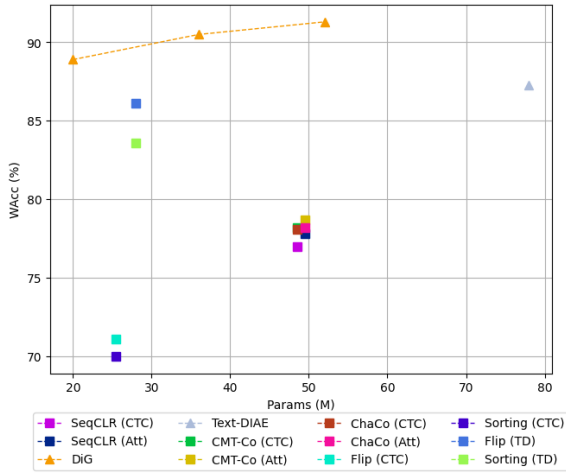


(b) Results for CVL dataset

Fig. 25: Comparison of methods that present results under semi-supervised settings for IAM and CVL datasets. The triangle and square markers respectively indicate fully transformer-based and CNN-based architectures. Dashed lines connect different sizes of the same model. For CNN-based models, markers show whether the decoder is Att, CTC or TD.

and SimAN (Luo et al, 2022), were framed within contrastive and generative learning, respectively, which were the state of the art at the time. Other works later explored the use of MIM and ViT architectures (Souibgui et al, 2023; Lyu et al, 2023; Guan et al, 2023). The most recent works

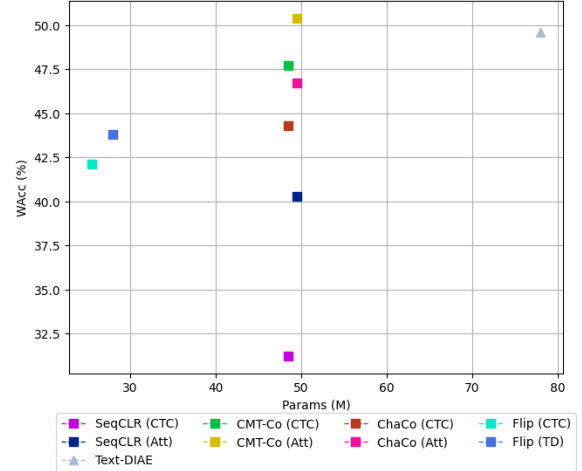

(a) Results for IAM dataset using 5% of training data.

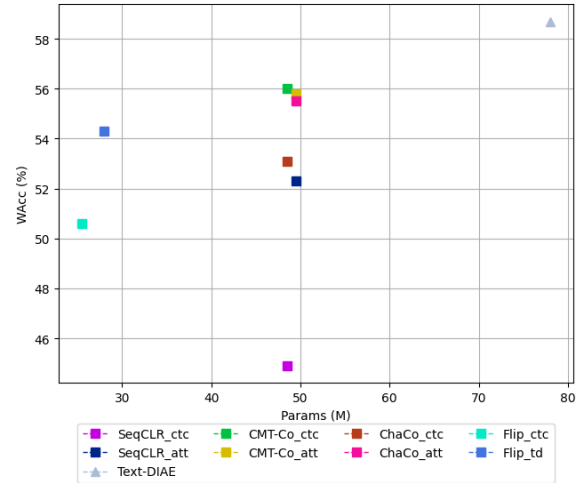

(b) Results for IAM dataset using 10% of training data.

Fig. 26: Results under semi-supervised settings for IAM datasets when using a reduced training set. For CNN-based models, markers show whether the decoder is Att, CTC or TD.

explore the combination of different SSL working principles (Yang et al, 2022a; Gao et al, 2024).

6.2 Open questions

This subsection addresses the gaps and challenges within the current SSL landscape for TR. We identify unexplored SSL categories, the need for a solid theoretical understanding, issues related

to efficiency, and the importance of standardized benchmarking protocols.

6.2.1 Unexplored SSL categories

Despite the significant progress in this field over a short period, many SSL areas remain unexplored for TR (Penarrubia et al, 2024). One might think that, due to the recent dominance of MIM, other fields hold little interest. However, as previously mentioned, there is a current trend to combine different paradigms. Thus, even if new methods do not strictly surpass the current state of the art, if they produce competitive and meaningful results, they should be published and made visible. These contributions could be useful in other fields, inspire new methods, or be combined in the future.

Unexplored SSL subcategories for TR include clustering (Caron et al, 2018, 2020; Qian et al, 2022), information-maximization (Zbontar et al, 2021; Bardes et al, 2021; Tong et al, 2023), use of GAN (Goodfellow et al, 2014; Radford et al, 2015; Yu et al, 2021), and inpainting (Pathak et al, 2016; Pajot et al, 2019; Elharrouss et al, 2020). For example, clustering, although being one of the oldest SSL methods and seemingly less relevant now, has been revived in works like that of Zhang et al (2021); Jiang et al (2023b) to be combined with contrastive learning. Therefore, it is crucial to explore and develop all SSL categories for TR.

6.2.2 Theoretical understanding

A solid theoretical foundation is essential to guide the development and application of SSL methods. While image classification has seen extensive research into how different paradigms learn data representations (Caron et al, 2021; Zhang et al, 2022c; Garrido et al, 2022; Chen et al, 2022; Zhang et al, 2022b; Ben-Shaul et al, 2023), TR has yet to see similar studies. Understanding how different models learn or what they focus on after applying different SSL categories is crucial.

In TR, there are two main levels of information: visual (recognizing a character by its shape) and semantic (recognizing a character by its context). It would be beneficial to understand how a DNN focuses on or distinguishes between these types of information and how they influence SSL training. So far, only PerSec has shown the differences between these two levels of information by

visualizing the embeddings produced in different network layers.

Additionally, theoretical understanding should help clarify contradictory conclusions drawn in different works. For example, in contrastive learning, the search for the unit to calculate the contrastive loss is a constant issue. SeqCLR focuses on subword level, but works like CMT-Co or ChaCo argue that subword level can break character or semantic continuity, suggesting character level is more suitable. Conversely, PerSec suggests negative pairs across different samples can break semantic continuity, while RCLSTR encourages rearrangement and contrastive loss calculation across samples. To validate these assumptions, studying how these issues influence representation quality is still missing.

6.2.3 Efficient SSL

As mentioned by Ozbolak et al (2023), current SSL methods require substantial computational resources. The latest trend of combining SSL methods to leverage their benefits further increases these complexities. For instance, MoCo v3 requires 625 TPU days and SimMIM claims to be 1.8 times more efficient than MoCo v3. DiG combines MoCo v3 with SimMIM, adding the computational costs of both methods. Executing such methods on large data volumes requires significant computational capacity. Additionally, TR methods often consider both visual and semantic information, resulting in more extensive and longer methods.

Thus, it is essential to investigate and implement techniques for efficient training and evaluation (Ciga et al, 2021; Baevski et al, 2023) and value simpler methods requiring less computational power to democratize the use of SSL in TR, as done for specific SSL working principles (Wang et al, 2021; Li et al, 2021a).

6.2.4 Standard evaluation protocols

A significant challenge in comparing different SSL methods for TR is the inconsistency in the data used for training, a topic that we have substantially covered in this survey. Standardizing datasets and clear documentation on how they are used in the experiments is imperative. Some studies use a combination of multiple datasets for

training, while others use isolated datasets, leading to incomparable results. Establishing common benchmarks and protocols will enable more accurate and fair comparisons, allowing to identify actual advancements in the field.

6.3 Future research

In this subsection, we outline potential areas for future research in SSL for both Scene Text Recognition (STR) and Handwritten Text Recognition (HTR). We discuss the challenges, opportunities, and potential impacts of advancing SSL methods in these fields.

6.3.1 Future research of SSL for STR

SSL leverages the data’s inherent structure to create supervisory signals without relying on external labels. Due to this unique characteristic, it has been demonstrated that SSL does help in issues like data scarcity (Kraft et al, 2021; Akrim et al, 2023), generalization capabilities (Bansal et al, 2020; Tendle and Hasan, 2021; Huang et al, 2021; Kim et al, 2021), overfitting, or class imbalance (Liu et al, 2021a; Li et al, 2021b; Zhou et al, 2023), which are prevalent in STR (Wan et al, 2020; Garcia-Bordils et al, 2022; Yang et al, 2024). Then, SSL techniques can heavily alleviate such challenges by reducing out-of-vocabulary reliance (Zhang et al, 2022f), addressing background noise or distortions in natural scenes (Zhuang et al, 2022).

As explained in Section 5.1.2, STR is currently reaching a performance ceiling due to recent developments and the simplicity of current benchmarking datasets. Works like that of Jiang et al (2023a) have already highlighted this problem and proposed more challenging datasets. The Union14M-Benchmark dataset (Jiang et al, 2023a), used by the latest method recorded in this work (SSM), focuses on unexplored STR problems such as salient text, multi-word text, and incomplete text. It is particularly interesting to see how SSL can improve recognition under such circumstances. Moreover, using well-defined datasets would help alleviate the data issues mentioned above.

6.3.2 Future research of SSL for HTR

Following the STR trend, SSL methods developed for HTR have been evaluated for word-level recognition. However, the current state of HTR is line-level recognition (Voigtlaender et al, 2016; Chowdhury and Vig, 2018; Yousef et al, 2020; Coquenot et al, 2022; Li et al, 2023) and beyond. Therefore, it would be advisable to start evaluating how current methods perform at least at the line level, which is probably the most common setting in the HTR literature. Line-level recognition would introduce new challenges, enriching and complicating SSL application in this field. The variability in line lengths and aspect ratios, for instance, could make it difficult to use methods developed for STR, which typically rescale inputs to a fixed size. Additionally, semantic information would expand from word level (character set) to line level (word set). These challenges have yet to be explored, limiting the potential of current SSL methods in HTR.

Furthermore, HTR has recently transitioned to develop paragraph- or page-level recognition using end-to-end formulations (Singh and Karayev, 2021; Kim et al, 2022; Dhiaf et al, 2023; Coquenot et al, 2023). These typically use curriculum learning or synthetic data generation for model training. Therefore, this challenge could significantly benefit from SSL methods that enhance model learning and robustness by pre-training on real unlabeled data in a self-supervised manner.

While STR has seen the development of unlabeled real datasets for SSL, to our knowledge HTR has not yet explored this area. The current state of the art still relies on pre-training with synthetic data generation (Kang et al, 2020a; Cascianelli et al, 2021; Kang et al, 2022; Pippi et al, 2023). Therefore, efforts should also be made to create large datasets of unlabeled real data to enable the development of more robust HTR models using SSL.

Acknowledgements. This work was partially funded by the Generalitat Valenciana through project CIGE/2023/216. The first author is supported by the University of Alicante through FPU Program (UAFPU22-19).

Declarations

- **Competing interests:** The authors have no competing interests to declare that are relevant to the content of this article.
- **Author contributions:** C.P. had the idea for the article, performed the literature search and data analysis, and drafted the work; J.C.-Z. and J.J.V.-M. critically revised the work.

References

- Aberdam A, Litman R, Tsiper S, et al (2021) Sequence-to-sequence contrastive learning for text recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp 15302–15312
- Aberdam A, Ganz R, Mazor S, et al (2022) Multimodal semi-supervised learning for text recognition. arXiv preprint arXiv:220503873
- Aggarwal A, Mittal M, Battineni G (2021) Generative adversarial network: An overview of theory and applications. *International Journal of Information Management Data Insights* 1(1):100004
- Agrawal P, Carreira J, Malik J (2015) Learning to see by moving. In: Proceedings of the IEEE international conference on computer vision, pp 37–45
- Akrim A, Gogu C, Vingerhoeds R, et al (2023) Self-supervised learning for data scarcity in a fatigue damage prognostic problem. *Engineering Applications of Artificial Intelligence* 120:105837
- Albelwi S (2022) Survey on self-supervised learning: auxiliary pretext tasks and contrastive learning methods in imaging. *Entropy* 24(4):551
- Ali AM, Benjdira B, Koubaa A, et al (2023) Vision transformers in image restoration: A survey. *Sensors* 23(5):2385
- AlKendi W, Gechter F, Heyberger L, et al (2024) Advancements and challenges in handwritten text recognition: A comprehensive survey. *Journal of Imaging* 10(1):18
- Ansari A, Kaur B, Rakhra M, et al (2022) Handwritten text recognition using deep learning algorithms. In: 2022 4th International Conference on Artificial Intelligence and Speech Technology (AIST), IEEE, pp 1–6
- Anwar S, Tahir M, Li C, et al (2020) Image colorization: A survey and dataset. arXiv preprint arXiv:200810774
- Atienza R (2021) Data augmentation for scene text recognition. In: Proceedings of the IEEE/CVF international conference on computer vision, pp 1561–1570
- Ba JL, Kiros JR, Hinton GE (2016) Layer normalization. arXiv preprint arXiv:160706450
- Baek J, Kim G, Lee J, et al (2019) What is wrong with scene text recognition model comparisons? dataset and model analysis. In: Proceedings of the IEEE/CVF international conference on computer vision, pp 4715–4723
- Baek J, Matsui Y, Aizawa K (2021) What if we only use real datasets for scene text recognition? toward scene text recognition with fewer labels. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 3113–3122
- Baevski A, Zhou Y, Mohamed A, et al (2020) wav2vec 2.0: A framework for self-supervised learning of speech representations. *Advances in neural information processing systems* 33:12449–12460
- Baevski A, Babu A, Hsu WN, et al (2023) Efficient self-supervised learning with contextualized target representations for vision, speech and language. In: *International Conference on Machine Learning*, PMLR, pp 1416–1429
- Bahdanau D, Cho K, Bengio Y (2014) Neural machine translation by jointly learning to align and translate. arXiv preprint arXiv:14090473
- Balestriero R, Ibrahim M, Sobal V, et al (2023) A cookbook of self-supervised learning. arXiv preprint arXiv:230412210

- Bansal Y, Kaplun G, Barak B (2020) For self-supervised learning, rationality implies generalization, provably. arXiv preprint arXiv:201008508
- Bao H, Dong L, Piao S, et al (2021) Beit: Bert pre-training of image transformers. arXiv preprint arXiv:210608254
- Bardes A, Ponce J, LeCun Y (2021) Vicreg: Variance-invariance-covariance regularization for self-supervised learning. arXiv preprint arXiv:210504906
- Bardes A, Ponce J, LeCun Y (2022) Vicregl: Self-supervised learning of local visual features. *Advances in Neural Information Processing Systems* 35:8799–8810
- Baykal G, Ozcelik F, Unal G (2022) Exploring deshuffle-gans in self-supervised generative adversarial networks. *Pattern Recognition* 122:108244
- Ben-Shaul I, Shwartz-Ziv R, Galanti T, et al (2023) Reverse engineering self-supervised learning. *Advances in Neural Information Processing Systems* 36:58324–58345
- Bezerra BLD, Zanchettin C, Toselli AH, et al (2017) *Handwriting: recognition, development and analysis*. Nova Science Publishers, Inc.
- Biten AF, Tito R, Mafla A, et al (2019) Scene text visual question answering. In: *Proceedings of the IEEE/CVF international conference on computer vision*, pp 4291–4301
- Bordes F, Lavoie S, Balestriero R, et al (2023) A surprisingly simple technique to control the pretraining bias for better transfer: Expand or narrow your representation. arXiv preprint arXiv:230405369
- Bromley J, Guyon I, LeCun Y, et al (1993) Signature verification using a "siamese" time delay neural network. *Advances in neural information processing systems* 6
- Carlucci FM, D’Innocente A, Bucci S, et al (2019) Domain generalization by solving jigsaw puzzles. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp 2229–2238
- Caron M, Bojanowski P, Joulin A, et al (2018) Deep clustering for unsupervised learning of visual features. In: *Proceedings of the European conference on computer vision (ECCV)*, pp 132–149
- Caron M, Misra I, Mairal J, et al (2020) Unsupervised learning of visual features by contrasting cluster assignments. *Advances in neural information processing systems* 33:9912–9924
- Caron M, Touvron H, Misra I, et al (2021) Emerging properties in self-supervised vision transformers. In: *Proceedings of the IEEE/CVF international conference on computer vision*, pp 9650–9660
- Cascianelli S, Cornia M, Baraldi L, et al (2021) Learning to read l’infinito: handwritten text recognition with synthetic training data. In: *Computer Analysis of Images and Patterns: 19th International Conference, CAIP 2021, Virtual Event, September 28–30, 2021, Proceedings, Part II* 19, Springer, pp 340–350
- Chen S, Guo W (2023) Auto-encoders in deep learning—a review with new perspectives. *Mathematics* 11(8):1777
- Chen T, Zhai X, Ritter M, et al (2019) Self-supervised gans via auxiliary rotation loss. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp 12154–12163
- Chen T, Kornblith S, Norouzi M, et al (2020a) A simple framework for contrastive learning of visual representations. In: *International conference on machine learning*, PMLR, pp 1597–1607
- Chen X, He K (2021) Exploring simple siamese representation learning. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp 15750–15758
- Chen X, Fan H, Girshick R, et al (2020b) Improved baselines with momentum contrastive learning. arXiv preprint arXiv:200304297

- Chen X, Jin L, Zhu Y, et al (2021a) Text recognition in the wild: A survey. *ACM Computing Surveys (CSUR)* 54(2):1–35
- Chen X, Xie S, He K (2021b) An empirical study of training self-supervised vision transformers. In: *Proceedings of the IEEE/CVF international conference on computer vision*, pp 9640–9649
- Chen X, Ding M, Wang X, et al (2024) Context autoencoder for self-supervised representation learning. *International Journal of Computer Vision* 132(1):208–223
- Chen Y, Bardes A, Li Z, et al (2022) Bag of image patch embedding behind the success of self-supervised learning. *arXiv preprint arXiv:220608954*
- Cheng Z, Yang Q, Sheng B (2015) Deep colorization. In: *Proceedings of the IEEE international conference on computer vision*, pp 415–423
- Cheng Z, Bai F, Xu Y, et al (2017) Focusing attention: Towards accurate text recognition in natural images. In: *Proceedings of the IEEE international conference on computer vision*, pp 5076–5084
- Chng CK, Liu Y, Sun Y, et al (2019) Icdar2019 robust reading challenge on arbitrary-shaped text-rrc-art. In: *2019 International Conference on Document Analysis and Recognition (ICDAR)*, IEEE, pp 1571–1576
- Chowdhury A, Vig L (2018) An efficient end-to-end neural model for handwritten text recognition. *arXiv preprint arXiv:180707965*
- Ciga O, Xu T, Martel AL (2021) Resource and data efficient self supervised learning. *arXiv preprint arXiv:210901721*
- Coquenat D, Chatelain C, Paquet T (2022) End-to-end handwritten paragraph text recognition using a vertical attention network. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 45(1):508–524
- Coquenat D, Chatelain C, Paquet T (2023) Dan: a segmentation-free document attention network for handwritten document recognition. *IEEE transactions on pattern analysis and machine intelligence*
- Creswell A, White T, Dumoulin V, et al (2018) Generative adversarial networks: An overview. *IEEE signal processing magazine* 35(1):53–65
- Devlin J, Chang MW, Lee K, et al (2018) Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:181004805*
- Dhiaf M, Rouhou AC, Kessentini Y, et al (2023) Msdoctr-lite: A lite transformer for full page multi-script handwriting recognition. *Pattern Recognition Letters* 169:28–34
- Diaz DH, Qin S, Ingle R, et al (2021) Rethinking text line recognition models. *arXiv preprint arXiv:210407787*
- Doersch C, Gupta A, Efros AA (2015) Unsupervised visual representation learning by context prediction. In: *Proceedings of the IEEE international conference on computer vision*, pp 1422–1430
- Dong S, Wang P, Abbas K (2021) A survey on deep learning and its applications. *Computer Science Review* 40:100379
- Dosovitskiy A, Beyer L, Kolesnikov A, et al (2020) An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:201011929*
- Elharrouss O, Almaadeed N, Al-Maadeed S, et al (2020) Image inpainting: A review. *Neural Processing Letters* 51:2007–2028
- Feng Z, Xu C, Tao D (2019) Self-supervised representation learning by rotation feature decoupling. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp 10364–10374
- Fischer A, Keller A, Frinken V, et al (2012) Lexicon-free handwritten word spotting using character hmms. *Pattern recognition letters* 33(7):934–942

- Gao Y, Chen Y, Wang J, et al (2021) Semi-supervised scene text recognition. *IEEE Transactions on Image Processing* 30:3005–3016
- Gao Z, Wang Y, Qu Y, et al (2024) Self-supervised pre-training with symmetric superimposition modeling for scene text recognition. *arXiv preprint arXiv:240505841*
- Garcia-Bordils S, Mafla A, Biten AF, et al (2022) Out-of-vocabulary challenge report. In: *European Conference on Computer Vision*, Springer, pp 359–375
- Garrido Q, Chen Y, Bardes A, et al (2022) On the duality between contrastive and non-contrastive self-supervised learning. *arXiv preprint arXiv:220602574*
- Ghosh T, Sen S, Obaidullah SM, et al (2022) Advances in online handwritten recognition in the last decades. *Computer Science Review* 46:100515
- Gidaris S, Singh P, Komodakis N (2018) Unsupervised representation learning by predicting image rotations. *arXiv preprint arXiv:180307728*
- Gómez L, Mafla A, Rusinol M, et al (2018) Single shot scene text retrieval. In: *Proceedings of the European conference on computer vision (ECCV)*, pp 700–715
- Goodfellow I, Pouget-Abadie J, Mirza M, et al (2014) Generative adversarial nets. *Advances in neural information processing systems* 27
- Graves A, Fernández S, Gomez F, et al (2006) Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks. In: *Proceedings of the 23rd international conference on Machine learning*, pp 369–376
- Grill JB, Strub F, Althé F, et al (2020) Bootstrap your own latent—a new approach to self-supervised learning. *Advances in neural information processing systems* 33:21271–21284
- Grosicki E, El Abed H (2009) Icdar 2009 handwriting recognition competition. In: *2009 10th International Conference on Document Analysis and Recognition*, IEEE, pp 1398–1402
- Guan T, Shen W, Yang X, et al (2023) Self-supervised character-to-character distillation for text recognition. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp 19473–19484
- Gui J, Sun Z, Wen Y, et al (2021) A review on generative adversarial networks: Algorithms, theory, and applications. *IEEE transactions on knowledge and data engineering* 35(4):3313–3332
- Gupta A, Vedaldi A, Zisserman A (2016) Synthetic data for text localisation in natural images. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp 2315–2324
- Gupta K, Ajanthan T, Hengel Avd, et al (2022) Understanding and improving the role of projection head in self-supervised learning. *arXiv preprint arXiv:221211491*
- Gupta N, Jalal AS (2022) Traditional to transfer learning progression on scene text detection and recognition: a survey. *Artificial Intelligence Review* 55(4):3457–3502
- Gutmann M, Hyvärinen A (2010) Noise-contrastive estimation: A new estimation principle for unnormalized statistical models. In: *Proceedings of the thirteenth international conference on artificial intelligence and statistics, JMLR Workshop and Conference Proceedings*, pp 297–304
- Hadsell R, Chopra S, LeCun Y (2006) Dimensionality reduction by learning an invariant mapping. In: *2006 IEEE computer society conference on computer vision and pattern recognition (CVPR'06)*, IEEE, pp 1735–1742
- Harshvardhan G, Gourisaria MK, Pandey M, et al (2020) A comprehensive survey and analysis of generative models in machine learning. *Computer Science Review* 38:100285
- He K, Zhang X, Ren S, et al (2016) Deep residual learning for image recognition. In: *Proceedings*

- of the IEEE conference on computer vision and pattern recognition, pp 770–778
- He K, Fan H, Wu Y, et al (2020) Momentum contrast for unsupervised visual representation learning. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 9729–9738
- He K, Chen X, Xie S, et al (2022) Masked autoencoders are scalable vision learners. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 16000–16009
- De la Higuera C, Oncina J (2014) The most probable string: an algorithmic study. *Journal of Logic and Computation* 24(2):311–330
- Hochreiter S, Schmidhuber J (1997) Long short-term memory. *Neural computation* 9(8):1735–1780
- Huang W, Yi M, Zhao X, et al (2021) Towards the generalization of contrastive self-supervised learning. arXiv preprint arXiv:211100743
- Hubenthal M, Kumar S (2023) Image-text pre-training for logo recognition. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision, pp 1145–1154
- Iwana BK, Rizvi STR, Ahmed S, et al (2016) Judging a book by its cover. arXiv preprint arXiv:161009204
- Jaderberg M, Simonyan K, Vedaldi A, et al (2014) Synthetic data and artificial neural networks for natural scene text recognition. arXiv preprint arXiv:14062227
- Jaiswal A, Babu AR, Zadeh MZ, et al (2020) A survey on contrastive self-supervised learning. *Technologies* 9(1):2
- Jiang Q, Wang J, Peng D, et al (2023a) Revisiting scene text recognition: A data perspective. In: Proceedings of the IEEE/CVF international conference on computer vision, pp 20543–20554
- Jiang X, Zhang J, Du J, et al (2022) Scene text recognition with self-supervised contrastive predictive coding. In: 2022 26th International Conference on Pattern Recognition (ICPR), IEEE, pp 1514–1521
- Jiang X, Du J, Hu P, et al (2023b) Group, contrast and recognize: A self-supervised method for chinese character recognition. In: International Conference on Document Analysis and Recognition, Springer, pp 411–427
- Jing L, Tian Y (2020) Self-supervised visual feature learning with deep neural networks: A survey. *IEEE transactions on pattern analysis and machine intelligence* 43(11):4037–4058
- Kang L, Riba P, Rusinol M, et al (2020a) Distilling content from style for handwritten word recognition. In: 2020 17th International Conference on Frontiers in Handwriting Recognition (ICFHR), IEEE, pp 139–144
- Kang L, Rusinol M, Fornés A, et al (2020b) Unsupervised writer adaptation for synthetic-to-real handwritten word recognition. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision, pp 3502–3511
- Kang L, Riba P, Rusiñol M, et al (2022) Pay attention to what you read: non-recurrent handwritten text-line recognition. *Pattern Recognition* 129:108766
- Karatzas D, Shafait F, Uchida S, et al (2013) Icdar 2013 robust reading competition. In: 2013 12th international conference on document analysis and recognition, IEEE, pp 1484–1493
- Karatzas D, Gomez-Bigorda L, Nicolaou A, et al (2015) Icdar 2015 competition on robust reading. In: 2015 13th international conference on document analysis and recognition (ICDAR), IEEE, pp 1156–1160
- Khan T, Sarkar R, Mollah AF (2021) Deep learning approaches to scene text detection: a comprehensive review. *Artificial Intelligence Review* 54:3239–3298
- Kim D, Yoo Y, Park S, et al (2021) Selfreg: Self-supervised contrastive regularization for

- domain generalization. In: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp 9619–9628
- Kim G, Hong T, Yim M, et al (2022) Ocr-free document understanding transformer. In: European Conference on Computer Vision, Springer, pp 498–517
- Kleber F, Fiel S, Diem M, et al (2013) Cvl-database: An off-line database for writer retrieval, writer identification and word spotting. In: 2013 12th international conference on document analysis and recognition, IEEE, pp 560–564
- Kraft M, Pieczyński D, Siemionow KK (2021) Overcoming data scarcity for coronary vessel segmentation through self-supervised pre-training. In: Neural Information Processing: 28th International Conference, ICONIP 2021, Sanur, Bali, Indonesia, December 8–12, 2021, Proceedings, Part III 28, Springer, pp 369–378
- Krizhevsky A, Sutskever I, Hinton GE (2012) Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems* 25
- Larsson G, Maire M, Shakhnarovich G (2016) Learning representations for automatic colorization. In: Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14, Springer, pp 577–593
- Larsson G, Maire M, Shakhnarovich G (2017) Colorization as a proxy task for visual understanding. In: Proceedings of the IEEE conference on computer vision and pattern recognition, pp 6874–6883
- LeCun Y, Boser B, Denker JS, et al (1989) Back-propagation applied to handwritten zip code recognition. *Neural computation* 1(4):541–551
- Lee J, Park S, Baek J, et al (2020) On recognizing texts of arbitrary shapes with 2d self-attention. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops, pp 546–547
- Li C, Yang J, Zhang P, et al (2021a) Efficient self-supervised vision transformers for representation learning. arXiv preprint arXiv:210609785
- Li C, Fehérvári I, Zhao X, et al (2022) Seetek: Very large-scale open-set logo recognition with text-aware metric learning. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision, pp 2544–2553
- Li H, Xue FF, Chaitanya K, et al (2021b) Imbalance-aware self-supervised learning for 3d radiomic representations. In: Medical Image Computing and Computer Assisted Intervention—MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part II 24, Springer, pp 36–46
- Li M, Lv T, Chen J, et al (2023) Trocr: Transformer-based optical character recognition with pre-trained models. In: Proceedings of the AAAI Conference on Artificial Intelligence, pp 13094–13102
- Liang J, Hu D, Wang Y, et al (2021) Source data-absent unsupervised domain adaptation through hypothesis transfer and labeling transfer. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 44(11):8602–8617
- Liu H, HaoChen JZ, Gaidon A, et al (2021a) Self-supervised learning is more robust to dataset imbalance. arXiv preprint arXiv:211005025
- Liu H, Wang B, Bao Z, et al (2022) Perceiving stroke-semantic context: Hierarchical contrastive learning for robust scene text recognition. In: Proceedings of the AAAI Conference on Artificial Intelligence, pp 1702–1710
- Liu J, Zhong Q, Yuan Y, et al (2020) Semi-text: Scene text detection with semi-supervised learning. *Neurocomputing* 407:343–353
- Liu X, Zhang F, Hou Z, et al (2021b) Self-supervised learning: Generative or contrastive. *IEEE transactions on knowledge and data engineering* 35(1):857–876

- Long S, He X, Yao C (2021) Scene text detection and recognition: The deep learning era. *International Journal of Computer Vision* 129(1):161–184
- Lucas SM, Panaretos A, Sosa L, et al (2005) Icdar 2003 robust reading competitions: entries, results, and future directions. *International Journal of Document Analysis and Recognition (IJDAR)* 7:105–122
- Luo C, Zhu Y, Jin L, et al (2020) Learn to augment: Joint data augmentation and network optimization for text recognition. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp 13746–13755
- Luo C, Jin L, Chen J (2022) Siman: Exploring self-supervised representation learning of scene text via similarity-aware normalization. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp 1039–1048
- Lyu P, Zhang C, Liu S, et al (2023) Maskocr: Text recognition with masked encoder-decoder pretraining. *arXiv preprint arXiv:220600311*
- Marti UV, Bunke H (2002) The iam-database: an english sentence database for offline handwriting recognition. *International journal on document analysis and recognition* 5:39–46
- Minaee S, Boykov Y, Porikli F, et al (2021) Image segmentation using deep learning: A survey. *IEEE transactions on pattern analysis and machine intelligence* 44(7):3523–3542
- Mishra A, Alahari K, Jawahar C (2012) Scene text recognition using higher order language priors. In: *BMVC-British machine vision conference, BMVA*
- Misra I, Maaten Lvd (2020) Self-supervised learning of pretext-invariant representations. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp 6707–6717
- Naiemi F, Ghods V, Khalesi H (2022) Scene text detection and recognition: a survey. *Multimedia Tools and Applications* 81(14):20255–20290
- Narang SR, Jindal MK, Kumar M (2020) Ancient text recognition: a review. *Artificial Intelligence Review* 53(8):5517–5558
- Nayef N, Patel Y, Busta M, et al (2019) Icdar2019 robust reading challenge on multi-lingual scene text detection and recognition—rrc-mlt-2019. In: *2019 International conference on document analysis and recognition (ICDAR)*, IEEE, pp 1582–1587
- Nikitha A, Geetha J, JayaLakshmi D (2020) Handwritten text recognition using deep learning. In: *2020 International Conference on Recent Trends on Electronics, Information, Communication & Technology (RTEICT)*, IEEE, pp 388–392
- Nikolaidou K, Seuret M, Mokayed H, et al (2022) A survey of historical document image datasets. *International Journal on Document Analysis and Recognition (IJDAR)* 25(4):305–338
- Noroozi M, Favaro P (2016) Unsupervised learning of visual representations by solving jigsaw puzzles. In: *European conference on computer vision*, Springer, pp 69–84
- Novotny D, Albanie S, Larlus D, et al (2018) Self-supervised learning of geometrically stable features through probabilistic introspection. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp 3637–3645
- Oord Avd, Li Y, Vinyals O (2018) Representation learning with contrastive predictive coding. *arXiv preprint arXiv:180703748*
- Ozbulak U, Lee HJ, Boga B, et al (2023) Know your self-supervised learning: A survey on image-based generative and discriminative training. *arXiv preprint arXiv:230513689*
- Pajot A, de Bezenac E, Gallinari P (2019) Unsupervised adversarial image inpainting. *arXiv preprint arXiv:191212164*

- Pang K, Yang Y, Hospedales TM, et al (2020) Solving mixed-modal jigsaw puzzle for fine-grained sketch-based image retrieval. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 10347–10355
- Pathak D, Krahenbuhl P, Donahue J, et al (2016) Context encoders: Feature learning by inpainting. In: Proceedings of the IEEE conference on computer vision and pattern recognition, pp 2536–2544
- Penarrubia C, Garrido-Munoz C, Valero-Mas JJ, et al (2024) Spatial context-based self-supervised learning for handwritten text recognition. arXiv preprint arXiv:240411585
- Phan TQ, Shivakumara P, Tian S, et al (2013) Recognizing text with perspective distortion in natural scenes. In: Proceedings of the IEEE international conference on computer vision, pp 569–576
- Pippi V, Cascianelli S, Baraldi L, et al (2023) Evaluating synthetic pre-training for handwriting processing tasks. *Pattern Recognition Letters* 172:44–50
- Puigcerver J (2017) Are multidimensional recurrent layers really necessary for handwritten text recognition? In: 2017 14th IAPR international conference on document analysis and recognition (ICDAR), IEEE, pp 67–72
- Qian Q, Xu Y, Hu J, et al (2022) Unsupervised visual representation learning by online constrained k-means. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp 16640–16649
- Qiao Z, Ji Z, Yuan Y, et al (2023) Decoupling visual-semantic features learning with dual masked autoencoder for self-supervised scene text recognition. In: International Conference on Document Analysis and Recognition, Springer, pp 261–279
- Qiu X, Sun T, Xu Y, et al (2020) Pre-trained models for natural language processing: A survey. *Science China Technological Sciences* 63(10):1872–1897
- Radford A, Metz L, Chintala S (2015) Unsupervised representation learning with deep convolutional generative adversarial networks. arXiv preprint arXiv:151106434
- Ramesh A, Pavlov M, Goh G, et al (2021) Zero-shot text-to-image generation. In: International conference on machine learning, Pmlr, pp 8821–8831
- Risnumawan A, Shivakumara P, Chan CS, et al (2014) A robust arbitrary text detection system for natural scene images. *Expert Systems with Applications* 41(18):8027–8048
- Rolfe JT (2016) Discrete variational autoencoders. arXiv preprint arXiv:160902200
- Sharma R, Kaushik B, Gondhi N (2020) Character recognition using machine learning and deep learning-a survey. In: 2020 International Conference on Emerging Smart Computing and Informatics (ESCI), IEEE, pp 341–345
- Sherstinsky A (2020) Fundamentals of recurrent neural network (rnn) and long short-term memory (lstm) network. *Physica D: Nonlinear Phenomena* 404:132306
- Shi B, Bai X, Yao C (2016a) An end-to-end trainable neural network for image-based sequence recognition and its application to scene text recognition. *IEEE transactions on pattern analysis and machine intelligence* 39(11):2298–2304
- Shi B, Wang X, Lyu P, et al (2016b) Robust scene text recognition with automatic rectification. In: Proceedings of the IEEE conference on computer vision and pattern recognition, pp 4168–4176
- Shi B, Yao C, Liao M, et al (2017) Icdar2017 competition on reading chinese text in the wild (rctw-17). In: 2017 14th iapr international conference on document analysis and recognition (ICDAR), IEEE, pp 1429–1434
- Singh A, Natarajan V, Shah M, et al (2019) Towards vqa models that can read. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 8317–8326

- Singh A, Pang G, Toh M, et al (2021) Textocr: Towards large-scale end-to-end reasoning for arbitrary-shaped scene text. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 8802–8812
- Singh SS, Karayev S (2021) Full page handwriting recognition via image to sequence extraction. In: Document Analysis and Recognition–ICDAR 2021: 16th International Conference, Lausanne, Switzerland, September 5–10, 2021, Proceedings, Part III 16, Springer, pp 55–69
- Smys S, Chen JIZ, Shakya S (2020) Survey on neural network architectures with deep learning. *Journal of Soft Computing Paradigm (JSCP)* 2(03):186–194
- Souibgui MA, Biswas S, Mafla A, et al (2023) Text-diae: A self-supervised degradation invariant autoencoder for text recognition and document enhancement. In: proceedings of the AAAI conference on artificial intelligence, pp 2330–2338
- Sun Y, Ni Z, Chng CK, et al (2019) Icdar 2019 competition on large-scale street view text with partial labeling-rrc-lsvt. In: 2019 International Conference on Document Analysis and Recognition (ICDAR), IEEE, pp 1557–1562
- Tao C, Zhu X, Su W, et al (2023) Siamese image modeling for self-supervised vision representation learning. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp 2132–2141
- Tendle A, Hasan MR (2021) A study of the generalizability of self-supervised representations. *Machine Learning with Applications* 6:100124
- Tong S, Chen Y, Ma Y, et al (2023) Emp-ssl: Towards self-supervised learning in one training epoch. arXiv preprint arXiv:230403977
- Valero-Mas JJ, Gallego AJ, Rico-Juan JR (2024) An overview of ensemble and feature learning in few-shot image classification using siamese networks. *Multimedia Tools and Applications* 83(7):19929–19952
- Vaswani A, Shazeer N, Parmar N, et al (2017) Attention is all you need. *Advances in neural information processing systems* 30
- Veit A, Matera T, Neumann L, et al (2016) Coco-text: Dataset and benchmark for text detection and recognition in natural images. arXiv preprint arXiv:160107140
- Vincent P, Larochelle H, Bengio Y, et al (2008) Extracting and composing robust features with denoising autoencoders. In: Proceedings of the 25th international conference on Machine learning, pp 1096–1103
- Voigtlaender P, Doetsch P, Ney H (2016) Handwriting recognition with large multidimensional long short-term memory recurrent neural networks. In: 2016 15th international conference on frontiers in handwriting recognition (ICFHR), IEEE, pp 228–233
- Wan Z, Zhang J, Zhang L, et al (2020) On vocabulary reliance in scene text recognition. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp 11425–11434
- Wang G, Wang K, Wang G, et al (2021) Solving inefficiency of self-supervised representation learning. In: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp 9505–9515
- Wang K, Babenko B, Belongie S (2011) End-to-end scene text recognition. In: 2011 International conference on computer vision, IEEE, pp 1457–1464
- Wang X, Gupta A (2015) Unsupervised learning of visual representations using videos. In: Proceedings of the IEEE international conference on computer vision, pp 2794–2802
- Wang XF, He ZH, Wang K, et al (2023) A survey of text detection and recognition algorithms based on deep learning technology. *Neurocomputing* 556:126702
- Wei C, Wang H, Shen W, et al (2020) Co2: Consistent contrast for unsupervised visual representation learning. arXiv preprint arXiv:201002217

- Xiang H, Zou Q, Nawaz MA, et al (2023) Deep learning for image inpainting: A survey. *Pattern Recognition* 134:109046
- Xie Z, Zhang Z, Cao Y, et al (2022) Simmim: A simple framework for masked image modeling. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp 9653–9663
- Yamaguchi S, Kanai S, Shioda T, et al (2021) Image enhanced rotation prediction for self-supervised learning. In: *2021 IEEE International Conference on Image Processing (ICIP)*, IEEE, pp 489–493
- Yang M, Liao M, Lu P, et al (2022a) Reading and writing: Discriminative and generative modeling for self-supervised text recognition. In: *Proceedings of the 30th ACM International Conference on Multimedia*, pp 4214–4223
- Yang M, Yang B, Liao M, et al (2024) Class-aware mask-guided feature refinement for scene text recognition. *Pattern Recognition* 149:110244
- Yang Z, Lu Y, Wang J, et al (2021) Tap: Text-aware pre-training for text-vqa and text-caption. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp 8751–8761
- Yang Z, Yu H, He Y, et al (2022b) Fully convolutional network-based self-supervised learning for semantic segmentation. *IEEE Transactions on Neural Networks and Learning Systems*
- Yousef M, Hussain KF, Mohammed US (2020) Accurate, data-efficient, unconstrained text recognition with convolutional neural networks. *Pattern Recognition* 108:107482
- Yu E, Zhang Z (2021) English billboard text recognition using deep learning. In: *Journal of Physics: Conference Series*, IOP Publishing, p 012003
- Yu J, Li X, Koh JY, et al (2021) Vector-quantized image modeling with improved vqgan. *arXiv preprint arXiv:211004627*
- Zbontar J, Jing L, Misra I, et al (2021) Barlow twins: Self-supervised learning via redundancy reduction. In: *International conference on machine learning*, PMLR, pp 12310–12320
- Zhang C, Ding W, Peng G, et al (2020) Street view text recognition with deep learning for urban scene understanding in intelligent transportation systems. *IEEE Transactions on Intelligent Transportation Systems* 22(7):4727–4743
- Zhang C, Zhang C, Song J, et al (2022a) A survey on masked autoencoder for self-supervised learning in vision and beyond. *arXiv preprint arXiv:220800173*
- Zhang C, Zhang K, Pham TX, et al (2022b) Dual temperature helps contrastive learning without many negative samples: Towards understanding and simplifying moco. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp 14441–14450
- Zhang C, Zhang K, Zhang C, et al (2022c) How does simsiam avoid collapse without negative samples? a unified understanding with self-supervised contrastive learning. *arXiv preprint arXiv:220316262*
- Zhang D, Nan F, Wei X, et al (2021) Supporting clustering with contrastive learning. *arXiv preprint arXiv:210312953*
- Zhang J, Lin T, Xu Y, et al (2023) Relational contrastive learning for scene text recognition. In: *Proceedings of the 31st ACM International Conference on Multimedia*, pp 5764–5775
- Zhang L, Qi GJ, Wang L, et al (2019a) Aet vs. aed: Unsupervised representation learning by auto-encoding transformations rather than data. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp 2547–2555
- Zhang R, Isola P, Efros AA (2016) Colorful image colorization. In: *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part III* 14, Springer, pp 649–666

- Zhang R, Zhou Y, Jiang Q, et al (2019b) Icdar 2019 robust reading challenge on reading chinese text on signboard. In: 2019 international conference on document analysis and recognition (ICDAR), IEEE, pp 1577–1581
- Zhang X, Wang J, Jin L, et al (2022d) Cmt-co: Contrastive learning with character movement task for handwritten text recognition. In: Proceedings of the Asian Conference on Computer Vision, pp 3104–3120
- Zhang X, Wang T, Wang J, et al (2022e) Chaco: character contrastive learning for handwritten text recognition. In: International Conference on Frontiers in Handwriting Recognition, Springer, pp 345–359
- Zhang X, Zhu B, Yao X, et al (2022f) Context-based contrastive learning for scene text recognition. In: Proceedings of the AAAI Conference on Artificial Intelligence, pp 3353–3361
- Zhang Y, Gueguen L, Zharkov I, et al (2017) Uber-text: A large-scale dataset for optical character recognition from street-level imagery. In: SUNw: Scene Understanding Workshop-CVPR, p 5
- Zhang Y, Nie S, Liu W, et al (2019c) Sequence-to-sequence domain adaptation network for robust text image recognition. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp 2740–2749
- Zheng M, You S, Wang F, et al (2021) Ressler: Relational self-supervised learning with weak augmentation. *Advances in Neural Information Processing Systems* 34:2543–2555
- Zhou J, Li G, Wang R, et al (2023) A novel contrastive self-supervised learning framework for solving data imbalance in solder joint defect detection. *Entropy* 25(2):268
- Zhou K, Liu Z, Qiao Y, et al (2022) Domain generalization: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 45(4):4396–4415
- Zhuang J, Ren Y, Li X, et al (2022) Text-level contrastive learning for scene text recognition. In: 2022 International Conference on Asian Language Processing (IALP), IEEE, pp 231–236