

Shapley Value Computation in Ontology-Mediated Query Answering

Meghyn Bienvenu^{1,2}, Diego Figueira¹, Pierre Lafourcade¹

¹ Univ. Bordeaux, CNRS, Bordeaux INP, LaBRI, UMR 5800, F-33400, Talence, France

² Japanese-French Laboratory for Informatics, CNRS, NII, IRL 2537, Tokyo, Japan

{meghyn.bienvenu, diego.figueira, pierre.lafourcade}@u-bordeaux.fr

Abstract

The Shapley value, originally introduced in cooperative game theory for wealth distribution, has found use in KR and databases for the purpose of assigning scores to formulas and database tuples based upon their contribution to obtaining a query result or inconsistency. In the present paper, we explore the use of Shapley values in ontology-mediated query answering (OMQA) and present a detailed complexity analysis of Shapley value computation (SVC) in the OMQA setting. In particular, we establish a FP/#P-hard dichotomy for SVC for ontology-mediated queries (\mathcal{T}, q) composed of an ontology \mathcal{T} formulated in the description logic $\mathcal{EL}\mathcal{HI}_\perp$ and a connected constant-free homomorphism-closed query q . We further show that the #P-hardness side of the dichotomy can be strengthened to cover possibly disconnected queries with constants. Our results exploit recently discovered connections between SVC and probabilistic query evaluation and allow us to generalize existing results on probabilistic OMQA.

☞ This pdf contains internal links: clicking on a notion leads to its *definition*.¹

1 Introduction

The Shapley value was originally proposed in the context of cooperative game theory as a method for fairly distributing the wealth of a coalition of players based upon their respective contributions. It has appealing theoretical properties, having been shown to be the unique wealth distribution measure that satisfies a set of desirable axioms. Since its proposal in (Shapley 1953), it has found application in numerous domains, including various areas of computer science. In artificial intelligence, the Shapley value has been utilized for defining inconsistency measures of propositional (Grant and Hunter 2006; Hunter and Konieczny 2010) and description logic knowledge bases (Deng, Haarslev, and Shiri 2007), and more recently for defining explanations of machine learning models (Lundberg and Lee 2017). The Shapley value has also gained attention in the database area (Bertossi et al. 2023), where it has been employed both for defining inconsistency values of databases (Livshits and Kimelfeld 2022) and also for providing quantitative explanations of query answers (Livshits et al. 2021). While other quantitative measures, such as *causal responsibility* and the

Banzhaf power index (aka *causal effect*), have also been considered for databases, the Shapley value has thus far garnered the most attention. We direct readers to (Livshits et al. 2021; Abramovich et al. 2024) for more details on alternative measures and how they relate to the Shapley value.

In general, Shapley value computation is known to be computationally challenging, being #P-hard in data complexity for common classes of queries, such as conjunctive queries. This has motivated non-uniform complexity studies aimed at pinpointing which queries admit tractable Shapley value computation (Reshef, Kimelfeld, and Livshits 2020; Khalil and Kimelfeld 2023), in particular, by establishing fruitful connections with probabilistic query evaluation and variants of model counting (Deutch et al. 2022; Kara, Olteanu, and Suciu 2023; Bienvenu, Figueira, and Lafourcade 2024).

In the present paper, we revisit the use of the Shapley value in the ontology setting, building upon these recent advances in the database area. We shall mostly focus on how the Shapley value can be employed for explaining answers in the context of ontology-mediated query answering (OMQA). We recall that the OMQA is used to improve access to incomplete and possibly heterogeneous data through the addition of ontology layer, which provides a user-friendly vocabulary for query formulation as well as domain knowledge that is taken into account when computing the query answers. Over the past fifteen years, OMQA has grown into a vibrant research topic within both the KR and database communities (Poggi et al. 2008; Cali et al. 2011; Mugnier and Thomazo 2014; Bienvenu and Ortiz 2015; Xiao et al. 2018). With the increasing maturity and deployment of OMQA techniques, there is an acknowledged need to help users understand the query results. Various notions of explanations with different levels of detail can be considered for OMQA, ranging from providing proofs of how an answer can be derived (Liebig et al. 2008; Alrabbaa et al. 2022) to generating minimal subsets of the KB that suffice to obtain the answer or identifying the assertions and/or axioms that are relevant in the sense that they belong to such a minimal subset (Bienvenu, Bourgaux, and Goasdoué 2019; Ceylan et al. 2019; Ceylan et al. 2020). The Shapley value offers a more nuanced, quantitative version of the latter approach, by assigning the relevant assertions and axioms scores based upon their level of responsibility or importance

¹<https://ctan.org/pkg/knowledge>

in obtaining the considered query answer (or entailment).

For our study of Shapley value computation, we will work with description logic (DL) knowledge bases (KB), consisting of an ABox (dataset) and TBox (ontology). We introduce some natural ways of defining the Shapley value computation (SVC) problem in the DL setting, by varying what is to be explained (entailment of a TBox axiom, ABox assertion, or query answer), which parts of the KB are assigned values, and how the complexity is measured. To begin our study, we establish the $\#P$ -hardness of the Shapley value computation of a simple graph reachability query, which we then employ to show $\#P$ -hardness of several variants of the SVC problem, even for inexpressive DLs and atomic queries. In light of these initial negative results, we embark on a non-uniform complexity analysis, whose aim is to classify the data complexity of the Shapley value computation problems SVC_Q associated with each ontology-mediated query (OMQ) $Q = (\mathcal{T}, q)$. By transferring recent results from the database setting, we establish a $FP/\#P$ -hard dichotomy result of Shapley value computation problem SVC_Q for OMQs $Q = (\mathcal{T}, q)$ where the TBox \mathcal{T} is formulated in the Horn DL \mathcal{ELHI}_\perp and q is a constant-free connected homomorphism-closed query. Moreover, if restricted to the case where q is a conjunctive query, then the dichotomy is *effective*, i.e. we can decide whether SVC_Q is \mathcal{ELHI}_\perp or $\#P$ -hard. Our final and most technically challenging result is to show that the $\#P$ -hardness part of the dichotomy can be strengthened to cover OMQs based upon a wider range of queries q . Specifically, we show that for any OMQ $Q = (\mathcal{T}, q)$ based upon a \mathcal{ELHI}_\perp TBox and a UCQ q (which may be disconnected and/or contain constants), non-FO-rewritability of Q implies $\#P$ -hardness of SVC_Q . Due to the tight connections holding between Shapley value computation and probabilistic query evaluation, the proof of this result can be further used to obtain a $\mathcal{ELHI}_\perp/\#P$ -hard dichotomy for probabilistic ontology-mediated queries from (\mathcal{ELHI}_\perp , UCQ), substantially generalizing existing results.

The paper is structured as follows. Section 2 introduces key notions from databases and description logics, and Section 3 defines Shapley values and recalls useful results about Shapley values in databases. We also prove a new hardness result for graph reachability queries, which we apply in Section 4 to show hardness of Shapley value computation in various ontology settings. In Section 5, we present our $\mathcal{ELHI}_\perp/\#P$ -hard dichotomy result for OMQs in the Horn DL \mathcal{ELHI}_\perp , and in Section 6, we strengthen the $\#P$ -hardness result to cover a wider range of queries. We conclude the paper in Section 7 with a summary of our contributions and a discussion of future work.

Some proof details have been omitted for lack of space, but they are provided in the appendix.

2 Preliminaries

We recall some important notions related to description logics (DLs), databases, queries, and complexity, directing readers to (Baader et al. 2017) for a detailed introduction to DLs. Our presentation of DLs and databases slightly differs from the ‘usual’ ones so as that we may employ some definitions and notations in both settings.

Databases A *database* \mathcal{D} is a finite set of relational facts $P(\vec{a})$, where P is a k -ary symbol drawn from a countably infinite set of relation symbols N_D and \vec{a} is a k -ary tuple of (individual) *constants* drawn from a countably infinite set N_I . We shall also consider *extended databases* which may contain infinitely many facts $P(\vec{a})$, and where the elements of \vec{a} are drawn from N_I and from a countably infinite set N_U of unnamed elements. The *domain* $dom(\mathcal{D})$ of \mathcal{D} contains all constants and unnamed elements occurring in \mathcal{D} , and we use $const(\mathcal{D})$ for the constants in \mathcal{D} . When \mathcal{D} is a database, $dom(\mathcal{D}) = const(\mathcal{D})$.

A *homomorphism* from an extended database \mathcal{D} to an extended database \mathcal{D}' is a function $h : dom(\mathcal{D}) \rightarrow dom(\mathcal{D}')$ such that $P(h(\vec{a})) \in \mathcal{D}'$ for every $P(\vec{a}) \in \mathcal{D}$. We write $\mathcal{D} \xrightarrow{hom} \mathcal{D}'$ to indicate the existence of such an h . If additionally $h(c) = c$ for every $c \in C \cap const(\mathcal{D})$, with $C \subseteq N_I$, then we call h a *C -homomorphism* and write $\mathcal{D} \xrightarrow{C-hom} \mathcal{D}'$.

We say that a (possibly extended) database \mathcal{D} is *connected* if so is the underlying undirected graph with vertices $dom(\mathcal{D}) \cup \mathcal{D}$ and edges $\{(a_i, P(a_1, \dots, a_k)) \mid P(a_1, \dots, a_k) \in \mathcal{D}\}$. The *connected components* of \mathcal{D} are the maximal subsets of \mathcal{D} that occur within a connected component of the associated graph.

Queries In the most general sense, a *k -ary query* ($k \geq 0$) can be defined as a function q that maps every extended database \mathcal{D} to a set of k -tuples of constants from $const(\mathcal{D})$ (the *answers* to q). Queries of arity 0 are called *Boolean*. When q is a Boolean query, each \mathcal{D} is mapped either to $\{\}$ or $\{\}$. In the former case, we say that \mathcal{D} *satisfies* q and write $\mathcal{D} \models q$. If additionally $\mathcal{D}' \not\models q$ for every $\mathcal{D}' \subsetneq \mathcal{D}$, then we shall call \mathcal{D} a *minimal support for q* .

A Boolean query q is said to be *closed under homomorphisms*, or *hom-closed*, if $\mathcal{D} \models q$ and $\mathcal{D} \xrightarrow{hom} \mathcal{D}'$ implies that $\mathcal{D}' \models q$. The notion of *C -hom-closed* is defined analogously using $\xrightarrow{C-hom}$ in place of \xrightarrow{hom} . When q is (C -)hom-closed, $\mathcal{D} \models q$ iff \mathcal{D} contains some *minimal support for q* .

So far we have considered an abstract notion of query, but in practice, queries are often specified in concrete query languages. First-order (FO) queries are given by formulas in first-order predicate logic with equality, whose relational atoms are built from predicates from N_D and terms drawn from $N_I \cup N_V$, with N_V a countably infinite set of variables, equipped with standard FO logic semantics (i.e. $\mathcal{D} \models q$ if \mathcal{D} , viewed as a first-order structure, satisfies the FO sentence q). Two prominent classes of FO queries are *conjunctive queries (CQs)*, and *unions of conjunctive queries (UCQs)* which are finite disjunctions of CQs having the same free variables. We remark that Boolean (U)CQs without constants are *hom-closed*, and Boolean (U)CQs with constants in C are *C -hom-closed*. Other examples of (C -)hom-closed queries include Datalog queries and regular path queries.

DL Knowledge Bases A DL *knowledge base (KB)* $\mathcal{K} = (\mathcal{A}, \mathcal{T})$ comprises an ABox (dataset) \mathcal{A} and a TBox (ontology) \mathcal{T} , which are built from countably infinite sets N_C of *concept names* (unary predicates) and N_R of *role names* (binary predicates) with $N_C \cup N_R \subseteq N_D$, and the individual

constants from \mathbb{N}_I . An *ABox* is a database with relations drawn from $\mathbb{N}_C \cup \mathbb{N}_R$ and thus contains two kinds of facts: *concept assertions* $A(c)$ ($A \in \mathbb{N}_C, c \in \mathbb{N}_I$) and *role assertions* $r(c, d)$ ($r \in \mathbb{N}_R, c, d \in \mathbb{N}_I$). A *TBox* is a finite set of axioms, whose form is dictated by the DL in question. We use \mathcal{L} *TBox* to refer to a TBox formulated in the DL \mathcal{L} . For example, in the DL \mathcal{ELHI}_\perp considered later in this paper, *complex concepts* are constructed as follows:

$$C := \top \mid A \mid C \sqcap C' \mid \exists R.C \quad A \in \mathbb{N}_C, R \in \mathbb{N}_R^\pm$$

where $\mathbb{N}_R^\pm = \mathbb{N}_R \cup \{r^- \mid r \in \mathbb{N}_R\}$, and \mathcal{ELHI}_\perp TBoxes consist of *concept inclusions* $C \sqsubseteq D$ (with C, D complex concepts) and *role inclusions* $R \sqsubseteq S$ with $R, S \in \mathbb{N}_R^\pm$. We shall also consider $\text{DL-Lite}_{\text{core}}$ TBoxes, which are composed of concept inclusions of the form

$$B_1 \sqsubseteq (\neg)B_2 \quad B_i := A \mid \exists R.\top \quad A \in \mathbb{N}_C, R \in \mathbb{N}_R^\pm$$

The semantics of DL KBs is defined using *interpretations* $\mathcal{I} = (\Delta^\mathcal{I}, \cdot^\mathcal{I})$, where $\Delta^\mathcal{I} \subseteq \mathbb{N}_I \cup \mathbb{N}_U$ is a non-empty set and $\cdot^\mathcal{I}$ a function² that maps every $A \in \mathbb{N}_C$ to a set $A^\mathcal{I} \subseteq \Delta^\mathcal{I}$ and every $r \in \mathbb{N}_R$ to a binary relation $r^\mathcal{I} \subseteq \Delta^\mathcal{I} \times \Delta^\mathcal{I}$. The function $\cdot^\mathcal{I}$ is straightforwardly extended to interpret complex concepts and roles: $\top^\mathcal{I} = \Delta^\mathcal{I}$, $(C \sqcap D)^\mathcal{I} = C^\mathcal{I} \cap D^\mathcal{I}$, $(\exists R.C)^\mathcal{I} = \{d \mid \exists e \in C^\mathcal{I} \text{ s.t. } (d, e) \in r^\mathcal{I}\}$, $(\neg G)^\mathcal{I} = \Delta^\mathcal{I} \setminus G^\mathcal{I}$, and $(r^-)^\mathcal{I} = \{(e, d) \mid (d, e) \in r^\mathcal{I}\}$. Note that by requiring that $\Delta^\mathcal{I} \subseteq \mathbb{N}_I \cup \mathbb{N}_U$, we ensure that every interpretation \mathcal{I} can be viewed as an extended database $\mathcal{D}_\mathcal{I} = \{A(e) \mid e \in A^\mathcal{I}\} \cup \{r(d, e) \mid (d, e) \in r^\mathcal{I}\}$, and we shall view \mathcal{I} as an extended database when convenient.

An interpretation \mathcal{I} *satisfies a (concept or role) inclusion* $G \sqsubseteq H$ if $G^\mathcal{I} \subseteq H^\mathcal{I}$, and it *satisfies an assertion* $A(c)$ (resp. $r(c, d)$) if $c \in A^\mathcal{I}$ (resp. $(c, d) \in r^\mathcal{I}$). We call \mathcal{I} a *model of a TBox* \mathcal{T} if it satisfies every axiom in \mathcal{T} , a *model of an ABox* \mathcal{A} if it satisfies every assertion in \mathcal{A} , and a *model of a KB* $(\mathcal{A}, \mathcal{T})$ if it is a model of both \mathcal{T} and \mathcal{A} . We use $\text{Mod}(\mathcal{K})$ for the set of models of a KB \mathcal{K} . A KB \mathcal{K} is *consistent* if $\text{Mod}(\mathcal{K}) \neq \emptyset$ (else it is *inconsistent*). An ABox \mathcal{A} is \mathcal{T} -consistent when the KB $(\mathcal{A}, \mathcal{T})$ is consistent. An axiom α is *entailed from a TBox* \mathcal{T} , written $\mathcal{T} \models \alpha$, if every model of \mathcal{T} satisfies α , and an axiom or assertion α is *entailed from a KB* \mathcal{K} , written $\mathcal{K} \models \alpha$, if every model of \mathcal{K} satisfies α .

Querying DL KBs We say that a Boolean query q is *entailed from a DL KB* \mathcal{K} , written $\mathcal{K} \models q$, if $\mathcal{D}_\mathcal{I} \models q$ for every $\mathcal{I} \in \text{Mod}(\mathcal{K})$. The *certain answers* to a non-Boolean k -ary query $q(\vec{x})$ w.r.t. a KB $\mathcal{K} = (\mathcal{A}, \mathcal{T})$ are the k -tuples \vec{a} of constants from $\text{const}(\mathcal{A})$ such that $\mathcal{K} \models q(\vec{a})$, with $q(\vec{a})$ the Boolean query obtained by substituting \vec{a} for the free variables \vec{x} . Note that when the KB is inconsistent, every Boolean query is trivially entailed, so every possible tuple \vec{a} of ABox constants counts as a certain answer.

While it is traditional to view queries as being posed to the KB, it is sometimes more convenient to adopt a database

²To simplify the comparison with the database setting, we make the *standard names assumption*, interpreting constants as themselves, but our results also hold under the weaker *unique names assumption*. Moreover, to allow for finite interpretation domains, we do not require all constants to be interpreted.

perspective and treat \mathcal{T} and q together as constituting a composite *ontology-mediated query (OMQ)* $Q = (\mathcal{T}, q)$, which is posed to the ABox \mathcal{A} . When we adopt this perspective, we will write $\mathcal{A} \models (\mathcal{T}, q)$ or $\mathcal{A} \models Q$ to mean $(\mathcal{A}, \mathcal{T}) \models q$. When convenient, we will use the notation $(\mathcal{L}, \mathcal{Q})$ to designate the class of all OMQs (\mathcal{T}, q) such that \mathcal{T} is formulated in the DL \mathcal{L} and q is a query from the class of queries \mathcal{Q} .

A prominent technique for computing certain answers (or checking query entailment) is to rewrite an OMQ into another query that can be directly evaluated using a database system. Formally, we call a query $q^*(\vec{x})$ a *rewriting of an OMQ* (\mathcal{T}, q) if for every ABox \mathcal{A} and candidate answer \vec{a} :

$$\mathcal{A} \models (\mathcal{T}, q(\vec{a})) \quad \text{iff} \quad \mathcal{A} \models q^*(\vec{a})$$

If we modify the above definition to only quantify over \mathcal{T} -consistent ABoxes, then we speak instead of a *rewriting w.r.t. consistent ABoxes*. When q^* is a first-order query, we call it a *first-order (FO) rewriting*. If an OMQ Q possesses an FO-rewriting, we say that Q is *FO-rewritable*, else it is called *non-FO-rewritable*.

In Horn DLs, like \mathcal{ELHI}_\perp and $\text{DL-Lite}_{\text{core}}$, every consistent KB $\mathcal{K} = (\mathcal{A}, \mathcal{T})$ admits a *canonical model* $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ with $\Delta^{\mathcal{I}_{\mathcal{A}, \mathcal{T}}} \subseteq \text{const}(\mathcal{A}) \cup \mathbb{N}_U$ with the special property that it embeds homomorphically into every model of \mathcal{K} . More precisely, $\mathcal{D}_{\mathcal{I}_{\mathcal{A}, \mathcal{T}}} \xrightarrow{C\text{-hom}} \mathcal{D}_\mathcal{I}$ for every $\mathcal{I} \in \text{Mod}(\mathcal{K})$ and every $C \subseteq \mathbb{N}_I$. While the definition of $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ depends on the particular Horn DL, the construction typically involves completing the ABox by adding tree-shaped structures using unnamed elements to satisfy the TBox axioms in the least constrained way possible. Importantly, if $\mathcal{K} = (\mathcal{A}, \mathcal{T})$ admits a canonical model $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$, then for every C -hom-closed query q (with $C \subseteq \mathbb{N}_I$):

$$\mathcal{K} \models q(\vec{a}) \quad \text{iff} \quad \mathcal{I}_{\mathcal{A}, \mathcal{T}} \models q(\vec{a})$$

In particular, this holds when q is a (U)CQ.

Complexity We assume familiarity with FP , the set of functions solved in polynomial-time; and $\#\text{P}$, the functions which output the number of accepting runs in polynomial-time nondeterministic Turing machines. We will work with *polynomial-time Turing reductions* between computational tasks, and we write $P_1 \equiv_{\text{P}} P_2$ to denote that there are polynomial-time algorithms to compute P_i using unit-cost calls to P_{3-i} , for both $i \in \{1, 2\}$.

3 Shapley Value: Definition & Basic Results

In this section, we formally define the Shapley value, recall relevant existing results, and prove a new intractability result for computing Shapley values in reachability games.

3.1 Definition of Shapley Value

The Shapley value (Shapley 1953) was introduced as a means to fairly distribute wealth amongst players in a cooperative game, based upon their respective contributions.

A *cooperative game* consists of a finite set of players P and a *wealth function* $\mathbf{v} : \wp(P) \rightarrow \mathbb{Q}$ that assigns a value to each coalition (*i.e.*, set) of players, with $\mathbf{v}(\emptyset) = 0$. Picture a scenario where the players arrive one by one in a random order, and each one earns what she added to the current

coalition’s wealth on arrival. The *Shapley value* of a player $p \in P$ is defined as her expected earnings in this scenario, which can be expressed as:

$$\text{Sh}(P, \mathbf{v}, p) := \frac{1}{|P|!} \sum_{\sigma \in \mathfrak{S}(P)} (\mathbf{v}(\sigma_{\leq p}) - \mathbf{v}(\sigma_{< p})) \quad (1)$$

where $\mathfrak{S}(P)$ denotes the set of permutations of P and $\sigma_{< p}$ (resp. $\sigma_{\leq p}$) the set of players that appear before p (resp. before or at p) in the permutation σ . Intuitively, we take the average marginal contribution $\mathbf{v}(\sigma_{\leq p}) - \mathbf{v}(\sigma_{< p})$ of player p , across all possible orderings σ of the players. Eq. (1) can be equivalently reformulated as:

$$\sum_{B \subseteq P \setminus \{p\}} \frac{|B|!(|P| - |B| - 1)!}{|P|!} (\mathbf{v}(B \cup \{p\}) - \mathbf{v}(B)) \quad (2)$$

which will be more convenient in our proofs.

3.2 Existing Results from the Database Setting

There has been significant interest lately in the problem of computing the Shapley value of database facts as a means of quantifying their contributions to a query answer. The formal setting is as follows: the database \mathcal{D} is *partitioned* into *endogenous* and *exogenous* facts, $\mathcal{D} = \mathcal{D}_n \uplus \mathcal{D}_x$, the players of the cooperative game are the endogenous facts \mathcal{D}_n , and the wealth function of a given Boolean query q is defined, for every subset $B \subseteq \mathcal{D}_n$ of endogenous facts, as $\mathbf{v}_q(B) = v_B - v_x$ where $v_B = 1$ (resp. $v_x = 1$) if $\mathcal{D}_x \cup B \models q$ (resp. if $\mathcal{D}_x \models q$), and 0 otherwise.³ Shapley value computation on q , denoted SVC_q , is the problem of computing the Shapley value $\text{Sh}(\mathcal{D}_n, \mathbf{v}_q, \alpha)$ for the input partitioned database $\mathcal{D}_n \uplus \mathcal{D}_x$ and fact $\alpha \in \mathcal{D}_n$. We will write SVC_q^n to refer to the task when restricted to *purely endogenous* databases, i.e., partitioned databases with only endogenous assertions (of the form $\mathcal{D} = (\mathcal{D}_n, \mathcal{D}_x)$ with $\mathcal{D}_x = \emptyset$).

Probabilistic Query Evaluation We will exploit known connections between SVC and probabilistic query evaluation. A *tuple-independent probabilistic database* is a pair $\mathcal{D} = (S, \pi)$ where S is a database and $\pi : S \rightarrow (0, 1]$ is a probability assignment. For a Boolean query q , $\Pr(\mathcal{D} \models q)$ is the probability of q being true, where each assertion α has independent probability $\pi(\alpha)$ of being in the database. The problem of computing, given a tuple-independent probabilistic database \mathcal{D} , the probability $\Pr(\mathcal{D} \models q)$ is known as the *probabilistic query evaluation* problem, or PQE_q .

We consider three restrictions of PQE_q , by limiting the probabilities that appear in the image $\text{Im}(\pi)$ of the probability assignment of the input probabilistic database:

- $\text{PQE}_q(1/2)$: input (S, π) is such that $\text{Im}(\pi) = \{1/2\}$;
- $\text{PQE}_q(1/2; 1)$: input (S, π) is such that $\text{Im}(\pi) = \{1/2, 1\}$;
- *single proper probability query evaluation* (SPPQE_q): input (S, π) is s.t. $\text{Im}(\pi) = \{p, 1\}$ for some $p \in (0, 1]$.

³By $A \uplus B$ we denote the union $A \cup B$ of two disjoint sets A, B .

These restricted versions of PQE can be also found in the literature under the names of their counting problem counterparts: $\text{PQE}(1/2)$ is also known as the “model counting” or “uniform reliability” problems, and $\text{PQE}(1/2; 1)$ as the “generalized model counting” problem.

Known results In (Livshits et al. 2021), a $\text{FP}/\#\text{P}$ -hard dichotomy was established for *self-join-free* CQs (i.e. not having two atoms with the same relation name). The dichotomy coincides with the $\text{FP}/\#\text{P}$ -hard dichotomy for PQE (Dalvi and Suciu 2004), and the tractable queries admit a syntactical characterization, known as *hierarchical* queries. In fact, the PQE dichotomy extends to the more general class of UCQs (Dalvi and Suciu 2012), where the queries for which PQE is tractable are known as *safe* UCQs (hence, in particular hierarchical CQs are safe). However, it is an open problem whether UCQs (or even CQs with self-joins) also enjoy a dichotomy for SVC. Concretely, it is unknown if SVC is $\#\text{P}$ -hard for all unsafe UCQs (or even CQs).

Recent work has clarified the relation between the two dichotomies by reducing SVC to PQE (Deutch et al. 2022) and reproving the hardness of SVC (Kara, Olteanu, and Suciu 2023) by reduction from the same model counting problem for *Boolean functions* that had been used to show hardness of PQE for non-hierarchical self-join-free CQs (Dalvi and Suciu 2004). Further, SPPQE and SVC have been shown to be polynomial-time inter-reducible for many fragments of hom-closed queries (Bienvenu, Figueira, and Lafourcade 2024), in particular for connected queries without constants.

Theorem 1. (Bienvenu, Figueira, and Lafourcade 2024, Corollaries 4.1 and 4.2) *For every connected hom-closed Boolean query q , $\text{SPPQE}_q \equiv_{\text{P}} \text{SVC}_q$; further, on graph databases, SVC_q is in FP if q is equivalent to a safe UCQ and $\#\text{P}$ -hard otherwise.*

In the context of the previous statement, a *graph database* is a database restricted to relations of arity 1 or 2 (hence an ABox can be seen as a graph database). The result above relies crucially on the $\#\text{P}$ -hardness of $\text{PQE}(1/2)$ (and hence of SPPQE) for non-FO-rewritable (a.k.a. *unbounded*) hom-closed queries on graph databases (Amarilli 2023), and the $\text{FP}/\#\text{P}$ -hard dichotomy of $\text{PQE}(1/2; 1)$ for UCQs (Dalvi and Suciu 2012; Kenig and Suciu 2021).

3.3 Hardness of SVC for Reachability Games

This subsection shows the $\#\text{P}$ -hardness of the Shapley value computation of graph reachability, which, as we shall see in Section 4, implies the $\#\text{P}$ -hardness of several problems in the setting of ontologies.

Consider the Boolean query *st-reach* which asks whether there is a directed path from a vertex s to a vertex t in a (directed) graph. A graph can be seen as a graph database using a single binary relation, and s, t are individuals. As we show next, computing the Shapley value for this simple query is already $\#\text{P}$ -hard, even in the restricted case of purely endogenous databases.

Proposition 2. $\text{SVC}_{st\text{-reach}}^n$ is $\#\text{P}$ -hard.




Figure 1: Illustration of the graph G_i .

The result follows via a reduction akin to the one in (Livshits et al. 2021), but from a different $\#P$ -hard task, namely S - T CONNECTEDNESS, which is the task of, given a graph G and vertices s, t thereof, counting the number of subgraphs of G which contain a path from s to t (Valiant 1979, problem 11). This reduction follows a technique that will be used again in later proofs, which consists in producing several related variants of an instance, so that when applying Equation (2) we obtain a system of linear combinations of the desired values. This system turns out to be invertible and thus we can obtain the values.

Proof sketch. By reduction from the S - T CONNECTEDNESS task, known to be $\#P$ -hard (Valiant 1979, Theorem 1 & Problem 11). Let $G = (V, E)$ be the input to the S - T CONNECTEDNESS. For each $1 \leq i \leq |E|$, let $G_i = (V_i, E_i)$ be the graph having $V_i = V \cup \{s_j : j \in [i]\}$, $E_i = E \cup \{(s_i, s), (s_1, t)\} \cup \{(s_j, s_{j+1}) : j \in [i-1]\}$ and let $\mu = (s_1, t)$, as shown in Figure 1. The argument then follows the same lines as (Bienvenu, Figueira, and Lafourcade 2024, Lemma 4.2), where one can show that each $\text{Sh}(E_i, \mathbf{v}, \mu)$ for the query $s_1 t$ -reach is a linear combination (plus constants) of the number of subgraphs of G of a given size on which there is a path from s to t , and that these form a solvable system. It suffices to solve the system and add up all solutions to obtain the total number of subgraphs that connect s to t . \square

4 Shapley Values in the Ontology Setting and First Intractability Results

Now that we that have seen how the Shapley value has been applied in the database setting, we can adapt the definitions and techniques to the context of OMQA. There are different ways to formalize this, in particular, the ontology may be considered to be part of the input or not. Remember that in Proposition 2 we identified the inherent difficulty of reachability-like queries for SVC. Since reasoning on TBox axioms inherently involves some form of reachability analysis, we will show that SVC is $\#P$ -hard as soon as the TBox is taken as being part of the input. This will motivate us to consider a different way of formulating and analyzing the SVC problem in later sections.

We first present a running example, which showcases the use of the Shapley value in the ontology setting.

Example 3. Consider the \mathcal{ELHI}_\perp KB defined in Figure 2, where the ABox (bottom half) contains information on some ingredients and recipes, and the TBox (top half) defines more complex notions such as a ‘land-sea recipe’. For instance, $\exists \text{HasIngr.FishBased} \sqsubseteq \text{FishBased}$ intuitively translates as ‘anything that has a fish-based ingredient is fish-based’.

A user of this KB might obtain *poulardeNantua* as an answer to the query $\text{LandSea}(x)$, and wonder which ingredi-

$\text{FishBased} \sqcap \text{MeatBased} \sqsubseteq \text{LandSea}$	$\text{Fish} \sqsubseteq \text{FishBased}$
$\exists \text{HasIngr.FishBased} \sqsubseteq \text{FishBased}$	$\text{Seafood} \sqsubseteq \text{FishBased}$
$\exists \text{HasIngr.MeatBased} \sqsubseteq \text{MeatBased}$	$\text{Crustacean} \sqsubseteq \text{SeaFood}$
$\text{HasSauce} \sqsubseteq \text{HasIngr}$	$\text{Meat} \sqsubseteq \text{MeatBased}$

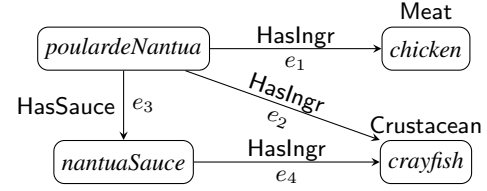


Figure 2: An example KB, with data and knowledge about a recipe from (Escoffier 1903). The arrows represent role assertions and labels on top of boxes (e.g. Meat) represent concept assertions.

ents are the most responsible for this fact. She can thus set everything but the role assertions (which specify ingredients) as exogenous and compute the Shapley values for the Boolean query $\text{LandSea}(\text{poulardeNantua})$. The modeling choice to set only role assertions as endogenous corresponds to considering the background knowledge provided by the TBox and the concept assertions as being external to responsibility attribution, since they are not part of recipes.⁴

We can compute the values via Eq. (1). There are $4! = 24$ possible permutations over the 4 endogenous role assertions $\{e_1, e_2, e_3, e_4\}$. 14 out of 24 permutations are s.t. $\mathbf{v}(\sigma_{\leq e_1}) - \mathbf{v}(\sigma_{< e_1}) = 1$, and similarly 6 for e_2 , 2 for e_3 , and 2 for e_4 , making the respective Shapley values: $14/24, 6/24, 2/24$ and $2/24$.

As expected, e_1 has the highest responsibility because it is necessary to satisfy the query, then comes e_2 that only needs to be combined with e_1 and finally e_3 and e_4 that must be used together in addition to e_1 .

Of course a naive application of Eqs. (1) or (2) is not efficient, since they involve an exponential number of permutations or subsets. This raises the natural question of when a tractable approach can be found.

In the remainder of this section we illustrate how the hardness for $\text{SVC}_{st\text{-reach}}^n$ can be used to prove the hardness of many natural applications of the Shapley value using the same example KB depicted in Figure 2.

4.1 Shapley Values for Axiom Entailment

A first application of the Shapley value to ontologies is to focus solely on the TBox and determine which axioms are most responsible for a given TBox entailment, e.g. to find out why crustaceans count as fish-based. Unfortunately, the transitive nature of concept inclusions make this a reachability question and hence $\#P$ -hard in light of Proposition 2. In fact, hardness holds already for the simplest possible DL \mathcal{L}_{\min} containing only concept name inclusions.

⁴It is especially important in this scenario to exclude the TBox axioms because while the axiom $\text{Meat} \sqsubseteq \text{MeatBased}$ is explicitly part of the KB, the inclusion $\text{Crustacean} \sqsubseteq \text{FishBased}$ is only indirectly inferred. This difference would lower the scores of the fish-based ingredients relative to the meat-based ones if the TBox axioms were also set as endogenous.

Proposition 4. For every TBox \mathcal{T} and $S \subseteq \mathcal{T}$ and pair of concept names A, B , define $\mathbf{v}_{A \sqsubseteq B}(S) := 1$ if $S \models A \sqsubseteq B$, and 0 otherwise. The problem of computing, given a \mathcal{L}_{\min} TBox \mathcal{T} , concept names A, B , and an axiom $\mu \in \mathcal{T}$, the Shapley value of μ in the game $(\mathcal{T}, \mathbf{v}_{A \sqsubseteq B})$ is #P-hard.

Proof. To reduce from $\text{SVC}_{st\text{-reach}}^n$, let $G = (V, E)$ a directed graph and $s, t \in V$. Consider the TBox $\mathcal{T}_G := \{A_x \sqsubseteq A_y \mid (A_x, A_y) \in E\}$ (it only contains concept name inclusions) and the concept inclusion $A_s \sqsubseteq A_t$. By construction the reachability from s to t is equivalent to the entailment of $A_s \sqsubseteq A_t$, which means the two games are isomorphic. \square

4.2 Shapley Values for Query Entailment

We next consider the application of the Shapley value to explaining query entailment w.r.t. a DL KB. In our running example, a user may ask why there is a fish-based recipe in the KB of Figure 2 if there is no Fish assertion. She could therefore compute the Shapley values for the CQ $\exists x. \text{FishBased}(x)$ and discover that the *crayfish* is considered fish-based because of the assertion $\text{Crustacean}(\text{crayfish})$ and the axioms $\text{Crustacean} \sqsubseteq \text{SeaFood} \sqsubseteq \text{FishBased}$. However, the chain of inclusions needed to satisfy the query expresses a form of reachability, and thus we can transfer the #P-hardness of $\text{SVC}_{st\text{-reach}}^n$.

In this setting we consider as input a *partitioned KB* $\mathcal{K} = (\mathcal{A}_n \uplus \mathcal{A}_x, \mathcal{T}_n \uplus \mathcal{T}_x)$ and the task is to compute the Shapley value of the statements in $\mathcal{A}_n \cup \mathcal{T}_n$, in order to quantify their responsibility in \mathcal{K} entailing q . Concretely, for any Boolean query q we consider the associated cooperative game having $\mathcal{A}_n \cup \mathcal{T}_n$ as players and $\mathbf{v}_q(S) := v_S - v_x$ where $v_S = 1$ (resp. $v_x = 1$) if $(\mathcal{A}_x \cup (S \cap \mathcal{A}_n), \mathcal{T}_x \cup (S \cap \mathcal{T}_n)) \models q$ (resp. if $(\mathcal{A}_x, \mathcal{T}_x) \models q$), and 0 otherwise.

Proposition 5. The problem of computing Shapley values for Boolean CQs over partitioned KBs on \mathcal{L}_{\min} is #P-hard. Hardness holds even for queries given as ABox assertions.

Proof. We build a TBox to reduce from $\text{SVC}_{st\text{-reach}}^n$: let $G = (V, E)$ be a directed graph and $s, t \in V$, from which we define $\mathcal{T}_G := \{A_x \sqsubseteq A_y \mid (A_x, A_y) \in E\}$, with $A_t = A$, and $\mathcal{A} := \{A_s(c)\}$. We set the ABox as exogenous and the TBox as endogenous. Then a subset $\mathcal{X} \subseteq \mathcal{T}_G$ is s.t. $(\mathcal{A}, \mathcal{X}) \models q$ iff $\mathcal{X} \models A_s \sqsubseteq A_t$ iff \mathcal{X} defines a subset of E which admits a path from s to t . The game for $(\mathcal{T}_G, \mathcal{A})$ is therefore isomorphic to the one for $\text{SVC}_{st\text{-reach}}^n$ on G . \square

4.3 Shapley Values on Exogenous Ontologies

Propositions 4 and 5 show that computing Shapley values of axioms is inevitably intractable, as reasoning on concept and role inclusions naturally involves reachability. One idea to sidestep this issue would be to treat the whole TBox as exogenous. Conceptually, this corresponds to treating TBox axioms as given or obvious, thereby focusing on explanations in terms of the ABox assertions. In our running example of Figure 2, the user may wonder what ingredients make the Poularde Nantua recipe fish-based. She could compute Shapley values for the CQ $\text{FishBased}(\text{poulardeNantua})$, setting everything but the HasIngr-roles as exogenous, and discover that the recipe is fish-based because of the two

chains of ingredients: $\text{poulardeNantua} \xrightarrow{\text{HasIngr}} \text{crayfish}$ and $\text{poulardeNantua} \xrightarrow{\text{HasSauce}} \text{nantuaSauce} \xrightarrow{\text{HasIngr}} \text{crayfish}$.

In terms of complexity the problem will once again be #P-hard due to reachability, which this time is expressed within the data itself. The culprit is the axiom $\exists \text{HasIngr. FishBased} \sqsubseteq \text{FishBased}$, which can be found in any DL at least as expressive as \mathcal{EL} .

Proposition 6. Let q be a CQ of the form $A(c)$, for $A \in \mathbf{N}_C$ and $c \in \mathbf{N}_I$. Then the problem of computing Shapley values for q over partitioned KBs on \mathcal{EL} is #P-hard, even if we assume that the TBox only contains exogenous axioms.

Proof. Let $G = (V, E)$ be a directed graph and $s, t \in V$, from which we define the partitioned ABox given by $\mathcal{A}_x := \{B(c_s), D(c_t)\}$ and $\mathcal{A}_n := \{r(c_x, c_y) \mid (x, y) \in E\}$ with B, D, r and the c_x being all fresh, except $c_s := c$. Then define the purely exogenous TBox $\mathcal{T} := \{B \sqcap D \sqsubseteq A, \exists r. D \sqsubseteq D\}$. Then a coalition $\mathcal{X} \subseteq \mathcal{A}_n$ is s.t. $(\mathcal{X} \cup \mathcal{A}_x, \mathcal{T}) \models q$ iff it defines a subset of G where there is a path from s to t . The corresponding cooperative game is then the same as the one defining $\text{SVC}_{st\text{-reach}}^n$, hence the desired reduction. \square

Interestingly, we can show that the problem stated in the preceding result is tractable for DL-Lite ontologies:

Proposition 7. The problem of computing Shapley values of CQs of the form $A(c)$ (with $A \in \mathbf{N}_C$ and $c \in \mathbf{N}_I$) over partitioned KBs on $\text{DL-Lite}_{\text{core}}$ is in FP when restricted to KBs with only exogenous TBox axioms.

Proof. Note that one can compute, in polynomial time, a set of facts $\{\alpha_1, \dots, \alpha_m\} \subseteq \mathcal{A}$ such that for every $\mathcal{A}' \subseteq \mathcal{A}$, we have $\mathcal{A} \models (\mathcal{T}, A(c))$ iff $\mathcal{A}' \models \alpha_1 \vee \dots \vee \alpha_m$. This is only possible because \mathcal{T} is a $\text{DL-Lite}_{\text{core}}$ TBox.

We can then compute the Shapley values for $q^* = \alpha_1 \vee \dots \vee \alpha_m$ and the database $\mathcal{A}_n \uplus \mathcal{A}_x$, disregarding the TBox \mathcal{T} since it is exogenous. We observe that if \mathcal{A}_x contains some α_i , all facts in \mathcal{A}_n have value zero. Otherwise, only the facts α_i will have a non-zero Shapley value, and their values can be easily computed using Eq. (2) and the observation that there are precisely $\binom{|\mathcal{A}_n| - m}{k}$ subsets $B \subseteq \mathcal{A}_n \setminus \{\alpha_i\}$ of size k such that $\mathbf{v}_{q^*}(B \cup \{\alpha_i\}) - \mathbf{v}_{q^*}(B) = 1$. \square

Determining for which classes of *non-atomic* CQs the previous proposition holds w.r.t. DL-Lite ontologies is challenging, as it would require us to first establish a full complexity characterization for plain CQs (without an ontology, on a binary signature), which remains an open question.

4.4 Approximation and Relevance

In view of the hardness results of Propositions 4 to 6, an alternative would be to give up on the precise Shapley value and instead find an approximation, or at the very least distinguish between elements having a zero or non-zero Shapley value. We call the elements with non-zero values *relevant*⁵, because they are exactly those that appear in some minimal

⁵The identification of relevant axioms has been considered in previous work on explaining DL entailments, see e.g. (Peñaloza and Sertkaya 2010).

support. However, observe that the Shapley value is more informative than relevance: in Example 3 all considered assertions are relevant, but have different Shapley values.

There have been different works on approximating Shapley values in the context of databases (Livshits et al. 2021; Khalil and Kimelfeld 2023), but in the case of $\text{SVC}_{st\text{-}reach}^n$ it has been shown in (Khalil and Kimelfeld 2023, Theorem 5.1) that no multiplicative FPRAS approximation can be found unless $\text{BPP} \subseteq \text{NP}$,⁶ because merely deciding relevance is NP-hard —indeed, it can be used to decide if a given edge lies on a simple path from s to t , which is a known NP-complete problem. Hence, in the previous cases we have considered, the intractability stems from the notion of relevance rather than from the precise Shapley value.

5 A Dichotomy for OMQs in \mathcal{ELHI}_\perp

The results of Section 4 show that allowing TBoxes to be part of the input, make the Shapley value computation problems #P-hard. This suggests the interest of analyzing the complexity of Shapley value computation at the level of individual ontology-mediated queries, only taking data as input. Such a non-uniform approach to complexity analysis has previously been undertaken for several OMQA settings, and in particular in the context of probabilistic OMQA (Jung and Lutz 2012). Moreover, this perspective aligns nicely with the formulation of Shapley value computation for database queries and shall allow us to transfer results from the database setting.

In the present section, we will be interested in applying Theorem 1 in a ‘black-box’ fashion, so we will need to identify a class of OMQs that is hom-closed and connected. To this end, we prove the following lemma, which shows that the addition of a \mathcal{ELHI}_\perp ontology preserves the connectedness of hom-closed queries.

Lemma 8. *Let q be a connected C -hom-closed query and \mathcal{T} an \mathcal{ELHI}_\perp ontology. Then the OMQ $Q := (\mathcal{T}, q)$ is a connected C -hom-closed query.*

Proof. Consider q and \mathcal{T} as in the lemma statement, and define q_\perp as the Boolean query that is satisfied whenever the input ABox \mathcal{A} is inconsistent with \mathcal{T} . By inspecting Datalog rewritings of ABox inconsistency for (extensions of) \mathcal{ELHI}_\perp (Eiter et al. 2012; Bienvenu and Ortiz 2015), it can be readily verified that the query q_\perp is both (C)-hom-closed and connected.

Now consider a minimal support \mathcal{A} of Q that is \mathcal{T} -consistent. The knowledge base $(\mathcal{A}, \mathcal{T})$ thus admits a canonical model $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ relative to \mathcal{T} , and we may suppose that $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ is constructed in a standard way, as in e.g. (Bienvenu and Ortiz 2015). By definition, $\mathcal{I}_{\mathcal{A}, \mathcal{T}} \models q$ since $\mathcal{A} \models Q$, so $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ must contain a minimal support \mathcal{S} of q . Moreover, since q is connected, \mathcal{S} must be contained in a single connected component of $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$. However, it can be easily seen from the construction of $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ that the connected components of $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ are the canonical models of the connected

components of \mathcal{A} . It follows that $\mathcal{S} \subseteq \mathcal{I}_{\mathcal{A}^*, \mathcal{T}}$ for some connected component \mathcal{A}^* of \mathcal{A} . Since $\mathcal{I}_{\mathcal{A}^*, \mathcal{T}}$ contains \mathcal{S} , we have $\mathcal{I}_{\mathcal{A}^*, \mathcal{T}} \models q$ and thus $\mathcal{A}^* \models Q$. Since \mathcal{A} is assumed to be minimal, then necessarily $\mathcal{A}^* = \mathcal{A}$ and thus \mathcal{A} is connected. This completes the proof that Q is connected.

To show Q is C -hom-closed, consider ABoxes \mathcal{A}, \mathcal{B} such that $\mathcal{A} \models Q$ and $\mathcal{A} \xrightarrow{C\text{-hom}} \mathcal{B}$. If $\mathcal{A} \models q_\perp$, then $\mathcal{B} \models q_\perp$ since q_\perp is hom-closed, and from $\mathcal{B} \models q_\perp$ we trivially have $\mathcal{B} \models Q$. Otherwise, the KB $(\mathcal{A}, \mathcal{T})$ is consistent, and if $\mathcal{B} \not\models q_\perp$, then so too is $(\mathcal{B}, \mathcal{T})$. An examination of the canonical model construction in (Bienvenu and Ortiz 2015) reveals that $\mathcal{A} \xrightarrow{C\text{-hom}} \mathcal{B}$ implies $\mathcal{I}_{\mathcal{A}, \mathcal{T}} \xrightarrow{C\text{-hom}} \mathcal{I}_{\mathcal{B}, \mathcal{T}}$. Since $\mathcal{A} \models Q$, we have $\mathcal{I}_{\mathcal{A}, \mathcal{T}} \models q$. As q is C -hom-closed, this yields $\mathcal{I}_{\mathcal{B}, \mathcal{T}} \models q$, hence $\mathcal{B} \models Q$ as required. \square

The first and most direct application of Lemma 8 is to establish a dichotomy for OMQs whose base query is constant-free and connected, as a consequence of the equivalence with probabilistic databases established in (Bienvenu, Figueira, and Lafourcade 2024).

Theorem 9. *For every connected (constant-free) hom-closed query q and \mathcal{ELHI}_\perp ontology \mathcal{T} we have $\text{SVC}_{(\mathcal{T}, q)} \equiv_{\text{P}} \text{SPPQE}_{(\mathcal{T}, q)}$. Further, the problem is in FP if the OMQ (\mathcal{T}, q) can be rewritten into a safe UCQ and #P-hard otherwise.*

Proof. For OMQs (\mathcal{T}, q) from the considered class, Lemma 8 states that (\mathcal{T}, q) is a connected (\emptyset)-hom-closed query, hence Theorem 1 gives the desired results. \square

It is decidable whether or not a given UCQ is safe (Dalvi and Suciu 2012, implicit). It therefore follows that the dichotomy given by Theorem 9 is effective whenever the first-order rewritability is decidable for the considered class of OMQs, and that a first-order rewriting can always be effectively computed when there exists one. This is in particular true for $(\mathcal{ELHI}_\perp, \text{CQ})$ (Bienvenu et al. 2016, Theorem 5).

Furthermore, (Jung and Lutz 2012, Theorem 5) gives a syntactic characterisation which constant-free connected OMQs in $(\text{DL-Lite}_{\text{core}}, \text{CQ})$ are equivalent to safe UCQs. By Theorem 9, it also characterizes constant-free connected OMQs $Q \in (\text{DL-Lite}_{\text{core}}, \text{CQ})$ that are s.t. $\text{SVC}_Q \in \text{FP}$.

6 Strengthening the #P-Hardness Result

The dichotomy of Theorem 9 is limited in two respects:

- The result only covers connected constant-free queries.
- When an OMQ is seen as an abstract query, the distinction between consistent and inconsistent ABoxes is lost. However, one might be interested in explaining answers to a query only over consistent ABoxes.

When considering OMQs in $(\mathcal{ELHI}_\perp, \text{UCQ})$, both of these points can be improved upon by studying the properties of such OMQs that are non-FO-rewritable.

Theorem 10. *Let q be a UCQ and \mathcal{T} a \mathcal{ELHI}_\perp ontology. If the OMQ $Q := (\mathcal{T}, q)$ is non-FO-rewritable w.r.t. consistent ABoxes, then SVC_Q and $\text{PQE}_Q(1/2; 1)$ on consistent ABoxes are both #P-hard.*

⁶The same article gives a so-called additive approximation, but its use is very limited by the fact that it cannot decide relevance.




Figure 3: Encoding \mathcal{P}^G of G in \mathcal{P} . The endogenous assertions are thick.

As a consequence of Theorem 10, we obtain the following dichotomy for the probabilistic evaluation of OMQs, which extends (Jung and Lutz 2012, Theorem 7) by generalizing from (\mathcal{ELI}, CQ) to $(\mathcal{ELHI}_\perp, UCQ)$.

Theorem 11. *Let Q be a $(\mathcal{ELHI}_\perp, UCQ)$ OMQ. Then $\text{PQE}_Q(1/2; 1)$, SPPQE_Q and PQE_Q are all in FP if Q is FO-rewritable into a safe UCQ, and #P-hard otherwise. Further, this dichotomy is effective if $Q \in (\mathcal{ELHI}_\perp, CQ)$.*

The remainder of this section will be devoted to proving Theorem 10. We start in Section 6.1 by explaining the core idea for the reduction with a restricted case, and showing the existence of the necessary structures to build the reduction. Then, in Section 6.2, we show how to apply the idea from the restricted case in general.

6.1 Proof Idea via a Restricted Setting

The idea behind the proof is the fact that any non-FO-rewritable OMQ $Q = (\mathcal{T}, q) \in (\mathcal{ELHI}_\perp, UCQ)$ must have minimal supports that contain arbitrarily deep tree-like structures (see Claim 13). These must contain some arbitrarily long path, where we define a *path* between two constants a_0 and a_k to be any non-empty set of assertions $\mathcal{P} = \{R_1(a_0, a_1), \dots, R_k(a_{k-1}, a_k)\}$, where a_0, \dots, a_k are pairwise distinct constants and each $R_i(a_{i-1}, a_i)$ stands for a role assertion of the form $r(a_{i-1}, a_i)$ or $r(a_i, a_{i-1})$. To give the intuition, we shall first consider the restricted case where \mathcal{P} is a minimal support for Q on its own, and where Q is connected and hom-closed.

Similarly to what has been done to prove (Livshits et al. 2021, Proposition 4.6), we wish to reduce from the known #P-hard problem of counting the number of independent sets in a bipartite graph $G = (X, Y, E)$. For a sufficiently large \mathcal{P} , we can take two consecutive internal individuals $(a_\chi, a_{\chi+1})$, and duplicate them to encode an arbitrary bipartite graph as an ABox \mathcal{P}^G , as shown in Figure 3. We set as endogenous every role assertion linking $a_{\chi-1}$ to a copy of a_χ , or linking a copy of $a_{\chi+1}$ to $a_{\chi+2}$, the remaining assertions are exogenous.

Any coalition $\mathcal{X} \subseteq \mathcal{P}_n^G$ naturally maps to a set $V_\mathcal{X} \subseteq X \cup Y$ of vertices of G . If $V_\mathcal{X}$ is not independent, then there is a path homomorphic to \mathcal{P} in $\mathcal{X} \cup \mathcal{P}_\mathcal{X}^G$, hence $\mathcal{X} \cup \mathcal{P}_\mathcal{X}^G \models Q$. Otherwise, if $V_\mathcal{X}$ is independent, then any connected subset of $\mathcal{X} \cup \mathcal{P}_\mathcal{X}^G$ will homomorphically map to a proper subset of \mathcal{P} . Since Q is connected and \mathcal{P} is a minimal support for it, this implies that $\mathcal{X} \cup \mathcal{P}_\mathcal{X}^G \not\models Q$. From this we can use the same technique as (Livshits et al. 2021, Proposition 4.6) to count the independent sets of G , as we shall see later.

6.2 The General Case

Now that we have seen the underlying idea for the restricted case, we formally show the existence of the path \mathcal{P} upon

which we shall build the reduction.

To fix the notations, let $Q = (\mathcal{T}, q) \in (\mathcal{ELHI}_\perp, UCQ)$ be the non-FO-rewritable (w.r.t. consistent ABoxes) OMQ we consider. We write $q = \bigvee_{i \in I} \bigwedge_{j \in J_i} q_{i,j}$ where the $q_{i,j}$ are *connected components*, that is, maximal connected subqueries.⁷ For every $q_{i,j}$ we write $C_{i,j} := \text{const}(q_{i,j})$, and $C := \bigcup_{i \in I} \biguplus_{j \in J_i} C_{i,j}$. Note that the last union is indeed disjoint because the connected components of a CQ cannot share any constant or variable.

The following is a simple consequence of Q being non-FO-rewritable w.r.t. consistent ABoxes.

Claim 12. *There exist i, j such that for all $N \in \mathbb{N}$, there are \mathcal{T} -consistent ABoxes $\mathcal{S}_{i,j}^N, \mathcal{S}_{i,-j}^N$ with $|\mathcal{S}_{i,j}^N| \geq N$ such that:*

- (1) $\text{const}(\mathcal{S}_{i,j}^N) \cap \text{const}(\mathcal{S}_{i,-j}^N) = \emptyset$ and $\mathcal{S}_{i,j}^N \uplus \mathcal{S}_{i,-j}^N$ is a minimal support for Q ;
- (2) $\mathcal{S}_{i,j}^N$ and $\mathcal{S}_{i,-j}^N$ are minimal supports for $(\mathcal{T}, q_{i,j})$ and $(\mathcal{T}, q_{i,-j})$ respectively, where $q_{i,-j} := \bigwedge_{j' \in J_i \setminus \{j\}} q_{i,j'}$.

Let us henceforth fix $q_{i,\bar{j}}$ as having the indices \bar{i}, \bar{j} satisfying the statement of Claim 12. The next claim is a straightforward application of (Bienvenu et al. 2020, Prop. 23)⁸.

Claim 13. *For all $k \in \mathbb{N}$, there exists a minimal support \mathcal{A}^k for $(\mathcal{T}, q_{i,\bar{j}})$ that is \mathcal{T} -consistent, individuals a_0, \dots, a_k , and $N \in \mathbb{N}$ s.t.:*

- (1) $\mathcal{A}^k \xrightarrow{c\text{-hom}} \mathcal{S}_{i,\bar{j}}^N$;
- (2) \mathcal{A}^k has a path $\mathcal{P} = \{R_1(a_0, a_1), \dots, R_k(a_{k-1}, a_k)\}$, and further \mathcal{P} is the only path between a_0 and a_k in \mathcal{A}^k ;
- (3) $\{a_0, \dots, a_k\} \cap C = \emptyset$.

We now have the minimal support $\mathcal{A}^\circ := \mathcal{A}^k \uplus \mathcal{S}_{i,-\bar{j}}^N$ we need for the reduction. However, it differs from the one in the restricted case of Section 6.1 in two respects:

1. the path \mathcal{P} is merely a subset of the minimal support;
2. the OMQ Q is not necessarily connected.

To deal with the first issue we introduce some notions. Let $\mathcal{A}_\chi^k := \mathcal{A}^k \setminus \{R_\chi(a_{\chi-1}, a_\chi), R_{\chi+1}(a_\chi, a_{\chi+1})\}$. Given an assertion $\alpha \in \mathcal{A}^k$ and an individual a_χ on the path \mathcal{P} , we say that α is *below* (resp. *left* of, resp. *right* of) a_χ if α is in the connected component of a_χ in \mathcal{A}_χ^k (resp. $a_{\chi-1}$, resp. $a_{\chi+1}$). Further, we say that the assertions $R_\chi(a_{\chi-1}, a_\chi)$ and $R_{\chi+1}(a_\chi, a_{\chi+1})$ are respectively *left* and *right* of a_χ .

Claim 14. *For every assertion a_χ on the path \mathcal{P} , the sets $\mathbf{B}(a_\chi)$, $\mathbf{L}(a_\chi)$ and $\mathbf{R}(a_\chi)$ of assertions that are below, left of and right of a_χ resp. are disjoint. Furthermore, if $\chi < \lambda$, then $\mathbf{R}(a_\chi)$ contains $\mathbf{B}(a_\lambda)$ and $\mathbf{R}(a_\lambda)$, while $\mathbf{L}(a_\lambda)$ contains $\mathbf{B}(a_\chi)$ and $\mathbf{L}(a_\chi)$ (see Figure 4).*

Proof sketch. If any two of $\mathbf{B}(a_\chi)$, $\mathbf{L}(a_\chi)$ and $\mathbf{R}(a_\chi)$ were to intersect, then we could build a path between a_0 and a_k other than \mathcal{P} . As for the inclusions, they are fairly intuitive when looking at Figure 4. \square

⁷Observe that, for example, the CQ $R(x, c) \wedge S(c, y)$, where c is a constant, has only one connected component.

⁸This paper is the extended version of (Bienvenu et al. 2016).

of splittable interfaces is therefore bounded by 2 times the number of connected components of q . \square

Once we have this, Claim 15 gives a bijection between the \mathcal{X} s.t. $\mathcal{X} \uplus \mathcal{A}_x^G \neq Q$ and the independent sets of G , and we can conclude by exactly reproducing the end of the proof for (Livshits et al. 2021, Proposition 4.6), which consists in building several variants of the graph G to obtain a solvable linear system for the number of independent sets of G of each size. The full proof can be found in Appendix B for sake of completeness.

7 Discussion

While the Shapley value had previously been suggested for ontology debugging (Deng, Haarslev, and Shiri 2007), its application to ontology-mediated query answering, and a precise analysis of the complexity of SVC, had not yet been considered. The present paper exploits very recent results on Shapley value computation in the database setting to obtain complexity dichotomies for OMQs whose TBoxes are formulated in the well-known Horn DL \mathcal{ELHI}_\perp . In particular, Theorem 9 identifies classes of OMQs for which the Shapley value can be computed in FP, while Theorem 10 provides a general $\#P$ -hardness result for non-FO-rewritable OMQs. Using the same techniques, and leveraging known connections between Shapley value computation and probabilistic query evaluation, we were further able to obtain a general dichotomy result for probabilistic OMQA (Theorem 11).

The dichotomy result we obtain for probabilistic OMQA is stronger than the one we obtain for SVC. This is to be expected as existing results in the pure database setting do not cover UCQs that are disconnected or with constants, and it is an important open question whether there is a dichotomy for SVC_q for all Boolean UCQs q . We remark however that any progress on this question can be immediately transferred to the OMQA setting.

In the context of probabilistic databases, existing works prove that $PQE_q(1/2; 1) \equiv_P PQE_q$ for any q that is either a UCQ or a (constant-free) hom-closed query. Our Theorem 11 shows that this equivalence also holds for any $q \in (\mathcal{ELHI}_\perp, UCQ)$ (with constants), suggesting that it might hold for the full class of C -hom-closed queries.

An interesting but challenging direction for future work is to study SVC for ontologies formulated using tuple-generating dependencies (*a.k.a.* existential rules). We expect that the extension of our results to such ontologies will be non-trivial, due both to the presence of higher-arity predicates and the lack of forest-shaped models. Indeed, in Section 5, the dichotomy for SPPQE that we exploited to obtain Theorem 9 is currently only known for arity 2 relations (*i.e.*, graph databases). The techniques in Section 6, on the other hand, rely on the existence of a unique path between anonymous elements, which was ensured by the existence of forest-shaped canonical models. By contrast, the bounded treewidth canonical models obtained for many classes of existential rules do not satisfy this unique-path condition.

Acknowledgements

This work is partially supported by ANR AI Chair INTENDED (ANR-19-CHIA-0014) and ANR project CQFD (ANR-18-CE23-0003).

References

- Abramovich, O.; Deutch, D.; Frost, N.; Kara, A.; and Olteanu, D. 2024. Banzhaf values for facts in query answering. *Proc. ACM Manag. Data* 2(3):123.
- Alrabbaa, C.; Borgwardt, S.; Koopmann, P.; and Kovtunova, A. 2022. Explaining ontology-mediated query answers using proofs over universal models. In *International Joint Conference on Rules and Reasoning (RuleML+RR)*, volume 13752 of *Lecture Notes in Computer Science*, 167–182. Springer.
- Amarilli, A. 2023. Uniform reliability for unbounded homomorphism-closed graph queries. In *International Conference on Database Theory (ICDT)*, volume 255 of *Leibniz International Proceedings in Informatics (LIPIcs)*, 14:1–14:17. Leibniz-Zentrum für Informatik.
- Baader, F.; Horrocks, I.; Lutz, C.; and Sattler, U. 2017. *An Introduction to Description Logic*. Cambridge University Press.
- Bacher, R. 2002. Determinants of matrices related to the Pascal triangle. *Journal de théorie des nombres de Bordeaux* 14(1):19–41.
- Bertossi, L. E.; Kimelfeld, B.; Livshits, E.; and Monet, M. 2023. The shapley value in database management. *SIGMOD Rec.* 52(2):6–17.
- Bienvenu, M., and Ortiz, M. 2015. Ontology-Mediated Query Answering with Data-Tractable Description Logics. In *Reasoning Web Summer School*, Lecture Notes in Computer Science. Springer. 218–307.
- Bienvenu, M.; Hansen, P.; Lutz, C.; and Wolter, F. 2016. First order-rewritability and containment of conjunctive queries in horn description logics. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 965–971. AAAI Press.
- Bienvenu, M.; Hansen, P.; Lutz, C.; and Wolter, F. 2020. First order-rewritability and containment of conjunctive queries in Horn description logics. *CoRR* abs/2011.09836.
- Bienvenu, M.; Bourgaux, C.; and Goasdoué, F. 2019. Computing and explaining query answers over inconsistent dl-lite knowledge bases. *Journal of Artificial Intelligence Research (JAIR)* 64:563–644.
- Bienvenu, M.; Figueira, D.; and Lafourcade, P. 2024. When is shapley value computation a matter of counting? In *ACM Symposium on Principles of Database Systems (PODS)*. ACM Press.
- Calì, A.; Gottlob, G.; Lukasiewicz, T.; and Pieris, A. 2011. A logical toolbox for ontological reasoning. *SIGMOD Rec.* 40(3):5–14.
- Ceylan, İ. İ.; Lukasiewicz, T.; Malizia, E.; and Vaicenavicius, A. 2019. Explanations for query answers under existential rules. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 1639–1646. ijcai.org.

- Ceylan, İ. İ.; Lukasiewicz, T.; Malizia, E.; and Vaicenavicius, A. 2020. Explanations for ontology-mediated query answering in description logics. In *European Conference on Artificial Intelligence (ECAI)*, volume 325 of *Frontiers in Artificial Intelligence and Applications*, 672–679. IOS Press.
- Dalvi, N. N., and Suciu, D. 2004. Efficient query evaluation on probabilistic databases. In *International Conference on Very Large Data Bases (VLDB)*, 864–875. Morgan Kaufmann.
- Dalvi, N., and Suciu, D. 2012. The dichotomy of probabilistic inference for unions of conjunctive queries. *Journal of the ACM* 59(6):1–87.
- Deng, X.; Haarslev, V.; and Shiri, N. 2007. Measuring Inconsistencies in Ontologies. In *The Semantic Web: Research and Applications*, Lecture Notes in Computer Science, 326–340. Springer.
- Deutch, D.; Frost, N.; Kimelfeld, B.; and Monet, M. 2022. Computing the shapley value of facts in query answering. In *ACM SIGMOD International Conference on Management of Data (SIGMOD)*, 1570–1583. ACM Press.
- Eiter, T.; Ortiz, M.; Simkus, M.; Tran, T.; and Xiao, G. 2012. Query rewriting for horn-shiq plus rules. In *Proceedings of the Twenty-Sixth AAAI Conference on Artificial Intelligence*, 726–733. AAAI Press.
- Escoffier, A. 1903. *Le guide culinaire : aide-mémoire de cuisine pratique / par A. Escoffier ; avec la collaboration de MM. Philéas Gilbert, E. Fétu, A. Suzanne, [et al.] ; dessins de Victor Morin.*
- Grant, J., and Hunter, A. 2006. Measuring inconsistency in knowledgebases. *Journal of Intelligent Information Systems* 27(2):159–184.
- Hunter, A., and Konieczny, S. 2010. On the Measure of Conflicts: Shapley Inconsistency Values. *Artificial Intelligence* 174(14):1007–1026.
- Jung, J. C., and Lutz, C. 2012. Ontology-based access to probabilistic data with OWL QL. In *The Semantic Web - ISWC 2012*, Lecture Notes in Computer Science, 182–197. Springer.
- Kara, A.; Olteanu, D.; and Suciu, D. 2023. From Shapley value to model counting and back. *CoRR* abs/2306.14211. To appear in PODS’24.
- Kenig, B., and Suciu, D. 2021. A dichotomy for the generalized model counting problem for unions of conjunctive queries. In *ACM Symposium on Principles of Database Systems (PODS)*, 312–324. ACM.
- Khalil, M., and Kimelfeld, B. 2023. The Complexity of the Shapley Value for Regular Path Queries. In *International Conference on Database Theory (ICDT)*, volume 255 of *LIPICs*, 11:1–11:19. Schloss Dagstuhl - Leibniz-Zentrum für Informatik.
- Liebig, T.; Luther, M.; Noppens, O.; Rodriguez, M.; Calvanese, D.; Wessel, M.; Horridge, M.; Bechhofer, S.; Tsarkov, D.; and Sirin, E. 2008. Owillink: DIG for OWL 2. In *Proceedings of OWLED Workshop on OWL*, volume 432 of *CEUR Workshop Proceedings*. CEUR-WS.org.
- Livshits, E., and Kimelfeld, B. 2022. The Shapley Value of Inconsistency Measures for Functional Dependencies. *Logical Methods in Computer Science (LMCS)* 18(2).
- Livshits, E.; Bertossi, L.; Kimelfeld, B.; and Sebag, M. 2021. The Shapley value of tuples in query answering. *Logical Methods in Computer Science (LMCS)* Volume 17, Issue 3:6942.
- Lundberg, S. M., and Lee, S.-I. 2017. A Unified Approach to Interpreting Model Predictions. In *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc.
- Mugnier, M.-L., and Thomazo, M. 2014. An Introduction to Ontology-Based Query Answering with Existential Rules. In *Reasoning Web Summer School*, Lecture Notes in Computer Science. Springer. 245–278.
- Peñaloza, R., and Sertkaya, B. 2010. On the complexity of axiom pinpointing in the EL family of description logics. In Lin, F.; Sattler, U.; and Truszczyński, M., eds., *Principles of Knowledge Representation and Reasoning: Proceedings of the Twelfth International Conference, KR 2010, Toronto, Ontario, Canada, May 9-13, 2010*. AAAI Press.
- Poggi, A.; Lembo, D.; Calvanese, D.; De Giacomo, G.; Lenzerini, M.; and Rosati, R. 2008. Linking Data to Ontologies. In *Journal on Data Semantics X*, Lecture Notes in Computer Science, 133–173. Springer.
- Reshef, A.; Kimelfeld, B.; and Livshits, E. 2020. The Impact of Negation on the Complexity of the Shapley Value in Conjunctive Queries. In *ACM Symposium on Principles of Database Systems (PODS)*, 285–297. ACM.
- Shapley, L. S. 1953. A value for n-Person games. In *Contributions to the Theory of Games II*. Princeton University Press. 307–317.
- Valiant, L. G. 1979. The complexity of enumeration and reliability problems. *SIAM Journal on computing* 8(3):410–421.
- Xiao, G.; Calvanese, D.; Kontchakov, R.; Lembo, D.; Poggi, A.; Rosati, R.; and Zakharyashev, M. 2018. Ontology-based data access: A survey. In *International Joint Conference on Artificial Intelligence (IJCAI)*, 5511–5519. International Joint Conferences on Artificial Intelligence Organization.

A Appendix to Section 3 “Shapley Value: Definition & Basic Results”

Proposition 2. $\text{SVC}_{st\text{-reach}}^n$ is $\#\text{P-hard}$.

Proof. The proof is by reduction from the S-T CONNECTEDNESS task, which is known to be $\#\text{P-hard}$ (Valiant 1979, Theorem 1 & Problem 11). Let $G = (V, E)$ a directed graph. Let $m = |E|$ and build for every $i \in [m]$ the graph $G_i = (V_i, E_i)$ by adding a set of edges C_i forming a path $s_1 \rightarrow s_2 \rightarrow \dots \rightarrow s_i \rightarrow s$ and an extra edge μ from s_1 to t whose Shapley value we will measure, for the reachability from s_1 to t (see Figure 1 on page 5). Recall Equation (2):

$$\text{Sh}(E_i, \mathbf{v}, \mu) = \sum_{\mathcal{X} \subseteq E_i \setminus \{\mu\}} \gamma_{\mathcal{X}} \cdot (\mathbf{v}(\mathcal{X} \cup \{\mu\}) - \mathbf{v}(\mathcal{X}))$$

where $\gamma_{\mathcal{X}} := \frac{|\mathcal{X}|!(|E_i| - |\mathcal{X}| - 1)!}{|E_i|!}$.

Here by definition $\mathbf{v}(\mathcal{X}) = 1$ if there exists a path from s_1 to t in (V_i, \mathcal{X}) and 0 otherwise. Therefore, $\mathbf{v}(\mathcal{X} \cup \{\mu\}) - \mathbf{v}(\mathcal{X}) = 0$ if \mathcal{X} already connects s_1 to t , i.e. if $\mathcal{X} \cap E$ connects s to t (denoted $s \xrightarrow{\mathcal{X} \cap E} t$) and the other edges of \mathcal{X} exactly form the set C_i . Otherwise, $\mathbf{v}(\mathcal{X} \cup \{\mu\}) - \mathbf{v}(\mathcal{X}) = 1$ since μ alone fulfills the connectedness condition. Hence, we can isolate the contribution of all terms such that $\mathbf{v}(\mathcal{X} \cup \{\mu\}) - \mathbf{v}(\mathcal{X}) = 0$:

$$\text{Sh}(E_i, \mathbf{v}, \mu) - \sum_{\mathcal{X} \subseteq E_i \setminus \{\mu\}} \gamma_{\mathcal{X}} = - \sum_{\substack{\mathcal{X} \subseteq E_i \setminus \{\mu\} \\ \mathcal{X} \setminus E = C_i \\ s \xrightarrow{\mathcal{X} \cap E} t}} \gamma_{\mathcal{X}}$$

The left-hand side of this equation can be simplified as $\text{Sh}(E_i, \mathbf{v}, \mu) - 1$, and the right-hand side can be expressed as follows in terms of the numbers cs_j of subgraphs of G of size j that connect s to t , by grouping the terms in the sum by $|\mathcal{X} \cap E| = j$.

$$\text{Sh}(E_i, \mathbf{v}, \mu) - 1 = - \sum_{j=1}^m \frac{(i+j)!(m-j)!}{(m+i+1)!} cs_j$$

In other words, we obtain a linear system of equations $A \cdot \mathbf{x} = \mathbf{y}$, where \mathbf{y} is the m -vector of the different values of $\text{Sh}(E_i, \mathbf{v}, \mu) - 1$ and \mathbf{x} is the m -vector of variables corresponding to the values cs_j . If the system can be solved, we obtain—with an oracle for computing the Sh-values plus polynomial-time arithmetic computations—the values of all the cs_j values, whose sum is precisely the solution to the S-T CONNECTEDNESS instance we wish to solve.

Finally, we can show that the matrix A is invertible by studying its determinant: multiplying every row by $(m+i+1)!$ and dividing every column by $(m-j)!$ reduces A to the matrix of general term $(i+j)!$, which is known to be invertible (Bacher 2002, proof of Theorem 1.1). \square

B Appendix to Section 6 “Strengthening the $\#\text{P-Hardness Result}$ ”

Theorem 10. Let q be a UCQ and \mathcal{T} a \mathcal{ELHI}_{\perp} ontology. If the OMQ $Q := (\mathcal{T}, q)$ is non-FO-rewritable w.r.t. consistent ABoxes, then SVC_Q and $\text{PQE}_Q(1/2; 1)$ on consistent ABoxes are both $\#\text{P-hard}$.

Theorem 11. Let Q be a $(\mathcal{ELHI}_{\perp}, \text{UCQ})$ OMQ. Then $\text{PQE}_Q(1/2; 1)$, SPPQE_Q and PQE_Q are all in FP if Q is FO-rewritable into a safe UCQ, and $\#\text{P-hard}$ otherwise. Further, this dichotomy is effective if $Q \in (\mathcal{ELHI}_{\perp}, \text{CQ})$.

Proof. If Q is FO-rewritable (w.r.t. arbitrary ABoxes), then it admits a UCQ-rewriting, and all problems between $\text{PQE}_Q(1/2; 1)$ and PQE_Q enjoy the same dichotomy over UCQs (Kenig and Suciu 2021; Dalvi and Suciu 2012). If instead Q is non-FO-rewritable w.r.t. consistent ABoxes, then we can apply Theorem 10.

It therefore remains to consider the case where Q is non-FO-rewritable (w.r.t. arbitrary ABoxes) but FO-rewritable w.r.t. consistent ABoxes, i.e. when the \mathcal{T} -consistency check is non-FO-rewritable. Thus, let $Q = (\mathcal{T}, q)$ be a $(\mathcal{ELHI}_{\perp}, \text{UCQ})$ OMQ with these properties. We may suppose w.l.o.g. that \perp occurs in \mathcal{T} uniquely in concept inclusions of the form $C \sqsubseteq \perp$ (otherwise we can remove or simplify some TBox axioms without impacting the OMQ).

We shall consider another OMQ $Q^* = (\mathcal{T}^*, q^*)$ where \mathcal{T}^* is obtained from \mathcal{T} by replacing every occurrence of \perp with a fresh concept name A_{\perp} , and letting

$$q^* = q \vee \exists x. A_{\perp}(x) \quad (3)$$

We can show that for every ABox that does not mention A_{\perp} , we have the following:

$$(\mathcal{A}, \mathcal{T}) \models q \text{ iff } (\mathcal{A}, \mathcal{T}^*) \models q^*$$

For the left-to-right direction, first suppose that \mathcal{A} is \mathcal{T} -inconsistent. Then this means that every model \mathcal{I} of $(\mathcal{A}, \mathcal{T}^*)$ is such that $A_{\perp}^{\mathcal{I}} \neq \emptyset$, so $(\mathcal{A}, \mathcal{T}^*) \models q^*$. If \mathcal{A} is \mathcal{T} -consistent, then $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ satisfies q and for every $C \sqsubseteq \perp \in \mathcal{T}$, we have $C^{\mathcal{I}_{\mathcal{A}, \mathcal{T}}} = \emptyset$. Recalling how \mathcal{T}^* is defined, we can see that $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ must also be a canonical model of $(\mathcal{A}, \mathcal{T}^*)$. Since it satisfies q (hence q^*), we obtain $\mathcal{A}, \mathcal{T}^* \models q^*$. Now let us consider the right-to-left direction. Suppose that $(\mathcal{A}, \mathcal{T}^*) \models q^*$. If \mathcal{A} is \mathcal{T} -inconsistent, we trivially get $\mathcal{A}, \mathcal{T} \models q$. Otherwise, as noted previously, the canonical model $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ is such that we have that $C^{\mathcal{I}_{\mathcal{A}, \mathcal{T}}} = \emptyset$ for every $C \sqsubseteq \perp \in \mathcal{T}$, so $\mathcal{I}_{\mathcal{A}, \mathcal{T}}$ will also be a canonical model for $(\mathcal{A}, \mathcal{T}^*)$. It follows then, since $(\mathcal{A}, \mathcal{T}^*) \models q^*$, that $\mathcal{I}_{\mathcal{A}, \mathcal{T}} \models q^*$. This gives us $\mathcal{I}_{\mathcal{A}, \mathcal{T}} \models q$ as $A_{\perp}^{\mathcal{I}_{\mathcal{A}, \mathcal{T}}} = \emptyset$. From this we obtain $(\mathcal{A}, \mathcal{T}) \models q$, as desired.

Now due to Eq (3), we know that, there is an FO-rewriting of Q , over ABoxes⁹ without A_{\perp} , iff there is an FO-rewriting of Q^* , again over ABoxes without A_{\perp} . However, as Q does not mention A_{\perp} at all, every FO-rewriting of Q , over ABoxes without A_{\perp} , yields an FO-rewriting of Q w.r.t. arbitrary ABoxes (indeed, any $A_{\perp}(x)$ atom in the rewriting can be replaced by \perp , or more precisely, by an unsatisfiable query with free variable x , like $D(x) \wedge \neg D(x)$). However, as

⁹Here we consider FO-rewritability with respect to an ABox signature (in this case, the signature that contains all concept and role names except A_{\perp}), a notion that has been previously studied, cf. (Bienvenu et al. 2016). The definition of FO-rewritings of OMQs relative to an ABox signature is the same as for (usual) FO-rewritings of OMQs, except that we only quantify over ABoxes formulated using concept and role names from the given signature.

we have assumed that no such rewriting exists for Q , we may conclude that there is no FO-rewriting of Q , over ABoxes without A_\perp , and hence no FO-rewriting of Q^* , again over ABoxes without A_\perp . However, now we can observe that if there were an FO-rewriting of Q^* w.r.t. arbitrary ABoxes, we could obtain one for the restricted class of ABoxes without A_\perp (as earlier, the idea is to replace any $A_\perp(x)$ by an unsatisfiable query). Since we already know that no such rewriting exists, it follows that there is no FO-rewriting of Q^* w.r.t. arbitrary ABoxes. Moreover, since \mathcal{T}^* does not contain \perp , every ABox is \mathcal{T}^* -consistent, and hence general FO-rewritings and FO-rewritings for consistent ABoxes coincide. Thus, there can be no FO-rewriting of Q^* w.r.t. consistent ABoxes.

We are now able to apply Theorem 10 to Q^* , which tells us that $\text{PQE}_{Q^*}(1/2; 1)$ is $\#\text{P}$ -hard. We observe that for any probabilistic database $\mathcal{D} = (\mathcal{B}, \pi)$, with \mathcal{B} an ABox and $\pi : \mathcal{B} \rightarrow \{1/2, 1\}$, we have:

$$\Pr(\mathcal{D} \models Q^*) = \Pr(\mathcal{D} \models \exists x.A_\perp(x)) - (1 - \Pr(\mathcal{D} \models \exists x.A_\perp(x))) \cdot \Pr(\mathcal{D} \models Q)$$

We then observe that $\Pr(\mathcal{D} \models \exists x.A_\perp(x))$ can be easily computed:

$$\Pr(\mathcal{D} \models \exists x.A_\perp(x)) = 1 - \prod_{A_\perp(c) \in \mathcal{B}} (1 - \pi(A_\perp(c)))$$

It follows that it is $\#\text{P}$ -hard to compute $\Pr(\mathcal{D} \models Q)$.

As for the effectiveness, FO-rewritability (w.r.t. arbitrary ABoxes and consistent ABoxes) is effective over $(\mathcal{ELHL}_\perp, \text{CQ})$ (Bienvenu et al. 2016, Theorem 5), and the problem of whether or not a given UCQ is safe is decidable as well (Dalvi and Suciu 2012). \square

Claim 12. *There exist i, j such that for all $N \in \mathbb{N}$, there are \mathcal{T} -consistent ABoxes $\mathcal{S}_{i,j}^N, \mathcal{S}_{i,\neg j}^N$ with $|\mathcal{S}_{i,j}^N| \geq N$ such that:*

- (1) $\text{const}(\mathcal{S}_{i,j}^N) \cap \text{const}(\mathcal{S}_{i,\neg j}^N) = \emptyset$ and $\mathcal{S}_{i,j}^N \uplus \mathcal{S}_{i,\neg j}^N$ is a minimal support for Q ;
- (2) $\mathcal{S}_{i,j}^N$ and $\mathcal{S}_{i,\neg j}^N$ are minimal supports for $(\mathcal{T}, q_{i,j})$ and $(\mathcal{T}, q_{i,\neg j})$ respectively, where $q_{i,\neg j} := \bigwedge_{j' \in J_i \setminus \{j\}} q_{i,j'}$.

Proof. Since $Q := (\mathcal{T}, q)$ is non-FO-rewritable w.r.t. consistent ABoxes and is only concerned by the finite set of predicates that appear in (q, \mathcal{T}) , it must contain arbitrarily large \mathcal{T} -consistent minimal supports.

Observe that every minimal support for Q is a minimal support for the OMQ $(\mathcal{T}, \bigwedge_{j \in J_i} q_{i,j})$ for some disjunct of q , meaning it can be written as the union of minimal supports of the OMQs $(\mathcal{T}, q_{i,j})$ with $j \in J_i$. Since $|J_i|$ is bounded by the size of q , at least one minimal support for some $(\mathcal{T}, q_{i,j})$ has to be arbitrarily large. We therefore obtain a minimal support $\mathcal{S}' = \mathcal{S}'_{i,j} \cup \mathcal{S}'_{i,\neg j}$ for Q that satisfies Claim 12.(2) and such that $\mathcal{S}'_{i,j}$ is arbitrarily large. The only remaining issue is that, a priori, $\text{const}(\mathcal{S}'_{i,j}) \cap \text{const}(\mathcal{S}'_{i,\neg j}) \neq \emptyset$. However, since the $q_{i,j}$ are connected components, they have disjoint sets of constants, meaning that any constant that appears in both $\mathcal{S}'_{i,j}$ and $\mathcal{S}'_{i,\neg j}$ can be $C_{i,j}$ - or $C_{i,\neg j}$ -isomorphically renamed out of $\mathcal{S}'_{i,j}$ or $\mathcal{S}'_{i,\neg j}$ to yield the desired $\mathcal{S}^N = \mathcal{S}_{i,j}^N \uplus \mathcal{S}_{i,\neg j}^N$.

We finally need to reverse the quantifier order, since until now the (i, j) depends on N . One way of looking at it is that we built an infinite sequence $(i_N, j_N)_{N \in \mathbb{N}}$. Now since the number of possible (i, j) is finite, there must necessarily be one that appears infinitely many times in this sequence. If we fix such a pair, then we get the desired (i, j) that satisfies (1) and (2) for all $N \in \mathbb{N}$. \square

Preliminaries to the proof of Claim 13. The proof of Claim 13 will rely on Proposition 17, which can be found in (Bienvenu et al. 2020). We first recall the following definitions, taken directly from (Bienvenu et al. 2016).

An ABox \mathcal{A} is *tree-shaped* if the undirected graph with nodes $\text{const}(\mathcal{A})$ and edges $\{\{a, b\} \mid r(a, b) \in \mathcal{A}\}$ is acyclic and connected and $r(a, b) \in \mathcal{A}$ implies that (i) $s(a, b) \notin \mathcal{A}$ for all $s \neq r$ and (ii) $s(b, a) \notin \mathcal{A}$ for all role names s . For tree-shaped ABoxes \mathcal{A} , we often distinguish an individual used as the root, denoted with $\rho_{\mathcal{A}}$. An ABox \mathcal{A} is a *pseudo tree* if it is the union of ABoxes $\mathcal{A}_0, \dots, \mathcal{A}_k$ that satisfy the following conditions:

1. $\mathcal{A}_1, \dots, \mathcal{A}_k$ are tree-shaped;
2. $k \leq |\text{const}(\mathcal{A}_0)|$;
3. $\mathcal{A}_i \cap \mathcal{A}_0 = \{\rho_{\mathcal{A}_i}\}$ and $\text{const}(\mathcal{A}_i) \cap \text{const}(\mathcal{A}_j) = \emptyset$, for $1 \leq i < j \leq k$.

We call \mathcal{A}_0 the *core* of \mathcal{A} and $\mathcal{A}_1, \dots, \mathcal{A}_k$ the *trees* of \mathcal{A} . The *width* of \mathcal{A} is $|\text{const}(\mathcal{A}_0)|$, its *depth* is the depth of the deepest tree of \mathcal{A} , and its *outdegree* is the maximum outdegree of the ABoxes $\mathcal{A}_1, \dots, \mathcal{A}_k$. For a pseudo tree ABox \mathcal{A} and $l \geq 0$, we write $\mathcal{A}|_{\leq l}$ to denote the restriction of \mathcal{A} to the individuals whose minimal distance from a core individual is at most l , and analogously for $\mathcal{A}|_{> l}$.

Proposition 17. (Bienvenu et al. 2020, Proposition 23)¹⁰ *Let $Q = (\mathcal{T}, q)$ be a Boolean OMQ from $(\mathcal{ELHL}_\perp, \text{CQ})$ with set of constants C and let \mathcal{A} be an ABox that is \mathcal{T} -consistent such that $\mathcal{A} \models Q$. Then there is a pseudo tree ABox \mathcal{A}^* that is \mathcal{T} -consistent, of width at most $|q|$, of depth bounded by $|\mathcal{T}|$ and such that C is in the core of \mathcal{A}^* and the following conditions are satisfied:*

- (a) $\mathcal{A}^* \models Q$;
- (b) $\mathcal{A}^* \xrightarrow{C\text{-hom}} \mathcal{A}$.

Claim 13. *For all $k \in \mathbb{N}$, there exists a minimal support \mathcal{A}^k for $(\mathcal{T}, q_{i,\bar{j}})$ that is \mathcal{T} -consistent, individuals a_0, \dots, a_k , and $N \in \mathbb{N}$ s.t.:*

- (1) $\mathcal{A}^k \xrightarrow{C\text{-hom}} \mathcal{S}_{i,\bar{j}}^N$;
- (2) \mathcal{A}^k has a path $\mathcal{P} = \{R_1(a_0, a_1), \dots, R_k(a_{k-1}, a_k)\}$, and further \mathcal{P} is the only path between a_0 and a_k in \mathcal{A}^k ;
- (3) $\{a_0, \dots, a_k\} \cap C = \emptyset$.

¹⁰This formulation slightly differs from the original because of a different context: in (Bienvenu et al. 2020), they considered fixing a signature which we aren't interested in here, and more importantly they consider queries with answer variables but no constant. This does not matter because any Boolean CQ with constants can be written as a constant-free CQ instantiated by a specific answer, which immediately leads to the current formulation.

Proof. Let us apply Proposition 17 defined above to the OMQ $(\mathcal{T}, q_{i,j})$ and the ABox $\mathcal{S}_{i,j}^N$. We obtain some \mathcal{A}^* that satisfies (a) and (b), and by removing some assertions if needed we can assume that it is a minimal support for $(\mathcal{T}, q_{i,j})$, because a connected subset of a pseudo tree is still a pseudo tree, whose width and depth are no larger. In particular it satisfies condition (1).

Observe that $|\mathcal{A}^*| \geq |\mathcal{S}_{i,j}^N|$, otherwise \mathcal{A}^* would homomorphically map into a proper subset of $\mathcal{S}_{i,j}^N$, which would contradict its minimality. Now since the width and depth of \mathcal{A}^* are bounded by $|q|$ and $|\mathcal{T}|$ resp., the only way for it to be arbitrarily large is to have an arbitrary depth. This means that if we choose a large enough N , the resulting \mathcal{A}^* (which we shall call \mathcal{A}^k) will contain tree of depth at least k , which implies the existence of the \mathcal{P} desired to satisfy condition (2). Finally, since \mathcal{P} is in a tree of $\mathcal{S}_{i,j}^N$ and C is its core, condition (3) is automatically satisfied. \square

Claim 14. *For every assertion a_χ on the path \mathcal{P} , the sets $\mathbf{B}(a_\chi)$, $\mathbf{L}(a_\chi)$ and $\mathbf{R}(a_\chi)$ of assertions that are below, left of and right of a_χ resp. are disjoint. Furthermore, if $\chi < \lambda$, then $\mathbf{R}(a_\chi)$ contains $\mathbf{B}(a_\lambda)$ and $\mathbf{R}(a_\lambda)$, while $\mathbf{L}(a_\lambda)$ contains $\mathbf{B}(a_\chi)$ and $\mathbf{L}(a_\chi)$ (see Figure 4).*

Proof. We start with the disjointness. Assume for a contradiction that $\mathbf{B}(a_\chi) \cap \mathbf{R}(a_\chi) \neq \emptyset$, the other cases being strictly analogous. By definition, since the special assertions $R_\chi(a_{\chi-1}, a_\chi)$ and $R_{\chi+1}(a_\chi, a_{\chi+1})$ only appear in one of $\mathbf{B}(a_\chi)$, $\mathbf{L}(a_\chi)$ and $\mathbf{R}(a_\chi)$, a_χ and $a_{\chi+1}$ must then be in the same connected component of \mathcal{A}^k . This implies the existence of a detour path between a_χ and $a_{\chi+1}$ that is distinct from the portion of \mathcal{P} because it doesn't contain the assertion $R_{\chi+1}(a_\chi, a_{\chi+1})$. This detour can be extended into \mathcal{D} . Since we made sure $\mathcal{P} \cap \mathcal{D} = \emptyset$, we can take the detour and build a path $\mathcal{P} \cup \mathcal{D} \setminus \mathcal{P}^*$ between a_0 and a_k that is distinct from \mathcal{P} . This contradicts Claim 13.(2).

Now we show the inclusions. Consider indices $\chi < \lambda$ and an assertion α in either $\mathbf{B}(a_\lambda)$ or $\mathbf{R}(a_\lambda)$. By definition there exists a path from a_λ that contains α but doesn't intersect any a_κ with $\kappa < \lambda$. This path can therefore be extended by adding $R_{\chi+1}(a_\chi, a_{\chi+1}), \dots, R_\lambda(a_{\lambda-1}, a_\lambda)$ without creating any cycle, thereby forming a path from a_χ that contains α and intersects a_λ , which implies $\alpha \in \mathbf{R}(a_\chi)$ since $\chi < \lambda$. We also obtain $\mathbf{B}(a_\chi) \cup \mathbf{L}(a_\chi) \subseteq \mathbf{R}(a_\lambda)$ by symmetry. \square

Claim 15. *\mathcal{A}^G is \mathcal{T} -consistent and, if it is built from an unsplittable interface $(a_\chi, a_{\chi+1})$, then for every coalition $\mathcal{X} \subseteq \mathcal{A}_n^G$, $\mathcal{X} \uplus \mathcal{A}_x^G \models Q$ iff $\eta(\mathcal{X})$ isn't independent in G .*

Proof. We first show that \mathcal{A}^G is \mathcal{T} -consistent. Denote by $\rho : \mathcal{A}^G \rightarrow \mathcal{A}^\circ$ the C -homomorphism that maps every fresh constant back to its original counterpart. Essentially, ρ reverses the construction of \mathcal{A}^G . Now the inconsistency with \mathcal{T} is C -hom-closed by Lemma 8 (simply take for q the always-false query) and $\rho(\mathcal{A}^G) = \mathcal{A}^\circ$, so if \mathcal{A}^G was inconsistent with \mathcal{T} , then \mathcal{A}° would be as well, which contradicts Claim 12 or 13.

Now we assume \mathcal{A}^G is built from an unsplittable interface $(a_\chi, a_{\chi+1})$ and show the equivalence, one direction at a time.

(\Rightarrow) Assume for a contradiction that $\mathcal{X} \subseteq \mathcal{A}_n^G$ is s.t. $\mathcal{X} \uplus \mathcal{A}_x^G \not\models Q$ but $\eta(\mathcal{X})$ is an independent set of G . Then, necessarily, there is a minimal support for Q $\mathcal{S} \subseteq \mathcal{X} \cup \mathcal{A}_x^G$. With the same ρ as above, since Q is C -hom-closed, $\rho(\mathcal{S}) \models Q$, hence $\rho(\mathcal{S}) = \mathcal{A}^\circ$ since the latter is a minimal support for Q .

The fact that \mathcal{S} maps to the whole of \mathcal{A}° means that it necessarily contains the set $\mathcal{A}^G \cap \mathcal{A}^\circ$ of facts that were untouched by the construction (the black regions in Figures 5 and 6).

The fact that \mathcal{S} maps to the whole of \mathcal{A}° further implies that it contains some $R_\chi(a_{\chi-1}, b_x)$ and some $R_{\chi+2}(c_y, a_{\chi+2})$, but there cannot be any assertion connecting them together otherwise B wouldn't be an independent set of G . This means that \mathcal{S} is disconnected since the respective sets $\mathbf{CC}(a_{\chi-1})$ and $\mathbf{CC}(a_{\chi+2})$ of assertions reachable from $a_{\chi-1}$ and $a_{\chi+2}$ are disjoint. If we then partition \mathcal{S} into the disconnected sets $\mathcal{S}_\rightarrow := \mathbf{CC}(a_{\chi+2})$ and $\mathcal{S}_\leftarrow := \mathcal{S} \setminus \mathcal{S}_\rightarrow$ (see Figure 6.(b)), then since \mathcal{S} is a minimal support for Q , \mathcal{S}_\leftarrow and \mathcal{S}_\rightarrow must necessarily be minimal supports for respective $(\mathcal{T}, \bigwedge_{j \in J_\leftarrow} q_{i,j})$ and $(\mathcal{T}, \bigwedge_{j \in J_\rightarrow} q_{i,j})$, where J_\leftarrow and J_\rightarrow are sets of connected components of some i^{th} disjunct of q , which together form the whole disjunct. This is because the $(\mathcal{T}, q_{i,j})$ are connected by Lemma 8, hence any of their minimal supports in \mathcal{S} must be fully contained in either \mathcal{S}_\leftarrow or \mathcal{S}_\rightarrow . Finally, since \mathcal{S}_\leftarrow contains every assertion left of a_χ and no assertion right of $a_{\chi+1}$, and vice versa for \mathcal{S}_\rightarrow , this contradicts the fact that the chosen interface is unsplittable.

(\Leftarrow) By contrapositive, if $\eta(\mathcal{X})$ isn't an independent set of G , then there is a path $a_{\chi-1} \xrightarrow{R_\chi} b_x \xrightarrow{R_{\chi+1}} c_y \xrightarrow{R_{\chi+2}} a_{\chi+2}$ in $\mathcal{X} \cup \mathcal{A}_x^G$, which was the only missing piece to have a C -homomorphism from the minimal support for Q . Since Q is C -hom-closed, this means $\mathcal{X} \cup \mathcal{A}_x^G \models Q$. \square

Claim 16. *The number of splittable interfaces in \mathcal{P} is bounded by a function of q .*

Proof. We show that two disjoint interfaces cannot have the same $J_\rightarrow \subseteq J_i$ for some $i \in I$. By contradiction, assume $(a_\chi, a_{\chi+1})$ and $(a_\lambda, a_{\lambda+1})$, with $\chi+1 < \lambda$ are two splittable interface with the same J_\rightarrow . By definition, there must be a minimal support \mathcal{S}_χ (resp. \mathcal{S}_λ) for $\bigwedge_{j \in J_\leftarrow} q_{i,j}$ such that $\mathbf{R}(a_{\chi+1}) \subseteq \mathcal{S}_\chi$ (resp. $\mathbf{R}(a_{\lambda+1}) \subseteq \mathcal{S}_\lambda$) and $\mathbf{L}(a_\chi) \cap \mathcal{S}_\chi = \emptyset$ (resp. $\mathbf{L}(a_\lambda) \cap \mathcal{S}_\lambda = \emptyset$). $\mathbf{L}(a_\lambda) \cap \mathcal{S}_\lambda = \emptyset$ implies in particular that $\mathcal{S}_\lambda \subseteq \mathbf{B}(a_\lambda) \cup \mathbf{R}(a_\lambda)$ since \mathcal{S}_λ is connected (it is a \mathcal{S}_\rightarrow set in the definition of splittable interfaces) and intersects a_λ . From there we get:

$$\begin{aligned} \mathcal{S}_\lambda &\subseteq \mathbf{B}(a_\lambda) \cup \mathbf{R}(a_\lambda) \\ &\subseteq \mathbf{R}(a_{\chi+1}) && \text{(Claim 14 and } \chi+1 < \lambda) \\ &\subseteq \mathcal{S}_\chi && \text{(above paragraph)} \end{aligned}$$

Finally, \mathcal{S}_χ intersects $a_{\chi+1}$ while \mathcal{S}_λ doesn't, which means that \mathcal{S}_λ is a proper subset of \mathcal{S}_χ , which contradicts the fact they are both minimal supports for Q . \square

We are now ready to prove Theorem 10, by building the same reduction that was used to prove the #P-hardness of $\text{Sh}(q_{\text{ARB}})$ for the CQ $q_{\text{ARB}} := A(x), R(x, y), B(y)$ (Livshits et al. 2021, Proposition 4.6). This reduction is from the known #P-hard problem of counting independent sets in bipartite graphs.

Proof (of Theorem 10). Recall that we are trying to compute the number of independent sets in some input bipartite graph $G = (X, Y, E)$. For convenience, we also denote by $V := X \cup Y$ the set of all vertices in G .

Since the possible number of splittable interfaces is bounded as a consequence of Claim 16, we can choose a large enough value for k so that \mathcal{P} contains an unsplittable interface (a_x, a_{x+1}) . From this we can build an \mathcal{A}^G which, by Claim 15, is such that the coalitions $\mathcal{X} \subseteq \mathcal{A}_n^G$ s.t. $\mathcal{X} \uplus \mathcal{A}_x^G \not\equiv Q$ are in a size-preserving bijection with the independent sets of G . Also note that \mathcal{A}^G can be C -homomorphically mapped back to a consistent minimal support for Q . Since we only consider C -hom-closed inconsistency conditions, \mathcal{A}^G and all of its subsets are consistent, hence the reduction is indeed limited to consistent data.

At this stage we have established that the number of independent subsets of G equals the complement of the number of $\mathcal{X} \subseteq \mathcal{A}_n^G$ s.t. $\mathcal{X} \uplus \mathcal{A}_x^G \not\equiv Q$. This number is $2^{|\mathcal{A}_n^G|}$ times the probability that $\mathcal{A}^G \models q$ if the endogenous (resp. exogenous) assertions all have probability $1/2$ (resp. 1), which proves the #P-hardness of $\text{PQE}_Q(1/2; 1)$, as desired. In order to conclude the proof, we now show the hardness of SVC_Q as well. The remainder of the proof is formally identical to the arguments that can be found in the proof of (Livshits et al. 2021, Proposition 4.6), and it is only presented here for sake of completeness.

The general idea is the same as for the proof of Proposition 2: since some carefully chosen Shapley values can be expressed as a linear combination of, in this instance, the numbers $\text{IS}(G, k)$ of independent sets of a given size k in G , we can build a family of instances to obtain an invertible linear system from which the $\text{IS}(G, k)$, whose sum is the value we desire, can be obtained in polynomial time. In details we build a family $(G_i)_{i \in [0, |V|+1]}$ of graphs by adding vertices and edges to G , as depicted in Figure 7. Formally we add a vertex μ to X , and i vertices y_1, \dots, y_i to Y . Then we add the edges $\{(\mu, y) | y \in Y\}$ if $i = 0$ and the edges $\{(\mu, y_k) | k \in [i]\}$ otherwise.

We first focus on the Shapley value of μ in G_0 in order to define and compute two values we will need later. For this we consider the permutations σ such that the arrival of μ doesn't change the score function. This happens in the following two mutually exclusive cases:

- (1) $\sigma_{<\mu} \cap Y = \emptyset$
- (2) $\exists x, y \in \sigma_{<\mu}. (x, y) \in E$

The first case is when there is no Y vertex to match μ , and the second is when there already is a matching between two vertices meaning those added by μ are redundant. The number of permutations that satisfy (1) is:

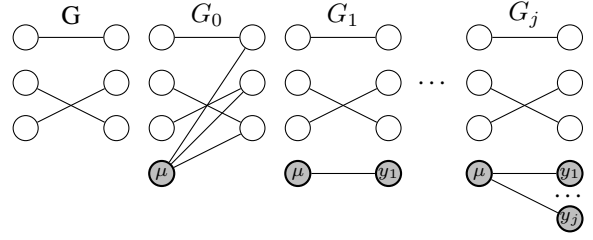


Figure 7: Variants of the graph G for the reduction. Adapted from (Livshits et al. 2021, Figure 4).

$$P_0^1 := \frac{(|V| + 1)!}{|Y| + 1}$$

This is because every element of $Y \cup \{\mu\}$ has the same $1/|V+1|$ probability of arriving first among these, and the total number of permutations is $(|V| + 1)!$.

To compute the number of permutations that satisfy (2), we denote by $|\text{NIS}(G, j)|$ the number of subsets of V of size j that are *not* independent in G . We can then express the number of permutations that satisfy (2) as:

$$P_0^2 := \sum_{j=2}^{|V|} |\text{NIS}(G, j)| \cdot j! \cdot (|V| - j)!$$

This is because, if $|\sigma_{<\mu}| = j$, we must have $\sigma_{<\mu} \in \text{NIS}(G, j)$, then we can have any permutation of the j elements of $\sigma_{<\mu}$ and of the $|V| - j$ elements of $\sigma_{>\mu}$ (i.e., the elements that appear strictly after μ in σ). We can now compute P_0^2 from P_0^1 and the Shapley oracle using Eq. (1):

$$\text{Sh}_Q(\mathcal{A}^{G_0}, \mu) = 1 - \frac{P_0^1 + P_0^2}{(|V| + 1)!}$$

$$P_0^2 = (1 - \text{Sh}_Q(\mathcal{A}^{G_0}, \mu)) \cdot (n + 1)! - P_0^1$$

We similarly express the Shapley value of μ in \mathcal{A}^{G_i} . In this context, the arrival of μ doesn't change the score function in the following two mutually exclusive cases:

- (3) $\exists x, y \in \sigma_{<\mu}. (x, y) \in E$
- (4) $\forall x, y \in \sigma_{<\mu}. (x, y) \notin E \wedge \sigma_{<\mu} \cap \{y_1, \dots, y_i\} = \emptyset$

Case (3) is when there already is a matching that makes the arrival of μ redundant, and case (4) is when, although there isn't any matching yet, there is no y_j to match μ with.

To choose a permutation that satisfies (3), we can first choose the order of the elements in $V \cup \{\mu\}$, which are the only ones that matter in satisfying the property. These must satisfy (2), and there also are P_0^2 of them. Then we need to choose a way to place the y_j in any position, and there are $m_i := \binom{|V|+i+1}{i} \cdot i!$ ways of doing it: $\binom{|V|+i+1}{i}$ ways of choosing where to place the i new elements, and $i!$ possible orderings. The number of permutations that satisfy (3) is therefore $m_i \cdot P_0^2$, which we can compute in polynomial time with the help of a Shapley oracle.

Next we count the number P_i of permutations that satisfy (4). Since $\sigma_{<\mu}$ shouldn't contain any of the y_i we added, $\sigma_{<\mu}$

must be an independent set of G , which leaves $|\text{IS}(G, j)|$ choices for each size j , then $j!$ orderings of $\sigma_{<\mu}$ and $(|V| + i - j)!$ orderings of $\sigma_{>\mu}$. Overall we get:

$$P_i = \sum_{j=0}^{|V|} |\text{IS}(G, j)| \cdot j! (|V| + i - j)!$$

We can also express the Shapley value of μ in terms of P_0^2 and P_i :

$$\text{Sh}_Q(\mathcal{A}^{G_i}, \mu) = 1 - \frac{m_i \cdot P_0^2 + P_i}{(|V| + i + 1)!}$$

We can now rearrange the equation and substitute P_i out to obtain a linear equations of unknowns $|\text{IS}(G, 0), \dots, |\text{IS}(G, |V|)$ for $i \in [|V| + 1]$:

$$\begin{aligned} \sum_{j=0}^{|V|} j! (|V| + i - j)! |\text{IS}(G, j)| \\ = (n + i + 1)! (1 - \text{Sh}_Q(\mathcal{A}^{G_i}, \mu)) - m_i \cdot P_0^2 \end{aligned}$$

The right-hand side has been shown to be computable in polynomial time with a Shapley oracle, so it only remains to prove that the system is solvable, which we do as follows: we take its underlying matrix whose general term is $j! (|V| + i - j)!$, we divide each column by $j!$ then reverse the column order to obtain the matrix of general term $(i + j + 1)!$, which is known to be invertible (Bacher 2002, proof of theorem 1.1). \square