

DIFFUSION FEEDBACK HELPS CLIP SEE BETTER

Wenxuan Wang^{1,2,3*} Quan Sun^{3*} Fan Zhang³ Yepeng Tang⁴ Jing Liu^{1,2} Xinlong Wang^{3†}

¹ Institute of Automation, Chinese Academy of Sciences

² School of Artificial Intelligence, University of Chinese Academy of Sciences

³ Beijing Academy of Artificial Intelligence

⁴ Institute of Information Science, Beijing Jiaotong University

Project Page: <https://rubics-xuan.github.io/DIVA/>

ABSTRACT

Contrastive Language-Image Pre-training (CLIP), which excels at abstracting open-world representations across domains and modalities, has become a foundation for a variety of vision and multimodal tasks. However, recent studies reveal that CLIP has severe visual shortcomings, such as which can hardly distinguish orientation, quantity, color, structure, *etc.* These visual shortcomings also limit the perception capabilities of multimodal large language models (MLLMs) built on CLIP. The main reason could be that the image-text pairs used to train CLIP are inherently biased, due to the lack of the distinctiveness of the text and the diversity of images. In this work, we present a simple post-training approach for CLIP models, which largely overcomes its visual shortcomings via a self-supervised diffusion process. We introduce **DIVA**, which uses the **D**iffusion model as a **V**isual **A**ssistant for CLIP. Specifically, **DIVA** leverages generative feedback from text-to-image diffusion models to optimize CLIP representations, with only images (without corresponding text). We demonstrate that **DIVA** improves CLIP’s performance on the challenging MMVP-VLM benchmark which assesses fine-grained visual abilities to a large extent (*e.g.*, 3-7% \uparrow), and enhances the performance of MLLMs and vision models on multimodal understanding and segmentation tasks. Extensive evaluation on 29 image classification and retrieval benchmarks confirms that our framework preserves CLIP’s strong zero-shot capabilities. The code will be available at <https://github.com/baaivision/DIVA>.

1 INTRODUCTION

Contrastive language-image pre-training (CLIP) (Radford et al., 2021b) has been widely applied to various multimodal understanding and generation tasks, including open-domain image classification (Sun et al., 2024d; Zhang et al., 2022; Zhu et al., 2023), text-to-image retrieval (Luo et al., 2023; Baldrati et al., 2022; Sain et al., 2023), visual grounding (Wang et al., 2022; Yu et al., 2023; Wang et al., 2024b;a), and text-to-image generation (Frans et al., 2022; Bar-Tal et al., 2022; Rombach et al., 2022a; Crowson et al., 2022; Ramesh et al., 2022; Vinker et al., 2022). This widespread application is due to CLIP’s excellent visual representation ability, learned from large-scale data. Thus, enhancing CLIP’s representation and capabilities is crucial for advancing downstream tasks.

Since the introduction of CLIP (Radford et al., 2021b), numerous subsequent studies on CLIP models have emerged in recent years. These studies have utilized training techniques pre-train (Sun et al., 2023; 2024b; Fang et al., 2023; Xu et al., 2023a; Zhai et al., 2023; Shi et al., 2024) and fine-tune (Wei et al., 2023; Zhang et al., 2024) CLIP models, achieving improved performance and unlocking new abilities. However, these approaches still suffer from unavoidable limitations, as they heavily rely on image-text data pairs and cannot work on image-only data.

As noted by recent works (Kim et al., 2023; Zeng et al., 2021; Zhang et al., 2024; Tong et al., 2024b;a), despite its excellent zero-shot performance, CLIP suffers from certain perceptual understanding limitations due to the contrastive learning paradigm and the noisy image-text pairs used in training.

*Equal contribution. † Correspondence to wangxinlong@baai.ac.cn.

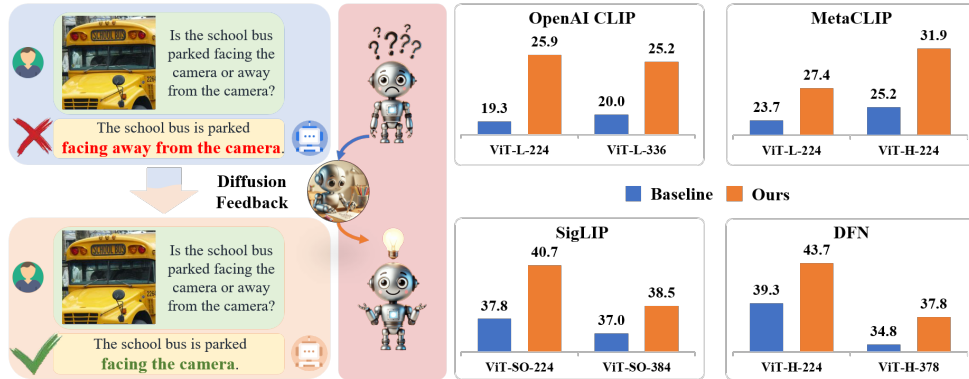


Figure 1: **Left:** The existing CLIP models mostly suffer from the inability to distinguish visual details. After enhancing the visual capabilities with our **DIVA**, the sensitivity of CLIP to visual details has greatly improved. **Right:** Our proposed **DIVA** consistently boosts the performance of various CLIP models (Radford et al., 2021b; Fang et al., 2023; Xu et al., 2023a; Zhai et al., 2023) on MMVP-VLM benchmark that evaluates the visual capabilities of vision-language models.

These limitations include an inability to accurately comprehend long texts and to perceive fine-grained differences in similar images. While some studies have attempted to address the text comprehension issue (Zhang et al., 2024), research on improving CLIP’s fine-grained visual perception remains underexplored. The ability to perceive visual detail is crucial for foundation models, and the lack of this capability in CLIP directly affects the performance of vision and multimodal models that use CLIP as a vision encoder (Tong et al., 2024b;a).

Thus, in this work, we focus on addressing CLIP’s inability to distinguish fine-grained visual details via self-supervised learning (SSL) paradigm. Based on text-to-image diffusion models generating realistic images with much details, we explore leveraging generative feedback from diffusion models to optimize CLIP representations. By conditioning diffusion models with CLIP’s densely recapped visual features and applying reconstruction loss to CLIP optimization, we leverage the **Diffusion** model as a **Visual Assistant** for CLIP, thus the name of our approach, **DIVA**. Our results highlight that **DIVA** greatly enhances CLIP’s performance on MMVP-VLM benchmark measuring visual abilities of V-L models, and improves multimodal large language models (MLLMs) and vision models on multimodal and vision understanding tasks. Besides, **DIVA** maintains CLIP’s excellent zero-shot performance on 29 image classification and retrieval benchmarks.

Our main contributions can be summarized as follows:

- Concentrating on overcoming CLIP’s visual shortcomings in perceiving fine-grained details, we present the first work to exploit the potential of leveraging generative feedback from text-to-image diffusion models to optimize CLIP model’s discriminative representations.
- We propose a simple self-supervised framework **DIVA** for CLIP’s representation optimization. Coupled with our visual dense recap scheme, **DIVA** conditions diffusion models with dense visual features from CLIP and incorporates image reconstruction loss for optimization.
- Our **DIVA** greatly boosts CLIP’s visual perception capability and improves its performance on MMVP-VLM benchmark, further enhancing MLLMs and vision models on multimodal and visual understanding tasks. Meanwhile, our results on 29 image classification and retrieval benchmarks show that **DIVA** maintains CLIP’s original excellent zero-shot performance.

2 RELATED WORK

CLIP Models & MLLMs. The introduction of CLIP (Radford et al., 2021b) has significantly advanced multimodal learning. Since its debut, a series of CLIP models have emerged (Sun et al., 2023; Fang et al., 2023; Xu et al., 2023a; Zhai et al., 2023), enhancing performance and unlocking new capabilities through improved pre-training techniques and model architectures. On this basis, CLIP has been widely adopted as a foundation model, serving as a backbone for various applications such as image segmentation (Li et al., 2022a; Xu et al., 2022; Shan et al., 2024; Xu et al., 2023c; Liang et al., 2023; Zhou et al., 2023), object detection (Gu et al., 2021; Li et al., 2022b; Subramanian et al., 2022) and video understanding (Bose et al., 2023; Lin et al., 2022; Castro & Heilbron, 2022; Xu et al., 2021; Rasheed et al., 2023; Tang et al., 2024). Its ability to align language and vision

has led to superior results on these tasks compared to traditional methods. Moreover, CLIP has driven the development of MLLMs (Liu et al., 2024b;a; Sun et al., 2024c;a). Combining strong visual understanding with advanced large language models facilitates more sophisticated interactions between vision and language. Recent works have highlighted inherent visual flaws in the CLIP models and MLLMs using CLIP as the visual encoder (Tong et al., 2024b;a). To address this, some research has incorporated multiple vision encoders to achieve more precise and comprehensive visual perception (Kar et al., 2024; Jiang et al., 2023; Tong et al., 2024b). However, this approach increases computational costs and memory usage. There has been no research directly enhancing CLIP’s visual perception capabilities to better serve MLLMs. Thus, the main focus of our work is to fundamentally overcome CLIP’s visual perception shortcomings, directly benefiting both vision models and multimodal MLLMs that use CLIP as a backbone.

Diffusion Models for Representation Learning. Diffusion models (Ho et al., 2020; Song et al., 2020) have made remarkable progress in various generative tasks, such as image generation (Rombach et al., 2022b; Saharia et al., 2022; Betker et al., 2023; Zheng et al., 2024), video generation (Singer et al., 2022; Blattmann et al., 2023; Junhao Zhang et al., 2023; Ho et al., 2022), editing (Meng et al., 2021; Hu et al., 2024; Mou et al., 2023), etc. Apart from research above, there are also many works focus on employing diffusion models for representation learning. Some of works leverage the intermediate activation of pre-trained diffusion models for different downstream tasks, including classification (Xiang et al., 2023), semantic segmentation (Baranchuk et al., 2021), panoptic segmentation (Xu et al., 2023b), depth estimation (Zhao et al., 2023), etc. Other works (Hudson et al., 2024; Pan et al., 2023) train their own diffusion models coupled with meticulously devised modules to further boosting the representation capabilities. Besides, Diffusion-TTA (Prabhudesai et al., 2023) aims to adapt pre-trained vision encoders to samples in testing set using feedback from a diffusion model. Additionally, some methods (Guo et al., 2024; Trabucco et al., 2023; Tian et al., 2024; Azizi et al., 2023) utilize diffusion models to generate synthetic data, which is then adopted to enhance the representation capabilities of corresponding models. In contrast, in our work, we mainly focus on exploring the potential of enhancing the original discriminative representations of CLIP models by directly utilizing generative feedback from the diffusion models. Additionally, we aim to leverage the diffusion models to break free from the constraints of paired image-text data and construct a self-supervised framework to improve CLIP’s visual perception capabilities.

3 ENHANCING CLIP’S REPRESENTATIONS VIA DIFFUSION FEEDBACK

In this section, we present our **DIVA**, an effective framework for boosting CLIP’s visual perception capabilities with a pre-trained conditional diffusion model. We first discuss CLIP’s visual deficiencies in perceiving details and generative diffusion models as preliminaries in Sec. 3.1.1 and Sec. 3.1.2 respectively. Then the overall architecture of **DIVA** is illustrated in Sec. 3.2, followed by our well-designed visual dense recap strategy for better unleashing the power of **DIVA** in Sec. 3.3.

3.1 PRELIMINARIES

3.1.1 CLIP’S VISUAL DEFICIENCIES

Thanks to the excellent representations learned through pre-training on massive data, CLIP (Radford et al., 2021b) exhibits outstanding generalization capabilities and is widely applied in the V-L understanding domain. However, CLIP is not without its flaws. As highlighted in the study (Tong et al., 2024b), CLIP struggles to distinguish detailed differences between two images that are obviously distinct to human observers. This deficiency mainly stems from two aspects: 1) **Training Paradigm:** The original contrastive learning strategy of CLIP aims to minimize the distance between positive pairs and maximize the distance between negative pairs of visual class tokens and textual semantics, resulting in visual perception bias that mainly focuses on high-level semantic information while overlooking visual details such as orientation, quantity, color, and structure. Consequently, CLIP sometimes encodes visually different images into similar embeddings, making it difficult to differentiate these images’ subtle variations. 2) **Data Format:** The text in the image-text pairs used to train CLIP is limited in length. As pointed out by (Zhang et al., 2024), although the length of the text token is restricted to 77, CLIP’s actual effective text length is less than 20. Therefore, the textual data in these image-text pairs inherently lacks descriptions of the visual details in the corresponding positive sample images. This fundamental limitation of the training data also leads to CLIP’s inability to adequately perceive visual detail information.

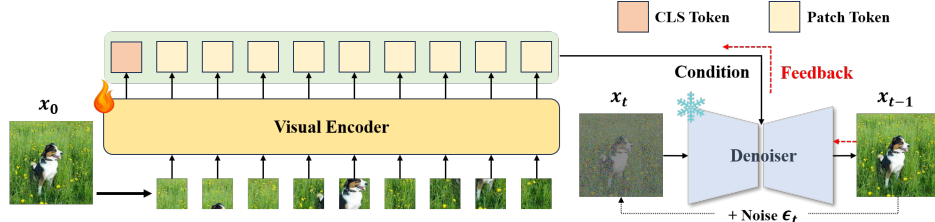


Figure 2: **Overall architecture of our DIVA.** Given an image x_0 , the CLIP model θ encodes the visual features as main part of condition \mathbf{c} , then the generative diffusion model ϕ predicts the added noise ϵ taking the noisy image x_t and condition \mathbf{c} as input. We optimize the CLIP’s representation by maximizing the image likelihood with the diffusion loss via generative feedback.

3.1.2 GENERATIVE DIFFUSION MODELS

A diffusion model learns to model a probability distribution by reversing a process that progressively adds noise to the image. Given an image sample x_0 drawn from an underlying probability distribution $p(x)$, a forward diffusion process defines a Markov chain to gradually add random Gaussian noise $\epsilon_t \in \mathcal{N}(\mathbf{0}, \mathbf{I})$ to the original sample \mathbf{x}_0 :

$$\mathbf{x}_t = \sqrt{1 - \beta_t} \mathbf{x}_{t-1} + \sqrt{\beta_t} \epsilon_t, \quad t = 1, \dots, T \quad (1)$$

Here, T denotes the number of diffusion steps, and $\beta_t \in (0, 1)$ is a predefined time-dependent variance schedule. As the T becomes large enough, \mathbf{x}_T is close to $\mathcal{N}(\mathbf{0}, \mathbf{I})$. The transition equation can be reformulated as follows by leveraging the additive property of Gaussian distribution:

$$\mathbf{x}_t = \sqrt{\bar{\alpha}_t} \mathbf{x}_0 + \sqrt{1 - \bar{\alpha}_t} \epsilon, \quad t = 1, \dots, T \quad (2)$$

in which $\alpha_t = 1 - \beta_t$ and $\bar{\alpha}_t = \prod_{i=1}^t \alpha_i$. On this basis, the image sample x_0 can be iteratively generated from a random noise $\mathbf{x}_T \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$ by reversing the forward diffusion process:

$$\mathbf{x}_{t-1} = \frac{1}{\sqrt{\alpha_t}} (\mathbf{x}_t - \frac{1 - \alpha_t}{\sqrt{1 - \bar{\alpha}_t}} \epsilon_\phi(\mathbf{x}_t, t)) + \sigma_t \epsilon, \quad t = T, \dots, 1 \quad (3)$$

ϵ_ϕ is a denoising neural network trained to predict ϵ in the forward diffusion process and σ_t is the posterior noise variance. A commonly used training objective for a diffusion model ϵ_ϕ is:

$$L(\phi) = \mathbb{E}_{t, \mathbf{x}_0, \epsilon} [\|\epsilon - \epsilon_\phi(\sqrt{\bar{\alpha}_t} \mathbf{x}_0 + \sqrt{1 - \bar{\alpha}_t} \epsilon, t)\|^2] \quad (4)$$

Besides, the diffusion models can be easily extended to conditional generation by incorporating a condition \mathbf{c} into ϵ_ϕ , in which \mathbf{c} can be a class label, a text prompt or a reference image. Thus, the training objective should be modified to:

$$L(\phi) = \mathbb{E}_{t, \mathbf{x}_0, \epsilon, \mathbf{c}} [\|\epsilon - \epsilon_\phi(\sqrt{\bar{\alpha}_t} \mathbf{x}_0 + \sqrt{1 - \bar{\alpha}_t} \epsilon, t, \mathbf{c})\|^2] \quad (5)$$

3.2 OVERALL STRUCTURE OF DIVA

As illustrated in Fig. 2, **DIVA** mainly consists of two parts: the CLIP model to be enhanced in terms of visual perception capabilities, and the pre-trained text-to-image diffusion model providing generative feedback. Taking an original image as input, the CLIP model encodes the corresponding visual features, which will be combined with the empty text’s embeddings (*i.e.*, [BOS] & [EOS]) from the diffusion model’s text encoder for diffusion’s condition. Given the image with added noise, the diffusion model attempts to predict the noise added from the previous step to the current step with the aforementioned condition. This process needs to be repeated N times because, for each image, we will randomly select N states (*i.e.*, two) from the total steps (*e.g.*, 0~1000 steps) of the diffusion model for optimization. The corresponding loss function can be represented as Equation 5. Keeping all parts’ weights except the CLIP visual encoder frozen, the training objective is simply to minimize the reconstruction loss (*i.e.*, generative guidance). In this manner, by constraining the diffusion model to more accurately predict the added noise, the CLIP’s original semantic-rich discriminative representations will be gradually optimized into representations with more visual details through diffusion feedback. On this basis, results in Sec. 4.4 demonstrate that our **DIVA** does not greatly damage the zero-shot performance of the original CLIP models. The pseudo code of the specific enhancement process can be found at Algorithm 1 in Appendix.

3.3 DIFFUSION’S CONDITION DESIGN

Visual Dense Recap Scheme. In our **DIVA**, the diffusion model’s condition design is pivotal, as it sets the upper limit for enhancing CLIP’s visual capabilities. We introduce a simple yet effective strategy called visual dense recap. Unlike detailed re-captioning of an image’s caption in natural language, our approach performs re-captioning at the level of visual richness by incorporating features from local patch tokens along with the class token into the condition. When only the class token is present, CLIP’s visual features primarily contain strong semantic information, which is insufficient for reconstructing the original image. Consequently, the reconstruction task becomes challenging due to the lack of adequate information, and CLIP cannot learn significantly enhanced representations. By incorporating local patch features, the auxiliary function of the condition is significantly enhanced, allowing the generative feedback to effectively improve CLIP’s visual perception capabilities. We conduct ablation studies in Sec. 4.5 to demonstrate the efficacy of visual dense recap.

Visual Recap Density. Although the visual dense recap scheme appears straightforward, the density of the recap is crucial. If the density is too high (*i.e.*, introducing too many local tokens), the richness of the condition information approaches its maximum, greatly reducing the difficulty of reconstruction task. This results in CLIP’s representation requiring minimal optimization to easily complete the reconstruction, limiting the upper bound of CLIP’s optimized capabilities. Conversely, if the recap density is too low (*i.e.*, retaining only class token or introducing few local tokens), CLIP’s optimization process will struggle with the high difficulty of reconstruction, failing to adequately learn the expected detailed visual representations. This intuitive point is confirmed in Sec. 4.5. Specifically, ensuring the visual class token is always present in the condition, we introduce randomly selected local token features with approximately 15% and 30% probabilities for OpenAI CLIP (Radford et al., 2021b) at 224 and 336 resolutions. For the SigLIP ViT-SO-14 (Zhai et al., 2023) at 224 and 384 image sizes, we incorporate local token features obtained through 1D average pooling with local window sizes of 6 and 10, respectively. Except that introducing 50% randomly selected patch tokens into the condition for DFN ViT-H-14/378, for the remaining baselines (Fang et al., 2023; Xu et al., 2023a), we include all local token features for the condition design. Apart from DFN ViT-H-14/224 and SigLIP ViT-SO-14/224&384 (Zhai et al., 2023) only using visual class token, all other models incorporate local features consistent with the training stage conditions during inference, combining them with class token to fully leverage the detailed representations captured by the enhanced CLIP.

4 EXPERIMENTAL RESULTS

To evaluate the effectiveness of our **DIVA** and demonstrate its potential to enhance CLIP representations, comprehensive experiments are conducted on multimodal understanding and visual perception tasks, which will be elaborated in the followings.

4.1 IMPLEMENTATION DETAILS

DIVA is trained on 8 NVIDIA-A100 80GB GPUs with a global batch size of 640. We adopt Stochastic Gradient Descent (SGD) optimizer with a learning rate of $1e-4$ and momentum of 0.9 to refine the representations of CLIP models via generative feedback. We only optimize the CLIP models with relatively high-quality Conceptual-3M dataset (Sharma et al., 2018) for 4600 steps (*i.e.*, nearly 1 epoch) among the training phase, which can already boost CLIP’s performance in a training-efficient manner. For all experiments, we adjust the parameters of the discriminative CLIP vision encoders and keep the pre-trained diffusion models’ parameters frozen through the training process.

4.2 FINE-GRAINED VISUAL PERCEPTION EVALUATION

To validate that our **DIVA** can effectively mitigate the inherent visual capability deficiencies of CLIP models, we first conduct experiment on various existing CLIP models (Radford et al., 2021b; Fang et al., 2023; Xu et al., 2023a; Zhai et al., 2023). Despite the variations in image resolution, model size, training data and methodology among these CLIP models, our method consistently enhances their performances on the MMVP-VLM benchmark. As presented in Table 1, our framework achieves the best performance improvements (*i.e.*, $\uparrow 4-7\%$) on OpenAI ViT-L-14 and MetaCLIP ViT-H-14, and even on current best-performing DFN ViT-H-14 our framework realizes a performance gain of nearly 3-5%. This fully demonstrates that **DIVA** is both general and effective in enhancing the fine-grained visual perception capabilities of CLIP models. Notably, through the generative guidance provided by our self-supervised framework that is free from image-text constraints, the perceptual abilities of CLIP models on almost all visual patterns have the potential to be enhanced.

Table 1: **Performance of CLIP based models on various visual patterns of MMVP-VLM benchmark.** Our framework greatly overcomes CLIP’s original shortcomings in terms of perceiving visual details. Symbols for visual patterns as (Tong et al., 2024b) are inherited: 🌀: Orientation and Direction, 🔍: Presence of Specific Features, 🔄: State and Condition, 📊: Quantity and Count, 📍: Positional and Relational Context, 🎨: Color and Appearance, ⚙️: Structural and Physical Characteristics, 📄: Texts, 📷: Viewpoint and Perspective.

Method	Ours	Image Size	Params (M)	🌀	🔍	🔄	📊	📍	🎨	⚙️	📄	📷	Average
OpenAI ViT-L-14		224 ²	427.6	13.3	13.3	20.0	20.0	13.3	53.3	20.0	6.7	13.3	19.3
OpenAI ViT-L-14	✓	224 ²	427.6	13.3	20.0	40.0	6.7	20.0	53.3	46.7	20.0	13.3	25.9 (+6.6)
OpenAI ViT-L-14		336 ²	427.9	0.0	20.0	40.0	20.0	6.7	20.0	33.3	6.7	33.3	20.0
OpenAI ViT-L-14	✓	336 ²	427.9	26.7	20.0	33.3	13.3	13.3	46.7	26.7	6.7	40.0	25.2 (+5.2)
MetaCLIP ViT-L-14		224 ²	427.6	13.3	6.7	66.7	6.7	33.3	46.7	20.0	6.7	13.3	23.7
MetaCLIP ViT-L-14	✓	224 ²	427.6	6.7	6.7	60.0	0.0	26.7	66.7	20.0	20.0	40.0	27.4 (+3.7)
MetaCLIP ViT-H-14		224 ²	986.1	6.7	13.3	60.0	13.3	6.7	53.3	26.7	13.3	33.3	25.2
MetaCLIP ViT-H-14	✓	224 ²	986.1	13.3	20.0	53.3	33.3	13.3	66.7	33.3	13.3	40.0	31.9 (+6.7)
SigLIP ViT-SO-14		224 ²	877.4	26.7	20.0	53.3	40.0	20.0	66.7	40.0	20.0	53.3	37.8
SigLIP ViT-SO-14	✓	224 ²	877.4	13.3	26.7	60.0	46.7	13.3	73.3	53.3	26.7	53.3	40.7 (+2.9)
SigLIP ViT-SO-14		384 ²	878.0	20.0	26.7	60.0	33.3	13.3	66.7	33.3	26.7	53.3	37.0
SigLIP ViT-SO-14	✓	384 ²	878.0	26.7	33.3	53.3	26.7	13.3	80.0	40.0	26.7	46.7	38.5 (+1.5)
DFN ViT-H-14		224 ²	986.1	20.0	26.7	73.3	26.7	26.7	66.7	46.7	13.3	53.3	39.3
DFN ViT-H-14	✓	224 ²	986.1	20.0	20.0	80.0	40.0	46.7	66.7	46.7	20.0	53.3	43.7 (+4.4)
DFN ViT-H-14		378 ²	986.7	13.3	20.0	53.3	33.3	26.7	66.7	40.0	20.0	40.0	34.8
DFN ViT-H-14	✓	378 ²	986.7	26.7	26.7	53.3	33.3	26.7	73.3	26.7	13.3	60.0	37.8 (+3.0)

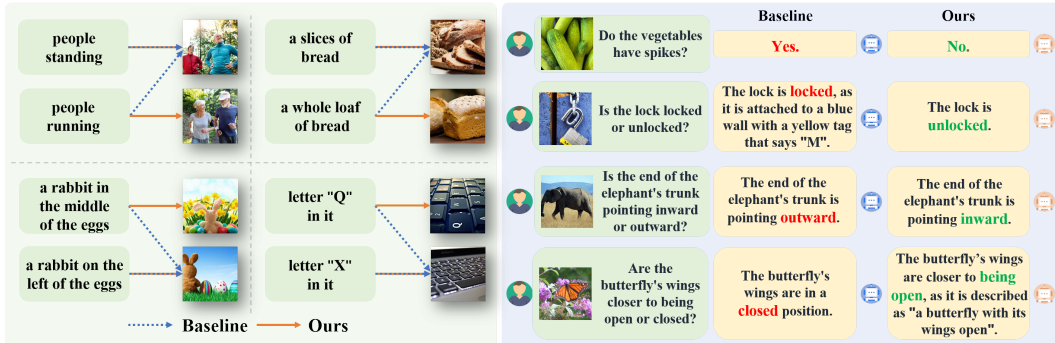


Figure 3: **Qualitative analysis on MMVP-VLM and MMVP benchmark.** Left: The prediction results from the OpenAI ViT-L-14 CLIP before & after incorporating DIVA. Right: The prediction results from LLaVA-1.5-7B before & after using our DIVA. The results on both benchmarks show that our framework can greatly enhance CLIP models’ fine-grained visual perception capability and effectively alleviate the hallucination problem.

4.3 BACKBONE ENHANCEMENT PERFORMANCE EVALUATION

Next, with the help of our DIVA, we further evaluate the performance gains brought by the enhanced CLIP backbones for multimodal understanding and visual perception tasks.

Table 2: **Performance gains achieved by our enhanced CLIP visual backbone for MLLM (i.e., LLaVA-1.5-7B and LLaVA-1.5-13B) on various V-L understanding tasks.** By refining the CLIP’s representation with generative feedback, our method mitigates the visual deficiencies in MLLMs (i.e., LLaVA^{1.5}) and improves original instruction following ability.

Method	Ours	LLM	Image Size	MMVP	POPE	rand	pop	adv	MME	MMBench	en	cn	LLaVA-Wild
LLaVA ^{1.5}		Vicuna-7B	336 ²	24.7	87.3	86.1	84.2	1510.7	64.3	58.3			65.4
LLaVA ^{1.5}	✓	Vicuna-7B	336 ²	31.3	87.9	87.0	84.6	1500.6	66.4	60.6			66.3
LLaVA ^{1.5}		Vicuna-13B	336 ²	30.7	87.1	86.2	84.5	1531.3	67.7	63.6			72.5
LLaVA ^{1.5}	✓	Vicuna-13B	336 ²	35.3	88.1	87.4	84.8	1522.9	69.4	63.1			73.5

Enhanced Vision Backbone for MLLMs. Firstly, we adopt LLaVA-1.5 (Liu et al., 2024a) as the baseline framework to explore the potential of improved visual encoders in MLLM. LLaVA employs a pre-trained CLIP vision encoder and trains a projector to semantically align visual tokens with textual tokens from large language model (LLM). To ensure fair comparisons, we train our model with the same setting in LLaVA and evaluate model performance on various multimodal understanding benchmarks (*i.e.*, MMVP (Tong et al., 2024b), POPE (Li et al., 2023), MME-Perception (Fu et al., 2023), MMBench (Liu et al., 2023), MMBench-CN (Liu et al., 2023), LLaVA-Bench-in-the-Wild (Liu et al., 2024b)). It can be clearly seen from Table 2 that LLaVA’s performance is greatly boosted by replacing the original CLIP vision encoder to ours. The big accuracy gains on these benchmarks (except MME) are all thanks to the significant enhancement in CLIP’s visual perception capabilities brought by our **DIVA** paradigm utilizing generative feedback.

Table 3: **Performance gains achieved by our enhanced CLIP backbone with generative guidance on semantic segmentation task.** * denotes the re-implemented results. Boosting CLIP’s ability to perceive fine-grained visual details results in considerable benefits for visual dense prediction task.

Method	Backbone	Ours	ADE20K-847	ADE20K-150	Pascal Context-459	Pascal Context-59
SAN*	ViT-L-14/224		10.9	29.2	14.2	55.8
SAN	ViT-L-14/224	✓	11.0	30.2	15.4	56.7
SAN*	ViT-L-14/336		11.5	30.3	14.7	56.7
SAN	ViT-L-14/336	✓	11.5	31.8	15.7	57.8

Enhanced Vision Backbone for Fine-Grained Visual Perception. We also include segmentation task to evaluate the benefits brought by our enhanced CLIP backbones for visual dense prediction task. We adopt the recent state-of-the-art model in the open vocabulary semantic segmentation field, SAN (Xu et al., 2023c) with CLIP (Radford et al., 2021b) at both 224 and 336 image resolutions, as baselines. Four commonly used benchmarks (*i.e.*, ADE20K-847/150 (Zhou et al., 2017) and Pascal Context-459/59 (Mottaghi et al., 2014) for are employed for performance evaluation. As shown in Table 3, with the benefit of our generative tuned CLIP backbone, the baseline models achieve considerable performance improvements on most of segmentation benchmarks and do not suffer performance degradation on the remaining one (*i.e.*, ADE20K-847).

4.4 GENERALIZATION CAPABILITY EVALUATION

Table 4: **Summary of zero-shot image classification performance on 27 datasets for evaluating model generalization capability.** O-1 and M-1 separately represent OpenAI ViT-L-14/224 and MetaCLIP ViT-H-14/224. **DIVA** greatly improves CLIP’s ability to perceive visual details, while preserving its outstanding generalization capabilities.

Method	Ours	ImageNet-1K	ImageNet-V2	ImageNet-Adv.	ImageNet-Ren.	ImageNet-Ske.	ObjectNet	CIFAR-10	CIFAR-100	MNIST	Caltech-101	SUN397	FGVC-Aircraft	Country-211	Stanford Cars	Birdsnap	DTD	Eurosat	FER2013	Flowers-102	Food-101	GTSRB	PCam	Pets	Rendered SST2	Resisc45	STL10	VOC2007	avg. top-1 acc.
O-1	✓	75.5	69.8	70.7	87.8	59.6	69.0	95.6	75.8	76.4	86.6	67.5	31.9	31.9	77.8	51.4	55.4	60.1	49.9	79.1	93.0	50.6	52.0	93.6	68.8	64.5	99.4	77.4	69.3
O-1	✓	75.5	69.7	70.8	87.7	59.5	69.1	95.5	76.3	76.1	86.8	67.5	31.8	31.8	77.9	51.8	55.1	60.2	49.4	78.9	93.0	50.2	53.8	93.7	67.0	64.5	99.3	77.8	69.3
M-1		78.5	72.1	69.6	91.8	68.1	73.6	98.3	86.7	81.3	89.1	74.1	48.2	34.7	87.2	68.5	69.8	55.6	54.9	80.7	92.5	62.3	56.1	94.2	71.0	72.6	99.4	77.6	74.4
M-1	✓	78.4	71.9	69.1	91.6	67.9	73.4	98.3	86.4	81.0	89.1	74.3	47.0	34.7	87.2	67.8	69.6	55.0	55.8	80.7	92.4	62.4	54.8	94.1	70.7	73.0	99.4	77.6	74.2

Table 5: **Summary of zero-shot text and image retrieval performance on Flickr30K and COCO datasets for evaluating model generalization capability.** Our **DIVA** significantly enhances CLIP’s visual detail perception ability while maintaining its excellent generalization capabilities.

Method	Ours	Image Size	Zero-Shot Text Retrieval						Zero-Shot Image Retrieval								
			Flickr30K			COCO			Flickr30K			COCO					
			R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
OpenAI ViT-L-14		224 ²	85.1	97.3	99.0	56.4	79.4	86.6	65.2	87.3	92.0	36.5	61.0	71.1			
OpenAI ViT-L-14	✓	224 ²	85.3	97.3	99.0	56.7	79.7	87.0	64.4	86.9	92.0	36.6	61.0	71.3			
MetaCLIP ViT-H-14		224 ²	89.5	98.8	99.7	65.5	85.2	91.1	76.8	93.9	96.6	48.2	72.3	81.1			
MetaCLIP ViT-H-14	✓	224 ²	89.2	98.7	99.7	65.5	85.0	91.1	77.3	93.8	96.7	48.4	72.4	81.1			

After comprehensive validation of our approach’s ability to boost CLIP models’ fine-grained visual perception abilities, we conduct a thorough assessment of CLIP model’s original generalization ability. The details about all benchmarks can be found at Table 9 in Appendix. Specifically, OpenAI ViT-L-14 (Radford et al., 2021b) and MetaCLIP ViT-H-14 (Xu et al., 2023a), which are widely used and shows the greatest performance gains on MMVP-VLM benchmark, are adopted as our baselines. We present their zero-shot accuracies on 27 image classification benchmarks in Table 4. It is evident that our **DIVA** significantly enhances CLIP models’ representations of fine-grained visual details without adversely affecting the generalization capabilities of the baselines to a large extent. Furthermore, Table 5 illustrates the comparison of zero-shot image and text retrieval performance before and after incorporating **DIVA**. The quantitative results reaffirm that optimizing CLIP models’ representations with **DIVA** preserves the original great generalization ability. Given that these tasks heavily rely on the CLIP visual backbone’s global semantic understanding, it is reasonable that our generative guided CLIPs do not achieve much performance improvements on these tasks.

4.5 ABLATION STUDY

By taking OpenAI ViT-L-14/224 as the baseline model, we conduct comprehensive ablation studies on MMVP-VLM regarding each pattern and average score, exploring the effect of condition designing, introduced data scale and adopted diffusion models for **DIVA**.

Table 6: **Ablation study on the condition design for diffusion models.** G and L denote visual class token and patch tokens. Compared to using semantic matching constraints from image-text pairs as condition, taking visual features as condition for representation-level optimization is more effective. Furthermore, an appropriate degree of visual dense recap scheme is also crucial for **DIVA**.

Visual Condition	Textual Condition								A		Average
x	x	13.3	13.3	20.0	20.0	13.3	53.3	20.0	6.7	13.3	19.3
x	Real Caption	6.7	13.3	26.7	20.0	6.7	53.3	33.3	13.3	20.0	21.5 (+2.2)
x	Free-Source Phrase	6.7	13.3	20.0	20.0	6.7	53.3	26.7	13.3	26.7	20.7 (+1.4)
only G	Empty Caption	20.0	20.0	20.0	20.0	13.3	46.7	26.7	20.0	13.3	22.2 (+2.9)
G + part_L	Empty Caption	13.3	20.0	40.0	6.7	20.0	53.3	46.7	20.0	13.3	25.9 (+6.6)
G + all_L	Empty Caption	6.7	20.0	40.0	6.7	6.7	40.0	40.0	6.7	13.3	20.0 (+0.7)

Effect of Condition Design for Diffusion Models. We first probe into the influence of diffusion models’ condition designing. As elaborated in Sec. 3.3, the condition design of diffusion models is vital as it directly determines the upper limit of CLIP models’ enhanced representation quality. As shown in Table 6, we consider two condition settings: 1) using pure text embeddings as condition, which similar to Diffusion-TTA (Prabhudesai et al., 2023) (rows 3-4); 2) incorporating densely recapped visual features and empty text’s embeddings as condition (rows 5-7). Specifically, whether using real caption matched with images from CC-3M dataset or using free-source phrases about image details, guiding CLIP through image-text matching constraints can yield performance gains. However, since this manner does not originate from the representation level, the achieved gain is not significant. In contrast, our condition design introduces appropriately densified visual features, constructing a framework that only uses images to achieve self-supervised optimization of CLIP representations and detaching from image-text form constraints. **DIVA** helps CLIP achieve the best performance gains ($\uparrow 6.6\%$) by introducing partial visual local features coupled with class tokens as condition. Introducing too few or many local tokens results in visual density being too low (row 5) or high (row 7), both of which reduce the achieved performance improvement.

Table 7: **Ablation study on the data scaling property of our DIVA with different data scales.** Training time is measured by # gpus \times hours. **DIVA** demonstrates great potential with data scaling properties, where the increase in data volume proportionally enlarges the performance gains.

Data Scale	Training Time								A		Average
x	x	13.3	13.3	20.0	20.0	13.3	53.3	20.0	6.7	13.3	19.3
25%	16.8	6.7	13.3	20.0	13.3	6.7	46.7	53.3	13.3	13.3	20.7 (+1.4)
50%	32.8	13.3	13.3	40.0	13.3	6.7	26.7	53.3	20.0	13.3	22.2 (+2.9)
75%	49.6	6.7	26.7	40.0	13.3	6.7	53.3	53.3	6.7	6.7	23.7 (+4.4)
100%	66.4	13.3	20.0	40.0	6.7	20.0	53.3	46.7	20.0	13.3	25.9 (+6.6)

Data Scaling Property. Then, we investigate the potential data scaling property of our **DIVA** by taking CC-3M dataset as training data. The corresponding results are presented in Table 7. It is obvious that the CLIP model’s performance on MMVP-VLM benchmark is consistently improved with more training samples. As the ratios of introduced samples continue to rise, there’s no sign of diminishing gains in accuracy, suggesting that our framework has great potential with continually scaled up training data. Noticeably, by integrating 100% training data, our method greatly boosts CLIP’s visual perception capability (*i.e.*, approximately $\uparrow 7\%$) with 66.4 # gpu \times hours. It means if 8 gpus are available, **DIVA** only need 8.3 hours training time to realize considerable performance gains for CLIP models. Besides, this setting results in an adaptation time of roughly 0.01 seconds per sample, which fully proves the efficacy of our method.

Table 8: **Ablation study on the adopted generative diffusion models in our DIVA.** Training time is measured by # gpu \times hours. Our framework is not sensitive to the version of stable diffusion models, consistently brings representation enhancement for CLIP models.

Method	Diffusion Resolution	Training Time										Average
X	X	X	13.3	13.3	20.0	20.0	13.3	53.3	20.0	6.7	13.3	19.3
DiT-XL/2	512 ²	80.8	20.0	13.3	20.0	6.7	6.7	20.0	20.0	6.7	6.7	13.3 (-6.0)
SD-1-4	512 ²	71.2	20.0	13.3	26.7	20.0	13.3	40.0	33.3	26.7	13.3	23.0 (+3.7)
SD-2-1-base	512 ²	66.4	13.3	20.0	40.0	6.7	20.0	53.3	46.7	20.0	13.3	25.9 (+6.6)
SD-xl-base-1.0	512 ²	90.4	20.0	20.0	26.7	26.7	6.7	46.7	33.3	6.7	26.7	23.7 (+4.4)

Effect of Diffusion Model Structures. At last, we explore the effect of incorporating various types of diffusion models for generative guidance. Specifically, two types of diffusion models are employed as generative guidance in our **DIVA**, including DiT (Peebles & Xie, 2023) and stable diffusion (SD) series (Rombach et al., 2022a) (*i.e.*, 1-4, 2-1-base, xl-base-1.0). It is clear in Table 8 that our method achieves the biggest performance gain (*i.e.*, $\uparrow 6.6$) on MMVP-VLM by integrating SD-2-1-base. Furthermore, we observe that integrating DiT-XL/2 as generative guidance exacerbates the perceptual ability of original CLIP model in capturing visual details. We attribute this to DiT’s relatively poor representation quality compared to SD models. For the included SD series, the quantitative results in Table 8 also demonstrate that **DIVA** is not sensitive to version of SD models, which can consistently refine CLIP’s feature representations within our framework.

5 CONCLUSION

In this work, we focus on addressing the visual limitation of CLIP models that struggle with distinguishing fine-grained image details. We present the first work to explore leveraging generative feedback from text-to-image diffusion models to directly optimize CLIP models’ representations. Specifically, by feeding dense visual features from CLIP as condition to the diffusion models and introducing the reconstruction loss from diffusion process onto the CLIP model’s optimization, we establish a self-supervised framework **DIVA**. Notably, this architecture is simple and clean, requiring no additional plugins while demonstrating significant potential. Extensive evaluations demonstrate that our **DIVA** not only substantially enhances CLIP models’ performance on the MMVP-VLM benchmark that measures visual abilities of vision-language models, but also aids in improving the performance of MLLMs and vision networks respectively on multimodal and visual understanding tasks. Furthermore, experiments on 29 benchmarks evaluating generalization capabilities confirm that our self-supervised **DIVA** maintains the CLIP models’ original excellent generalization capabilities.

6 LIMITATIONS AND FUTURE TOPICS

One potential limitation of this work is that the data scale for generative fine-tuning and the model capacity of our **DIVA** could be scaled up further to push better CLIP representations and performance. Moreover, this work mainly focuses on designing a simple but effective framework to enhance CLIP models with generative diffusion process, which means although our **DIVA** demonstrates the newly exploited potential of using generative diffusion models for better CLIP models’ representation guidance, it can be integrated with finer-grained supervision scheme to further boost discriminative model capabilities. Furthermore, exploring additional modalities beyond image-text data, *e.g.*, video and audio, is also a promising direction for investigation. Since this work is just a beginning in this direction, it opens up a future research perspective to develop a more general and powerful framework based on diffusion models that could enhance vision-language foundation models.

REFERENCES

- Shekoofeh Azizi, Simon Kornblith, Chitwan Saharia, Mohammad Norouzi, and David J Fleet. Synthetic data from diffusion models improves imagenet classification. *arXiv preprint arXiv:2304.08466*, 2023.
- Alberto Baldradi, Marco Bertini, Tiberio Uricchio, and Alberto Del Bimbo. Effective conditioned and composed image retrieval combining clip-based features. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 21466–21474, 2022.
- Omer Bar-Tal, Dolev Ofri-Amar, Rafail Fridman, Yoni Kasten, and Tali Dekel. Text2live: Text-driven layered image and video editing. In *European conference on computer vision*, pp. 707–723. Springer, 2022.
- Dmitry Baranchuk, Ivan Rubachev, Andrey Voynov, Valentin Khruikov, and Artem Babenko. Label-efficient semantic segmentation with diffusion models. *arXiv preprint arXiv:2112.03126*, 2021.
- Andrei Barbu, David Mayo, Julian Alverio, William Luo, Christopher Wang, Dan Gutfreund, Josh Tenenbaum, and Boris Katz. Objectnet: A large-scale bias-controlled dataset for pushing the limits of object recognition models. In *NeurIPS*, 2019.
- Thomas Berg, Jiongxin Liu, Seung Woo Lee, Michelle L Alexander, David W Jacobs, and Peter N Belhumeur. Birdsnap: Large-scale fine-grained visual categorization of birds. In *CVPR*, 2014.
- James Betker, Gabriel Goh, Li Jing, Tim Brooks, Jianfeng Wang, Linjie Li, Long Ouyang, Juntang Zhuang, Joyce Lee, Yufei Guo, et al. Improving image generation with better captions. *Computer Science. https://cdn.openai.com/papers/dall-e-3.pdf*, 2(3):8, 2023.
- Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023.
- Digbalay Bose, Rajat Hebbar, Krishna Somandepalli, Haoyang Zhang, Yin Cui, Kree Cole-McLaughlin, Huisheng Wang, and Shrikanth Narayanan. Movieclip: Visual scene recognition in movies. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 2083–2092, 2023.
- Lukas Bossard, Matthieu Guillaumin, and Luc Van Gool. Food-101—mining discriminative components with random forests. In *ECCV*, 2014.
- Santiago Castro and Fabian Caba Heilbron. Fitclip: Refining large-scale pretrained image-text models for zero-shot video understanding tasks. *arXiv preprint arXiv:2203.13371*, 2022.
- Gong Cheng, Junwei Han, and Xiaoqiang Lu. Remote sensing image scene classification: Benchmark and state of the art. *Proceedings of the IEEE*, 2017.
- M. Cimpoi, S. Maji, I. Kokkinos, S. Mohamed, , and A. Vedaldi. Describing textures in the wild. In *CVPR*, 2014.
- Adam Coates, Andrew Ng, and Honglak Lee. An analysis of single-layer networks in unsupervised feature learning. In *AISTAT*, 2011.
- Katherine Crowson, Stella Biderman, Daniel Kornis, Dashiell Stander, Eric Hallahan, Louis Castricato, and Edward Raff. Vqgan-clip: Open domain image generation and editing with natural language guidance. In *European Conference on Computer Vision*, pp. 88–105. Springer, 2022.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *CVPR*, 2009.
- M. Everingham, L. Van Gool, C. K. I. Williams, J. Winn, and A. Zisserman. "the PASCAL Visual Object Classes Challenge 2007 (VOC2007) Results. "http://www.pascal-network.org/challenges/VOC/voc2007/workshop/index.html", 2007.
- Alex Fang, Albin Madappally Jose, Amit Jain, Ludwig Schmidt, Alexander Toshev, and Vaishaal Shankar. Data filtering networks. *arXiv preprint arXiv:2309.17425*, 2023.
- Li Fei-Fei, Rob Fergus, and Pietro Perona. Learning generative visual models from few training examples: An incremental bayesian approach tested on 101 object categories. In *CVPRW*, 2004.
- Kevin Frans, Lisa Soros, and Olaf Witkowski. Clipdraw: Exploring text-to-drawing synthesis through language-image encoders. *Advances in Neural Information Processing Systems*, 35:5207–5218, 2022.

- Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Jinrui Yang, Xiawu Zheng, et al. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*, 2023.
- Ian J Goodfellow, Dumitru Erhan, Pierre Luc Carrier, Aaron Courville, Mehdi Mirza, Ben Hamner, Will Cukierski, Yichuan Tang, David Thaler, Dong-Hyun Lee, et al. Challenges in representation learning: A report on three machine learning contests. In *ICONIP*, 2013.
- Xiuye Gu, Tsung-Yi Lin, Weicheng Kuo, and Yin Cui. Open-vocabulary object detection via vision and language knowledge distillation. *arXiv preprint arXiv:2104.13921*, 2021.
- Jiayi Guo, Junhao Zhao, Chunjiang Ge, Chaoqun Du, Zanlin Ni, Shiji Song, Humphrey Shi, and Gao Huang. Everything to the synthetic: Diffusion-driven test-time adaptation via synthetic-domain alignment. *arXiv preprint arXiv:2406.04295*, 2024.
- Patrick Helber, Benjamin Bischke, Andreas Dengel, and Damian Borth. Eurosat: A novel dataset and deep learning benchmark for land use and land cover classification. *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.*, 2019.
- Dan Hendrycks, Steven Basart, Norman Mu, Saurav Kadavath, Frank Wang, Evan Dorundo, Rahul Desai, Tyler Zhu, Samyak Parajuli, Mike Guo, et al. The many faces of robustness: A critical analysis of out-of-distribution generalization. In *CVPR*, 2021a.
- Dan Hendrycks, Kevin Zhao, Steven Basart, Jacob Steinhardt, and Dawn Song. Natural adversarial examples. In *CVPR*, 2021b.
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020.
- Jonathan Ho, William Chan, Chitwan Saharia, Jay Whang, Ruiqi Gao, Alexey Gritsenko, Diederik P Kingma, Ben Poole, Mohammad Norouzi, David J Fleet, et al. Imagen video: High definition video generation with diffusion models. *arXiv preprint arXiv:2210.02303*, 2022.
- Hexiang Hu, Kelvin CK Chan, Yu-Chuan Su, Wenhui Chen, Yandong Li, Kihyuk Sohn, Yang Zhao, Xue Ben, Boqing Gong, William Cohen, et al. Instruct-imagen: Image generation with multi-modal instruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 4754–4763, 2024.
- Drew A Hudson, Daniel Zoran, Mateusz Malinowski, Andrew K Lampinen, Andrew Jaegle, James L McClelland, Loic Matthey, Felix Hill, and Alexander Lerchner. Soda: Bottleneck diffusion models for representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 23115–23127, 2024.
- Dongsheng Jiang, Yuchen Liu, Songlin Liu, Xiaopeng Zhang, Jin Li, Hongkai Xiong, and Qi Tian. From clip to dino: Visual encoders shout in multi-modal large language models. *arXiv preprint arXiv:2310.08825*, 2023.
- David Junhao Zhang, Jay Zhangjie Wu, Jia-Wei Liu, Rui Zhao, Lingmin Ran, Yuchao Gu, Difei Gao, and Mike Zheng Shou. Show-1: Marrying pixel and latent diffusion models for text-to-video generation. *arXiv e-prints*, pp. arXiv–2309, 2023.
- Oğuzhan Fatih Kar, Alessio Tonioni, Petra Poklukar, Achin Kulshrestha, Amir Zamir, and Federico Tombari. Brave: Broadening the visual encoding of vision-language models. *arXiv preprint arXiv:2404.07204*, 2024.
- Dahun Kim, Anelia Angelova, and Weicheng Kuo. Region-aware pretraining for open-vocabulary object detection with vision transformers. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 11144–11154, 2023.
- Jonathan Krause, Michael Stark, Jia Deng, and Li Fei-Fei. 3d object representations for fine-grained categorization. In *ICCVW*, 2013.
- Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 1998.
- Boyi Li, Kilian Q Weinberger, Serge Belongie, Vladlen Koltun, and René Ranftl. Language-driven semantic segmentation. *arXiv preprint arXiv:2201.03546*, 2022a.

- Liunian Harold Li, Pengchuan Zhang, Haotian Zhang, Jianwei Yang, Chunyuan Li, Yiwu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, et al. Grounded language-image pre-training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 10965–10975, 2022b.
- Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. *arXiv preprint arXiv:2305.10355*, 2023.
- Feng Liang, Bichen Wu, Xiaoliang Dai, Kunpeng Li, Yanan Zhao, Hang Zhang, Peizhao Zhang, Peter Vajda, and Diana Marculescu. Open-vocabulary semantic segmentation with mask-adapted clip. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 7061–7070, 2023.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European conference on computer vision*, pp. 740–755. Springer, 2014.
- Ziyi Lin, Shijie Geng, Renrui Zhang, Peng Gao, Gerard De Melo, Xiaogang Wang, Jifeng Dai, Yu Qiao, and Hongsheng Li. Frozen clip models are efficient video learners. In *European Conference on Computer Vision*, pp. 388–404. Springer, 2022.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 26296–26306, 2024a.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024b.
- Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? *arXiv preprint arXiv:2307.06281*, 2023.
- Ziyang Luo, Pu Zhao, Can Xu, Xiubo Geng, Tao Shen, Chongyang Tao, Jing Ma, Qingwei Lin, and Daxin Jiang. Lexlip: Lexicon-bottlenecked language-image pre-training for large-scale image-text sparse retrieval. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 11206–11217, 2023.
- Subhransu Maji, Esa Rahtu, Juho Kannala, Matthew Blaschko, and Andrea Vedaldi. Fine-grained visual classification of aircraft. *arXiv preprint arXiv:1306.5151*, 2013.
- Chenlin Meng, Yutong He, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sedit: Guided image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021.
- Roosbeh Mottaghi, Xianjie Chen, Xiaobai Liu, Nam-Gyu Cho, Seong-Whan Lee, Sanja Fidler, Raquel Urtasun, and Alan Yuille. The role of context for object detection and semantic segmentation in the wild. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 891–898, 2014.
- Chong Mou, Xintao Wang, Jiechong Song, Ying Shan, and Jian Zhang. Dragondiffusion: Enabling drag-style manipulation on diffusion models. *arXiv preprint arXiv:2307.02421*, 2023.
- Maria-Elena Nilsback and Andrew Zisserman. Automated flower classification over a large number of classes. In *ICVGIP*, 2008.
- Zixuan Pan, Jianxu Chen, and Yiyu Shi. Masked diffusion as self-supervised representation learner. *arXiv preprint arXiv:2308.05695*, 2023.
- Omkar M. Parkhi, Andrea Vedaldi, Andrew Zisserman, and C. V. Jawahar. Cats and dogs. In *CVPR*, 2012.
- William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 4195–4205, 2023.
- Mihir Prabhudesai, Tsung-Wei Ke, Alexander Cong Li, Deepak Pathak, and Katerina Fragkiadaki. Diffusion-tta: Test-time adaptation of discriminative models via generative feedback. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *ICML*, 2021a.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pp. 8748–8763. PMLR, 2021b.

- Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 1(2):3, 2022.
- Hanoona Rasheed, Muhammad Uzair Khattak, Muhammad Maaz, Salman Khan, and Fahad Shahbaz Khan. Fine-tuned clip models are efficient video learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 6545–6554, 2023.
- Benjamin Recht, Rebecca Roelofs, Ludwig Schmidt, and Vaishaal Shankar. Do imagenet classifiers generalize to imagenet?, 2019.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022a.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *CVPR*, 2022b.
- Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Burcu Karagol Ayan, S Sara Mahdavi, Rapha Gontijo Lopes, et al. Photorealistic text-to-image diffusion models with deep language understanding. *arXiv preprint arXiv:2205.11487*, 2022.
- Aneeshan Sain, Ayan Kumar Bhunia, Pinaki Nath Chowdhury, Subhadeep Koley, Tao Xiang, and Yi-Zhe Song. Clip for all things zero-shot sketch-based image retrieval, fine-grained or not. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2765–2775, 2023.
- Xiangheng Shan, Dongyue Wu, Guilin Zhu, Yuanjie Shao, Nong Sang, and Changxin Gao. Open-vocabulary semantic segmentation with image embedding balancing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 28412–28421, 2024.
- Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In *ACL*, 2018.
- Bowen Shi, Peisen Zhao, Zichen Wang, Yuhang Zhang, Yaoming Wang, Jin Li, Wenrui Dai, Junni Zou, Hongkai Xiong, Qi Tian, et al. Umg-clip: A unified multi-granularity vision generalist for open-world understanding. *arXiv preprint arXiv:2401.06397*, 2024.
- Uriel Singer, Adam Polyak, Thomas Hayes, Xi Yin, Jie An, Songyang Zhang, Qiyuan Hu, Harry Yang, Oron Ashual, Oran Gafni, et al. Make-a-video: Text-to-video generation without text-video data. *arXiv preprint arXiv:2209.14792*, 2022.
- Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint arXiv:2011.13456*, 2020.
- Johannes Stallkamp, Marc Schlipsing, Jan Salmen, and Christian Igel. Man vs. computer: Benchmarking machine learning algorithms for traffic sign recognition. *Neural networks*, 2012.
- Sanjay Subramanian, William Merrill, Trevor Darrell, Matt Gardner, Sameer Singh, and Anna Rohrbach. Reclip: A strong zero-shot baseline for referring expression comprehension. *arXiv preprint arXiv:2204.05991*, 2022.
- Quan Sun, Yuxin Fang, Ledell Wu, Xinlong Wang, and Yue Cao. EVA-CLIP: Improved training techniques for clip at scale. *arXiv preprint arXiv:2303.15389*, 2023.
- Quan Sun, Yufeng Cui, Xiaosong Zhang, Fan Zhang, Qiying Yu, Yueze Wang, Yongming Rao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Generative multimodal models are in-context learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 14398–14409, June 2024a.
- Quan Sun, Jinsheng Wang, Qiying Yu, Yufeng Cui, Fan Zhang, Xiaosong Zhang, and Xinlong Wang. Eva-clip-18b: Scaling clip to 18 billion parameters. *arXiv preprint arXiv:2402.04252*, 2024b.
- Quan Sun, Qiying Yu, Yufeng Cui, Fan Zhang, Xiaosong Zhang, Yueze Wang, Hongcheng Gao, Jingjing Liu, Tiejun Huang, and Xinlong Wang. Emu: Generative pretraining in multimodality. *arXiv preprint arXiv:2307.05222*, 2024c.
- Zeyi Sun, Ye Fang, Tong Wu, Pan Zhang, Yuhang Zang, Shu Kong, Yuanjun Xiong, Dahua Lin, and Jiaqi Wang. Alpha-clip: A clip model focusing on wherever you want. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 13019–13029, 2024d.

- Yepeng Tang, Weining Wang, Chunjie Zhang, Jing Liu, and Yao Zhao. Learnable feature augmentation framework for temporal action localization. *IEEE Transactions on Image Processing*, 2024.
- Yonglong Tian, Lijie Fan, Phillip Isola, Huiwen Chang, and Dilip Krishnan. Stablerep: Synthetic images from text-to-image models make strong visual representation learners. *Advances in Neural Information Processing Systems*, 36, 2024.
- Shengbang Tong, Ellis Brown, Penghao Wu, Sanghyun Woo, Manoj Middepogu, Sai Charitha Akula, Jihan Yang, Shusheng Yang, Adithya Iyer, Xichen Pan, et al. Cambrian-1: A fully open, vision-centric exploration of multimodal llms. *arXiv preprint arXiv:2406.16860*, 2024a.
- Shengbang Tong, Zhuang Liu, Yuexiang Zhai, Yi Ma, Yann LeCun, and Saining Xie. Eyes wide shut? exploring the visual shortcomings of multimodal llms. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9568–9578, 2024b.
- Brandon Trabucco, Kyle Doherty, Max Gurinas, and Ruslan Salakhutdinov. Effective data augmentation with diffusion models. *arXiv preprint arXiv:2302.07944*, 2023.
- Bastiaan S Veeling, Jasper Linmans, Jim Winkens, Taco Cohen, and Max Welling. Rotation equivariant cnns for digital pathology. In *MICCAI*, 2018.
- Yael Vinker, Ehsan Pajouheshgar, Jessica Y Bo, Roman Christian Bachmann, Amit Haim Bermano, Daniel Cohen-Or, Amir Zamir, and Ariel Shamir. Clipasso: Semantically-aware object sketching. *ACM Transactions on Graphics (TOG)*, 41(4):1–11, 2022.
- Haohan Wang, Songwei Ge, Zachary Lipton, and Eric P Xing. Learning robust global representations by penalizing local predictive power. *NeurIPS*, 2019.
- Wenxuan Wang, Xingjian He, Yisi Zhang, Longteng Guo, Jiachen Shen, Jiangyun Li, and Jing Liu. Cm-masksd: Cross-modality masked self-distillation for referring image segmentation. *IEEE Transactions on Multimedia*, 2024a.
- Wenxuan Wang, Tongtian Yue, Yisi Zhang, Longteng Guo, Xingjian He, Xinlong Wang, and Jing Liu. Unveiling parts beyond objects: Towards finer-granularity referring expression segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 12998–13008, 2024b.
- Zhaoqing Wang, Yu Lu, Qiang Li, Xunqiang Tao, Yandong Guo, Mingming Gong, and Tongliang Liu. Cris: Clip-driven referring image segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 11686–11695, 2022.
- Yixuan Wei, Han Hu, Zhenda Xie, Ze Liu, Zheng Zhang, Yue Cao, Jianmin Bao, Dong Chen, and Baining Guo. Improving clip fine-tuning performance. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 5439–5449, 2023.
- Weilai Xiang, Hongyu Yang, Di Huang, and Yunhong Wang. Denoising diffusion autoencoders are unified self-supervised learners. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 15802–15812, 2023.
- Jianxiong Xiao, James Hays, Krista A Ehinger, Aude Oliva, and Antonio Torralba. Sun database: Large-scale scene recognition from abbey to zoo. In *CVPR*, 2010.
- Hu Xu, Gargi Ghosh, Po-Yao Huang, Dmytro Okhonko, Armen Aghajanyan, Florian Metze, Luke Zettlemoyer, and Christoph Feichtenhofer. Videoclip: Contrastive pre-training for zero-shot video-text understanding. *arXiv preprint arXiv:2109.14084*, 2021.
- Hu Xu, Saining Xie, Xiaoqing Ellen Tan, Po-Yao Huang, Russell Howes, Vasu Sharma, Shang-Wen Li, Gargi Ghosh, Luke Zettlemoyer, and Christoph Feichtenhofer. Demystifying CLIP data. *arXiv preprint arXiv:2309.16671*, 2023a.
- Jiarui Xu, Shalini De Mello, Sifei Liu, Wonmin Byeon, Thomas Breuel, Jan Kautz, and Xiaolong Wang. Groupvit: Semantic segmentation emerges from text supervision. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 18134–18144, 2022.
- Jiarui Xu, Sifei Liu, Arash Vahdat, Wonmin Byeon, Xiaolong Wang, and Shalini De Mello. Open-vocabulary panoptic segmentation with text-to-image diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2955–2966, 2023b.
- Mengde Xu, Zheng Zhang, Fangyun Wei, Han Hu, and Xiang Bai. Side adapter network for open-vocabulary semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2945–2954, 2023c.

- Peter Young, Alice Lai, Micah Hodosh, and Julia Hockenmaier. From image descriptions to visual denotations: New similarity metrics for semantic inference over event descriptions. *TACL*, 2014.
- Seonghoon Yu, Paul Hongsuck Seo, and Jeany Son. Zero-shot referring image segmentation with global-local context features. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 19456–19465, 2023.
- Yan Zeng, Xinsong Zhang, and Hang Li. Multi-grained vision language pre-training: Aligning texts with visual concepts. *arXiv preprint arXiv:2111.08276*, 2021.
- Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *ICCV*, 2023.
- Beichen Zhang, Pan Zhang, Xiaoyi Dong, Yuhang Zang, and Jiaqi Wang. Long-clip: Unlocking the long-text capability of clip. *arXiv preprint arXiv:2403.15378*, 2024.
- Renrui Zhang, Wei Zhang, Rongyao Fang, Peng Gao, Kunchang Li, Jifeng Dai, Yu Qiao, and Hongsheng Li. Tip-adapter: Training-free adaption of clip for few-shot classification. In *European conference on computer vision*, pp. 493–510. Springer, 2022.
- Wenliang Zhao, Yongming Rao, Zuyan Liu, Benlin Liu, Jie Zhou, and Jiwen Lu. Unleashing text-to-image diffusion models for visual perception. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 5729–5739, 2023.
- Wendi Zheng, Jiayan Teng, Zhuoyi Yang, Weihang Wang, Jidong Chen, Xiaotao Gu, Yuxiao Dong, Ming Ding, and Jie Tang. Cogview3: Finer and faster text-to-image generation via relay diffusion. *arXiv preprint arXiv:2403.05121*, 2024.
- Bolei Zhou, Hang Zhao, Xavier Puig, Sanja Fidler, Adela Barriuso, and Antonio Torralba. Scene parsing through ade20k dataset. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 633–641, 2017.
- Ziqin Zhou, Yinjie Lei, Bowen Zhang, Lingqiao Liu, and Yifan Liu. Zegclip: Towards adapting clip for zero-shot semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 11175–11185, 2023.
- Xiangyang Zhu, Renrui Zhang, Bowei He, Aojun Zhou, Dong Wang, Bin Zhao, and Peng Gao. Not all features matter: Enhancing few-shot clip with adaptive prior refinement. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 2605–2615, 2023.

APPENDIX

A DATASETS FOR GENERALIZATION CAPABILITY EVALUATION

Table 9: Datasets used to evaluate CLIP models’s generalization capability.

Dataset	Classes	Test size	Evaluation Metric
ImageNet-1K (Deng et al., 2009)	1000	50,000	accuracy
ImageNet-V2 (Recht et al., 2019)	1000	10,000	accuracy
ImageNet-Adversarial (Hendrycks et al., 2021b)	1000	7,500	accuracy
ImageNet-R(ention) (Hendrycks et al., 2021a)	1000	30,000	accuracy
ImageNet-Sketch (Wang et al., 2019)	1000	50,899	accuracy
ObjectNet (Barbu et al., 2019)	1000	50,273	accuracy
CIFAR-10 (Krizhevsky et al., 2009)	10	10,000	accuracy
CIFAR-100 (Krizhevsky et al., 2009)	100	10,000	accuracy
MNIST (LeCun et al., 1998)	10	10,000	accuracy
Caltech101 (Fei-Fei et al., 2004)	101	9144	accuracy
SUN397 (Xiao et al., 2010)	397	108,754	accuracy
FGVC Aircraft (Maji et al., 2013)	100	3,333	accuracy
Country-211 (Radford et al., 2021a)	211	21,100	accuracy
Stanford Cars (Krause et al., 2013)	196	8,041	accuracy
Birdsnap (Berg et al., 2014)	500	2,195	accuracy
Describable Textures (Cimpoi et al., 2014)	47	1,880	accuracy
EuroSAT (Helber et al., 2019)	10	27,000	accuracy
Facial Emotion Recognition 2013 (Goodfellow et al., 2013)	8	3,574	accuracy
Oxford Flowers 102 (Nilsback & Zisserman, 2008)	102	6,149	accuracy
Food-101 (Bossard et al., 2014)	102	25,250	accuracy
GTSRB (Stallkamp et al., 2012)	43	12,630	accuracy
PatchCamelyon (Veeling et al., 2018)	2	32,768	accuracy
Oxford-IIIT Pets (Parkhi et al., 2012)	37	3,669	accuracy
Rendered SST2 (Radford et al., 2021a)	2	1,821	accuracy
RESISC45 (Cheng et al., 2017)	45	31,500	accuracy
STL-10 (Coates et al., 2011)	10	8000	accuracy
Pascal VOC 2007 Classification (Everingham et al., 2007)	20	4,952	accuracy
Flickr30K (Young et al., 2014)	-	1000	recall
COCO (Lin et al., 2014)	-	5000	recall

B PSEUDO CODE FOR DIVA PIPELINE

Algorithm 1 DIVA

-
- 1: **Input:** Image x , CLIP model weights θ , diffusion model weights ϕ , representation optimization steps N , batch size B , learning rate η , optimized CLIP model weights θ^* .
 - 2: **for** optimization step $s \in (1, \dots, N)$ **do**
 - 3: Compute current CLIP’s visual features $\theta(x)$ as partial condition \mathbf{c}
 - 4: Sample timesteps $\{t_i\}_{i=1}^B$ and noises $\{\epsilon_i\}_{i=1}^B$
 - 5: Loss $L(\theta, \phi) = \frac{1}{N} \sum_{i=1}^B \|\epsilon_\phi(\sqrt{\alpha_{t_i}}x + \sqrt{1 - \alpha_{t_i}}\epsilon_i, \mathbf{c}, t_i) - \epsilon_i\|^2$
 - 6: Update CLIP weights $\theta^* \leftarrow \theta - \eta \nabla_\theta L(\theta, \phi)$
 - 7: **end for**
 - 8: **return** optimized CLIP weights θ^*
-