

Coordinating Decisions via Quantum Telepathy

Dawei Ding*¹ and Liang Jiang²

¹Independent

²Pritzker School of Molecular Engineering, University of Chicago, Chicago, Illinois 60637

Abstract

Quantum telepathy is the phenomenon where two non-communicating parties can exhibit correlated behaviors that are impossible to achieve using classical mechanics. This is also known as Bell inequality violation and is made possible by quantum entanglement. In this work, we present a conceptual framework for applying quantum telepathy to real-world problems. In general, the problems involve coordinating decisions given a set of observations without being able to communicate. We argue this inability is actually quite prevalent in the modern era where the decision-making timescales of computer processors are so short that the speed of light delay is actually quite appreciable in comparison. We highlight the example of high-frequency trading (HFT), where trades are made at microsecond timescales, but the speed of light delay between different exchanges can range from the order of 100 microseconds to 10 milliseconds. Due to the maturity of Bell inequality violation experiments, experimental realization of quantum telepathy schemes that can attain a quantum advantage for real-world problems *is already almost immediately possible*. We demonstrate this by conducting a case study for a concrete HFT scenario that gives rise to a generalization of the CHSH game and evaluate different possible physical implementations for achieving a quantum advantage. It is well known that Bell inequality violation is a rigorous mathematical proof of a quantum advantage over any classical strategy and does not need any complexity-theoretic assumptions such as $BQP \neq BPP$. Moreover, fault tolerance is not necessary to realize a quantum advantage: for example, violating the CHSH inequality only requires single-qubit gates applied on two entangled physical qubits.

Contents

1	Introduction	2
2	Definition of TC Problems	4
3	Latency TC Problems	6
3.1	High Frequency Trading	6
4	Physical Implementation	8
4.1	Direct Photonic Connection	8
4.2	Using Quantum Memory	14

*dding@alumni.stanford.edu

5 Discussion	19
A General TC Problems: Definitions and Facts	25
A.1 Quantum Advantage	27
A.2 XOR Arrays	32
A.3 Behaviors with Loss	34
A.4 Noisy Quantum Behavior	37
B Numerical Optimizer	39
B.1 Classical value	39
B.2 Quantum value	39
B.3 Lossy value	41

1 Introduction

Quantum entanglement is a unique testament to the strangeness of quantum mechanics. As stated in the celebrated result of John Bell [1], no local hidden variable theory can reproduce the correlated behaviors of entangled particles. His prediction, which is known as Bell inequality violation, and its subsequent experimental verification [2, 3, 4, 5], completely overturned traditional assumptions of how nature works and made mathematically explicit the departure quantum mechanics makes from the familiar classical world. This phenomenon was also described by Einstein, Podolsky, and Rosen as “spooky action at a distance” [6]: although they are not communicating, entangled particles can display behaviors that seem inconceivable and even uncanny. Hence Bell inequality violation is also known as **quantum telepathy**.¹ How this is possible can be tied to the particularly counterintuitive nature of quantum entanglement. Stated plainly, *just as relativity defies the ancient intuition that time is absolute, quantum entanglement defies the ancient intuition that a description of a combination of objects is the combination of their descriptions*. Borrowing the words of Aristotle, for a system of entangled particles, “the whole is greater than the sum of its parts” in an information-theoretic sense.

Quantum telepathy is not a just topic of fundamental physics or philosophy. A series of patents [8, 9] pointed out that *quantum telepathy is a technology with real-world applications*. To better elucidate how Bell inequalities can appear in real-world settings, the patents propose a new concept called “coordinating decisions between non-communicating parties” (CDNP) problems, which we will henceforth refer to more simply as **tacit coordination** (TC) problems. We also introduce this terminology because we will make some generalizations and slight deviations from the usual theory of Bell inequalities and the equivalent computer science concept of nonlocal games [10, 11]. In short, a TC problem arises when there are multiple non-communicating parties who each make a local observation and a local decision. The aim is to optimize a global “utility” of their collective decisions based on their collective observations.² Note that for consistency, we will use this terminology throughout the paper. One very natural real-world setting where TC problems can appear is *high-frequency trading* (HFT). In this case, each party is a colocated server at a stock exchange engaged in HFT for the same firm. Each server has access to local information, such as stock price fluctuations at their respective exchange. Now, these stock exchanges are spatially

¹There is also a related term, **pseudo-telepathy** [7].

²See Section 2 for a more detailed description and see Appendix A for a technical definition.

separated by distances ranging from tens of kilometers to thousands of kilometers. The speed of light delay thus ranges from hundreds of microseconds to tens of milliseconds. However, modern HFT is conducted on timescales as short as microseconds and in the future may even shorten to nanoseconds [12]. No matter how much effort is put into shortening latencies, with these numbers it is physically impossible for different servers to communicate before making a trade decision. However, there could be a nontrivial globally optimal pair of trades given a pair of observations to minimize risk or maximize expected returns. See Section 3 for an example. Thus, HFT is naturally a TC problem.

Now, we emphasize Bell inequality violation *is irrefutable proof of a quantum advantage*. It does not require any complexity-theoretic assumptions such as $BQP \neq BPP$ and is actually a straightforward mathematical argument. In fact, Bell inequality violation is so convincing that it can be used to prove quantum advantage in other settings, such as shallow quantum circuits [13]. Furthermore, to achieve a quantum advantage we do not necessarily need complicated schemes such as fault-tolerant quantum computing. For example, violating the CHSH inequality [14] only requires two physical qubits and a single-qubit gate prior to each measurement. Indeed, the number of qubits and fidelities necessary to violate the inequality have already been achieved half a century ago [2, 3, 4, 5]. Even for Bell inequalities that require high-dimensional quantum systems to achieve the maximum violation, it is sufficient to find (if it exists) a low-dimensional scheme that also violates the inequality, just not maximally, to attain a quantum advantage.

The main message of this paper is the observation that *TC problems are actually quite prevalent in the real world and that a quantum advantage can be attained with currently available or near-future technologies*. The core insight is that speed of light delays for distances on the order of 10 km is already 10 to 100 μs , which is a relatively long period of time in our modern world satiated with classical processors that have GHz clock speeds. In particular, we conduct a case study of a concrete HFT scenario that gives rise to a generalization of the CHSH game and assess different possible physical implementations of quantum telepathy schemes. Our paper will be organized as follows. In Section 2, we first give an informal definition of TC problems. Then, in Section 3, we present the concrete HFT scenario and compute what quantum advantages can be attained. In Section 4, we go into the detailed physical implementations of quantum telepathy schemes. In particular, we evaluate their ability to achieve a quantum advantage for the said HFT scenario, considering practical issues such as photon loss, entanglement generation rates, and robustness to noise. We end with a discussion in Section 5, where we consider other settings where TC problems may arise such as distributed computing and computer architecture. Appendix A gives technical definitions and proves facts about TC problems that we use in our analyses, and Appendix B presents a numerical optimizer for computing the quantum advantage attainable for general TC problems.

Related work Quantum telepathy is not a new concept. There are multiple papers discussing applications of quantum telepathy [7, 15, 16, 17], but none point out that the speed of light delay is a fundamental barrier for communication in many real-world settings. Furthermore, many of the examples given are artificial and do not immediately appear relevant for real-world problems. The concept of using quantum telepathy for HFT was first presented in [8, 9], but no realistic example was given and the distance scales considered were thousands of kilometers. Distributing entanglement across such a distance would require a quantum satellite [18], which is not always practical. These patents also do not go into much detail about physical implementations nor quantitatively evaluate their ability to achieve a quantum advantage. We note the ideas of this paper were included in a

new patent [19]. An analysis of using quantum computers to solve Prisoner’s Dilemma which is used to model HFT is given in [20].

2 Definition of TC Problems

We give an informal definition of TC problems. For a technical exposition, see Appendix A. A TC problem involves multiple **parties** that each make an **observation** followed by a **decision** so as to maximize a global **utility**. In fig. 1, we give an illustration of a TC problem. For simplicity, we will assume there are two parties. A **utility array** describes what is the utility of a set of decisions given




Figure 1: A TC problem with two parties. The first party makes observation o_1 and subsequent decision d_1 while the second party makes observation o_2 and subsequent decision d_2 .

a set of observations. For simplicity, suppose each party can only have two possible observations $\{o, o'\}$ and two possible decisions $\{d, d'\}$. The utility array can be written in matrix form:

$$\mathcal{U} = \begin{matrix} & d, d & d, d' & d', d & d', d' \\ \begin{matrix} o, o \\ o, o' \\ o', o \\ o', o' \end{matrix} & \begin{pmatrix} u_{11} & u_{12} & u_{13} & u_{14} \\ u_{21} & u_{22} & u_{23} & u_{24} \\ u_{31} & u_{32} & u_{33} & u_{34} \\ u_{41} & u_{42} & u_{43} & u_{44} \end{pmatrix} & \in \mathbb{R}^{4 \times 4}, \end{matrix}$$

where the rows are labeled by possible pairs of observations and the columns are labeled by possible pairs of decisions. The matrix element is then the utility of that pair of decisions given that pair of observations. The parties are to each make a decision given their observation that maximizes the expected value of the utility, given an **input distribution**, that is, a probability distribution over the observations. The catch is that the parties are cannot communicate during this decision-making process. The reason for this could be various:

- The parties may be spatially separated and have to make decisions faster than the communication latency or even the speed of light delay.
- The parties may have lost their communication link due to a technical fault or other problem.

The former case can be quite prevalent in modern settings: take the parties to be computers that perform tasks with GHz clock speeds. As long as the spatial separation between the computers is more than 30 cm, communication is physically impossible.

Without communication, how do the parties maximize their utilities? If they're smart, the parties would have agreed on a **strategy** beforehand given knowledge of the utility array. The implementation of the strategy leads in general to a probability distribution of decisions conditioned on observations, which can also be expressed as a matrix:

$$p(d|o) = \begin{matrix} & d, d & d, d' & d', d & d', d' \\ \begin{matrix} o, o \\ o, o' \\ o', o \\ o', o' \end{matrix} & \begin{pmatrix} p_{11} & p_{12} & p_{13} & p_{14} \\ p_{21} & p_{22} & p_{23} & p_{24} \\ p_{31} & p_{32} & p_{33} & p_{34} \\ p_{41} & p_{42} & p_{43} & p_{44} \end{pmatrix} & \in \mathbb{R}_{\geq 0}^{4 \times 4}. \end{matrix}$$

Because these are probabilities, this is a right stochastic matrix, i.e. the rows sum to 1. We will call this conditional probability distribution the **behavior** of the parties. The expected utility is then given by multiplying these probabilities with the entries of the utility array and some input distribution $p_O(o)$.

In a **deterministic strategy**, each individual party simply makes a decision based on their local observation:

1. Before starting, the parties prepare respective functions $f_1, f_2 : \{o, o'\} \rightarrow \{d, d'\}$ based on the utility matrix.
2. After starting, the parties compute their respective functions by taking their respective local observation as input and use the corresponding output as their decision.

In general, a **classical strategy**, also known as a local hidden variable theory, can involve randomness: both local randomness for each party and shared randomness establishing correlations between different parties. However, the expected utility of any classical strategy is always a convex combination of the expected utilities of deterministic strategies. Hence, to find the maximum possible expected utility function of all classical strategies, it is sufficient to only consider deterministic strategies.

Now, the phenomenon of Bell inequality violation in the language of TC problems is this: for certain TC problems, *we can devise strategies using quantum mechanics that achieve higher expected utilities than that of any strategy we can devise classically*. Such **quantum strategies** are of the following form:

1. Before starting, the parties share entangled particles. The precise state of the entangled particles is specifically designed for the utility matrix.
2. After starting, the parties apply a quantum measurement to their particle, the type of measurement being based on their observation.
3. The parties make decisions based on the measurement result.

Note here that no communication is conducted at any step. However, the parties need to be able to share entangled particles.

In general, we will be interested in the **quantum value** and **classical value**, which are defined as the expected utilities optimized over quantum and classical strategies, respectively. We will refer to the difference between the quantum and classical value as the **gap**, or **quantum advantage**. For detailed technical definitions of the concepts in this section, readers can refer to Appendix A.

3 Latency TC Problems

We currently live in a world where the speed of light delay between different parties can be appreciable compared to the timescales in which decisions need to be made. Classical processors have GHz clock speeds, while light in vacuum can only travel 30 cm in 1 ns. Hence, TC problems can easily arise in real-world scenarios where communication is not possible due to latency. In general, we give the following criteria for a *latency TC problem*:

1. Multiple parties are involved that each make local observations and decisions.
2. There is a global utility associated with a set of decisions given a set of observations.
3. The parties do not have enough time to communicate their observations with each other before having to make a decision.

The last criterion could be due to fundamental physics constraints such as speed of light (in vacuum) delay or other factors such as having only an optical fiber connection through which light has to travel farther than the displacement between the parties and travels more slowly than in vacuum.

3.1 High Frequency Trading

In this paper we will conduct a detailed case study involving a high frequency trading scenario where quantum entanglement can provide an advantage. We will attempt to make the scenario as detailed as possible, but some simplifications will be necessary due to lack of real market data and to keep things conceptually straightforward. The TC problem we present should therefore be interpreted as a toy model. In general, to obtain concrete quantitative predictions of quantum advantage in practical settings, real historical HFT data is needed. We hope that this HFT scenario and the quantum advantage that can be attained will inspire other interesting examples and attract further research in this area.

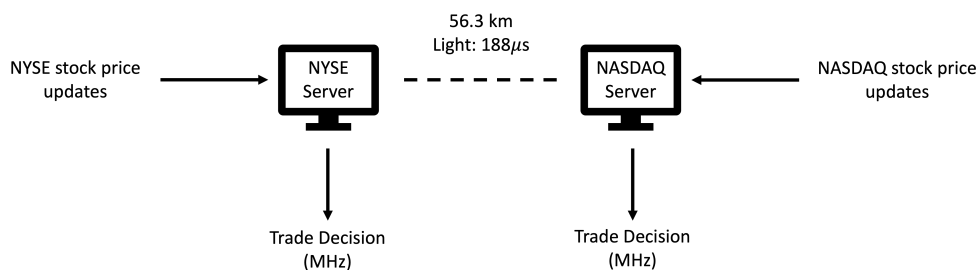


Figure 2: HFT setup between NYSE and NASDAQ exchanges.

Consider the HFT setup in fig. 2. Suppose a market maker named Zhuo operates in NYSE and NASDAQ, where he respectively trades correlated stocks X and Y. In layman's terms, Zhuo is a supplier: he provides trades (both buying and selling) for a stock X listed in NYSE and a stock Y listed in NASDAQ near current market prices so that trading can proceed. Zhuo has two colocated servers, one at each exchange. Each server receives market data from its local exchange (observations) and modifies its HFT algorithm accordingly (decision). Thus the first criterion for latency TC problems is satisfied. Since the stocks are correlated, the pair of decisions given the

observations will determine how favorable Zhuo’s position is given the market information at both exchanges (utility). Thus the second criterion is fulfilled. Furthermore, the data centers of these two stock exchanges are around 35 miles [21], or 56.3 km, apart which means even a line of sight connection in vacuum would entail a speed of light delay of at least about 188 μ s. However, HFT is sometimes conducted on timescales as short as microseconds [12], which means in general the two colocated servers do not have enough time to communicate before they have to make a trade decision. Thus the third criterion is satisfied.

We now provide the full details of this particular TC problem. As Zhuo is a market maker, each server conventionally issues orders in pairs where one order is a bid and the other an ask. However, the pair of orders is issued sequentially,³ and the first order is in general more likely to be filled. This is due to the first order arriving earlier and having being made with slightly more up-to-date information. Thus, if a bid order is always issued first in the pair, then there will be a slight bias toward successful bid orders over ask orders. Which order to issue first corresponds to the decision to be made in the TC problem for each server.

Now, assume the price movements of stock X and Y are usually positively correlated. In this case, Zhuo should let the servers make opposite decisions in order to **hedge**, that is, to reduce risk. That is, if one server decides to ask first, the other should bid first. This way Zhuo’s portfolio will effectively have a nice tradeoff between two positively correlated stocks, thereby reducing the variance of his position. However, each server will also look for a technical indicator that stock X and Y are now negatively correlated.⁴ This corresponds to the observation in the TC problem that each server makes. In this case, Zhuo should let the two servers make the same decision, again for hedging. Now, both exchanges are looking for this indicator. If both see the indicator, then Zhuo should definitely let the servers make the same decision. If only one sees an indicator, there can be slight preference for making the same decision over opposite decisions or vice versa.

At a high level, we see that in this HFT scenario the utility (favorability of Zhuo’s position) is only dependent on whether the servers make the same decision or different decisions. Hence, it is an instance of an XOR game [11]. Here, the XOR of the decisions of the two servers has a natural trading interpretation as hedging for positively or negatively correlated stocks. We next wish to explicitly write out the utility array. Assuming that only one indicator of potential negative correlation is not sufficient to prefer making the same decision over opposite decisions, the utility array is actually that of the opposite winning conditions of the CHSH game:

$$\mathcal{U} = \begin{matrix} & & A, A & A, B & B, A & B, B \\ \begin{matrix} N, N \\ N, I \\ I, N \\ I, I \end{matrix} & \left(\begin{array}{cccc} 0 & 1 & 1 & 0 \\ 0 & 1 & 1 & 0 \\ 0 & 1 & 1 & 0 \\ 1 & 0 & 0 & 1 \end{array} \right), \end{matrix}$$

where the observations N, I correspond to “No indicator” versus “Indicator” of negative correlation, and the decisions A, B correspond to “Ask-first” or “Bid-first” order issuing, respectively. We will choose the order of parties as the NYSE server followed by the NASDAQ server. *This establishes that*

³In general this will depend on the order types available at the exchanges. For example, some order types send both the ask and bid orders in one message, but even then the server has to sequentially decide on their respective price values. A possible exception to this is if the order type allows for specifying a spread.

⁴The precise nature of such an indicator would need to be empirically determined in real-world settings.

a TC problem such as the CHSH game can manifest in real-world scenarios.⁵ Now, to quantitatively evaluate a quantum advantage, we also need to consider the input distribution. Suppose the input distribution is independent Bernoulli distributed with parameter p for both servers, where with probability p the indicator is observed (I). We analytically solve this TC problem in Appendix A.1 where we find that a quantum advantage exists iff $p \in (1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}})$.

We can also consider a natural extension where one server observing the indicator leads to a partial preference of making the same over opposite decisions. In this case we can introduce a parameter $\beta \in [0, 1]$ and the utility array is given by

$$\mathcal{U} = \begin{array}{c} \\ \\ \\ \\ \end{array} \begin{array}{cccc} A, A & A, B & B, A & B, B \\ \left(\begin{array}{cccc} 0 & 1 & 1 & 0 \\ \beta & 1 - \beta & 1 - \beta & \beta \\ \beta & 1 - \beta & 1 - \beta & \beta \\ 1 & 0 & 0 & 1 \end{array} \right) \end{array}. \quad (3.1)$$

Assuming again an independent Bernoulli distribution for the input distribution with parameter p , we can numerically evaluate the quantum advantage. The result is shown in fig. 3 for a grid of values for p, β , as well as different cross-sections. These and other numerical results are obtained via a general-purpose numerical optimizer applicable to any TC problem outlined in Appendix B. We see that when $\beta = 0$, we obtain the previous results where there is a quantum advantage for $p \in (1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}})$. Interestingly, as β increases to 0.5, the range of p for which there is a quantum advantage increases, although the value of the quantum advantage decreases. At $\beta = 0.5$ there is no quantum advantage. For $\beta > 0.5$ we observe a mirror image by taking $\beta \mapsto 1 - \beta$. This is because the corresponding utility array can be obtained by appropriately relabeling the observations and decisions, which will lead to the same gap as per Lemma 7 in Appendix A. Hence, we see a family of real-world scenarios where quantum entanglement can provide an indubitable advantage. For convenience of reference, we will refer to this TC problem with the utility array given in eq. (3.1) and with an independent Bernoulli distributed input with parameter p as the **hedging problem**.

4 Physical Implementation


In this section we explore the concrete details of physically implementing a quantum strategy for a latency TC problem. We will in particular take the hedging problem as a case study. *Our results suggest that there is a tantalizing possibility for quantum entanglement to bring practical gains to real-life TC problems such as those encountered in HFT with current or near-future quantum technologies.* Moreover, we have a concrete and realistic roadmap to realize said near-future quantum technologies, such as vacuum beam guides [22].

In general, we will classify possible physical implementations into two types: direct photonic connection (Type I) and quantum memory (Type II).


4.1 Direct Photonic Connection

In a Type I implementation, the two parties directly receive entangled photons from an intermediate source node. This is exhibited pictorially in fig. 4.


⁵For simplicity, we assume that the figure of merit is indeed the expected utility. This is sensible for special cases.

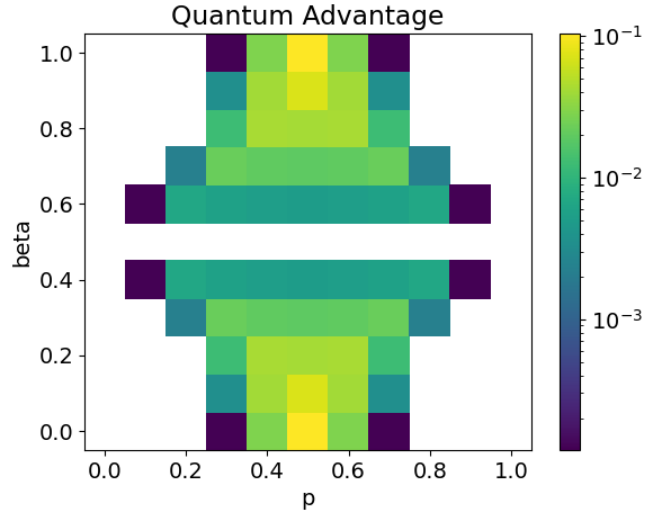

(a)

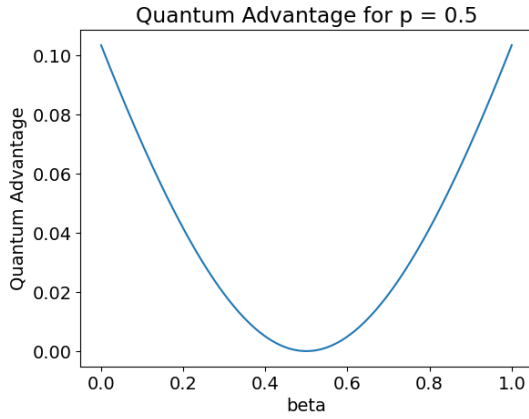

(b)

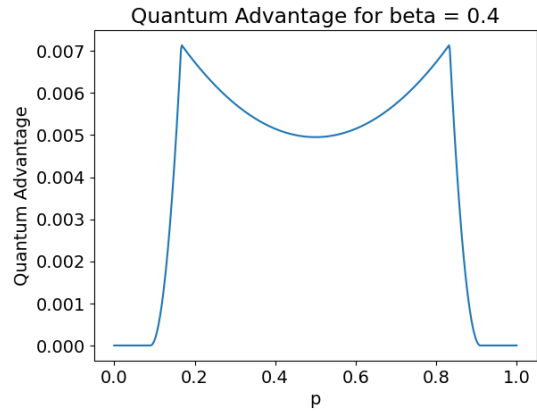

(c)

Figure 3: (a) Quantum advantage for the hedging problem as a function of p and β , where each ranges from 0 to 1 in increments of 0.1. Colors are in log scale. White squares indicate that there was no quantum advantage found up to floating point error. (b) Quantum advantage as a function of β for $p = 0.5$. (c) Quantum advantage as a function of p for $\beta = 0.4$.

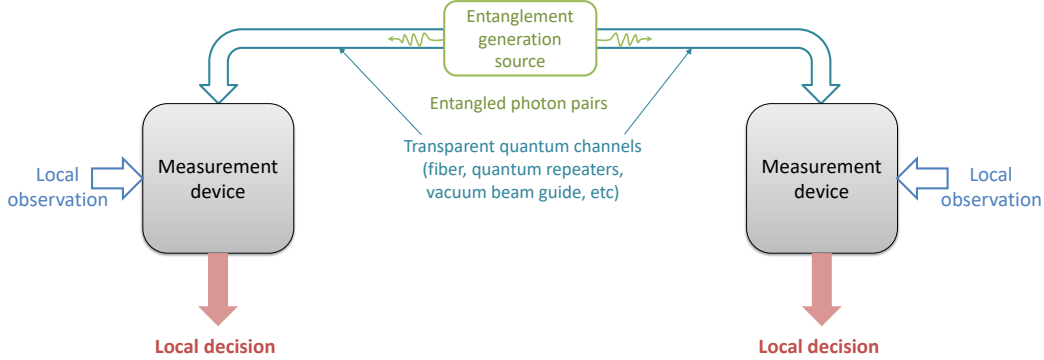


Figure 4: A physical implementation of a quantum strategy using a direct photonic connection (Type I). The two parties each have photon measurement devices that receive entangled photon pairs from an intermediate source. The measurement bases are determined by local observations and the local decisions are determined by the measurement outcomes.

We will focus on two key specs for this setup to successfully implement a quantum strategy for a latency TC problem:

1. Entangled photon generation rate
2. Photon loss.

A latency TC problem arises due to the extremely short time window in which decisions have to be made. Furthermore, for simplicity *we will assume the same TC problem repeats itself with high frequency*. This is sensible for many HFT scenarios: for instance, market makers such as Zhuo would be solving the same TC problem over and over again because their method of taking a favorable position or getting returns is always the same. The hedging problem is one such example. For cases where the utility matrix changes with time, the parties and entangled photon source could synchronize changing the quantum strategy over time. Nevertheless, this leads to the first requirement for the physical setup: the entangled photons are generated at a sufficiently high frequency so that a quantum strategy can be executed within the time window. In HFT, these time windows are on the order of microseconds, which means entangled photons need to be generated at MHz rates. This is already possible with current technologies using a continuous-wave laser and a nonlinear crystal to produce photon pairs maximally entangled in polarization via parametric down-conversion. These pairs can be produced at MHz rates (see for instance [18]). It is possible to accommodate even shorter time windows by using pumped pulses, thereby achieving generation rates up to 50 GHz [23]. We can also simply increase the number of entangled photon sources. However, note that it is not strictly necessary that the entanglement generation rate be sufficiently high to attain a quantum advantage overall. The parties can simply execute a deterministic strategy during times when entanglement is unavailable, and execute a quantum strategy when it is.

The second spec is photon loss. This is a key difficulty for a Type I implementation that could even preclude a quantum advantage [24]. Because of photon loss, not only are photons sometimes unavailable, each party does not know whether the other party received their photon.⁶ One could

⁶There is also the problem of dark counts where one party erroneously detects a photon. This scenario can be captured with the same mathematical framework.

imagine that if they both knew that one of the photons was lost, they could revert to the best classical strategy and thereby effectively achieve a nontrivial convex combination of the classical and quantum values. This would retain a quantum advantage. However, because they each do not know whether a photon was lost for the other party, they only have probabilistic control over what strategy they implement. We explicitly define in Appendix A.3 how exactly loss affects the resulting behavior of a quantum strategy. In general, the resulting behavior will be a convex combination of behaviors where the weight is the probability of entanglement loss and the parties that experience loss fall back to a deterministic strategy. As the probability of loss increases, the quantum behavior eventually becomes a classical behavior, thereby leading to a loss of a quantum advantage.


Given a TC problem, assume each party successfully obtains their entangled particle with probability η , which we call the **efficiency**. We can then define a **threshold efficiency** η^* as the minimal value such that for $\eta > \eta^*$, we can attain a quantum advantage. If the TC problem had no quantum advantage even without loss, we define $\eta^* := 1$. Consider for example the hedging problem. We use the numerical optimizer outlined in Appendix B to compute η^* for different possible values of p and β . The results are shown in fig. 5. At a qualitative level, we see the same pattern as in fig. 3. This is intuitive as lowering the efficiency will continuously lower the achievable expected utility for quantum strategies with loss until it reaches the classical value.

It is known that for TC problems with two parties where each party has two possible observations, the threshold efficiency is at least $\frac{2}{3}$ [25]. This is also apparent in fig. 5. If we use optical fiber to distribute the photons, this efficiency is already difficult to achieve for the distances involved for HFT. In general, η exponentially decreases with the length of the channel l :


$$\eta = 10^{-0.1\alpha l},$$

where α is the **attenuation rate** of the physical medium used for the channel. Now, the lowest attenuation rate achievable by optical fiber for the optimal wavelength of 1550 nm is 0.17 dB/km [26]. Hence, to achieve an efficiency of at least $\frac{2}{3}$, the maximum length l allowed is around 10.4 km. Note that this is the distance from the source to each party is therefore half the distance between the two servers. The efficiency computed should also include detector efficiency, inter-component coupling efficiency, and other possible sources of photon loss. This places an even stronger bound on length. We see η^* values considerably higher than $\frac{2}{3}$ in fig. 5, which shows that using optical fiber in a type I physical implementation is insufficient for the hedging problem when the two servers are separated by larger distances, such as in the case of NYSE to NASDAQ. There are other physical medium to consider, however. The authors of [22] consider using vacuum beam guides to distribute entangled photons with which an attenuation rate as low as 5×10^{-5} dB/km can be achieved according to numerical simulations. In this case, an efficiency of $\frac{2}{3}$ is achievable for distances less than about 35,000 km, which is about the circumference of the Earth. Thus this would allow for quantum strategies to be executed at *continental distance scales*, for which speed of light delays can be significant. For example, the geodesic distance between the NYSE data center and the HKEX data centre is about 12.9×10^3 km, which is a delay of about 43.1 ms. This is very long compared to the time scale of HFT. For the case of NYSE and NASDAQ, using vacuum beam guides we can achieve $1 - \eta$ of about 3.24×10^{-4} , which is sufficient for the majority of the points in fig. 5. Note that optical fiber can still be useful for TC problems with shorter distances, or with a higher number of parties [27] or possible observations [28].


For demonstration purposes, we next go into the fine details of strategies for the hedging problem, setting $p = 0.3$, $\beta = 0.3$ for concreteness. In this case the threshold efficiency is computed to be

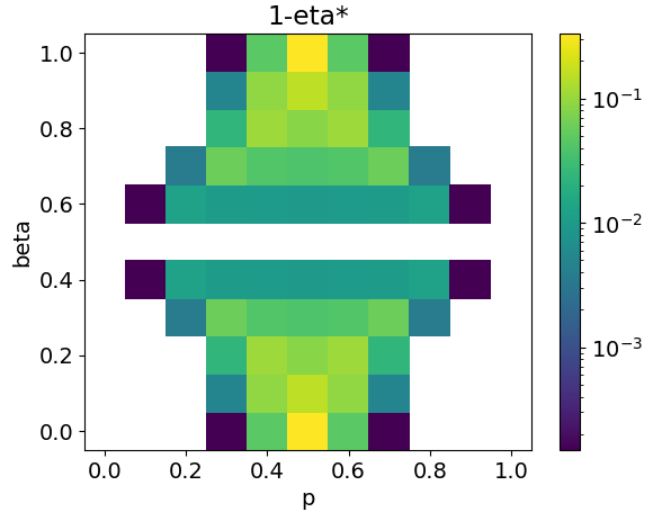

(a)

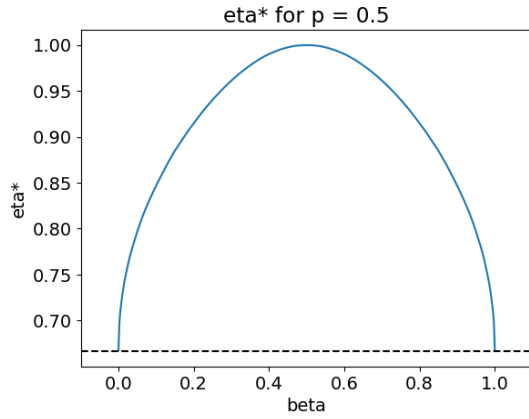

(b)

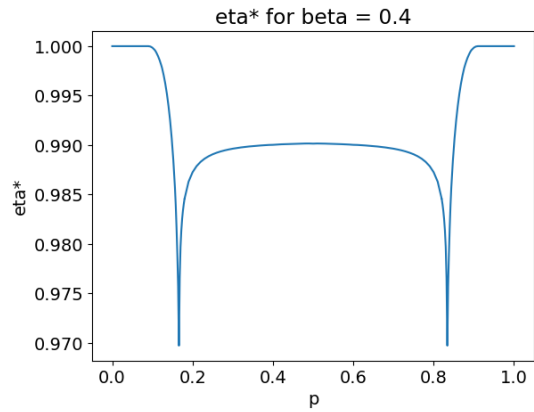

(c)

Figure 5: (a) $1 - \eta^*$ values computed for the hedging problem with p and β taking values between 0 and 1 with increments of 0.1. Colors are in log scale. When there was no quantum advantage to begin with, by definition $1 - \eta^* = 0$ and we draw a white square. (b) η^* as a function of β when $p = 0.5$. The lower bound of $\frac{2}{3}$ is plotted as a dashed line. (c) η^* as a function of p when $\beta = 0.4$.

$\eta^* \approx 0.941$. So that we attain a noticeable quantum advantage, we set $\eta = 0.95$. We run the numerical optimizer and find that the classical value is

$$c^* = 0.79,$$

where an optimal deterministic strategy is for the NYSE server to always bid first and the NASDAQ server to ask first when it sees no indicator and to bid first when it sees an indicator. The highest expected utility for a quantum strategy with efficiency $\eta = 0.95$ is

$$q^*(\eta = 0.95) \approx 0.792.$$

We prove in Appendix A.3 and Appendix B that when there are only two possible observations and decisions for each party, qubit systems are sufficient for achieving the quantum value, even in the presence of loss. Furthermore, we can parameterize the measurement basis with only one parameter. Define the states

$$\begin{aligned} |\psi(\theta)\rangle &:= \cos\theta|0\rangle - \sin\theta|1\rangle \\ |\psi^\perp(\theta)\rangle &:= \sin\theta|0\rangle + \cos\theta|1\rangle. \end{aligned}$$

One optimal quantum strategy uses the following measurement operators. When neither server sees an indicator, both servers measure in the computational basis⁷

$$\{|0\rangle\langle 0|, |1\rangle\langle 1|\}.$$

When either server sees an indicator, it instead uses the measurement

$$\{|\psi(-0.590)\rangle\langle\psi(-0.590)|, |\psi^\perp(-0.590)\rangle\langle\psi^\perp(-0.590)|\},$$

where the angle is in radians and three significant figures are kept. The shared entangled state is

$$|\Phi\rangle = 0.0401|00\rangle - 0.902|01\rangle - 0.428|10\rangle - 0.0401|11\rangle,$$

keeping three significant figures for the coefficients. Note that since the measurement operators have all real elements, the shared entangled state also has all real elements. To realize this quantum physically, we perform a Schmidt decomposition:

$$|\Phi\rangle = 0.903|u_0v_0\rangle + 0.429|u_1v_1\rangle, \tag{4.1}$$

where

$$|u_0\rangle := 0.9995|0\rangle + 0.0301|1\rangle, |u_1\rangle := 0.0301|0\rangle - 0.9995|1\rangle$$

and

$$|v_0\rangle := 0.0301|0\rangle + 0.9995|1\rangle, |v_1\rangle := -0.9995|0\rangle + 0.0301|1\rangle.$$

The state in eq. (4.1) can for example be realized by letting $|u_i\rangle, |v_i\rangle$ be the vertical-horizontal polarization basis and using the technique of [29]. The single-qubit rotations needed before the measurement to switch back to the computational basis can be realized using linear optics. Lastly, the optimal fallback deterministic strategy is for the NYSE server to always ask first and the NASDAQ server to always bid first.

⁷Since we only care about the largest eigenvalue of the Bell operator (see Appendix A), there is a local unitary degree of freedom and therefore we can without loss of generality always assume the measurement for the first observation is in the computational basis.

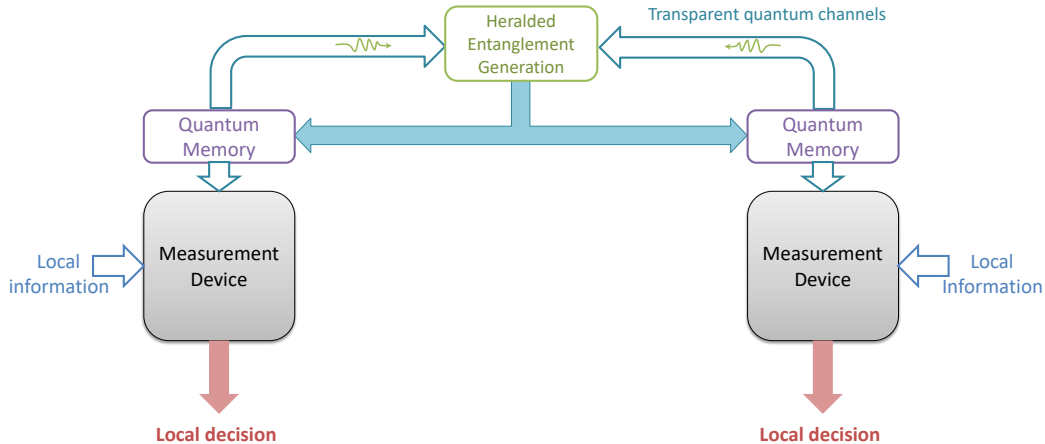


Figure 6: A physical implementation of a quantum strategy via quantum memories (Type II). Each party has a quantum memory, which are entangled via photons in a heralded entanglement scheme. The measurement bases are determined by local observations and the local decisions are determined by the measurement outcomes.

4.2 Using Quantum Memory

The main shortcoming of Type I implementations is that the magnitude of photon loss in optical fiber, the predominant physical medium for photonic communication in industrial applications, is too high for many TC problems. One solution for this is for the parties to each have a quantum memory, which could be a simple (few qubits) quantum computer with a long coherence time. The memories are entangled via photons in a heralded entanglement scheme. This constitutes a Type II implementation. The setup is shown in fig. 6. Because the entanglement is heralded, we can avoid the problem in Type I implementations where the parties do not know if entanglement was successfully distributed. Furthermore, by using quantum memories we can realize more complicated and higher dimensional entangled states that may be difficult to realize with photons. Furthermore, we know for XOR games it is sufficient to use maximally entangled states [30] to achieve all possible XOR behaviors (probability of XOR = 0 or 1). Without having to worry about loss, for Type II implementations all we have to do is to realize the maximally entangled state in this case.

The main specs we need to consider for Type II implementations are

1. Effective entanglement generation rate r_e
2. Fidelity of quantum operations F .

The effective entanglement generation rate is determined by the following parameters:

- Entanglement attempt time t_a
- Heralded entanglement success probability p_s
- Quantum memories multiplicity M

Here, t_a is the time needed to generate entanglement for each quantum memory. This includes the time for the physical operation to create memory-photon entanglement, the time for the photons

to travel to the intermediate node, and the time for the heralded entanglement information to be received. Usually t_a is dominated by the traversal times. Next, p_s includes the probability of successfully creating memory-photon entanglement, the probability of the photons reaching the intermediate node, and the probability of correctly projecting the photons into the desired state. Lastly, M is the number of quantum memories available to each party. This increases the effective entanglement generation rate by a multiplicative factor. In summary,

$$r_e = \frac{Mp_s}{t_a}.$$

We would like a Type II implementation to have an effective generation rate sufficiently high for the TC problem's demand for entanglement (although again like Type I implementations this isn't necessary to get an overall quantum advantage).

We compute the effective entanglement generation rate for HFT between NYSE and NASDAQ as a function of M . Assuming t_a is dominated by photon traversal time, we split it into two terms. The entangled photon traversal we will assume is through fiber with velocity v_f , while to minimize time for heralding we can use free space transmission with velocity v_s . Then,

$$t_a = \frac{56.3}{2} \text{ km} \div v_f + \frac{56.3}{2} \text{ km} \div v_s \approx 230 \mu\text{s},$$

where we take

$$v_f = \frac{2}{3} \cdot 3 \times 10^8 \text{ m/s} = 2 \times 10^8 \text{ m/s}$$

and

$$v_s = 3 \times 10^8 \text{ m/s}.$$

Next, we assume p_s is dominated by photon loss and the probability of successful photon state projection which is usually $\frac{1}{2}$. Thus, using the optical fiber attenuation rate of 0.17 dB/km,

$$p_s = \frac{1}{2} \cdot (10^{-0.1 \cdot 0.17 \text{ dB/km} \cdot 56.3/2 \text{ km}})^2 \approx 0.055.$$

We therefore have

$$r_e \approx M \cdot 240 \text{ Hz}.$$

As an example, to achieve 1 MHz rates needed for HFT, we require $M \approx 4300$. This is entirely feasible, for not only are multi-thousand-qubit processors already within reach [31, 32], but what is needed here is not a 4300-qubit processor, but simply *4300 copies of single-qubit processors*, where each copy has a good photonic interface for establishing long-range entanglement. The technology to achieve this has already been demonstrated: see for instance [33, 34]. Note that we are assuming that the TC problem only requires qubit systems as in the case of the hedging problem. In general, letting d be the distance between the parties, with the above assumptions on t_a and p_s , the effective entanglement rate is

$$r_e = M \cdot \frac{10^{-0.1\alpha d}}{2(\frac{d}{2v_f} + \frac{d}{2v_s})} = M \cdot \frac{10^{-0.1\alpha d}}{d(\frac{1}{v_f} + \frac{1}{v_s})}.$$

For Type II implementations, fidelity is also an important specification. Entanglement generation involves noisy memory-photon entanglement, imperfect photon detection, as well as decoherence of the memories during photon traversal. Measurement of the memories themselves can also be noisy. We will evaluate how much the quantum advantage computed for the hedging problem in fig. 3 is robust to noise. For simplicity, we will assume depolarizing noise on the entangled state, but in realistic scenarios, a detailed physics simulation should be conducted. We define the **robustness** ν^* as how much depolarizing noise can be tolerated before the quantum advantage disappears.

Now, the effect of depolarizing noise

$$\rho \mapsto (1 - \nu)\rho + \nu\pi,$$

where π is the maximally mixed state and ν is the magnitude of the noise, on the behavior of a quantum strategy for the hedging problem is the following:

$$p(d|o) \mapsto (1 - \nu)p(d|o) + \nu\frac{1}{4}, \quad (4.2)$$


where we assume the quantum strategy achieves the quantum value and uses only qubits. Using higher dimensional systems could affect the robustness, but at the cost of also incurring larger error rates for the physical implementation. For a derivation of these results, see Appendix A.4. See also [35] for a general study on noise tolerance. Using eq. (4.2) and the utility array eq. (3.1), we can directly compute the effect of depolarizing noise on the expected utility:

$$\begin{aligned} \bar{u} &\mapsto (1 - \nu)\bar{u} + \nu\frac{1}{4} \times [(1 - p)^2(1 + 1) + 2p(1 - p)(\beta + \beta + 1 - \beta + 1 - \beta) + p^2(1 + 1)] \\ &= (1 - \nu)\bar{u} + \nu\frac{1}{2}. \end{aligned} \quad (4.3)$$


Conveniently, this transformation does not depend on p or β . We observe the second term in eq. (4.2) corresponds to a constant classical behavior where each party independently chooses one of the possible decisions A, B with probability $\frac{1}{2}$ regardless of the observation, so the utility of $\frac{1}{2}$ achieved by such a behavior as computed in eq. (4.3) is always at most the quantum value. Thus, we can simply compute the robustness as

$$\nu^* = \frac{q^* - c^*}{q^* - \frac{1}{2}}.$$


We plot the robustness for the hedging problem as a function of p and β in fig. 7. In the range of p and β considered, other than some extreme values, we observe a robustness to depolarizing noise of about 10^{-3} to 10^{-1} . We even see robustness values of up to 0.293. That is, optimal quantum strategies using qubits can tolerate depolarizing noise up to (not including) that magnitude and a quantum advantage would remain. For fixed β , we also observe some regions with constant robustness, which implies in those regions the quantum value q^* is a fixed affine function of the classical value c^* . In general, noise robustness can be interpreted as some form of normalized maximal Bell inequality violation [35]. We also plot the quantum advantage for different values of p and β under various noise levels in fig. 8. The range of p and β for which there is a quantum advantage shrinks as the noise level increases.

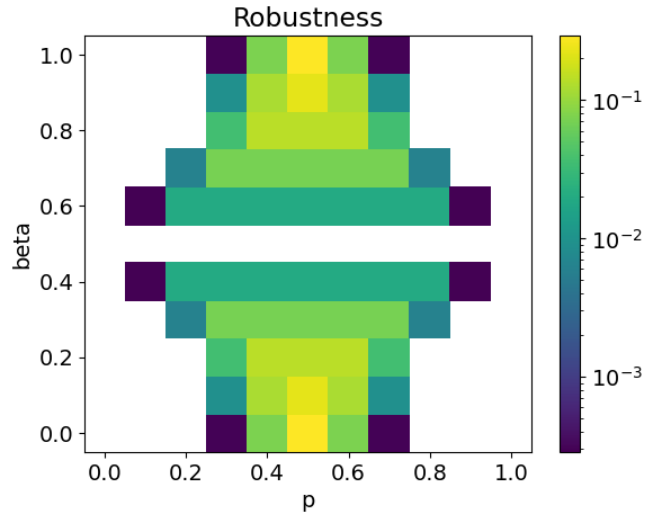

(a)

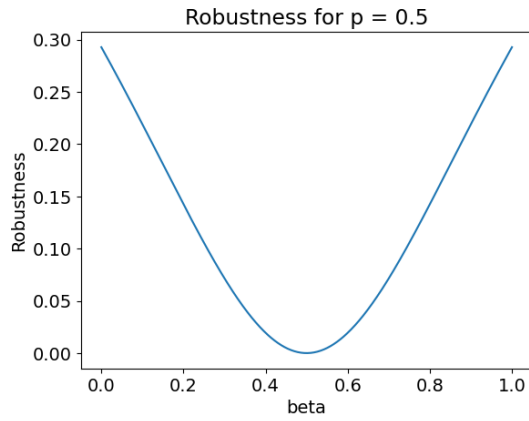

(b)

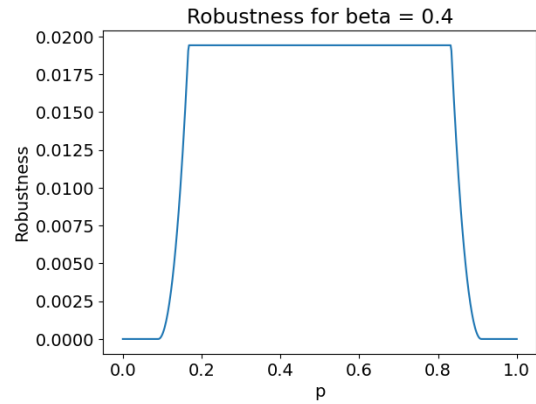

(c)

Figure 7: (a) Robustness values computed for the hedging problem with p and β taking values between 0 and 1 with increments of 0.1. Colors are in log scale. When robustness is 0, we draw a white square. (b) Robustness as a function of β when $p = 0.5$. (c) Robustness as a function of p when $\beta = 0.4$.

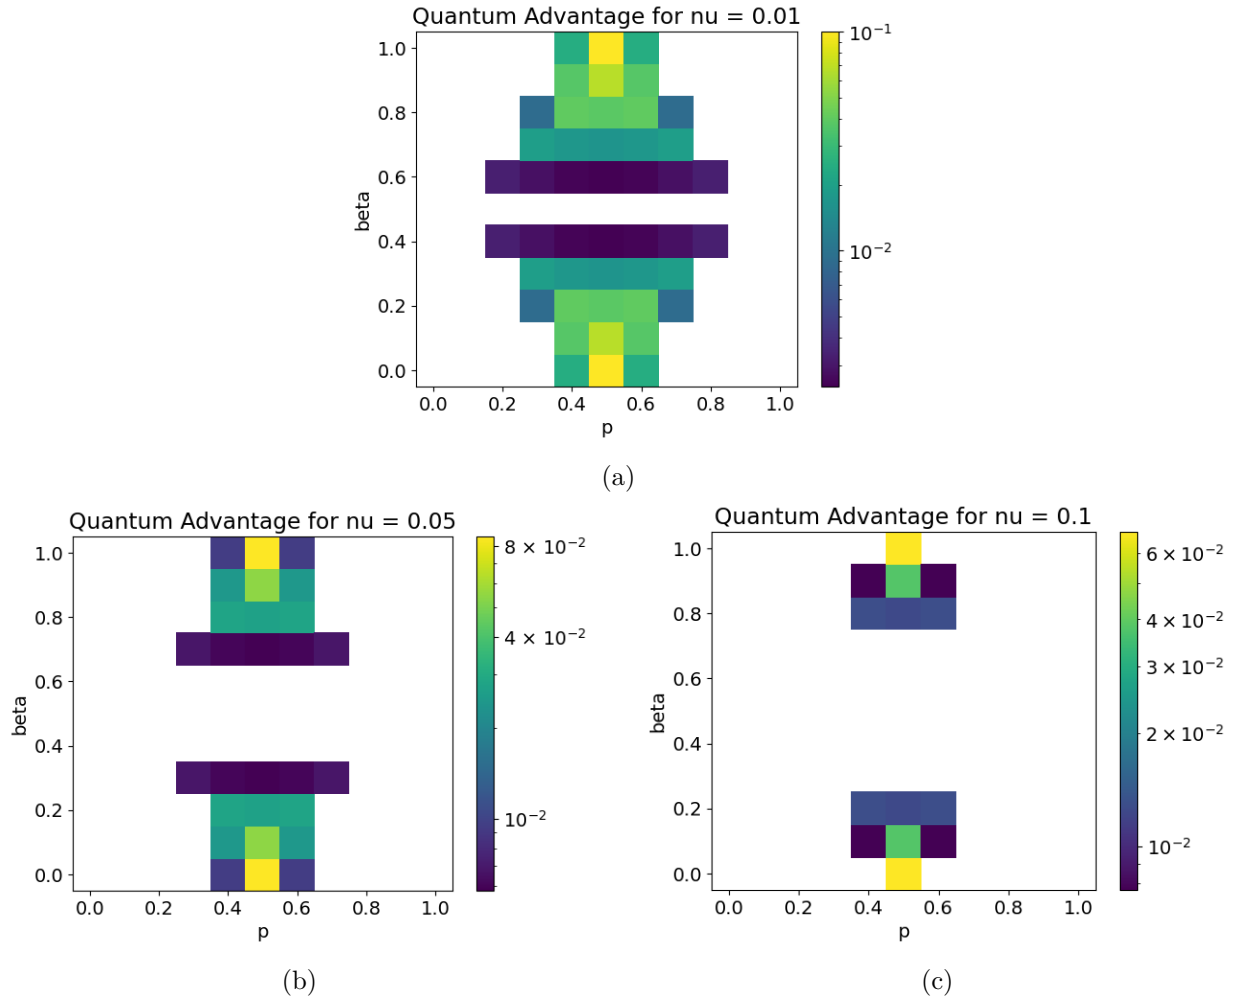


Figure 8: Quantum advantage for the hedging problem as a function of p and β , where each ranges from 0 to 1 in increments of 0.1, for various levels of depolarizing noise. Colors are in log scale. White squares indicate that there was no quantum advantage found up to floating point error.

5 Discussion

Quantum telepathy is a potential new application of quantum technologies. In our modern era of electronic computing where timescales are measured in microseconds or even nanoseconds, the speed of light delay is actually appreciable in many scenarios. Coordinating decisions at such timescales between space-like separated parties could benefit from using quantum entanglement. High frequency trading is a notable example.

Aside from HFT, other possible applications include distributed computing and (classical) computer architecture. While HFT is somewhat specialized, these latter two scenarios are much more common, and any interesting usage of quantum telepathy would have a greater impact. We consider the first application. Distributed computing may involve computers with a spatial separation of around 100 meters, the square root of the area of an average data center in 2024 [36]. At this distance, any computational processes faster than 0.1 microseconds would be space-like separated. Current entangled photon sources can achieve generation rates at this timescale [18], and optical fiber can achieve an efficiency of $\eta \approx 0.998$ at this distance scale.⁸ Hence this is the best regime to make use of current technologies. As for the latter application of computer architecture, distance scales may be on the order of 1 cm or shorter in a CPU (for example an Intel i7 CPU core package size is 50×25 mm [38]). Although it would be difficult to find any processes faster than the speed of light delay at such a distance scale, in general signal delays in a microprocessor cache can be dominated by resistive-capacitive time delays in long on-chip interconnects [39]. Furthermore, modern computer memories can have latencies significantly longer than the speed of light delay: DDR memories can have latencies on the order of 10 ns [40], while SSD memories can have latencies of 10 to 100 μ s [41]. Needing to coordinate processes in different parts of the memory at these timescales may therefore engender a TC problem. However, for such timescales, we may need to use photon sources with very high generation rates such as [23] as well as faster electronics for measurement. Now, in the case of computer architecture, for integration purposes it is more practical to use optical waveguides to distribute photons. Compared to optical fiber, waveguides have a much higher attenuation rate of about 0.2 dB/cm [42], which implies an efficiency of $\eta \approx 0.955$ for a 1 cm distance. Note that the speed of light in a waveguide is around the same as that of optical fiber: 2/3 of that in vacuum. Taking a step back, whether the application is HFT, distributed computing, or computer architecture, the crucial next step for assessing the practical usefulness of quantum telepathy is to analyze a TC problem encountered in an industrial setting with a utility array based on real data, not just a toy model such as the hedging problem, and to comprehensively analyze achievable efficiencies, fidelities, and entanglement generation rates to evaluate how big of a quantum advantage can be attained. We leave this for future research.

Indeed, as a potential important application of quantum technologies, we anticipate quantum telepathy will inspire new lines of theoretical and experimental research to make the technology practically viable. On the theory side, a key research direction is to figure out techniques to compute the quantum value and a quantum strategy that realizes it in an efficient way for general TC problems, or special classes of TC problems encountered in real-life scenarios. Such techniques should ideally also be able to consider entanglement loss. In particular, stronger results regarding the minimum number of continuous variables needed in the general-purpose optimizer outlined in Appendix B would be very useful. It would also be interesting to theoretically take into account

⁸Note in this case, the dominating source of loss would instead be from coupling. With current technologies, coupling efficiencies of 90% or higher can be achieved [37].

the multi-round nature [43] of TC problems encountered in practice. On the experimental side, a research direction of crucial importance is to devise ways to share programmable entangled states between the different parties. For Type I implementations, one possible approach is for the entanglement source to use quantum computers such as atoms [44] or superconducting circuits [45] to produce optical or microwave entangled photons with a programmable quantum state. For Type II implementations, quantum teleportation [46] is a natural solution. It may also be useful to devise heralded entanglement schemes that produce more general entangled states and not just the maximally entangled state or a state of the type in eq. (4.1). Regardless of implementation type, the authors of [8, 9] mention it would also be particularly interesting to physically realize quantum embezzling states [47] which can be used to produce any bipartite entangled state without communication. Such an entanglement source can accommodate all possible TC problems, which is very convenient for standardization purposes. It could also be used in more complicated scenarios where the utility array is changing over time.

Acknowledgment We would like to thank Jianxin Chen, Dalu Ding, Yong Ding, Jack Gidding, Patrick Hayden, Zhengfeng Ji, Rongzhi Jiang, Matt Meinel, Anand Natarajan, Mario Szegedy, and Zhaoyou Wang for helpful discussions. We also thank John Gardiner and Javier Lopez for pointing out an issue with the initial HFT scenario. DD would like to thank God for all of His provisions. LJ acknowledges support from the Packard Foundation (2020-71479).

References

- [1] John S Bell. On the Einstein Podolsky Rosen paradox. *Physics Physique Fizika*, 1(3):195, 1964.
- [2] Stuart J Freedman and John F Clauser. Experimental test of local hidden-variable theories. *Physical Review Letters*, 28(14):938, 1972.
- [3] Edward S Fry and Randall C Thompson. Experimental test of local hidden-variable theories. *Physical Review Letters*, 37(8):465, 1976.
- [4] Alain Aspect, Philippe Grangier, and Gérard Roger. Experimental tests of realistic local theories via bell’s theorem. *Physical review letters*, 47(7):460, 1981.
- [5] Alain Aspect, Philippe Grangier, and Gérard Roger. Experimental realization of einstein-podolsky-rosen-bohm gedankenexperiment: A new violation of bell’s inequalities. *Physical review letters*, 49(2):91, 1982.
- [6] Albert Einstein, Boris Podolsky, and Nathan Rosen. Can quantum-mechanical description of physical reality be considered complete? *Physical review*, 47(10):777, 1935.
- [7] Gilles Brassard, Anne Broadbent, and Alain Tapp. Quantum pseudo-telepathy. *Foundations of Physics*, 35:1877–1907, 2005.
- [8] Mario Szegedy, Dawei Ding, and Yaoyun Shi. Systems and methods for coordinating decisions between non-communicating parties, December 17 2020. US Patent 11676104B2.
- [9] Mario Szegedy, Dawei Ding, and Yaoyun Shi. Systems and methods for coordinating decisions, August 31 2023. US Patent Application 18/312,232.

- [10] Adán Cabello, David Rodríguez, and Ignacio Villanueva. Necessary and sufficient detection efficiency for the mermin inequalities. *Physical review letters*, 101(12):120402, 2008.
- [11] Richard Cleve, Peter Hoyer, Benjamin Toner, and John Watrous. Consequences and limits of nonlocal strategies. In *Proceedings. 19th IEEE Annual Conference on Computational Complexity, 2004.*, pages 236–249. IEEE, 2004.
- [12] Andrew Haldane. Patience and Finance. <https://www.bis.org/review/r100909e.pdf>, 2010. Online; accessed 16 February 2024.
- [13] Sergey Bravyi, David Gosset, and Robert König. Quantum advantage with shallow circuits. *Science*, 362(6412):308–311, 2018.
- [14] John F Clauser, Michael A Horne, Abner Shimony, and Richard A Holt. Proposed experiment to test local hidden-variable theories. *Physical review letters*, 23(15):880, 1969.
- [15] Yotam Ashkenazi and Shlomi Dolev. Distributed coordination based on quantum entanglement. *arXiv preprint arXiv:2210.10551*, 2022.
- [16] Anne Broadbent and Alain Tapp. Can quantum mechanics help distributed computing? *ACM SIGACT News*, 39(3):67–76, 2008.
- [17] Bernardo A Huberman and Tad Hogg. Quantum solution of coordination problems. *Quantum Information Processing*, 2(6):421–432, 2003.
- [18] Juan Yin, Yuan Cao, Yu-Huai Li, Sheng-Kai Liao, Liang Zhang, Ji-Gang Ren, Wen-Qi Cai, Wei-Yue Liu, Bo Li, Hui Dai, et al. Satellite-based entanglement distribution over 1200 kilometers. *Science*, 356(6343):1140–1144, 2017.
- [19] Dawei Ding and Liang Jiang. System for solving coordination problems using quantum telepathy, May 1 2024. US Patent Application 63/641,181.
- [20] Faisal Shah Khan and Ning Bao. Quantum prisoner’s dilemma and high frequency trading on the quantum cloud. *Frontiers in Artificial Intelligence*, 4:769392, 2021.
- [21] Phil Mackintosh. Time is Relative: Where Trade Speed Matters, and Where It Doesn’t. <https://www.nasdaq.com/articles/time-relative:-where-trade-speed-matters-and-where-it-doesnt-2019-05-30>, 2019. Online; accessed 4 July 2024.
- [22] Yuexun Huang, Rana X Adhikari, Amir H Safavi-Naeini, Liang Jiang, et al. Vacuum beam guide for large-scale quantum networks. *arXiv preprint arXiv:2312.09372*, 2023.
- [23] Kentaro Wakui, Yoshiaki Tsujimoto, Mikio Fujiwara, Isao Morohashi, Tadashi Kishimoto, Fumihiro China, Masahiro Yabuno, Shigehito Miki, Hirotaka Terai, Masahide Sasaki, et al. Ultra-high-rate nonclassical light source with 50 ghz-repetition-rate mode-locked pump pulses and multiplexed single-photon detectors. *Optics Express*, 28(15):22399–22411, 2020.
- [24] ND Mermin. New techniques and ideas in quantum measurement theory. *New York Academy of Science, New York*, pages 422–427, 1986.

- [25] Serge Massar and Stefano Pironio. Violation of local realism versus detection efficiency. *Physical Review A*, 68(6):062109, 2003.
- [26] Cisco Systems, Inc. Calculate the Maximum Attenuation for Optical Fiber Links. <https://www.cisco.com/c/en/us/support/docs/optical-networking/ons-15454-sonet-multiservice-provisioning-platform-mspp/27042-max-att-27042.html>, 2024. Online; accessed 6 June 2024.
- [27] Jan-Åke Larsson and Jason Semitecolos. Strict detector-efficiency bounds for n-site Clauser-Horne inequalities. *Physical Review A*, 63(2):022117, 2001.
- [28] Serge Massar. Nonlocality, closing the detection loophole, and communication complexity. *Physical Review A*, 65(3):032121, 2002.
- [29] Marissa Giustina, Alexandra Mech, Sven Ramelow, Bernhard Wittmann, Johannes Kofler, Jörn Beyer, Adriana Lita, Brice Calkins, Thomas Gerrits, Sae Woo Nam, et al. Bell violation using entangled photons without the fair-sampling assumption. *Nature*, 497(7448):227–230, 2013.
- [30] Boris S Tsirelson. Some results and problems on quantum bell-type inequalities. *Hadronic Journal Supplement*, 8(4):329–345, 1993.
- [31] Davide Castelvecchi. Ibm releases first-ever 1,000-qubit quantum chip. <https://www.nature.com/articles/d41586-023-03854-1>, 2023. Online; accessed 18 June 2024.
- [32] Atom Computing. Atom computing reaches 1000-qubit quantum computing milestone. <https://www.hpcwire.com/off-the-wire/atom-computing-reaches-1000-qubit-quantum-computing-milestone/>, 2023. Online; accessed 18 June 2024.
- [33] Yuan Lee, Eric Bersin, Axel Dahlberg, Stephanie Wehner, and Dirk Englund. A quantum router architecture for high-fidelity entanglement flows in quantum networks. *npj Quantum Information*, 8(1):75, 2022.
- [34] D Andrew Golter, Genevieve Clark, Tareq El Dandachi, Stefan Krastanov, Andrew J Leenheer, Noel H Wan, Hamza Raniwala, Matthew Zimmermann, Mark Dong, Kevin C Chen, et al. Multiplexed control of spin quantum memories in a photonic circuit. *arXiv preprint arXiv:2209.11853*, 2022.
- [35] David Pérez-García, Michael M Wolf, Carlos Palazuelos, Ignacio Villanueva, and Marius Junge. Unbounded violation of tripartite Bell inequalities. *Communications in Mathematical Physics*, 279:455–486, 2008.
- [36] Raj Vardhman. 15 Crucial Data Center Statistics to Know in 2024. <https://techjury.net/blog/data-center-statistics/>, 2024. Online; accessed 21 June 2024.
- [37] Mihir K Bhaskar, Ralf Riedinger, Bartholomeus Machielse, David S Levonian, Christian T Nguyen, Erik N Knall, Hongkun Park, Dirk Englund, Marko Lončar, Denis D Sukachev, et al. Experimental demonstration of memory-enhanced quantum communication. *Nature*, 580(7801):60–64, 2020.

- [38] Intel Corporation. Intel® Core™ i7-1065G7 Processor. <https://ark.intel.com/content/www/us/en/ark/products/196597/intel-core-i7-1065g7-processor-8m-cache-up-to-3-90-ghz.html>, 2019. Online; accessed 21 June 2024.
- [39] Jari Nurmi, Jouni Isoaho, Axel Jantsch, and Hannu Tenhunen. *Interconnect-centric design for advanced SoC and NoC*. Springer, 2004.
- [40] Micron Technology, Inc. What are memory timings? <https://www.crucial.com/support/articles-faq-memory/what-are-memory-timings>, 2024. Online; accessed 21 June 2024.
- [41] Frank T. Hady. Achieve Consistent Low Latency for Your Storage-Intensive Workloads. <https://www.intel.com/content/dam/www/public/us/en/documents/technology-briefs/low-latency-for-storage-intensive-workloads-tech-brief.pdf>, 2018. Online; accessed 21 June 2024.
- [42] KH Jürgen et al Buschow. *Encyclopedia of materials: science and technology*. Elsevier, 2001.
- [43] Jonathan Barrett, Daniel Collins, Lucien Hardy, Adrian Kent, and Sandu Popescu. Quantum nonlocality, bell inequalities, and the memory loophole. *Physical Review A*, 66(4):042111, 2002.
- [44] Ofer Firstenberg, Charles S Adams, and Sebastian Hofferberth. Nonlinear quantum optics mediated by rydberg interactions. *Journal of Physics B: Atomic, Molecular and Optical Physics*, 49(15):152003, 2016.
- [45] Alexandre Blais, Arne L Grimsmo, Steven M Girvin, and Andreas Wallraff. Circuit quantum electrodynamics. *Reviews of Modern Physics*, 93(2):025005, 2021.
- [46] Charles H Bennett, Gilles Brassard, Claude Crépeau, Richard Jozsa, Asher Peres, and William K Wootters. Teleporting an unknown quantum state via dual classical and einstein-podolsky-rosen channels. *Physical review letters*, 70(13):1895, 1993.
- [47] Wim van Dam and Patrick Hayden. Universal entanglement transformations without communication. *Physical Review A*, 67(6):060302, 2003.
- [48] Nicolas Brunner, Daniel Cavalcanti, Stefano Pironio, Valerio Scarani, and Stephanie Wehner. Bell nonlocality. *Reviews of modern physics*, 86(2):419, 2014.
- [49] Boris S Cirel’son. Quantum generalizations of Bell’s inequality. *Letters in Mathematical Physics*, 4:93–100, 1980.
- [50] Boris S Tsirelson. Problems of the theory probability distributions ix. zapiski math. inst. steklov (lomi), 142: 174–194, 1985. english translation in quantum analogues of the bell inequalities. the case of two spatially separated domains. *J. Soviet Math*, 36:557–570, 1987.
- [51] Lawrence J Landau. Empirical two-point correlation functions. *Foundations of Physics*, 18:449–460, 1988.
- [52] Ll Masanes. Necessary and sufficient condition for quantum-generated correlations. *arXiv preprint quant-ph/0309137*, 2003.

- [53] Wolfram Research, Inc. Mathematica (version 14.0.0.0).
- [54] Stephanie Wehner. Tsirelson bounds for generalized clauser-horne-shimony-holt inequalities. *Physical Review A*, 73(2):022110, 2006.
- [55] Itamar Pitowsky. The range of quantum probability. *Journal of Mathematical Physics*, 27(6):1556–1565, 1986.
- [56] Arthur Fine. Hidden variables, joint probability, and the bell inequalities. *Physical Review Letters*, 48(5):291, 1982.
- [57] Torsten Franz, Fabian Furrer, and Reinhard F Werner. Extremal quantum correlations and cryptographic security. *Physical review letters*, 106(25):250502, 2011.
- [58] Iain Raeburn and Allan M Sinclair. The c^* -algebra generated by two projections. *Mathematica Scandinavica*, pages 278–290, 1989.
- [59] Marek Żukowski, Dągomiř Kaszlikowski, Adam Baturó, and Jan-Åke Larsson. Strengthening the bell theorem: conditions to falsify local realism in an experiment. *arXiv preprint quant-ph/9910058*, 1999.
- [60] Dągomiř Kaszlikowski, Piotr Gnaciński, Marek Żukowski, Wiesław Miklaszewski, and Anton Zeilinger. Violations of local realism by two entangled n -dimensional systems are stronger than for two qubits. *Physical Review Letters*, 85(21):4418, 2000.
- [61] Christoph Spengler, Marcus Huber, and Beatrix C Hiesmayr. A composite parameterization of unitary groups, density matrices and subspaces. *Journal of Physics A: Mathematical and Theoretical*, 43(38):385306, 2010.
- [62] Pauli Virtanen, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, Pearu Peterson, Warren Weckesser, Jonathan Bright, Stéfan J. van der Walt, Matthew Brett, Joshua Wilson, K. Jarrod Millman, Nikolay Mayorov, Andrew R. J. Nelson, Eric Jones, Robert Kern, Eric Larson, C J Carey, İlhan Polat, Yu Feng, Eric W. Moore, Jake VanderPlas, Denis Laxalde, Josef Perktold, Robert Cimrman, Ian Henriksen, E. A. Quintero, Charles R. Harris, Anne M. Archibald, Antônio H. Ribeiro, Fabian Pedregosa, Paul van Mulbregt, and SciPy 1.0 Contributors. SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python. *Nature Methods*, 17:261–272, 2020.
- [63] Nikolaus Hansen. The cma evolution strategy: A tutorial. *arXiv preprint arXiv:1604.00772*, 2016.
- [64] Ryoki Hamano, Shota Saito, Masahiro Nomura, and Shinichi Shirakawa. Cma-es with margin: Lower-bounding marginal probability for mixed-integer black-box optimization. In *Proceedings of the genetic and evolutionary computation conference*, pages 639–647, 2022.
- [65] Masahiro Nomura and Masashi Shibata. cmaes: A simple yet practical python library for cma-es. *arXiv preprint arXiv:2402.01373*, 2024.

A General TC Problems: Definitions and Facts

In this section we present the theory of TC problems. Many of the concepts before Appendix A.1 are well known in the literature on Bell inequalities (see for example [48]), although we do make some generalizations and slight deviations [8, 9] to capture essential elements of a real-world TC problem and give a convenient framework to prove some results. We will make such deviations explicit.

We first define a general TC problem.

Definition 1. *Let $n \geq 2$ be an integer. An n -party TC problem is a tuple*

$$(\{\mathcal{O}_i\}_{i=1}^n, \{\mathcal{D}_i\}_{i=1}^n, p_{\mathcal{O}}(o), u),$$

where $\mathcal{O}_i, \mathcal{D}_i$ are non-empty finite⁹ sets, $p_{\mathcal{O}}(o)$ is a probability distribution over $\mathcal{O} := \mathcal{O}_1 \times \mathcal{O}_2 \times \cdots \times \mathcal{O}_n$, and u is a multidimensional array indexed by observations and decisions: $u_{o_1, o_2, \dots, o_n}^{d_1, d_2, \dots, d_n} \in \mathbb{R}$, $o_i \in \mathcal{O}_i$ and $d_i \in \mathcal{D}_i$. We also define $\mathcal{D} := \mathcal{D}_1 \times \mathcal{D}_2 \times \cdots \times \mathcal{D}_n$.

\mathcal{O}_i and \mathcal{D}_i are the sets of **observations** and **decisions** for party i . $p_{\mathcal{O}}(o)$ is the input distribution, a probability distribution over the set of possible observation tuples across all parties. The marginal distributions of observations for each party in general may not be independent. This is an additional element that is present in nonlocal games but not general Bell expressions as presented in [48]. Lastly, u is the **utility array**, where¹⁰ $u_o^d \in \mathbb{R}$ is the utility of making a combination of decisions $d \in \mathcal{D}$ given the combination of observations $o \in \mathcal{O}$. We deviate from the theory in [48] by proposing a *multidimensional array structure* instead of a vector structure for their equivalent notion of a Bell expression. This is more natural since for one we should differentiate the observation indices from the decision indices and each party's index from each other. We also introduce the terminology that when each party has the same number of observations m and the same number of decisions Δ , we have an (n, m, Δ) **problem**.

Definition 2. *For any $i \in [n]$, where $[n] := \{1, 2, \dots, n\}$, let $o_i \in \mathcal{O}_i, d_i \in \mathcal{D}_i$. We define a **behavior** as a multidimensional array $p_{o_1, o_2, \dots, o_n}^{d_1, d_2, \dots, d_n}$ as conditional probabilities $p(d|o)$. The **expected utility** of a behavior is given by*

$$\sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) \sum_{d \in \mathcal{D}} p_o^d u_o^d. \quad (\text{A.1})$$

The conditional probability distribution $p(d|o)$ describes how parties make decisions given the observations. Again, we deviate from [48] by choosing to describe this as a multidimensional array instead of a vector. Now, in a TC problem, the parties are not in communication. Hence, their behavior has to satisfy a **no-signaling** condition, that is, for all $i \in [n]$, $o_1, o_2, \dots, o_{i-1}, o_{i+1}, \dots, o_n$, $d_1, d_2, \dots, d_{i-1}, d_{i+1}, \dots, d_n$ in their respective alphabets,

$$\sum_{d_i \in \mathcal{D}_i} p_{o_1, o_2, \dots, o_i, \dots, o_n}^{d_1, d_2, \dots, d_i, \dots, d_n}$$

is the same for all $o_i \in \mathcal{O}_i$. In words, the marginal distribution over decisions of all parties other than party i is independent of the observation of party i . Here, our choice using an array structure for the

⁹Theoretically, we could consider infinite sets, but this is not feasible in practical experimental settings.

¹⁰For convenience here and in other places we will often use the shorthand $u_o^d := u_{o_1, o_2, \dots, o_n}^{d_1, d_2, \dots, d_n}$.

behavior gives the no-signaling condition a more natural interpretation as a form of multidimensional array symmetry. Note that the TC problem formalism generalizes nonlocal games that usually only have only binary outcomes of winning or losing. The formalism can capture this notion as a special case by letting $u_o^d = 1$ if (o, d) satisfies the winning conditions and equal 0 otherwise. Then, the expected utility of a behavior is the probability of winning the nonlocal game.

We next define what behaviors are possible for parties with classical and quantum resources. This part is very similar to the concepts in [48], so we will be brief.

Definition 3. A *deterministic strategy* is given by $\{f_i\}_{i=1}^n$ where $f_i : \mathcal{O}_i \rightarrow \mathcal{D}_i$.

In a deterministic strategy, each player has a local function $f_i : \mathcal{O}_i \rightarrow \mathcal{D}_i$ which they use to make decision d_i given observation o_i . The corresponding **deterministic behavior** is given by

$$p_o^d := \prod_{i=1}^n \delta_{d_i, f_i(o_i)},$$

where $o := (o_1, o_2, \dots, o_n)$, $d := (d_1, d_2, \dots, d_n)$, and δ is the Kronecker delta function. The expected utility of a deterministic behavior is given by

$$\sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) u_o^{f(o)},$$

where $f : \mathcal{O} \rightarrow \mathcal{D}$ is given by $f((o_1, o_2, \dots, o_n)) := (f_1(o_1), f_2(o_2), \dots, f_n(o_n))$. More generally, a **classical behavior** is defined by convex combinations of deterministic behaviors, which are attained by **classical strategies**: probabilistic mixtures of deterministic strategies where shared randomness can be used.

Definition 4. A *quantum strategy* is a tuple $(\{q_i\}_{i=1}^n, \{M_i\}_{i=1}^n, |\psi\rangle)$, where $q_i \geq |\mathcal{D}_i|$ is a positive integer, $M_i : \mathcal{O}_i \rightarrow S_M(q_i, |\mathcal{D}_i|)$, $S_M(q_i, |\mathcal{D}_i|)$ being the set of all projective measurements on a q_i -dimensional Hilbert space consisting of $|\mathcal{D}_i|$ projectors, and $|\psi\rangle$ is a $\prod_{i=1}^n q_i$ -dimensional quantum state.

In a quantum strategy, the players share a global quantum state $|\psi\rangle$, where each of their shares is of dimension q_i . They apply a projective measurement $M_i(o_i)$ on their share when they make the observation o_i . There are $|\mathcal{D}_i|$ possible measurement outcomes, which correspond to the possible decisions each party can make. We can more conveniently denote the projectors of $M_i(o_i)$ as $\Pi_i^{(d_i|o_i)}$, indexed by $d_i \in \mathcal{D}_i$. The corresponding **quantum behavior** is then given by

$$p_o^d := \langle \psi | \bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} | \psi \rangle.$$

We can therefore express the expected utility as

$$\langle \psi | \sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) \sum_{d \in \mathcal{D}} \bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} u_o^d | \psi \rangle.$$

We will call the operator

$$\sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) \sum_{d \in \mathcal{D}} \bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} u_o^d \tag{A.2}$$

the **Bell operator** of a quantum strategy. For the purposes of computing the quantum value it is sufficient to compute the largest eigenvalue of the Bell operator. Note in general we can also allow density matrices and POVM elements, but such strategies can always be considered to be a quantum strategy according to Definition 4 but in a higher dimensional space via Naimark's dilation theorem.

A.1 Quantum Advantage

Now, we want to optimize the expected utility over different strategies. We can see from eq. (A.1) that for such a purpose the key object of interest is the **weighted utility array** w where $w_o^d := p_{\mathcal{O}}(o)u_o^d$. Indeed, we can express the expected utility of a behavior $p(d|o)$ as simply

$$\sum_{o \in \mathcal{O}, d \in \mathcal{D}} p_o^d w_o^d.$$

We denote the set of all possible deterministic behaviors as \mathbf{D} and quantum behaviors as \mathbf{Q} . Then, we define the **classical value** and **quantum value** of w as

$$c^*(w) := \max_{p_o^d \in \mathbf{D}} \sum_{o \in \mathcal{O}, d \in \mathcal{D}} p_o^d w_o^d,$$

$$q^*(w) := \max_{p_o^d \in \mathbf{Q}} \sum_{o \in \mathcal{O}, d \in \mathcal{D}} p_o^d w_o^d.$$

We will call $g(w) := q^*(w) - c^*(w)$ the **gap**.

Now, since deterministic strategies form a subset of quantum strategies, $g(w) \geq 0$. We will particularly be interested in cases for which $g(w) > 0$, in which case we call w **gapped**. Otherwise, $g(w) = 0$ and we call it **gapless**. We denote the set of all gapped weighted utility arrays by \mathcal{G} . We establish some basic properties of \mathcal{G} . We in particular explore transformations of an array that preserves the gapped property.

Proposition 5. \mathcal{G} is a cone, that is, it is closed under positive scalar multiplication.

Proof. Let $\alpha > 0$. Then, let $w \in \mathcal{G}$. It is clear that

$$c^*(\alpha \cdot w) = \max_{p(d|o) \in \mathbf{D}} \sum_{o \in \mathcal{O}, d \in \mathcal{D}} p(d|o) \alpha w(o, d) = \alpha \max_{p(d|o) \in \mathbf{D}} \sum_{o \in \mathcal{O}, d \in \mathcal{D}} p(d|o) w(o, d) = \alpha c^*(w).$$

Similarly, $q^*(\alpha \cdot w) = \alpha q^*(w)$. Thus, $g(\alpha \cdot w) = \alpha g(w) > 0$ and so $\alpha \cdot w \in \mathcal{G}$. \square

We also define the constant array $e \in \mathcal{G}$ where $e_o^d = 1$. It is clear translation by a multiple e also preserves \mathcal{G} :

Proposition 6. Let w be a weighted utility array. Then, $g(w + xe) = g(w)$ for $x \in \mathbb{R}$. In particular, if $w \in \mathcal{G}$, then $w + xe \in \mathcal{G}$.

Proof. We have trivially

$$c^*(w + \eta e) = c^*(w) + \eta |\mathcal{O}|$$

$$q^*(w + \eta e) = q^*(w) + \eta |\mathcal{O}|.$$

Hence, $g(w + xe) = g(w)$. The second statement is immediate. \square

Another observation is that the ordering of observations and decision is arbitrary. Hence, the following holds.

Lemma 7. *The gap of a weighted utility array is invariant under permutations of observations and decisions. That is, letting w be a weighted utility array, define the multidimensional array v whose elements are*

$$v_{o_1, o_2, \dots, o_n}^{d_1, d_2, \dots, d_n} := w_{\pi_1(o_1), \pi_2(o_2), \dots, \pi_n(o_n)}^{\sigma_1(d_1), \sigma_2(d_2), \dots, \sigma_n(d_n)},$$

where π_i, σ_i are permutations of $\mathcal{O}_i, \mathcal{D}_i$, respectively. Then, $g(v) = g(w)$. In particular, if $w \in \mathcal{G}$, then $v \in \mathcal{G}$.

Proof. This is immediate via simply relabeling observations and decisions according to π_i and σ_i , respectively, for all strategies. \square

We also state properties that *do not hold* regarding \mathcal{G} .

Fact 8. \mathcal{G} is not closed under addition.

That is, \mathcal{G} is a cone but not a convex cone. To see this, consider the weighted utility matrix w_{CHSH} corresponding to the CHSH game [14]:

$$4(w_{\text{CHSH}})_{o_1, o_2}^{d_1, d_2} := (o_1 \wedge o_2) \oplus (d_1 \oplus d_2) \oplus 1.$$

Here, we let $o_i, d_i \in \{0, 1\}$ so that we can use logical and bitwise addition operators. Intuitively, the two parties have to make opposite decisions when both observations are 1 and have to make the same decision otherwise. It is well known that $w_{\text{CHSH}} \in \mathcal{G}$. Then, define the ‘‘anti-CHSH game’’ weighted utility matrix \bar{w}_{CHSH} as

$$4(\bar{w}_{\text{CHSH}})_{o_1, o_2}^{d_1, d_2} := (o_1 \wedge o_2) \oplus (d_1 \oplus d_2).$$

That is, it has the opposite winning condition. By a similar argument as that of the CHSH game, $\bar{w}_{\text{CHSH}} \in \mathcal{G}$. However,

$$w_{\text{CHSH}} + \bar{w}_{\text{CHSH}} = \frac{1}{4}e \notin \mathcal{G}.$$

This establishes Fact 8.

Furthermore, counter to intuition, scaling the weighted utility by a different positive constant for each set of observations does not always preserved gappedness. This kind of scaling can be interpreted as changing the input distribution.

Fact 9. $\exists w \in \mathcal{G}, \alpha_o > 0$ such that the array w' , defined as $(w')_o^d := \alpha_o w_o^d$, is not in \mathcal{G} .

The example is again CHSH, but this time we will make use of the correlation form:

$$\frac{1}{4}\langle A_0 B_0 \rangle + \frac{1}{4}\langle A_0 B_1 \rangle + \frac{1}{4}\langle A_1 B_0 \rangle - \frac{1}{4}\langle A_1 B_1 \rangle.$$

The scaling we choose is a natural scenario in which the input distribution for each party is i.i.d. according to a Bernoulli distribution with parameter $p \in [0, 1]$ instead of the uniform distribution as is usually assumed for the CHSH game. In this case, we want to instead compute

$$(1-p)^2\langle A_0 B_0 \rangle + p(1-p)\langle A_0 B_1 \rangle + p(1-p)\langle A_1 B_0 \rangle - p^2\langle A_1 B_1 \rangle.$$

For conciseness, we will denote the correlations with $a, b, c, d \in [-1, 1]$, respectively. Then, the quantum value is given by [49, 50, 51, 52]

$$\max_{a,b,c,d \in [-1,1]} (1-p)^2 a + p(1-p)b + p(1-p)c - p^2 d \quad (\text{A.3})$$

subject to

$$|\arcsin a + \arcsin b + \arcsin c - \arcsin d| \leq \pi \quad (\text{A.4})$$

and its possible permutations of a, b, c, d . We will compute this in full generality. First, we see that if eq. (A.4) is strictly satisfied, we can always increase a, b, c and decrease d until

$$\arcsin a + \arcsin b + \arcsin c - \arcsin d = \pi \quad (\text{A.5})$$

and the expression in eq. (A.3) can only increase. Thus, it is sufficient to consider the equality condition eq. (A.5). We will also see that this is sufficient to satisfy all other permuted versions of eq. (A.4), so the result must be the maximum. We make use of the method of Lagrange multipliers:

$$\mathcal{L} = (1-p)^2 a + p(1-p)b + p(1-p)c - p^2 d - \lambda(\arcsin a + \arcsin b + \arcsin c - \arcsin d - \pi).$$

We solve for the stationary points:

$$\frac{\partial \mathcal{L}}{\partial a} = (1-p)^2 - \lambda \frac{1}{\sqrt{1-a^2}} = 0,$$

so

$$a = \pm \sqrt{1 - \frac{\lambda^2}{(1-p)^4}}.$$

Similarly,

$$b = \pm \sqrt{1 - \frac{\lambda^2}{p^2(1-p)^2}}, c = \pm \sqrt{1 - \frac{\lambda^2}{p^2(1-p)^2}}, d = \pm \sqrt{1 - \frac{\lambda^2}{p^4}}.$$

In particular, we see that $b = \pm c$. If $b = -c$, the correlation expression becomes

$$(1-p)^2 a - p^2 d \leq (1-p)^2 + p^2.$$

The RHS can be obtained by the classical behavior where $a = 1, b = 1, c = -1, d = -1$, which also does not attain the classical value (It is clear that depending on the value of p , we either want to set either the first or last term in eq. (A.3) to be negative.). Thus, WOLOG, we will set c to equal b . Thus, we have the simpler optimization

$$\max_{a,b,d \in [-1,1]} C,$$

where

$$C := (1-p)^2 a + 2p(1-p)b - p^2 d \quad (\text{A.6})$$

and

$$\arcsin a + 2 \arcsin b - \arcsin d = \pi. \quad (\text{A.7})$$

Let

$$\text{sgn}(x) = \begin{cases} -1 & x < 0 \\ 0 & x = 0 \\ 1 & x > 0 \end{cases}$$

be the sign function. We consider the following cases

1. $\text{sgn}(a) \text{sgn}(d) \geq 0$: Then, taking the cosine of both sides of

$$\arcsin a - \arcsin d = \pi - 2 \arcsin b,$$

we obtain

$$\begin{aligned} & \cos \arcsin \sqrt{1 - \frac{\lambda^2}{(1-p)^4}} \cos \arcsin \sqrt{1 - \frac{\lambda^2}{p^4}} + \sqrt{1 - \frac{\lambda^2}{(1-p)^4}} \sqrt{1 - \frac{\lambda^2}{p^4}} \\ &= -\cos 2 \arcsin \sqrt{1 - \frac{\lambda^2}{p^2(1-p)^2}} \end{aligned}$$

since cosine is an even function. We simplify this equation to get

$$\frac{\lambda}{(1-p)^2} \frac{\lambda}{p^2} + \sqrt{1 - \frac{\lambda^2}{(1-p)^4}} \sqrt{1 - \frac{\lambda^2}{p^4}} = 2 \left(1 - \frac{\lambda^2}{p^2(1-p)^2}\right) - 1. \quad (\text{A.8})$$

We plug this into Mathematica [53] and obtain

$$\lambda = 0, \pm \frac{1}{2\sqrt{2}} \sqrt{(2p^2 - 1)(2p^2 - 4p + 1)} =: \pm \lambda^*.$$

The $\lambda = 0$ solutions are classically attainable solutions, which might be optimal for certain values of p .

2. $\text{sgn}(a) \text{sgn}(d) < 0$: We follow similar steps to get

$$\lambda = \pm \lambda^*.$$

We need to check what conditions on $p \in [0, 1]$ guarantee that $\lambda^* \in \mathbb{R}$. We see that this is true if

$$p \in \left[1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}\right].$$

We can easily check that $(\lambda^*)^2 \leq p^4, (1-p)^4$ and so is $\leq p^2(1-p)^2$, their geometric mean. This ensures that $a, b, d \in \mathbb{R}$, which means when $\lambda^* \in \mathbb{R}$, we obtain feasible solutions.

Now, we observe that to satisfy eq. (A.7), we must have at least one of $a, b \geq 0$. Furthermore, at least one of $b, d \geq 0$. We therefore analyze 5 cases. We will see that in every case where $\pm \lambda^*$ is feasible,

$$\arcsin d \leq \arcsin a, \arcsin b. \quad (\text{A.9})$$

Since $2(\arcsin x - \arcsin y) \geq -2\pi$ for all x, y and eq. (A.5) holds, all permutations of eq. (A.4) are satisfied.

1. $a, b, d \geq 0$: Then $\text{sgn}(a) \text{sgn}(d) \geq 0$. Hence,

$$C|_{\lambda=\pm\lambda^*} = \frac{1}{2\sqrt{2}} \left(|2p^2 - 6p + 3| + 4p^2 - 4p + 2 - |2p^2 + 2p - 1| \right),$$

which is feasible when $p \in [1 - \frac{1}{\sqrt{2}}, \frac{-1+\sqrt{3}}{2}]$ by checking if eq. (A.7) is satisfied. Note that the three-term expression is written in the same order as eq. (A.6). In this range for p , we can further simplify this to

$$C|_{\lambda=\pm\lambda^*} = \sqrt{2}[1 - 2p(1 - p)].$$

Note that since $p \leq \frac{-1+\sqrt{3}}{2} < 0.5$, $|a| \geq |b| \geq |d|$. As a, b, d are all non-negative, eq. (A.9) holds. There is also the classical solution which is possible for all $p \in [0, 1]$:

$$C_{\lambda=0} = -2p^2 + 1.$$

2. $a, b \geq 0, d < 0$:

$$C|_{\lambda=\pm\lambda^*} = \sqrt{2}[1 - 2p(1 - p)],$$

feasible when $p \in [\frac{-1+\sqrt{3}}{2}, \frac{3-\sqrt{3}}{2}]$. Due to the signs of a, b, d we clearly have eq. (A.9).

3. $a, d \geq 0, b < 0$: One can check the λ^* solution is not feasible for any $p \in [1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}]$. The classical solution in this case is

$$C|_{\lambda=0} = 2p^2 - 4p + 1.$$

4. $b, d \geq 0, a < 0$: One can check the λ^* solution is not feasible for any $p \in [1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}]$.

5. $b \geq 0, a, d < 0$:

$$C|_{\lambda=\pm\lambda^*} = \sqrt{2}[1 - 2p(1 - p)],$$

feasible when $p \in [\frac{3-\sqrt{3}}{2}, \frac{1}{\sqrt{2}}]$. Since $p \geq \frac{3-\sqrt{3}}{2} > 0.5$, $|d| \geq |b| \geq |a|$. Due to the signs of a, b, d , we again can conclude eq. (A.9). The classical solution is

$$C_{\lambda=0} = -2p^2 + 4p - 1.$$

We combine the above results and compare the $\lambda = \pm\lambda^*$ and $\lambda = 0$ solutions and find the former solutions do better for $p \in (1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}})$. Outside of this range the quantum value equals the classical value, the latter of which can be easily computed. Since the CHSH inequality with an independent Bernoulli distributed input is a natural generalization of the original inequality, we summarize our result as a theorem.

Theorem 10. *Consider the utility array $w_{CHSH,p}$ for the CHSH game with each input distribution being an independent Bernoulli random variable with probability p . Then, the classical value is given by*

$$c^* = \begin{cases} 1 - p^2 & 0 \leq p \leq \frac{1}{2} \\ -p^2 + 2p & \frac{1}{2} \leq p \leq 1. \end{cases}$$

while the quantum value is given by

$$q^* = \begin{cases} 1 - p^2 & 0 \leq p \leq 1 - \frac{1}{\sqrt{2}} \\ \frac{1}{\sqrt{2}}[1 - 2p(1 - p)] + \frac{1}{2} & 1 - \frac{1}{\sqrt{2}} \leq p \leq \frac{1}{\sqrt{2}} \\ -p^2 + 2p & \frac{1}{\sqrt{2}} \leq p \leq 1. \end{cases}$$

In particular, $w_{\text{CHSH},p} \in \mathcal{G}$ when $p \in (1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}})$ and $\notin \mathcal{G}$ otherwise.

Hence, for $p \notin (1 - \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}})$, we obtain Fact 9. For convenience, we also provide the numerical values for the bounds:

$$q^* = \begin{cases} 1 - p^2 & 0 \leq p \leq 0.293\dots \\ \frac{1}{\sqrt{2}}[1 - 2p(1 - p)] + \frac{1}{2} & 0.293\dots \leq p \leq 0.707\dots \\ -p^2 + 2p & 0.707\dots \leq p \leq 1. \end{cases}$$

We can check that indeed for $p = \frac{1}{2}$,

$$q^* = \frac{1}{\sqrt{2}}(1 - \frac{1}{2}) + \frac{1}{2} = \frac{1 + \sqrt{2}}{2\sqrt{2}} = \cos^2(\frac{\pi}{8})$$

as expected.

A.2 XOR Arrays

An interesting class of TC problems have utilities that only depend on the XOR of the decisions. We make the following definition.

Definition 11. Suppose we have a TC problem where $\forall i, \mathcal{D}_i = \{0, 1\}$. An array m indexed by $o \in \mathcal{O}, d \in \mathcal{D}$ is an **XOR array** if

$$m_o^d = f(o, \bigoplus_{i=1}^n d_i) \in \mathbb{R}.$$

We will call TC problems whose utility array is an XOR array an **XOR problem**. Note that this implies the weighted utility array is also an XOR array. Such problems are equivalent to correlation expressions [48] and the quantum values can be explicitly computed via a semidefinite program (SDP) [11, 54].

An interesting observation is that we can conclude $g(\bar{w}_{\text{CHSH}}) = g(w_{\text{CHSH}})$ via Lemma 7 applied to w_{CHSH} and setting π_1 be a bit flip while letting all else be equal. We can generalize this observation by making the following definition.

Definition 12. Let m be an XOR array, where $m_o^d = f(o, \bigoplus_{i=1}^n d_i)$. Then, define \bar{m} as the **anti-array** that has elements

$$\bar{m}_o^d := f(o, \neg \bigoplus_{i=1}^n d_i),$$

where $\neg x$ denotes the bit flip of x .

Intuitively, if w is a nonlocal XOR game, then \bar{w} is the same game with the opposite winning conditions. We can now easily establish the following

Proposition 13. *Suppose w is an XOR array. Then, $g(\bar{w}) = g(w)$.*

Proof. Let π_1 be the bit flip permutation on $\{0, 1\}$. Then,

$$\bar{w}_o^d = f(o, \neg \bigoplus_{i=1}^n d_i) = f(o, \pi_1(d_1) \oplus \bigoplus_{i=2}^n d_i) = w_o^{\pi_1(d_1), d_2, d_3, \dots, d_n}.$$

Hence, by Lemma 7, the conclusion follows. \square

Intuitively, for XOR problems, the procedure of reversing the winning conditions is equivalent to local index permutation of the utility array, thereby preserving the gap.

A central result for XOR problems with two parties is the following theorem by Tsirelson.

Theorem 14 (Tsirelson [49]). *The following four conditions for real numbers c_{kl} , $k = 1, \dots, m$, $l = 1, \dots, n$ are equivalent.*

1. *There are a C^* algebra \mathcal{A} with identity I , Hermitian $A_1, \dots, A_m, B_1, \dots, B_n \in \mathcal{A}$, and a state f on \mathcal{A} such that, for every k, l ,*

$$A_k B_l = B_l A_k; \quad -I \leq A_k \leq I; \quad -I \leq B_l \leq I; \quad f(A_k B_l) = c_{kl}.$$

2. *There are Hermitian operators $A_1, \dots, A_m, B_1, \dots, B_n$ and a density matrix ρ in a Hilbert space \mathcal{H} such that, for every k, l ,*

$$A_k B_l = B_l A_k; \quad \text{Spec}(A_k) \subseteq [-1, +1]; \quad \text{Spec}(B_l) \subseteq [-1, +1]; \quad \text{tr}[A_k B_l \rho] = c_{kl}.$$

3. *The same as 2 and in addition for every k, l ; and $\mathcal{H} = \mathcal{H}_1 \otimes \mathcal{H}_2$, $A_k = A_k^{(1)} \otimes I_2$ and $B_l = I_1 \otimes B_l^{(2)}$ act on \mathcal{H}_1 and \mathcal{H}_2 , respectively; furthermore*

$$(A_k^{(1)})^2 = I_1, (B_l^{(2)})^2 = I_2, \text{tr}[(A_k^{(1)} \otimes I_2)\rho] = 0, \text{tr}[(I_1 \otimes B_l^{(2)})\rho] = 0;$$

besides that

$$\{A_k^{(1)}, A_{k'}^{(1)}\} \propto I_1, \{B_l^{(2)}, B_{l'}^{(2)}\} \propto I_2;$$

$\mathcal{H}_1, \mathcal{H}_2$ are finite dimensional, obeying

$$\dim(\mathcal{H}_1) \leq \begin{cases} 2^{\frac{m}{2}} & m \text{ even} \\ 2^{\frac{m+1}{2}} & m \text{ odd} \end{cases}$$

and similarly for \mathcal{H}_2 .

4. *There are unit vectors $x_1, \dots, x_m, y_1, \dots, y_n \in \mathbb{R}^{m+n}$ such that, for every k, l ,*

$$\langle x_k, y_l \rangle = c_{kl}.$$

The set $\{c_{kl}\}_{k,l}$ is called a **quantum correlation matrix**. In terms of the TC problem formalism, we can relate a quantum correlation matrix c_{kl} corresponding to the quantum behavior p_o^d via

$$c(p_o^d)_{kl} := (p_{(k,l)}^{(0,0)} + p_{(k,l)}^{(1,1)}) - (p_{(k,l)}^{(0,1)} + p_{(k,l)}^{(1,0)}) = 2p(\text{XOR} = 0|(k,l)) - 1. \quad (\text{A.10})$$

Note for XOR problems the expected utility of a quantum behavior p_o^d only depends on the quantities $p(\text{XOR} = 0|(k,l))$. Furthermore, we can relate the operators $A_k^{(1)}, B_l^{(2)}$ with the measurement operators $\Pi_i^{(d_i|o_i)}$ by

$$A_k^{(1)} = 2\Pi_1^{(0|k)} - I_1, B_l^{(2)} = 2\Pi_2^{(0|l)} - I_2.$$

We make the following definition.

Definition 15. Define a projection operator Π as **trivial** if Π is the zero or identity operator. We define a quantum strategy to be **degenerate** if one party uses a trivial measurement operator. Otherwise, we call it **non-degenerate**.

Note that if a party with only two possible decisions uses a trivial measurement operator, they are locally implementing a deterministic strategy. We can thereby obtain the following corollary.

Corollary 16. Consider an XOR problem with two parties. Then, any possible quantum correlation matrix c_{kl} can be realized using a non-degenerate quantum strategy. Moreover, such a strategy can attain the quantum value.

Proof. Let \mathcal{S}_q be a quantum strategy and the c_{kl} be the quantum correlation matrix realized. If one of the parties uses a trivial measurement operator, WOLOG the first party, then for some k , $\Pi_1^{(0|k)}$ is the zero or identity operator. Then, $A_k = \pm I$. But this implies $\text{tr}[A_k \rho] \neq 0$ for any quantum state ρ . Thus, measurement operators obeying condition 3 of Theorem 14 must all be nontrivial measurement operators. The first conclusion follows. Since c_{kl} are all that is involved in the expected utility of an XOR problem, the second conclusion follows. \square

Such results can help reduce the search space for numerical optimizers that search over all possible quantum strategies.

A.3 Behaviors with Loss

Here we take a look from a theoretical standpoint the phenomenon of entanglement loss when physically implementing a quantum strategy. As mentioned in Section 4.1, such loss is common when using photons to distribute entanglement [24]. In general, when loss occurs for a certain party, that party can fall back to a predetermined local deterministic strategy. We can rigorize this concept using the following definition.¹¹

Definition 17. Let $S \subseteq [n]$. Then, we define an **S -semiclassical strategy** as a quantum strategy where the measurement operators of the parties in S are all trivial for all possible observations. That is, $\Pi_i^{(d_i|o_i)}$ for $i \in S$ are either the zero or identity operator.

¹¹Note that instead of defining a semiclassical strategy as a special case of a quantum strategy, we could define it as a generalization of a classical strategy, which would then allow for the choice of trivial measurement operators to be based on observations and shared randomness. This is more general than what we define but does not lead to higher expected utilities. Furthermore, “semiclassical” more often implies starting from quantum and then taking the classical limit.

In other words, the parties in S are each implementing a local deterministic strategy. An **S -semiclassical behavior** is the corresponding behavior of an S -semiclassical strategy. Now, in general entanglement loss is stochastic, therefore leading to the following definition.

Definition 18. Let \mathcal{S}_q be a quantum strategy, \mathcal{S}_d a deterministic strategy, and $S \subseteq [n]$. Then, we use $\mathcal{S}_q \sqcup_S \mathcal{S}_d$ to denote the S -semiclassical strategy obtained by modifying the quantum strategy \mathcal{S}_q so that the each party in S locally implements the deterministic strategy \mathcal{S}_d .

Next, let $\eta_i \in [0, 1]$ where $i \in [n]$. Then, the $\{\eta_i\}_i$ -**lossy behavior** of the tuple $(\mathcal{S}_q, \mathcal{S}_d)$ is given by

$$p_{(\mathcal{S}_q, \mathcal{S}_d); \{\eta_i\}_i}(d|o) := \sum_{S \subseteq [n]} \prod_{i \in S} (1 - \eta_i) \prod_{j \notin S} \eta_j \cdot p_{\mathcal{S}_q \sqcup_S \mathcal{S}_d}(d|o), \quad (\text{A.11})$$

where $p_{\mathcal{S}}(d|o)$ denotes the behavior corresponding to a strategy \mathcal{S} .

Finally we define $q^*(\{\eta_i\}_i)$ as the $\{\eta_i\}_i$ -**lossy value** of a TC problem the maximum expected utility with respect to all possible $\{\eta_i\}_i$ -lossy behaviors.

It will be useful to define the $\{\eta_i\}_i$ -**lossy Bell operator** for a tuple $(\mathcal{S}_q, \mathcal{S}_d)$

$$\sum_{S \subseteq [n]} \prod_{i \in S} (1 - \eta_i) \prod_{j \notin S} \eta_j \cdot \sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) \sum_{d \in \mathcal{D}} \bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)}(\mathcal{S}_q \sqcup_S \mathcal{S}_d) u_o^d, \quad (\text{A.12})$$

where $\Pi_i(\mathcal{S}_q \sqcup_S \mathcal{S}_d)$ are the measurement operators used in the S -semiclassical strategy $\mathcal{S}_q \sqcup_S \mathcal{S}_d$, which is itself a quantum strategy. The largest eigenvalue of this operator is highest expected utility for the choice of measurement operators over all possible shared quantum states.

It is straightforward to show that the set of all quantum behaviors \mathbf{Q} is convex [55]. Since a semiclassical behavior is a quantum behavior, by the definition in eq. (A.11) we can conclude a lossy behavior also belongs to \mathbf{Q} . Thus, all possible $\{\eta_i\}_i$ -lossy behaviors constitute a subset of \mathbf{Q} . We can interpret $\{\eta_i\}_i$ as a “shrinking factor” of \mathbf{Q} to $\mathbf{D} \subseteq \mathbf{Q}$: when $\eta_i = 1$ for all i , we can attain all of \mathbf{Q} , whereas when $\eta_i = 0$ for all i , we can only attain \mathbf{D} .

We will establish the following basic result.

Proposition 19. Consider a $(2, 2, 2)$ problem. Then, the behavior of a degenerate quantum strategy is a classical behavior. Moreover, the same is true for lossy behavior where the quantum strategy is degenerate.

Proof. The set of all possible classical behaviors is given by a polytope, called the **local polytope** [48]. By [56], the inequalities that define the local polytope for the case of two parties, two observations, and two decisions are positivity conditions and permutations of the four terms in the CHSH inequality.

We will explicitly show that the behavior of a degenerate quantum strategy satisfies all possible CHSH inequalities. WOLOG, suppose the first party always outputs 0 when they make the first observation. When they make the second observation, they perform some quantum measurement $\{\Pi_A, I_A - \Pi_A\}$. Let the second party’s measurement operators be given by $\{\Pi_B, I_B - \Pi_B\}$ and

$\{\Pi'_B, I_B - \Pi'_B\}$, in order of their observations. Then, we can compute

$$\begin{aligned}
p(\text{XOR} = 0 | (0, 0)) &= \text{tr}[(I_A \otimes \Pi_B)\rho_{AB}] \\
p(\text{XOR} = 0 | (0, 1)) &= \text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] \\
p(\text{XOR} = 0 | (1, 0)) &= \text{tr}[(\Pi_A \otimes \Pi_B)\rho_{AB}] + \text{tr}[(I_A - \Pi_A) \otimes (I_B - \Pi_B)]\rho_{AB} \\
&= 2\text{tr}[(\Pi_A \otimes \Pi_B)\rho_{AB}] + 1 - \text{tr}[(I_A \otimes \Pi_B)\rho_{AB}] - \text{tr}[(\Pi_A \otimes I_B)\rho_{AB}] \\
p(\text{XOR} = 0 | (1, 1)) &= 2\text{tr}[(\Pi_A \otimes \Pi'_B)\rho_{AB}] + 1 - \text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] - \text{tr}[(\Pi_A \otimes I'_B)\rho_{AB}].
\end{aligned}$$

Now, the CHSH inequalities are usually expressed in terms of the quantum correlation matrix elements c_{kl} . We first consider the usual permutation

$$\begin{aligned}
&c_{00} + c_{01} + c_{10} - c_{11} \\
&= 2\text{tr}[(I_A \otimes \Pi_B)\rho_{AB}] - 1 + 2\text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] - 1 + 4\text{tr}[(\Pi_A \otimes \Pi_B)\rho_{AB}] + 2 - 2\text{tr}[(I_A \otimes \Pi_B)\rho_{AB}] \\
&\quad - 2\text{tr}[(\Pi_A \otimes I_B)\rho_{AB}] - 1 - 4\text{tr}[(\Pi_A \otimes \Pi'_B)\rho_{AB}] - 2 + 2\text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] + 2\text{tr}[(\Pi_A \otimes I_B)\rho_{AB}] + 1 \\
&= -2 + 4\text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] + 4\text{tr}[(\Pi_A \otimes \Pi_B)\rho_{AB}] - 4\text{tr}[(\Pi_A \otimes \Pi'_B)\rho_{AB}] \\
&= 4\text{tr}[(\Pi_A \otimes \Pi_B + (I_A - \Pi_A) \otimes \Pi'_B)\rho_{AB}] - 2.
\end{aligned}$$

Now, it is easy to see that the operator $\Pi_A \otimes \Pi_B + (I_A - \Pi_A) \otimes \Pi'_B$ is an orthogonal projector. Thus, its eigenvalues are either 0 or 1. Hence,

$$|c_{00} + c_{01} + c_{10} - c_{11}| \leq 2.$$

By symmetry, we only need to consider one other permutation:

$$\begin{aligned}
&c_{00} + c_{10} + c_{11} - c_{01} \\
&= 2\text{tr}[(I_A \otimes \Pi_B)\rho_{AB}] - 1 + 4\text{tr}[(\Pi_A \otimes \Pi_B)\rho_{AB}] + 2 - 2\text{tr}[(I_A \otimes \Pi_B)\rho_{AB}] - 2\text{tr}[(\Pi_A \otimes I_B)\rho_{AB}] - 1 \\
&\quad + 4\text{tr}[(\Pi_A \otimes \Pi'_B)\rho_{AB}] + 2 - 2\text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] - 2\text{tr}[(\Pi_A \otimes I_B)\rho_{AB}] - 1 - 2\text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] + 1 \\
&= 2 + 4\text{tr}[(\Pi_A \otimes \Pi_B)\rho_{AB}] - 4\text{tr}[(\Pi_A \otimes I_B)\rho_{AB}] + 4\text{tr}[(\Pi_A \otimes \Pi'_B)\rho_{AB}] - 4\text{tr}[(I_A \otimes \Pi'_B)\rho_{AB}] \\
&= -4\text{tr}[(\Pi_A \otimes (I_B - \Pi_B) + (I_A - \Pi_A) \otimes \Pi'_B)\rho_{AB}] + 2.
\end{aligned}$$

Again, $\Pi_A \otimes (I_B - \Pi_B) + (I_A - \Pi_A) \otimes \Pi'_B$ is an orthogonal projector. Thus,

$$|c_{00} + c_{10} + c_{11} - c_{01}| \leq 2.$$

We can conclude that the quantum behavior satisfies the inequalities of the local polytope and is therefore a classical behavior.

Now, given a tuple $(\mathcal{S}_q, \mathcal{S}_d)$ where \mathcal{S}_q is degenerate, the corresponding lossy behavior is a convex combination of quantum behaviors (possibly semiclassical) where each behavior results from a degenerate strategy. Hence, by the previous result, the lossy behavior is a convex combination of classical behaviors and is therefore itself classical. \square

We next prove that 2-dimensional (qubit) quantum systems are sufficient to achieve lossy values for $(n, 2, 2)$ problems.

Proposition 20. *Consider an $(n, 2, 2)$ problem. Then, the $\{\eta_i\}$ -lossy value can be attained where the optimal quantum strategy \mathcal{S}_q uses only qubit quantum systems.*

Proof. Fix a deterministic strategy \mathcal{S}_d . Let \mathcal{S}_q be a quantum strategy. The results in [57, 58] show that the extremal points of the set of all quantum behaviors for $(n, 2, 2)$ problems are realized by quantum strategies using only qubit quantum systems. Thus, in this setting every quantum behavior is a convex combination of qubit quantum behaviors. We therefore have

$$\begin{aligned} p_{(\mathcal{S}_q, \mathcal{S}_d); \{\eta_i\}_i}(d|o) &= \sum_{S \subseteq [n]} \prod_{i \in S} (1 - \eta_i) \prod_{j \notin S} \eta_j \cdot p_{\mathcal{S}_d}(d_S|o_S) p_{\mathcal{S}_q}(d_{\bar{S}}|o_{\bar{S}}) \\ &= \sum_{S \subseteq [n]} \prod_{i \in S} (1 - \eta_i) \prod_{j \notin S} \eta_j \cdot p_{\mathcal{S}_d}(d_S|o_S) \left(\sum_k \lambda_k p_{\mathcal{S}_{q_k}}(d_{\bar{S}}|o_{\bar{S}}) \right) \\ &= \sum_k \lambda_k \sum_{S \subseteq [n]} \prod_{i \in S} (1 - \eta_i) \prod_{j \notin S} \eta_j \cdot p_{\mathcal{S}_d}(d_S|o_S) p_{\mathcal{S}_{q_k}}(d_{\bar{S}}|o_{\bar{S}}), \end{aligned}$$

where \bar{S} is the complementary set of S , $p(d_S|o_S)$ is the marginal probability¹² on $S \subseteq [n]$, λ_k is a probability vector, and \mathcal{S}_{q_k} are qubit strategies. Thus, for fixed \mathcal{S}_d , the maximum expected utility is achieved by a qubit behavior. We can then maximize over \mathcal{S}_d to obtain the desired conclusion. \square

A.4 Noisy Quantum Behavior

We give a theoretical exposition on the effect of depolarizing noise in quantum strategies. We make the following definition.

Definition 21. Let $\mathcal{S}_q = (\{q_i\}_{i=1}^n, \{M_i\}_{i=1}^n, |\psi\rangle)$ be a quantum strategy and $\nu \in [0, 1]$. Then, the ν -noisy behavior of \mathcal{S}_q is the behavior that corresponds to the strategy \mathcal{S}_q except the quantum state $|\psi\rangle$ is replaced by $(1 - \nu)|\psi\rangle\langle\psi| + \nu\pi$, where π is the maximally mixed state. That is, the ν -noisy behavior is given by

$$p_o^d(\nu) := \text{tr} \left[\bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} ((1 - \nu)|\psi\rangle\langle\psi| + \nu\pi) \right]. \quad (\text{A.13})$$

The **robustness** ν^* of a quantum strategy whose expected utility is at least the classical value is the smallest ν such that the expected utility of the ν -noisy behavior is equal to the classical value.

We can expand out eq. (A.13):

$$p_o^d(\nu) = \text{tr} \left[\bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} ((1 - \nu)|\psi\rangle\langle\psi| + \nu\pi) \right] = (1 - \nu)p_o^d(0) + \nu \frac{\text{rank} \left[\bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} \right]}{\prod_{i=1}^n q_i}.$$

We see that the effect of the noise is completely determined by the ranks of the measurement operators. Now, the fraction in the second term can be interpreted as a behavior. Indeed, we observe that it factorizes into behaviors for individual parties:

$$\frac{\text{rank} \left[\bigotimes_{i=1}^n \Pi_i^{(d_i|o_i)} \right]}{\prod_{i=1}^n q_i} = \prod_{i=1}^n \frac{\text{rank}[\Pi_i^{(d_i|o_i)}]}{q_i}. \quad (\text{A.14})$$

¹²Note that by the no-signaling property the marginal probability does not depend on the observations of \bar{S} .

Hence, it is a classical behavior. We can therefore interpret ν as a shrinking factor of \mathbf{Q} to the set of all classical behaviors (with rational probabilities) that are factorizable, that is, where the behavior of each party is independent. Note that this set includes \mathbf{D} , so we can always attain the classical value even for $\nu = 1$. Furthermore, this implies for a quantum strategy with an expected utility higher than the classical value, the expected utility for the ν -noisy behavior is monotonically decreasing with ν .

For the case of the hedging problem when there is a quantum advantage, if a quantum strategy only uses qubits and achieves the quantum value, the ranks of the measurement operators must be rank 1 according to Proposition 19. Hence, in this case

$$p_o^d(\nu) = (1 - \nu)p_o^d(0) + \nu\frac{1}{4}.$$

We claim that in the presence of depolarizing noise, increasing the dimensions of the quantum systems used can increase the expected utility, even for the CHSH inequality. Recall the utility array is given by

$$\mathcal{U} = \begin{array}{c} 0,0 \\ 0,1 \\ 1,0 \\ 1,1 \end{array} \begin{array}{cccc} 0,0 & 0,1 & 1,0 & 1,1 \\ \left(\begin{array}{cccc} 1 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 1 & 0 & 0 & 1 \\ 0 & 1 & 1 & 0 \end{array} \right) \end{array},$$

and the inputs are uniformly distributed. Then, by Theorem 14 and Corollary 16, there exists an optimal qubit strategy for the noiseless setting, call it \mathcal{S}_q , which is non-degenerate. Thus, the factorizable behavior in eq. (A.14) must be the uniform distribution. The expected utility for the ν -noisy behavior of \mathcal{S}_q is

$$(1 - \nu) \cos^2 \frac{\pi}{8} + \nu \frac{1}{2}.$$

Now, consider modified quantum strategy \mathcal{T}_q where both parties use ququarts (dimension 4). Instead of the original entangled state $|\psi\rangle$, we use $|\psi\rangle \otimes |00\rangle$. And for the all the projectors $\Pi_i^{(0|o_i)}$ for the 0 decision, we replace it with $\Pi_i^{(0|o_i)} \otimes |0\rangle\langle 0|$ (the corresponding 1 decision projector is the orthogonal complement). This clearly preserves the expected utility of the noiseless quantum behavior. However, the ranks of the projectors are not doubled while the quantum dimensions are. It is not difficult to see that the factorizable behavior in this case is, in matrix form,

$$\begin{array}{c} 0,0 \\ 0,1 \\ 1,0 \\ 1,1 \end{array} \begin{array}{cccc} 0,0 & 0,1 & 1,0 & 1,1 \\ \left(\begin{array}{cccc} \frac{1}{16} & \frac{3}{16} & \frac{3}{16} & \frac{9}{16} \\ \frac{1}{16} & \frac{3}{16} & \frac{3}{16} & \frac{9}{16} \\ \frac{1}{16} & \frac{3}{16} & \frac{3}{16} & \frac{9}{16} \\ \frac{1}{16} & \frac{3}{16} & \frac{3}{16} & \frac{9}{16} \end{array} \right) \end{array},$$

which implies for \mathcal{T}_q , the ν -noisy behavior achieves an expected utility of

$$(1 - \nu) \cos^2 \frac{\pi}{8} + \nu \frac{9}{16} > (1 - \nu) \cos^2 \frac{\pi}{8} + \nu \frac{1}{2}$$

for $\nu > 0$. This establishes the claim.

B Numerical Optimizer

We give some details of the numerical optimizer used to compute classical and quantum values, as well as how some of the figures were computed. The optimizer itself is quite straightforward but can be used for arbitrary TC problems and not just special classes such as XOR problems.

B.1 Classical value

The classical value is straightforward to compute. The optimizer proceeds via brute force by iterating over all possible deterministic strategies and tracking the largest expected utility found. Each deterministic strategy is simply a choice of decision given an observation for each party, which for a $(\{\mathcal{O}_i\}_{i=1}^n, \{\mathcal{D}_i\}_{i=1}^n, p_{\mathcal{O}}(o), u)$ TC problem, would simply be parameterized by

$$\sum_{i=1}^n |\mathcal{O}_i|$$

discrete variables, the variables for party i taking $|\mathcal{D}_i|$ different values. Aside from this brute force approach, there are also linear programming methods as detailed in [59, 60].

B.2 Quantum value

Our numerical optimizer computes the quantum value via an optimization over explicit parameterizations of projective measurements on a q -dimensional Hilbert space \mathcal{H}_q with $\Delta \leq q$ possible outcomes. This parameterization has both continuous and discrete variables.

The continuous variables parameterize an orthogonal basis of \mathcal{H}_q modulo nonzero scalar multiplication. We can do this via [61], which gives a parameterization of a unitary matrix via q^2 real parameters $\lambda_{m,n}$, $m, n \in [q]$:

$$U = \left[\prod_{m=1}^{q-1} \left(\prod_{n=m+1}^q \exp(iP_n \lambda_{n,m}) \exp(i\sigma_{m,n} \lambda_{m,n}) \right) \right] \cdot \left(\prod_{l=1}^q \exp(iP_l \lambda_{l,l}) \right), \quad (\text{B.1})$$

where the matrix multiplication proceeds from left to right,

$$P_l := |l\rangle\langle l|,$$

and

$$\sigma_{m,n} := -i|m\rangle\langle n| + i|n\rangle\langle m|.$$

The range for $\lambda_{m,n}$ is $[0, 2\pi]$ for $m \geq n$ and $[0, \frac{\pi}{2}]$ for $m < n$. Since an orthogonal basis modulo nonzero scalar multiplication is basically a unitary matrix modulo multiplication by a diagonal unitary, we see from eq. (B.1) that we simply can remove the rightmost term to obtain our desired parameterization. Thus, in the end we only need the $q^2 - q$ parameters $\lambda_{m,n}$ where $m \neq n$, and use the parameterization

$$U = \left[\prod_{m=1}^{q-1} \left(\prod_{n=m+1}^q \exp(iP_n \lambda_{n,m}) \exp(i\sigma_{m,n} \lambda_{m,n}) \right) \right], \quad (\text{B.2})$$

where the columns of U are the basis vectors that we use.

We have figured out how to parameterize a projective measurement for each party. We next must combine the parameters for each party together to parameterize a Bell operator in eq. (A.2). Note that we do not need to parameterize the shared quantum state since we can simply compute the largest eigenvalue of the Bell operator. In fact, WOLOG we can assume each party performs the measurement in the computational basis upon the first observation, with respect to some ordering of the observations. This is because we can always conjugate the Bell operator by a tensor product unitary that rotates for each party the measurement operator used upon making the first observation to the computational basis. In sum, for a TC problem $(\{\mathcal{O}_i\}_{i=1}^n, \{\mathcal{D}_i\}_{i=1}^n, p_{\mathcal{O}}(o), u)$, a quantum strategy where party i uses a quantum system of dimension q_i has a total of

$$\sum_{i=1}^n (q_i^2 - q_i)(|\mathcal{O}_i| - 1) \quad (\text{B.3})$$

continuous variables and

$$\sum_{i=1}^n |\mathcal{O}_i|$$

discrete variables.

Interestingly, this is not always the minimum number of variables we need: for some cases we can further eliminate variables. In the case of $(n, 2, 2)$ problems, we can obtain the following result.

Proposition 22. *Consider an $(n, 2, 2)$ problem. Then, it is sufficient to use n continuous variables to parameterize a quantum strategy that achieves the quantum value. Moreover, it is also sufficient to parameterize a quantum strategy that with the appropriate deterministic strategy achieves the lossy value.*

Proof. By Proposition 20, to achieve the quantum value we can assume we are only using qubit systems. By eq. (B.3), we therefore seem to need $\sum_{i=1}^n 2 \cdot (2 - 1) = 2n$ continuous variables to parameterize a Bell operator up to local unitary equivalence. We can halve this. Let $\lambda_{m,n}^{(j)}$ denote the continuous parameters for party j 's projective measurement upon their second observation (recall measurement upon first observation is in the computational basis). Now, for $q = 2$, eq. (B.2) gives

$$U = \begin{pmatrix} \cos \lambda_{1,2}^{(j)} & \sin \lambda_{1,2}^{(j)} \\ -e^{i\lambda_{2,1}^{(j)}} \sin \lambda_{1,2}^{(j)} & e^{i\lambda_{2,1}^{(j)}} \cos \lambda_{1,2}^{(j)} \end{pmatrix}.$$

Let $|v\rangle$ denote the first column vector. Hence, considering all possible observations and partitions, the choices of a projector for party j is the following:

$$\Pi_j \in \{|v\rangle\langle v|, I - |v\rangle\langle v|, 0, I, |0\rangle\langle 0|, |1\rangle\langle 1|\}. \quad (\text{B.4})$$

Then, we observe for all possibilities, the operator

$$Z_{-\lambda_{2,1}^{(j)}} \Pi_j Z_{\lambda_{2,1}^{(j)}}$$

is independent of $\lambda_{2,1}^{(j)}$. Here we used the Z rotation matrix

$$Z_\lambda := \begin{pmatrix} 1 & 0 \\ 0 & e^{i\lambda} \end{pmatrix}.$$

Thus, we see that

$$\begin{aligned} & \left(\bigotimes_{j=1}^n Z_{-\lambda_{2,1}^{(j)}} \right) \sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) \sum_{d \in \mathcal{D}} \bigotimes_{j=1}^n \Pi_j^{(d_j | o_j)} u_o^d \left(\bigotimes_{j=1}^n Z_{\lambda_{2,1}^{(j)}} \right) \\ &= \sum_{o \in \mathcal{O}} p_{\mathcal{O}}(o) \sum_{d \in \mathcal{D}} \left(\bigotimes_{j=1}^n Z_{-\lambda_{2,1}^{(j)}} \Pi_j^{(d_j | o_j)} Z_{-\lambda_{2,1}^{(j)}} \right) u_o^d \end{aligned}$$

is independent of $\lambda_{2,1}^{(j)}$ for all j . However, this operator is local unitarily equivalent to the Bell operator. This implies that the largest eigenvalue is independent of these n parameters and so the first conclusion follows.

In the lossy case, for any quantum strategy \mathcal{S}_q and deterministic strategy \mathcal{S}_d , every term in the convex combination of eq. (A.12) also satisfies the above independence property since eq. (B.4) still holds. The second conclusion therefore follows. \square

As an example, a quantum strategy for a $(2, 2, 2)$ problem using only qubits would have 2 continuous variables and $2 + 2 = 4$ discrete variables. Note that by Proposition 19 in this case a quantum strategy whose behavior is not classical uses only nontrivial measurement operators. Thus, the 4 discrete variables can be eliminated as we only need to consider the $1 + 1 = 2$ partition. Thus, to compute fig. 3, fig. 7 and fig. 8, we need to only optimize over 2 continuous variables.

Optimization is conducted via two methods. The first is brute force. For the continuous variables, we choose a grid of values to evaluate over and also perform a gradient descent for each point in the grid. This is implemented via `scipy.optimize` [62]. The discrete variables are evaluated at every possible value. This method is clearly not scalable, so we also include another method, the CMA-ES evolutionary algorithm [63] with discrete variables [64]. We use the Python implementation of [65] in our optimizer. Note that CMA-ES does not guarantee a global optimum. However, in practical scenarios it may be sufficient to find a quantum strategy with a higher expected utility than the classical value. To double-check the results in fig. 3, fig. 7, and fig. 8, we performed both brute force (with a grid linear size of 20 points) and CMA-ES optimizations and verified that we obtained the same results. Note that since the hedging problem is an XOR problem, we can also use semidefinite programming to solve for the quantum value [11, 54]. We instead use our optimizer since it can handle general TC problems and use the hedging problem as an example of how to apply it.

B.3 Lossy value

To compute the lossy value of a TC problem, we optimize over tuples $(\mathcal{S}_q, \mathcal{S}_d)$. This simply combines the parameterization of a deterministic strategy and that of a quantum strategy. The number of continuous variables is the same, but now the number of discrete variables is

$$2 \sum_{i=1}^n |\mathcal{O}_i|.$$

Note that we are now instead computing the largest eigenvalue of the lossy Bell operator in eq. (A.12), so we again do not need to parameterize the shared quantum state. We can perform optimization via brute force where for the deterministic strategy variables we also iterate over all possible values. The CMA-ES optimization can be done by treating the deterministic strategy variables as just additional discrete variables.

By Proposition 19 and Proposition 20, we can compute the lossy value of a $(2, 2, 2)$ problem by parameterizing a quantum strategy that only uses qubits and nontrivial measurement operators. By Proposition 22, we again only need 2 continuous variables. However, we now have 4 discrete variables parameterizing the deterministic strategy which must be included in the optimization. We perform brute force optimization over both continuous (grid linear size of 20) and discrete variables for a given η to compute the lossy value, then perform a binary search over $\eta \in [\frac{2}{3}, 1]$ to find η^* , thereby obtaining the results in fig. 5.