

Artificial Intelligence Approaches for Energy Efficiency: A Review

Alberto Pasqualetto^{1*}, Lorenzo Serafini^{2*}, Michele Sprocatti^{3*}

Department of Information Engineering, University of Padua
Via Gradenigo 6, 35131 Padova, Italy
{alberto.pasqualetto.2¹, lorenzo.serafini.1², michele.sprocatti³}@studenti.unipd.it

Abstract

United Nations set Sustainable Development Goals and this paper focuses on 7th (Affordable and Clean Energy), 9th (Industries, Innovation and Infrastructure), and 13th (Climate Action) goals. Climate change is a major concern in our society; for this reason, a current global objective is to reduce energy waste. This work summarizes all main approaches towards energy efficiency using Artificial Intelligence with a particular focus on multi-agent systems to create smart buildings. It mentions the tight relationship between AI, especially IoT, and Big Data. It also explains the application of AI to anomaly detection in smart buildings and a possible classification of Intelligent Energy Management Systems: Direct and Indirect. Finally, some drawbacks of AI approaches and some possible future research focuses are proposed.

Introduction

According to estimates by the United States Energy Information Administration, 40% of the annual CO₂ emissions are directly related to electricity consumption.

A way to tackle pollutant emissions is to reduce the amount of wasted energy. Thanks to a more efficient use of energy, we can reduce energy consumption by more than 30% as shown in Figure 1.

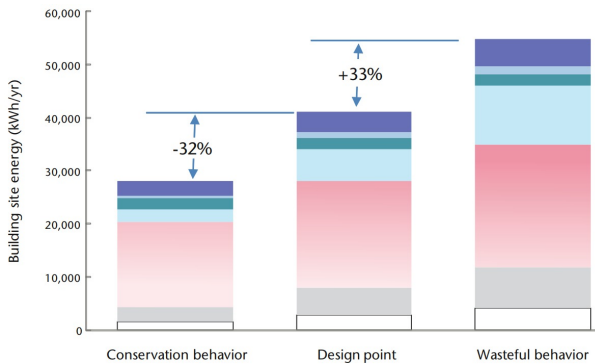


Figure 1: Conservation vs wasteful behavior in energy consumption of a building according to World Business Council For Sustainable Development, colors represent different energy usage types, image from (WBCSD 2009).

*These authors contributed equally.

The most energy-consuming part of a building is the Heating, Ventilation, and Air Conditioning (HVAC) system (WBCSD 2009), for this reason, a special focus is put on this system in the literature.

To improve awareness about energy waste habits and reduce it, consumers must first monitor their energy consumption and manage it after receiving appropriate advice (Darby 2006). This can be achieved practically by using an Energy Management System (EMS). Many approaches use Artificial Intelligence (AI) tools to design Intelligent Energy Management Systems (IEMS), detect and minimize faults and increase energy efficiency. Here we review some possible approaches found in the literature.

AI in IEMS has a strong coupling with data collection from sensors, in this case, due to the amount of elaborated data, we can talk about "Big Data".

Big Data Usage in IEMS

Big Data (BD) refers to huge amounts of data, both structured and unstructured, that can be used to extract useful information. BD usage has been increasing in recent years, and it is expected to continue to grow in the future because of the massive increase in global data creation (IDC 2021).

BD is characterized by the V's (Volume, Velocity, Variety, Veracity, and Value, and even more are being added to the list during the years) (Sagiroglu and Sinanc 2013) and, regarding energy efficiency, the most relevant characteristics are (Koseleva and Ropaite 2017; Zhou, Fu, and Yang 2016):

Volume The amount of electricity consumption data collected by 1 million smart meters in 1 year (collecting once every 15 minutes) is about 3 TB; this presents a challenge for data storage and analysis.

Velocity To analyze the data in real-time, the data processing speed must be fast enough to keep up with the incoming information, which means in a range that goes from sub-second to 15 minutes.

Variety The data collected from smart meters is heterogeneous, including electricity consumption data, weather data, and customer information: each of them is useful in a different part of the industry. Also, this data is structured, semi-structured, and unstructured.

BD's primary focus is on collecting data and gaining insights, while AI aims to accomplish tasks.

The usage of BD for energy-efficient buildings is powered by the Internet of Things (IoT), the collection of local data from sensors and other services that provide local and global weather data, building information, and historical data provided by societies, groups, and commercial companies. It is also worth mentioning the potential usage of 3D topographic data which can help to assess the shadowing of surroundings, air flow, noise level, and other site-specific information even before the construction of a building (Mehmood et al. 2019).

Once the data is collected, it can be used to train (fine-tune) AI models to predict weather and inhabitant patterns together with the building's characteristics like insulation, heat transfer, household appliances energy consumption, etc. (Mehmood et al. 2019).

Big Data can not only be used commercially, or for personal use, but also for research purposes thanks to the massive amount of geographically distributed data, which can be used for weather study and prediction or for AI training, etc..

Artificial Intelligence for Energy Efficiency

The most promising use of AI is in smart buildings equipped with sensors and actuators. They can be components of a smart grid that uses a Demand Side Management system (DSM) to plan, control, and manage the loads of electricity.

AI systems can also be used for a statistical approach in order to make predictions about consumer energy use; the main 4 steps are:

1. Data collection
2. Data preprocessing
3. Model training
4. Model testing

Farzaneh et al. presented several AI techniques and models with their respective use cases:

Decision trees to predict blackouts and to define energy storage planning and management in buildings.

Random forest to predict energy consumption.

Wavelet neural networks to predict time-series data for hybrid renewable residential micro-grids.

Naive Bayes models to solve energy problems in buildings when having a prior probability, and the next consume guess is needed.

Artificial neural networks to evaluate thermal comfort and to give suggestions to the user to save energy.

Deep learning to estimate the power consumption of appliances in a distributed system.

Regression to predict monthly heating and cooling demands.

Genetic algorithms to minimize the total energy cost in a dynamic pricing scheme and it can be also used for finding the optimal energy consumption to provide a comfortable temperature.

Fuzzy logic to forecast the demand load based on changes in indoor and outdoor conditions.

Particle swarm optimization together with other techniques to find the optimal solution in problems like estimating the energy demand.

K-nearest neighbor to analyze energy demands.

Principal Component Analysis (PCA) to reduce the dimensionality of the data and then use another AI method to make the prediction.

Different models can be combined to make better predictions.

Multi-Agent Systems

An agent is a computer system situated in some environment, and that is capable of autonomous action in such environment to meet its design objectives (Wooldridge 1999). It can be described as the implementation of the "Belief-Desire-Intention" (BDI) model, where the agent has beliefs about the environment, desires to achieve some goals, and intentions to act to achieve them.

A Multi-Agent System (MAS) consists of an environment, objects, agents, and all their relations, a set of actions that can be performed by the entities to change the environment (Ferber 1999); each agent cooperates with the others to achieve a common goal (but it can also have its own objectives). This system makes it possible to emulate the actions and interactions of human organizations through the decomposition of problems into smaller parts; problems are solved by agents communicating. An example of decomposition occurs when a group of agents monitor the comfort temperature set by the user and another group controls the HVAC system and communicates with a service agent that collects past data to help select a new ideal temperature for the residents.

MASs often rely on frameworks that provide the necessary tools to create and manage agents, such as JADE (Java Agent DEvelopment framework) (Bellifemine, Poggi, and Rimassa 1999) and PADE (Python Agent DEvelopment framework), the most used in the MAS community. Both of them are compatible with the FIPA (Foundation for Intelligent Physical Agents) (O'Brien and Nicol 1998) standard, which defines the communication protocols between agents.

In the past there has been a lack of standardization in the communication protocols; nowadays BACnet is the leader in the market for HVAC (BACnet International 2024) systems; in the last years an open-source protocol supported by big players in the market, Matter, is arising and being established as the new standard for all the IoT devices (Connectivity Standards Alliance 2022, 2020). Optimization algorithms are used to lower the energy consumption of the building, two types of algorithms can be used: exact or heuristic. The first ones are based on mathematical models and can find the optimal solution; the second ones are not necessarily optimal, but they are faster and overall they are better suitable in problems with a human in the loop, like the energy efficiency of a building, in which a trade-off with users' comfort is needed. MASs have been proven to be promising as heuristic techniques for solving such problems whose domains are distributed, complex, and heterogeneous.

An interesting agent learning approach is the one described by Tuyls and Nowè; Tuyls, Hoen, and Vanschoenwinkel who use Reinforcement Learning (RL): the inhabitants of an Intelligent Building (IB) are modeled as agents that play a game in which they obtain a benefit if they lower their energy consumption and they are punished if they increase it. Agents acting as humans learn to optimize the trade-off between energy consumption and their comfort. In this way, the system can learn the best configuration for the IB.

MAS usage in the energy efficiency field can be divided into three main areas of application (González-Briones et al. 2018b):

Demand Response (DR) the ability of the supplier-client system to react to the supplier's request to adjust energy consumption according to available supplies or to reduce the cost of energy. This is particularly useful in the case of demand peaks, failure, or maintenance in the grid or to exploit renewable energy sources at their best.

Human Behavior Simulation the simulation ability, which is, as already mentioned, a strong potential of MASs. Simulations focus on humans present in the house: their habits and preferences, their interactions with the building (appliances, heating & cooling, lighting, etc.), and the consequences of their actions on energy consumption also taking into account all the external factors (weather, time of the day, price of energy, etc.). Each person can be modeled by a separate agent, allowing the evaluation of a different behavior for each inhabitant, taking into account the heterogeneity of human behavior in the comfort pursuit. The system aims to optimize energy consumption without reducing the user's comfort sensation. Yang and Wang studied how the user's preferences can be perceived (asking the users or learning from manual adjustments made by users). Main parameters that influence energy consumption and need, a fundamental stage for improving optimization models, can be found using Principal Component Analysis (PCA) (Darakdjian, Billé, and Inard 2019). A review of other works can be found in tables 3,4 in González-Briones et al..

Wireless Sensor Networks (WSN) management the use of MASs to simulate real buildings and how sensors would act in it. A classification of the most relevant elements to be monitored: occupation, preferences, activities, temperature, etc. can be found in Nguyen and Aiello. The integration of Real-Time Localization Systems boosted MAS systems evolution in this field, achieving an average energy saving of 17-22% (González-Briones et al. 2018b). After a WSN simulation, which is especially useful in the research field, a real WSN can be deployed in situ.

Summing up a MAS-based system should focus on the following aspects (González-Briones et al. 2018b):

Knowledge and learning the agents should know the user's preferences which affect energy consumption such as tastes in terms of comfort, habits, timetables, etc., also agents should know the environment characteristics like

the building's structure, the thermal relation with the external environment, weather forecast, etc.

Analysis, adaptation, and communication with the environment the agents should be able to analyze their prior knowledge and communicate the information that the MAS must use to adapt to the environment. To communicate with the environment, and send and receive information from it, it is necessary to deploy a WSN.

Decision-making the agents should be able to make decisions based on the information they have, the environment, and the user's preferences. Here algorithms should give greater weight to the factors they consider appropriate; to identify the most important ones, a PCA can be used (Darakdjian, Billé, and Inard 2019).

The results in energy saving that can be achieved with MAS varies between 17% and 41% based on the specialization and the target human satisfaction of the system (González-Briones et al. 2018a; Spears, Spears, and Heil 2005)

Anomaly Detection

AI can be used to detect anomalous usage of electricity and its causes (Himeur et al. 2021). Anomalies can be caused by different factors like:

- Wrong behavior of the user that forgets to turn off some electrical appliances.
- Some appliances not working like they are supposed to (faults).
- Electricity thefts.

Moreover, an anomaly must be detected depending on the time of the day or the season, for example, it is not an anomaly if the heating system is on during the winter, but it is during the summer.

To determine if there is an anomalous electricity usage, the AI model must take care of a lot of aspects like the power consumption but also appliance-specific parameters, occupancy patterns, and weather conditions.

Many anomaly detection approaches can be found in the literature:

- *Unsupervised detection* (clustering, dimensionality reduction)
- *Supervised detection* (Neural Networks, regression, probabilistic models)
- *Ensemble method* (boosting, bagging)
- *Feature extraction* (distance-based, time-series analysis, etc.)
- *Hybrid learning*
- *Other techniques*

Also, systems can be categorized based on the anomaly detection level:

Aggregated level detect anomalous consumption based on data of the main building-wise meter but, doing so, the information about the responsible appliance is lost.

Appliance level detect using individual sub-meters to have fine-grained tracking of abnormalities.

Spatial-temporal level detect abnormal usage related to specific days and hours and, possibly, provide users some feedback to reduce energy waste.

A relevant challenge in this field is defining what exactly is an anomaly: it can be described as the event that occurs when the power usage is an outlier, both regarding a peak in power usage or a too-long electricity consumption; but this definition doesn't take in account the fact that if an appliance is running for a long time-span, for example, long cooking in the oven, then it can also not be an anomaly. The aim is the production of systems that have good accuracy and consider all the possible abnormal usage.

A current problem is the lack of annotated datasets: the existent ones are mostly not labeled or contain only a small amount of anomaly samples, because of the rarity of anomalies in reality.

Direct vs Indirect Control

Mischos, Dalagdi, and Vrakas introduced a new distinction in IEMS classification:

Direct Control IEMS (DCIEMS) includes all systems with the ability to modify the environment using actuators; these systems are able to process data, make decisions, and execute them, without the intervention of a human being. The advantages of Direct Control IEMS are that the occupants don't need to alter their daily routine and these systems can be involved in fault detection. Furthermore, they are better suited for people with reduced mobility.

Indirect Control IEMS (ICIEMS) instead puts humans in the position of the actuator, forming a human-in-the-loop architecture. These systems aim to change the behavior of end-users to stop energy-wasting habits. To achieve this goal, suggestions are provided to the users through interfaces. This approach is cheaper since there is no need to buy actuators like smart sockets for every appliance; moreover, by inducing an eco-friendly behavior in the users, they will apply the acquired habits in all the other aspects of their lives, like at their workplace.

Both the IEMS types produce a lot of data: Direct Control IEMS through sensors, and Indirect Control IEMS through feedback from end users. AI tools can be used to process this quantity of data as described in section "Big Data Usage in IEMS". Machine learning tools can extract from such data the behavioral usage patterns of the users, predicting their future needs and personalizing the recommendations for each one of them. Deep learning tools can monitor the energy profile of the environment and derive information about the energy consumption of appliances. They are also able to make predictions about the next consumption in a determined time window.

Future proposals

Until today only a few studies have been conducted on the use of Deep Learning in the energy efficiency field, in the authors' opinion this should be the focus of future research. A possible approach could be to combine Deep Learning

with Reinforcement Learning to enhance the learning done by Deep Learning Neural Networks in DCIEMS through both the refinements provided by a reward function based on the environment changes and the feedback provided by the human.

Although the aforementioned proposal, the authors recognize that a major issue in the implementation of DL systems is the computational power requirements that are needed in training/fine-tuning, but also at inference, such power is not always available in the buildings due to the high cost of the required hardware.

Using DL, the "Explainability" issue arises, since the user must understand the actions (DCIEMS) or suggestions (ICIEMS) from the system in order to be compliant with them. An optimal system should be able to explain the reasons behind its output in a way that the user can understand.

Another proposal could be to implement gamification experiences in ICIEMS architecture to engage users in the energy-saving process, making them more aware of their energy consumption and more willing to change their habits both at home and in other buildings. An example implementation could be a mobile application that rewards the user with points for every energy-saving action taken; the user can then compete with other users globally or locally against occupants of the same building.

Conclusion

This paper has reviewed the literature on the use of AI and its different techniques in the energy efficiency field, focusing on Big Data produced by IoT, Anomaly Detection with AI, and the different approaches in interaction with humans and buildings.

Energy efficiency is a very important topic in current society since, as many studies pointed out, it can lead to a reduction in CO₂ emissions and, consequently, to a reduction of climate change. This also reflects on people's health: MacNaughton et al. found that for every dollar saved on energy expenditures by smart buildings, 77 cents are saved in health and climate benefits.

All the reviewed papers pointed out problems in AI systems, especially the privacy aspects because models know a lot of information about the users and the buildings, and such information can be used to harm inhabitants; in case of data leaks malicious people can harm users by knowing if they are at home. A way of enforcing users' privacy in global models training is using anonymized data or, even better, using federated learning which helps to train algorithms over various de-centralized edge servers without sharing data.

In general, these systems are not even immune to attacks: in particular, DCIEMS are sensitive to attacks since they rely on IoT devices; a possible attack can be Denial of Service (DoS) and False Data Injection (FDI), which can affect electricity bills and load consumption.

References

- BACnet International. 2024. BACnet. <https://bacnet.org>.
- Bellifemine, F.; Poggi, A.; and Rimassa, G. 1999. JADE—A FIPA-compliant Agent Framework. In *Proceedings of*

- PAAM, volume 99, 33. London, UK: The Practical Application Company Ltd.
- Connectivity Standards Alliance. 2020. Project-Chip/Connectedhomeip. Connectivity Standards Alliance.
- Connectivity Standards Alliance. 2022. Build With Matter | Smart Home Device Solution. <https://csa-iot.org/all-solutions/matter/>.
- Darakdjian, Q.; Billé, S.; and Inard, C. 2019. Data Mining of Building Performance Simulations Comprising Occupant Behaviour Modelling. *Advances in Building Energy Research*, 13(2): 157–173.
- Darby, S. 2006. The Effectiveness of Feedback on Energy Consumption. *A Review for DEFRA of the Literature on Metering, Billing and direct Displays*, 486.
- Farzaneh, H.; Malehmirchegini, L.; Bejan, A.; Afolabi, T.; Mulumba, A.; and Daka, P. P. 2021. Artificial Intelligence Evolution in Smart Buildings for Energy Efficiency. *Applied Sciences*, 11(2): 763.
- Ferber, J. 1999. *Multi-Agent Systems: An Introduction to Distributed Artificial Intelligence*. USA: Addison-Wesley Longman Publishing Co., Inc., 1st edition. ISBN 0-201-36048-9.
- González-Briones, A.; Chamoso, P.; De La Prieta, F.; Demazeau, Y.; and Corchado, J. M. 2018a. Agreement Technologies for Energy Optimization at Home. *Sensors*, 18(1633).
- González-Briones, A.; De La Prieta, F.; Mohamad, M.; Omatu, S.; and Corchado, J. 2018b. Multi-Agent Systems Applications in Energy Optimization Problems: A State-of-the-Art Review. *Energies*, 11(8): 1928.
- Himeur, Y.; Ghanem, K.; Alsalemi, A.; Bensaali, F.; and Amira, A. 2021. Artificial Intelligence Based Anomaly Detection of Energy Consumption in Buildings: A Review, Current Trends and New Perspectives. *Applied Energy*, 287: 116601.
- IDC. 2021. Volume of Data/Information Created, Captured, Copied, and Consumed Worldwide from 2010 to 2020, with Forecasts from 2021 to 2025 (in Zettabytes) [Graph]. In Statista. <https://www.statista.com/statistics/871513/worldwide-data-created/>.
- Koseleva, N.; and Ropaite, G. 2017. Big Data in Building Energy Efficiency: Understanding of Big Data and Main Challenges. *Procedia Engineering*, 172: 544–549.
- MacNaughton, P.; Cao, X.; Buonocore, J.; Cedeno-Laurent, J.; Spengler, J.; Bernstein, A.; and Allen, J. 2018. Energy Savings, Emission Reductions, and Health Co-Benefits of the Green Building Movement. *Journal of Exposure Science & Environmental Epidemiology*, 28(4): 307–318.
- Mehmood, M. U.; Chun, D.; Zeeshan; Han, H.; Jeon, G.; and Chen, K. 2019. A Review of the Applications of Artificial Intelligence and Big Data to Buildings for Energy-Efficiency and a Comfortable Indoor Living Environment. *Energy and Buildings*, 202: 109383.
- Mischos, S.; Dalagdi, E.; and Vrakas, D. 2023. Intelligent Energy Management Systems: A Review. *Artificial Intelligence Review*, 56(10): 11635–11674.
- Nguyen, T. A.; and Aiello, M. 2013. Energy Intelligent Buildings Based on User Activity: A Survey. *Energy and Buildings*, 56: 244–257.
- O'Brien, P. D.; and Nicol, R. C. 1998. FIPA — Towards a Standard for Software Agents. *BT Technology Journal*, 16(3): 51–59.
- Sagiroglu, S.; and Sinanc, D. 2013. Big Data: A Review. In *2013 International Conference on Collaboration Technologies and Systems (CTS)*, 42–47. San Diego, CA, USA: IEEE. ISBN 978-1-4673-6404-1 978-1-4673-6403-4 978-1-4673-6402-7.
- Spears, W.; Spears, D.; and Heil, R. 2005. A Formal Analysis of Potential Energy in a Multi-Agent System. In *International Workshop on Formal Approaches to Agent-Based Systems*, volume 3228 of *Lecture Notes in Artificial Intelligence (Subseries of Lecture Notes in Computer Science)*, 131–145. Springer. ISBN 978-3-540-24422-6.
- Tuyls, K.; Hoen, P. J. T.; and Vanschoenwinkel, B. 2006. An Evolutionary Dynamical Analysis of Multi-Agent Learning in Iterated Games. *Autonomous Agents and Multi-Agent Systems*, 12(1): 115–153.
- Tuyls, K.; and Nowè, A. 2005. Evolutionary Game Theory and Multi-Agent Reinforcement Learning. *The Knowledge Engineering Review*, 20(1): 63–90.
- United Nations. 2015. Take Action for the Sustainable Development Goals. <https://www.un.org/sustainabledevelopment/sustainable-development-goals/>.
- WBCSD. 2009. Transforming the Market: Energy Efficiency in Buildings.
- Wooldridge, M. 1999. 1 Intelligent Agents. In *Multiagent Systems: A Modern Approach to Distributed Artificial Intelligence*, 3–44. MA, USA: MIT Press: Cambridge.
- Yang, R.; and Wang, L. 2013. Development of Multi-Agent System for Building Energy and Comfort Management Based on Occupant Behaviors. *Energy and Buildings*, 56: 1–7.
- Zhou, K.; Fu, C.; and Yang, S. 2016. Big Data Driven Smart Energy Management: From Big Data to Big Insights. *Renewable and Sustainable Energy Reviews*, 56: 215–225.