

VideoQA in the Era of LLMs: An Empirical Study

Junbin Xiao · Nanxin Huang · Hangyu Qin · Dongyang Li · Yicong Li ·
Fengbin Zhu · Zhulin Tao · Jianxing Yu · Liang Lin · Tat-Seng Chua ·
Angela Yao

Received: date / Accepted: date

Abstract Video Large Language Models (Video-LLMs) are flourishing and has advanced many video-language tasks. As a golden testbed, Video Question Answering (VideoQA) plays pivotal role in Video-LLM developing. This work conducts a timely and comprehensive study of Video-LLMs' behavior in VideoQA, aiming to elucidate their success and failure modes, and provide insights towards more human-like video understanding and question answering. Our analyses demonstrate that Video-LLMs excel in VideoQA; they can correlate contextual cues and generate plausible responses to questions about varied video contents. However, models falter in handling video temporality, both in reasoning about temporal content ordering and grounding QA-relevant temporal moments. Moreover, the models behave unintuitively - they are unresponsive to adversarial video perturbations while being sensitive to simple variations of candidate answers and questions. Also, they do not necessarily generalize better. The findings demonstrate Video-LLMs' QA capability in standard condition yet highlight their severe deficiency in robustness and interpretability, suggesting the urgent need on rationales in Video-LLM developing.

This research is supported by the National Research Foundation, Singapore under its NRF Fellowship for AI (NRF-NRFFAI1-2019-0001). Any opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not reflect the views of National Research Foundation, Singapore.

Junbin Xiao, Hangyu Qin, Yicong Li, Fengbin Zhu, Tat-Seng Chua and Angela Yao are with National University of Singapore. Corresponding to: {junbin, ayao}@comp.nus.edu.sg. Nanxin Huang, Dongyang Li and Zhulin Tao are with Communication University of China. Jianxing Yu and Liang Lin are with Sun Yat-Sen University.

1 Introduction

Large language models (LLMs) are revolutionizing research in various X+Language tasks (with X be vision, robotics, sciences, etc.), ushering in a new era with unprecedented advancements in computer science (OpenAI, 2023; Chung et al., 2022; Touvron et al., 2023; Chiang et al., 2023; Dubey et al., 2024). Video Question Answering (VideoQA), as a multimodal and multifaceted challenge that requires both linguistic and visual reasoning, is at the forefront of this revolution. It also serves as a litmus test for evaluating the comprehensive multimodal understanding and reasoning capabilities of cutting-edge Video-LLMs¹ (Alayrac et al., 2022; Dai et al., 2023; Maaz et al., 2023; Chen et al., 2023; Liu et al., 2023; Zhang et al., 2023c,b; Lin et al., 2023; Li et al., 2023e; Team et al., 2023).

While VideoQA performance steadily improves with Video-LLMs, the pursuit of higher QA accuracy alone is insufficient to demonstrate the models' capability, neither in video understanding nor in question-answering. For example, a recent study (Xiao et al., 2024) reveals that the models can answer a large portion of questions (correctly) with irrelevant video inputs or even without video at all. Also, there is a surge of works (Bai et al., 2024) studying the hallucination problem of multimodal LLMs in visual description. These observations raise the concern about whether these models can provide faithful answers in real-world applications. In this regard, we conduct a comprehensive study to Video-LLM's behavior in VideoQA. We delve into the models' success and failure modes from multiple aspects to provide insights towards more trustworthy and human-like machine intelligence.

¹ In this paper, we denote Video-LLMs as video-language models that use LLMs with ≥ 1 billion parameters.

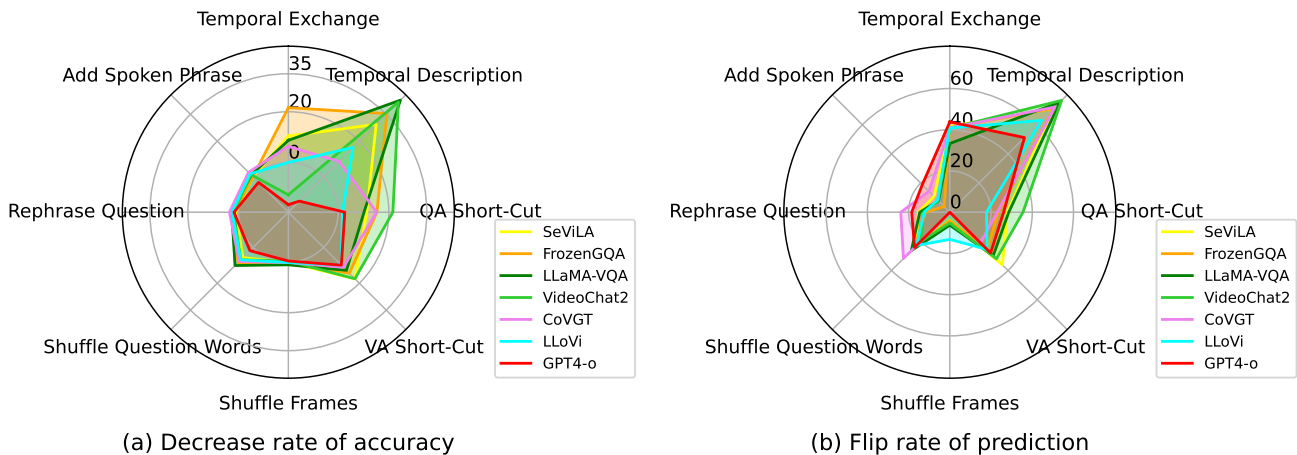


Fig. 1: Models’ QA behavior under different probes on NExT-QA. The plots show that the models rarely align with human intuition in maintaining their accuracy and specific predictions when facing adversarial challenges.

We begin by collecting a series of representative Video-LLMs (Yang et al., 2022; Ko et al., 2023; Yu et al., 2023; Zhang et al., 2023a,b; Li et al., 2023e; Lin et al., 2023; Li et al., 2024a). These models have achieved state-of-the-art (SOTA) on VideoQA in either finetuned or zero-shot settings by harnessing popular LLMs such as DeBERTa-V2 (He et al., 2020), Flan T5 (Chung et al., 2022), LLaMA (Touvron et al., 2023), Vicuna (Chiang et al., 2023) and GPT-4 (OpenAI, 2023). The accuracy of these models reaches around 70%~80% on popular benchmarks such as NExT-QA (Xiao et al., 2021) and MSVD-QA (Xu et al., 2017), for both multi-choice (MC) QA and open-ended (OE) QA.

With the models, we design a comprehensive suite of adversarial probes to dissect their behavior in either video understanding or question answering. Specifically, the probes are derived by adjusting the original VQA data or settings with targeted tests on: 1) temporal understanding, 2) visual grounding, 3) multimodal VQA reasoning, 4) robustness, and 5) generalization. More details are in Sec. 3). The analyses are thus based on a comparison of the model accuracy and specific prediction before and after the adjustment. For better comparison, we also provide the behavior of the SOTA non-LLM methods (Fu et al., 2023; Xiao et al., 2023) that fully fine-tune small language models such as BERT (Devlin et al., 2018) and RoBERTa (Liu et al., 2019).

Fig. 1 presents an overview of the models’ behavior when confronted with some typical probes. It shows that the models often violate human intuition in maintaining or changing their accuracy and specific predictions. While no single model wins on all tests, we find that GPT-4o is fairly among the strongest for answering video questions though it is mainly developed for image understanding. We summarize and outline some

of the common findings below, more specific analyses are presented in Sec. 3:

- Temporal Understanding:** Most Video-LLMs answer temporal questions with high accuracy, but they can hardly reason the order of the video content and are even inferior to non-LLM methods in this regard. Notably, GPT-4o shows strong temporal reasoning capabilities.
- Visual Grounding:** Video-LLMs significantly outperform non-LLM methods in answering video questions, but they win marginally in answer grounding. This indicates that their much better performances are largely due to their strength in capturing language priors and spurious vision-text correlations.
- Multimodal VQA Reasoning:** Compared with non-LLM methods, Video-LLMs are better at exploiting the short-cuts in candidate answers (especially video-answer short-cuts) for multi-choice QA, reflecting their deficiency in faithful reasoning from video-question to the correct answers.
- Robustness:** Video-LLMs are “overly robust” and unresponsive to data perturbation on videos (*e.g.*, shuffling video frames) while being unexpectedly sensitive to language variations (*e.g.*, rephrasing questions), especially for open-ended QA.
- Generalization:** Fine-tuned Video-LLMs still favour the answers of high frequency as predictions in OEQA. While they generalize better across question types and datasets, this is not guaranteed for each specific model. Additionally, according to our observation on NExT-OOD (Zhang et al., 2024c), out-of-distribution (OOD) data for non-LLM methods may not be actual OOD for Video-LLMs.

On the one hand, the above findings demonstrate Video-LLM’s strengths in performing normal video

question-answering. On the other hand, they highlight significant limitations in faithful visual reasoning and conditioning their predictions on the visual content. This underscores the necessity of rationales in developing future Video-LLMs.

2 VideoQA Background

2.1 Preliminaries

VideoQA is the task of answering visual content-related questions for videos. It extends image VQA (Antol et al., 2015; Goyal et al., 2017) to dynamic scenarios, such as the movement state of objects (*e.g.*, “slow” or “fast”?, “put down” or “take away”?), action repetitions and their transitions over time (Jang et al., 2017, 2019). VideoQA is studied through multiple-choice (MCQA) and open-ended (OEQA) questions. MCQA provides candidate answers along with each question for models to select the correct one (Jang et al., 2017; Xiao et al., 2021). It is favored in answering inference- and explanatory-type questions (*e.g.*, “why and how”) that require relatively longer answers. OEQA treats each answer as a category and requires the models to predict a correct answer from a predefined answer list (Xu et al., 2017; Yu et al., 2019). It is mainly adopted to assess factoid QA where the questions pertain to visual recognition (*e.g.*, “what is”). We refer to the recent survey (Zhong et al., 2022) for a more detailed introduction.

2.2 VideoQA Technique Evolution

The VideoQA techniques generally follow the corresponding development of vision and text representation models. The development can be roughly divided into three stages. The first is **1) CNN + RNN** (Jang et al., 2017; Xu et al., 2017; Le et al., 2020; Li et al., 2022; Xiao et al., 2022a) where video and text are encoded by convolutional neural networks (*e.g.*, ResNet (He et al., 2016)) and recurrent neural networks (*e.g.*, LSTM (Hochreiter and Schmidhuber, 1997)) respectively. The second stage **2) CNN/ViT+BERT** (Sun et al., 2019; Li et al., 2020; Seo et al., 2021; Lei et al., 2021; Yang et al., 2021; Xiao et al., 2022b, 2023; Fu et al., 2023; Li et al., 2023g,f), features improved visual (Dosovitskiy et al., 2021) and language representations (Devlin et al., 2018; Liu et al., 2019), where the models also benefit from self-supervised cross-modal pre-training at scale and fine-tuned small language models (*e.g.*, BERT and RoBERTa) on the target datasets. Finally, the third (and the current) stage **3) CLIP+LLM** (Yang et al.,

2022; Liu et al., 2023; Maaz et al., 2023; Li et al., 2023a; Yu et al., 2023; Ko et al., 2023; Zhang et al., 2023b; Dai et al., 2023; Zhang et al., 2023c; Lin et al., 2023) features pre-trained cross-modal visual encoders (*e.g.*, CLIP-ViT (Radford et al., 2021)) and frozen LLMs (*e.g.*, Flan T5 (Chung et al., 2022), LLaMA (Touvron et al., 2023)) with instruction tuning of projection and adaptation modules. In the transition of each stage, there are significant performance jumps. Especially in the LLM stage, leading models like GPT-4V/o (OpenAI, 2023) and Gemini (Team et al., 2023) rival human performance in answering standard visual questions.

2.3 LLMs for VideoQA

Existing LLM-based VideoQA methods can be roughly classified into 3 groups: **1) General-purpose MLLMs**, where models are not specialized to VideoQA and are instead capable of handling various vision-language tasks such as image/video QA and captioning. Typical models are InstructBLIP (Dai et al., 2023), Video-ChatGPT (Maaz et al., 2023), Video-LLaMA (Zhang et al., 2023b), VideoChat (Li et al., 2023b), VideoChat2 (Li et al., 2024a), Video-LLaVA (Lin et al., 2023), LLaMA-VID (Li et al., 2023e), and LLaVA-NeXT (Zhang et al., 2024e), and commercial models such as GPT-4V/4o (OpenAI, 2023), Gemini (Team et al., 2023). These models do not finetune on the target datasets but are instruction tuned and prompted to perform different tasks, *e.g.* VideoQA. We refer to the recent survey (Tang et al., 2023) for a more detailed introduction.

2) Specialized Video-LLMs exploit frozen LLMs or general-purpose image MLLMs (*e.g.*, BLIP-2 (Li et al., 2023a), LLaVA (Liu et al., 2023), LLaMA-Adapter (Zhang et al., 2024b)) while finetuning adaptor or LoRA (Hu et al., 2021) modules on target VideoQA datasets. Successful examples include Frozen-BiLM (Yang et al., 2022), SeViLA (Yu et al., 2023), LLaMA-VQA (Ko et al., 2023). Additionally, Video-LLaMA (Zhang et al., 2023b) is a general-purpose Video-LLM, but in this paper we study its finetuned version (Xiao et al., 2024) that is similar to LLaMA-Adapter but with Video Q-Former to encapsulate short clips of a video.

3) Tool-based Video-LLMs. These methods are parameter-free and focused on the use or collaboration of different MLLMs (LLaVA, GPT-4V, LaViLA (Zhao et al., 2023)) and LLMs (LLaMA, GPT-3.5 and GPT-4) as tools (*e.g.*, planning, captioning, and question-answering) for VideoQA. Representative examples include ViperGPT (Suris et al., 2023), MoReVQA (Min et al., 2024), LLoVi (Zhang et al., 2023a), IG-VLM

(Kim et al., 2024), TraveLER (Shang et al., 2024), VideoAgent (Wang et al., 2024a; Fan et al., 2024) and VideoTree (Wang et al., 2024b). These methods are training-free and perform zero-shot VideoQA.

2.4 Empirical VQA Study

Existing literature analyzed image VQA with non-LLM techniques (*e.g.*, RNNs or BERT) and focus on specific issues such as data imbalance (Goyal et al., 2017; Keravade et al., 2021), robustness (Shah et al., 2019), or language bias (Niu et al., 2021). While (Agrawal et al., 2016) analyze the behavior of VQA models from multiple aspects of generalization to long-tailed data as well as complete image and question understanding, they focus on image QA and the techniques examined are from the CNN+RNN stage. In this paper, we will revisit some of the probes (specified in Sec. 3.7) and check if the problems get alleviated in the LLM era.

To our best knowledge, no previous work has comprehensively studied Video-LLMs’ behavior in VideoQA. Several works explore specific phenomena with models from the stage of CNN/ViT+BERT. For example, (Buch et al., 2022) and (Lei et al., 2023) have revealed the single-frame bias issue, where a large number of questions can be answered with a single video frame. (Bagad et al., 2023) have uncovered that existing VLMs (to be distinguished from MLLMs) that fully finetune BERT lack a sense of time. (Zhang et al., 2023d, 2024c) have investigated the problem of imbalanced distribution of candidate answers in MCQA, and show that the models tend to exploit the short-cuts in candidate answers for answer prediction. Recently, (Xiao et al., 2024) have studied visually grounded QA and disclose that existing VLMs and MLLMs are poor at substantiating their predictions with visual evidence.

The above works each focuses on a particular aspect of VideoQA; they study either MCQA or OEQA with non-LLM models. Furthermore, most of them only mention the problems to induce their own solutions or datasets, without delving into the extent of the problems. Given the emerging and revolutionary effect of LLMs for question answering, in this paper, we concentrate on LLM-based techniques and present the first comprehensive analysis for Video-LLMs in VideoQA. We study both MCQA and OEQA either for classification or generation, and additionally compare with non-LLM techniques in face of the same probes.

Additionally, we notice that there is a surge of new benchmarks targeting the analysis of Video-LLMs in a broad aspect of video understanding (Li et al., 2023d, 2024a; Fu et al., 2024; Liu et al., 2024b; Li et al., 2024b) (*e.g.*, diverse video categories such as

TV/Magic/Fashion shows and related challenges). In this study, we focus on VideoQA of daily activities for its significance towards human-machine interaction. While we use common names for the probes (*e.g.*, temporal understanding, multimodal reasoning, ...), the specific probes and data are entirely different.

3 Probes and Analyses

3.1 Overview

We explore the following probes to examine Video-LLMs’ behavior in VideoQA. The probes are related to either video understanding or question answering:

1. **Temporal Understanding.** VideoQA characterizes temporal dynamics compared with image VQA. Hence, our first study is to check if Video-LLMs can (or to what extent) interpret the chronological order of video content by answering paired adversarial temporal questions, *i.e.*, questions elicited by different time words but are about the same video content, *e.g.*, from “A after B” to “B before A”.
2. **Visual Grounding.** To discern possible reasons for model failures in following the video content to answer questions, we further study the problem of visual grounding, which is to check whether or to what extent the Video-LLMs’ predictions anchored on the *relevant* video content versus irrelevant contexts.
3. **Multimodal VQA Reasoning.** Both temporal understanding and visual grounding are evaluated on MCQA because there is no suitable OEQA benchmarks for such tests. As such, we delve deeper into multimodal reasoning to check how much Video-LLMs can reason faithfully from video and question to the correct answer, without influence from short-cuts of candidate answers.
4. **Robustness.** Are Video-LLMs robust (like human) to general data perturbation? We further study if model decisions are invariant and equivariant to more general video and question perturbations that are not specific to a particular short-cut problem.
5. **Generalizability.** All the above experiments curate new data for testing, which may have probed model generalization to a certain extent. Yet for a better study, we consider two classic generalization problems of long-tailed and out-of-distribution (OOD). Long-tailed is to predict long-tailed answers within the same dataset. OOD is to answer questions of completely different types or related to different kinds of videos (*e.g.*, short to long videos, 3rd-to 1st-person view videos) across different datasets.

Table 1: Tested models from 4 different groups: Specialized, General-Purpose, Tool-Based and Non-LLMs.

Models	Backbone	Video Encoder	Text Encoder
FrozenBiLM (Yang et al., 2022)	-	CLIP (Radford et al., 2021)	DeBERTa-V2-XL (1B) (He et al., 2020)
FrozenGQA (Xiao et al., 2024)	FrozenBiLM	CLIP (Radford et al., 2021)	DeBERTa-V2-XL (1B) (He et al., 2020)
S-LLM SeViLA (Yu et al., 2023)	BLIP-2 (Li et al., 2023a)	CLIP (Radford et al., 2021)	Flan-T5-XL (3B) (Chung et al., 2022)
LLaMA-VQA (Ko et al., 2023)	LLaMA-Adapter (Zhang et al., 2023c)	CLIP (Radford et al., 2021)	LLaMA (7B) (Touvron et al., 2023)
Video-LLaMA (Zhang et al., 2023b)	BLIP-2 (Li et al., 2023a)	EVA-CLIP (Sun et al., 2023)	LLaMA (7B) (Touvron et al., 2023)
VideoChat2 (Li et al., 2024a)	BLIP-2 (Li et al., 2023a)	UMT-L (Li et al., 2023c)	Vicuna (7B) (Chiang et al., 2023)
G-LLM Video-LLaVA (Lin et al., 2023)	LLaVA (Liu et al., 2023)	LangBind (Zhu et al., 2023)	Vicuna (7B) (Chiang et al., 2023)
LLaMA-VID (Li et al., 2023e)	-	CLIP (Radford et al., 2021)	Vicuna (7B, 13B) (Chiang et al., 2023)
GPT-4o	-	unknown	GPT-4
T-LLM LLoVi (Zhang et al., 2023a)	LLaVA, GPT-4	LangBind (Zhu et al., 2023)	GPT-4
VIOLETv2 (Fu et al., 2023)	VIOLET (Fu et al., 2021)	VidSwin (Liu et al., 2022)	BERT (110M) (Devlin et al., 2018)
N-LLM CoVGT (Xiao et al., 2023)	VGT (Xiao et al., 2022b)	ResNet (He et al., 2016)	RoBERTa (125M) (Liu et al., 2019)
Temp[CLIP] (Xiao et al., 2024)	-	CLIP (Radford et al., 2021)	RoBERTa (125M) (Liu et al., 2019)

Table 2: Involved datasets. MCQA and OEQA denote multi-choice and open-ended QA respectively.

QA Tasks	Datasets	Video Length	# Answers	# Videos	# QA pairs
MCQA	NExT-QA (Xiao et al., 2021)	42s	5	570	5K
	NExT-GQA (Xiao et al., 2024)	40s	5	990	5.5K
	EgoSchema (Mangalam et al., 2023)	180s	5	500	0.5K
	Perception Test (Pătrăucean et al., 2023)	23s	3	5.9K	19K
OEQA	MSVD-QA (Xu et al., 2017)	10s	1,853	520	13K
	ActivityNet-QA (Yu et al., 2019)	180s	1,000	1,000	10K

3.2 Tested Models

We select prominent Video-LLMs that have reported state-of-the-art performance on VideoQA and summarize them in Tab. 1. These models exploit cross-modal pretrained visual encoders (*e.g.*, CLIP (Radford et al., 2021), EVA-CLIP (Sun et al., 2023) and UMT-L (Li et al., 2023c)) and powerful LLMs (*e.g.*, DeBERTa-V2 (He et al., 2020), Flan T5 (Chung et al., 2022), LLaMA (Touvron et al., 2023), Vicuna (Chiang et al., 2023), GPT-4 (OpenAI, 2023)) to perform VideoQA.

Models in the 1st block of Tab. 1 are specially finetuned on target datasets to achieve VideoQA. Models in the 2nd block are general-purpose Video-LLMs and most of them do a zero-shot evaluation on VideoQA. As exception, VideoChat2 (Li et al., 2023b) includes the training data of NExT-QA (Xiao et al., 2021) (one of our major testbed) for instruction tuning, and thus should be considered a normal evaluation versus zero-shot. Also, for Video-LLaMA, we adopt the implementation in (Xiao et al., 2024), which is finetuned on NExT-QA by adding adaptation parameters as in LLaMA-Adapter (Zhang et al., 2023c). Additionally, we include the recent GPT-4o (OpenAI, 2023) as a representative of commercial models for off-the-shelf use. In the 3rd block, we include LLoVi (Zhang et al., 2023a) which is a tool-based Video-LLM established on LLaVA (Liu et al., 2023), LLaViLA (Zhao et al., 2023) and GPT-4. As non-LLM baselines (the bottom block), we consider VIOLETv2, CoVGT and Temp[CLIP] as representative methods for their good performance achieved by fully finetuning small language models, such as BERT and RoBERTa.

All models except for Video-LLaMA, we use their official checkpoints (or API for GPT-4o). It is noteworthy that different models often tackle a different type of QA, either MCQA or OEQA. For GPT-4o, we uniformly sample video frames and feed them along with the questions into the API and prompt it for QA. Related details are presented in the Appendix 4.

3.3 Datasets & Evaluation Measures

Our major experiments are conducted on NExT-QA (Xiao et al., 2021) for multi-choice QA, and MSVD-QA (Xu et al., 2017) for open-ended QA. We select the datasets for their high quality and popularity with completed models of both non-LLMs and LLMs. Moreover, we add other datasets for specific probes as necessary. Concretely, we test on NExT-GQA (Xiao et al., 2024) for visually grounded QA (Sec. 3.5), NExT-OOD (Zhang et al., 2024c) for multi-choice biases in multimodal VQA reasoning (Sec. 3.6) as well as generalization (Sec. 3.8.2), ActivityNet-QA (Yu et al., 2019) for robustness in answering open-ended temporal questions with shuffled frames (Sec. 3.7). To probe generalization across different types of videos, we add EgoSchema (Mangalam et al., 2023) and Perception Test (Pătrăucean et al., 2023) datasets (Sec. 3.8.2). The former features long-form video understanding from an ego-centric viewpoint, while the latter emphasizes visual perception and reasoning of fine-grained human-object interactions. Other details are listed in Tab. 2. NExT-OOD shares the same statistics as NExT-QA so we do not list it in the table. Finally, for evaluation, we report both accuracies and flip rates of specific predic-

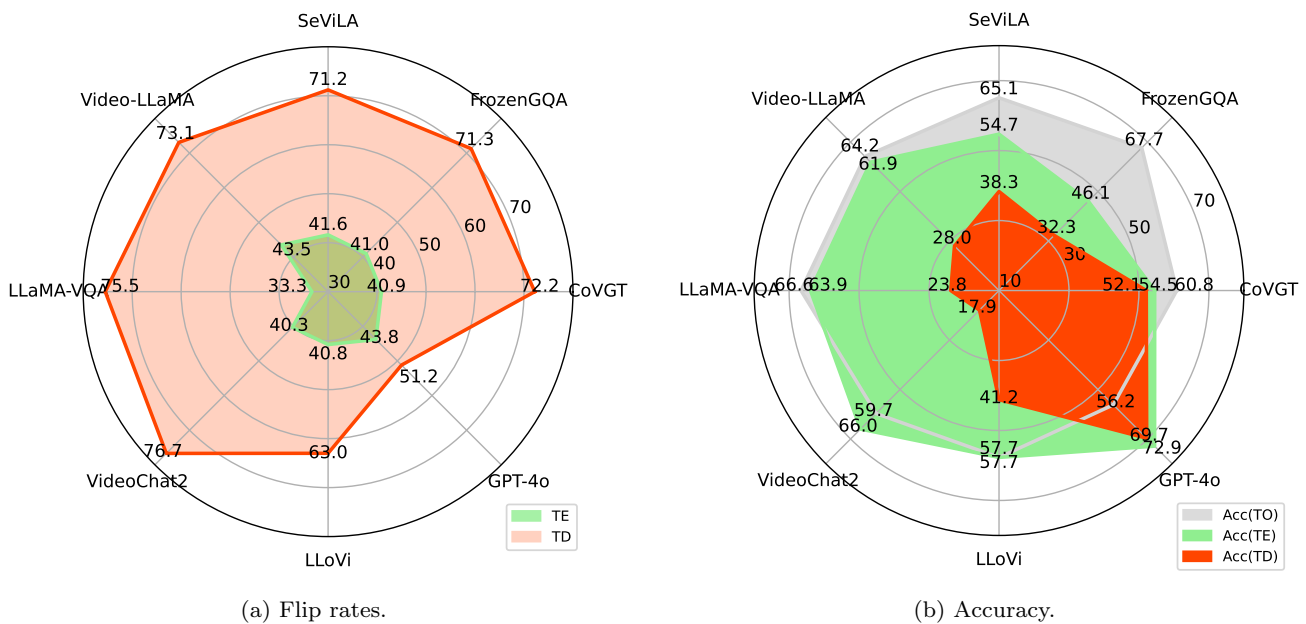


Fig. 2: Results of temporal probing. Most models frequently change their predictions and show decreased accuracy in answering temporally homologous questions w.r.t the chronological order of video contents.

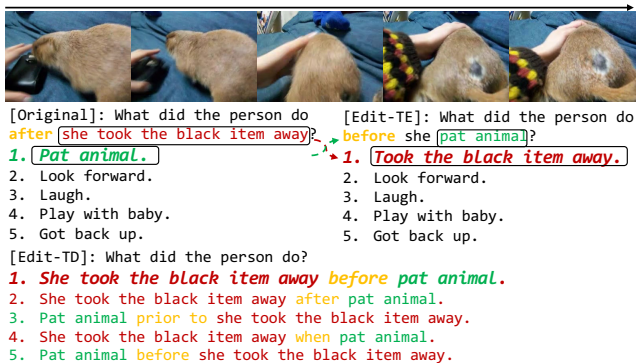


Fig. 3: Examples for probing temporal understanding. Correct answers are highlighted in ***bold and italic***.

tions before and after the probes, where the flip rate denotes the proportion of changed predictions.

3.4 Temporal Understanding

VideoQA distinguishes from image VQA for its factoring a rich set of temporal questions signaled by time words “before/after/when”. Video-LLMs demonstrate increasingly high accuracy in answering temporal questions (Xiao et al., 2021), so we try to verify if these models really interpret content order in videos. To this end, we derive two new sets of questions from the original temporal questions in NExT-QA.

Considering the example in Fig. 3. The original question asks the person’s next action *after* “taking the black item away” and should be answered with

“pat the animal”. Our first edit, called **Temporal Exchange (TE)**, exchanges the actions in the question and the correct answer, by asking for the action *before* “the person pats the animal” (right of Fig. 3). The models should be able to answer “take the black item away” for the derived question if it correctly answered the original question. A second edit called **Temporal Description (TD)**, focuses on the time order and isolates the effect of language correlation by asking in a coarse manner of “what did xx do or what is happening/doing”. The bottom of Fig. 3 shows a TD example, where the question provides little to no contextual information compared to the original and TE questions. Moreover, all answers for the question describe the same visual content with different orders though only one is correct. Correctly answering TD questions requires stronger action order reasoning compared to the original and TE questions.

To obtain the testing examples, we collect about 1K temporal questions (TO) originated from NExT-QA and derive the TE and TD examples by prompting GPT-4 and parsing the syntactic structure of the questions respectively. Regarding prompting for TE examples, we split the questions into two groups of “before/after” and “when”, and design different prompts for them to achieve better results. Regarding parsing for TD questions, we mainly detect the time words “before/after/when”, keep the question parts (e.g., “what did the person do?”) as new questions, and recombine the contextual parts (e.g., “she took the black item away”) with the correct answers (e.g., “pat animal”)

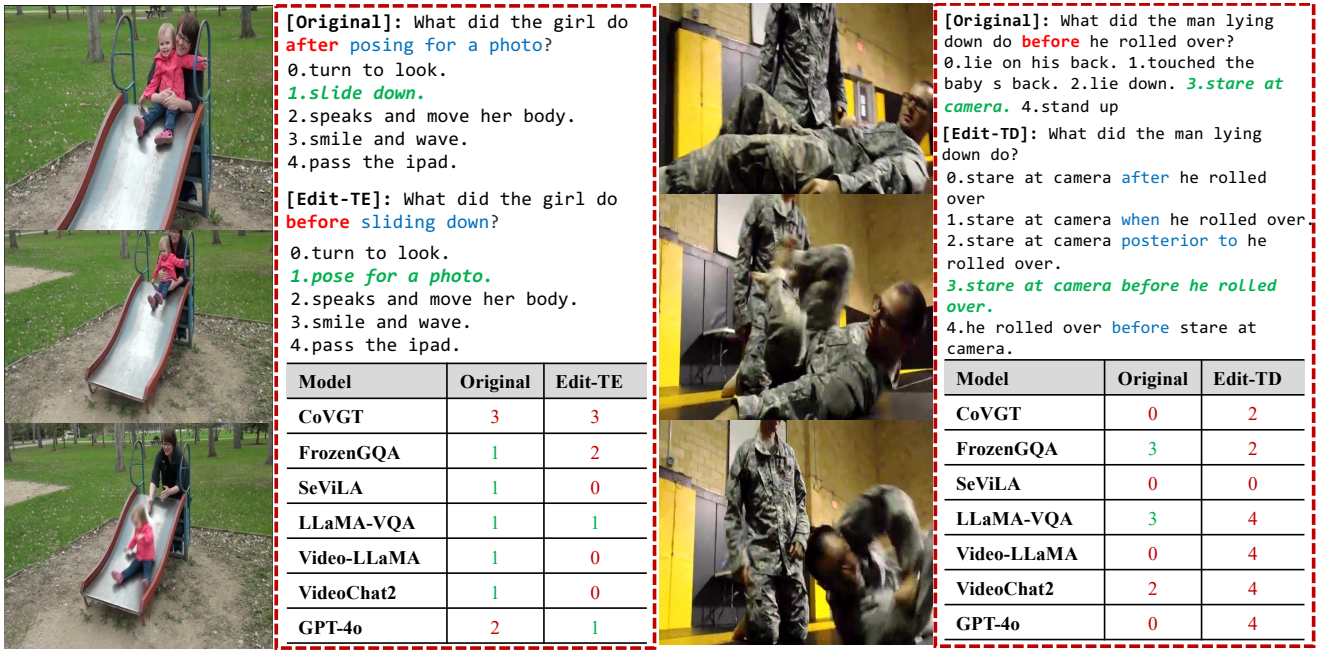


Fig. 4: Visualization of temporal probing results. Examples show that most models tend to change their predictions and make mistakes. Correct answers or predictions are in green.

while varying the time words to form different options (see Fig. 3). More details are presented in Appendix .1. For both the generated TE and TD examples, we further manually check and refine as necessary to ensure the quality of the derived QAs.

The results in Fig. 2 demonstrate that most models are brittle towards such temporal tests. Specifically, the high flip rates in Fig. 2a show that both LLM and non-LLM methods tend to change their answers for the edited questions. Moreover, the accuracy in Fig. 2b also show that most models’ performances shrink. The effects are specially prominent for the TD test, where most models flip more than 70% of their predictions and decline their accuracy by more than 30%, even though the involved video contents remain the same (also refer to prediction examples in Fig. 4).

Among the models, GPT-4o significantly outperforms others in the TD test even though it does not encode any temporal information (we specify in the prompts that the images are ordered video frames). By jointly considering the accuracy in Fig. 2b, we speculate that the models trained on the target datasets (all models except for GPT-4o and LLoVi (Zhang et al., 2023a)) likely overfit to dataset statistics rather than reason about time faithfully. Additionally, LLaMA-VQA (Ko et al., 2023) shows the smallest flip rate in TE test. We attribute such strength of LLaMA-VQA to its auxiliary training objective by inversely predicting the questions given the answers, which implicitly suits the TE probes by enhancing the relation between the answer

and the contextual term in the question. Moreover, Fig. 2b shows that models using advanced LLMs such as LLaMA (Li et al., 2023e) and Vicuna (Chiang et al., 2023) perform better on the TE test but worse on the TD test than non-LLM method CoVGT. This indicates that LLM-based methods are better at exploiting language priors or commonsense in the TE questions for predicting answers, even though they seem weaker than non-LLM methods in understanding video content order. Again, we find that GPT-4o achieves the highest accuracy in both TE and TD tests, showcasing strong zero-shot temporal QA capability.

The above observations, together with the findings in some related studies (Bagad et al., 2023; Liu et al., 2024b), suggest that the end-to-end learning approach (even with LLMs) may not be a good choice to cope with temporal relations. It seems more favourable to explicitly reason across the sequence of video frames in a way like GPT-4o, and alternatively, to convert the video frames into time-aware descriptions and then feed them into LLMs for question answering, such as in MoReVQA (Min et al., 2024) and LLoVi (Zhang et al., 2023a). Yet how to effectively and efficiently coordinate visual captioning and question-answering is still open challenge that deserves further efforts.

3.5 Visual Grounding

With the observation that model answers flip a lot even with paired questions about the same video content, a

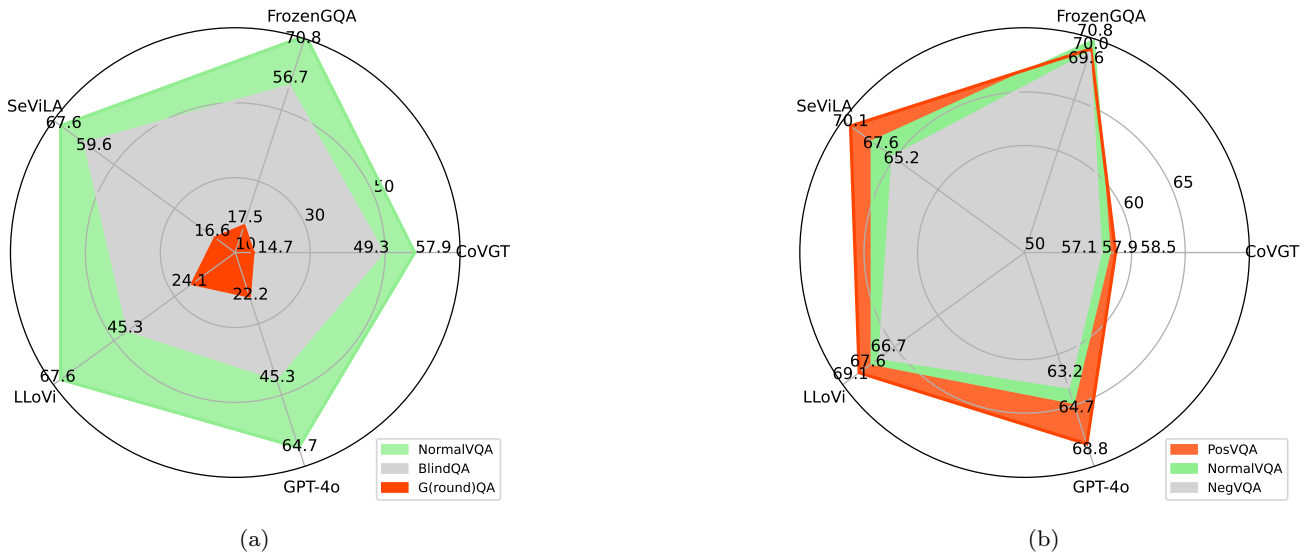


Fig. 5: Results of grounding probing. All models hardly rely on the *relevant video segments* to perform QA though videos are important for better performances.

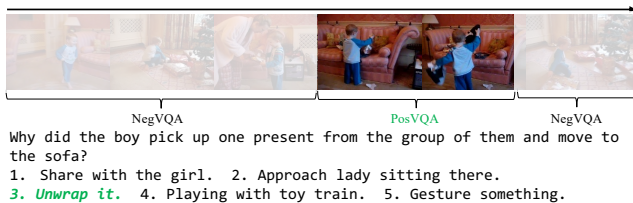


Fig. 6: Illustration of PosVQA and NegVQA.

natural question arises – to what extent are the models’ predictions grounded on the relevant video content? To study this, we conduct experiments on visual grounding. Specifically, we experiment on the recent NExT-GQA dataset (Xiao et al., 2024). This dataset extends NExT-QA with temporal location labels of question-answer pairs. With NExT-GQA, we compare model performance with different visual inputs as follows: **NormalVQA** follows the common practice of performing VideoQA by uniformly sampling frames over the whole video. **BlindQA** removes the video inputs to train and test the models with only the QA pairs to check reliance on pure language priors. **PosVQA** and **NegVQA** provides only QA-relevant (positive) or only irrelevant segments (negative) as inputs to the model (see Fig. 6 as an illustration). Finally, we evaluate **Grounded QA** (GQA) accuracy, *i.e.*, jointly answer the questions and also localize the QA-relevant video moments. By comparing QA performance with and without requirements on visual grounding, we study how much the models’ predictions are anchored on the relevant video content. Note that similar experiments are also conducted in NExT-GQA (Xiao et al., 2024), but their analyses are focused on the connection be-

tween visual grounding and VQA, with also their major findings established on non-LLM techniques. In this paper, we inherit such settings but target a thorough analysis of Video-LLMs’ behavior in visual grounding and a comparison with non-LLM techniques.

The results in Fig. 5 deliver the following major observations: **1)** Fig. 5a shows that both LLM and non-LLM methods are poor at substantiating their answers with relevant video content. For example, from NormalVQA to Grounded VQA, *i.e.* when the correct predictions are required to be visually grounded, the accuracies decrease by more than 40% for all models.

2) Compared with the non-LLM method (CoVGT), specialized Video-LLMs (*e.g.*, FrozenGQA and SeViLA) benefit more from short-cut learning. This is because they remarkably surpass the non-LLM method on normal VQA accuracy (by $\sim 10\%$) but are only marginally better on GQA (*e.g.*, by $\sim 2\%$) (Fig. 5a). Also their LLMs alone (*e.g.*, DeBERTa-V2-XL and Flan-T5-XL) already wins over CoVGT’s language model (RoBERTa) by more than 7% according to the corresponding BlindQA accuracies. A further comparison of NormalVQA *vs.* BlindQA (Fig. 5a), NormalVQA *vs.* PosVQA *vs.* NegVQA (Fig. 5b) indicates that the short-cuts are primarily from language priors and spurious vision-text correlations. For example, the BlindQA baselines without any visual inputs retain more than 70% of the corresponding NormalVQA’ performance. Moreover, visual signals that come from answer-irrelevant video segments yield surprisingly high performance that is competitive to model variants with answer-relevant (ground-truth) visual segments (NegVQA *vs.* PosVQA).

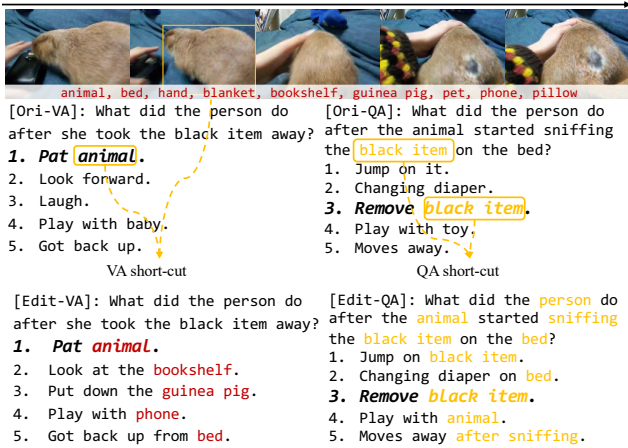


Fig. 7: Illustration of mitigating the VA (left) and QA (right) short-cuts by incorporating into the negative answers with detected visual concepts and question key words respectively.

3) Comparing among models, Fig. 5a manifests that the predictions of LLoVi (using GPT-4) and GPT-4o are more visually grounded. Because they achieve the highest GQA accuracy despite being zero-shot methods. Nonetheless, Fig. 5b shows that SeViLA and GPT-4o’ predictions are more responsive to different video inputs. Because they have the largest performance gaps between QA with the relevant (positive) and irrelevant (negative) temporal segments. By comparing the BlindQA performance of the finetuned models (CoVGT, FrozenGQA and SeViLA) and zero-shot models (LLoVi and GPT-4o) in Fig. 5a, we can conclude that finetuned models are much better at exploiting statistic language biases for QA. For example, a finetuned RoBERTa (CoVGT) performs even better than zero-shot GPT-4, 49.3% *vs.* 45.3%.

Additionally, in our implementation, when GPT-4o is prompted to also output the indexes of the video frames that it uses to predict the answers versus just answering the questions. Its QA accuracy increases remarkably by more than 15%, from 49.0% to 64.7% for NormalVQA. This suggests GPT-4o’s great potential in reasoning like human and providing visually grounded answers if appropriately prompted. We believe this is also an interesting finding and raise it (how to use/prompt MLLMs like GPT-4o) as an open challenge for future exploration.

3.6 Multimodal VQA Reasoning

The analyses of both temporal understanding and visual grounding are based on MCQA because current OEQA benchmarks do not support such tests, *e.g.*, no

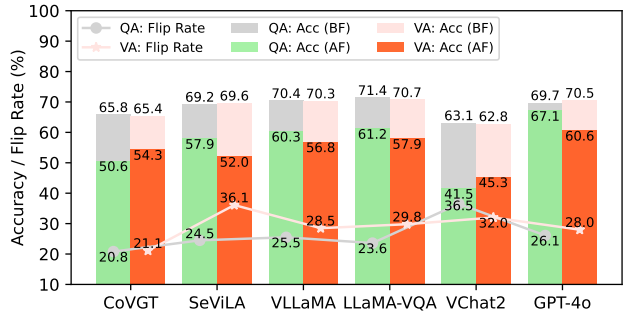


Fig. 8: Results of multimodal VQA reasoning. Acc(BF) and (AF) denote accuracy before and after the edit. VLLaMA and VChat2 are abbreviated from VideoLLaMA and VideoChat2. The flip rates and decrease rate of accuracy demonstrate that the models are susceptible towards such tests.

sufficient temporal questions or no temporal location labels. Thus, we want to study if (or to what extent) the models’ failure of reasoning is because of the short-cuts in candidate answers. We call this probe as multimodal reasoning because such short-cuts dispense with the reasoning between videos and questions, leading to a direct jump to the answers.

Accordingly, we study two kinds of short-cuts related to candidate answers. A **video-answer (VA) short-cut** exists when only one candidate answer contains the visual objects presented in the video, while most other answers do not involve video-related objects. As such, models may ignore the question and choose the video-relevant answer as final prediction. A similar **question-answer (QA) short-cut** exists when only one candidate answer contains question-relevant keywords. This shortcut allows models ignore the video and also bypass interpreting the question as well; they may simply associate common keywords in question and answer for prediction. Fig. 7 illustrates such VA and QA short-cuts. Note that the short-cuts may not necessarily bring correct answers but can result in false positives, if for example the video-object related answers are not the correct ones. This is possible because the correct answers often contain the actions (or verbs) presented in the videos though without the objects.

To study the problem, we randomly sample 30% ($\sim 1.2K$ to save API budgets) of the validation data from NExT-QA. We then check for the samples that have the aforementioned VA and QA short-cuts. For the target samples, we curate new answers for each question on the basis of the original candidate answers to avoid the possibility of having such shortcuts, *i.e.*, do little change to make most of the candidate answers contain the corresponding video objects or question keywords as shown in the bottom of Fig. 7. In our implementa-

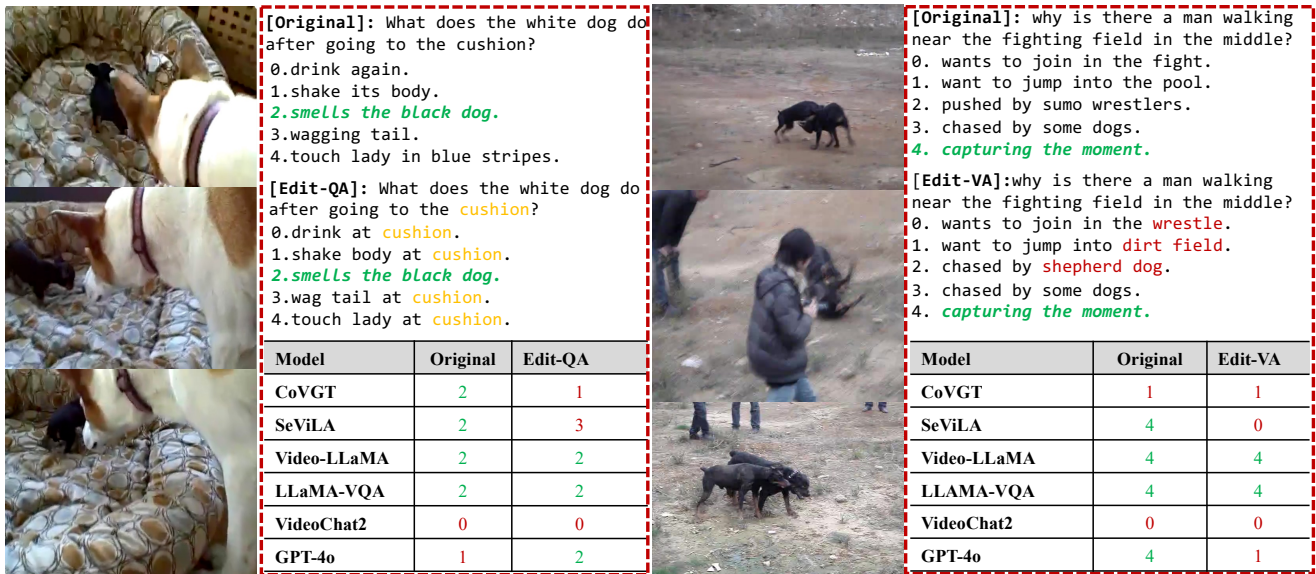


Fig. 9: Visualization of predictions before and after removing the QA (left) and VA (right) short-cuts. Examples show that the models are prone to get distracted by the new negative answers.

tion, we prompt GPT-4 to achieve the goal, followed by human checking and correction as necessary.

Specifically, to eliminate **VA short-cut**, we first obtain from the related video a collection of visual object labels. We begin by detecting object labels from the sampled video frames by using image-tagging model RAM (Zhang et al., 2024d) and then filter for redundancy before merging the labels together. With the object labels (Examples in the top of Fig. 7) and the original QAs, we then prompt GPT-4 (OpenAI, 2023) to incorporate into each candidate answer the appropriate visual label to make it relate to the video (Examples in the bottom left of Fig. 7).

For **QA short-cut**, we follow a similar practice to prompt GPT-4 to reword each answer option to contain keywords in the question. Note that the identification of samples with short-cuts are completed at the same time by asking GPT-4 to first check before modifying the answers (details in Appendix .2). We removed samples whose candidate answers are the same as the original ones as these samples are identified by the GPT-4 as qualified samples without VA and QA short-cuts. Eventually, we obtain two different sets of samples with both size of 1K for probing of VA and QA short-cuts respectively. The high short-cut rates (1K out of 1.2K) is because our short-cuts are defined on nouns while NExT-QA features verbs in its answers.

The results in Fig. 8 show that almost all models, regardless of the language models used, suffer substantial declines in accuracy (10% ~ 20%) when answering questions with edited distractor answers (see prediction examples in Fig. 9). The flip rates are also high

Table 3: Performance on NExT-OOD Test set (N=1).

Methods	LLM	NExT-OOD			
		All	VA	QA	VQA
Prev. SoTA (Zhang et al., 2024c)	✗	43.7	39.6	36.6	35.8
FrozenGQA (Xiao et al., 2024)	✓	73.1	71.3	71.6	72.3
SeViLA (Yu et al., 2023)	✓	71.8	70.1	71.4	70.0

with 21% ~ 37% even though the triplets of <video, question, correct answer> remain the same. This posits that the models largely rely on the short-cuts in candidate answers and are limited in faithful multimodal reasoning from video and question to correct answers. Again, GPT-4o’s zero-shot performance surpasses others on the edited data.

Compared with non-LLM method (CoVGT), all Video-LLMs, especially VideoChat2, show higher flip rates when confronted with the edited options. This suggests that Video-LLMs are better at exploiting the short-cuts of candidate answers for question answering. By comparing the performances on QA and VA tests, we find that most Video-LLMs experience greater performance loss on edited VA data compared to QA data, especially for GPT-4o whose performance degenerates marginally on QA questions (2.6%) but more on VA type questions (9.9%). Such a discrepancy suggests that the models are primarily exploiting spurious vision-text correspondence for answer prediction.

Additionally, we extend our experiments to the recent NExT-OOD dataset (Zhang et al., 2024c). NExT-OOD is also designed to reduce candidate answer biases in NExT-QA. It aims for a balanced distribution of objects and actions in the correct and distractor answers, whereas our VA and QA short-cuts pertains to

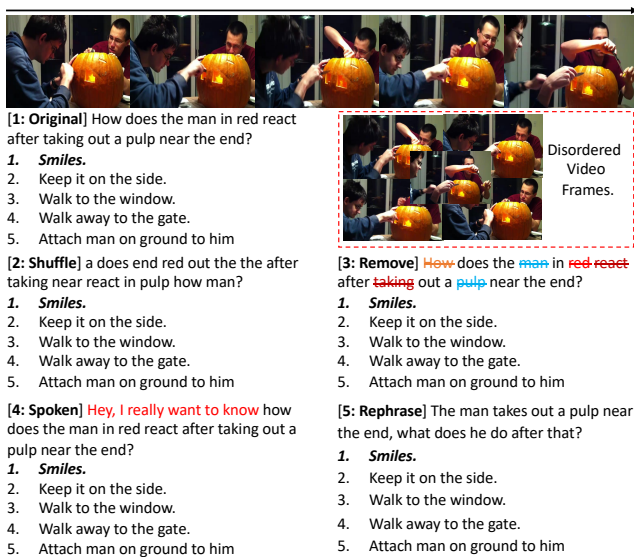


Fig. 10: Examples of video and question perturbations.

the video- and question- correlated candidate answers. The results in Tab. 3 show that Video-LLMs perform surprisingly well on NExT-OOD, surpassing the previous non-LLM SoTA by significant margins. Moreover, the accuracies of Video-LLMs only slightly decrease from NExT-QA to NExT-OOD. We speculate that NExT-OOD unintentionally introduces new and simple patterns that LLMs can exploit, such as mismatches between questions and answers as well as other language issues. This additionally reveals that OOD-data for conventional VideoQA techniques may not be effective OOD for LLM-based methods.

3.7 Robustness

The brittle behavior of models in the above studies prompts us to conduct a more general test on model robustness towards common perturbations on the videos and questions. To this end, we consider two kinds of perturbation: **data diversifying** and **data poisoning**, and experiment on both MCQA and OEQA.

For **data diversifying**, we modify the original questions by rephrasing them or prepending spoken phrases (see examples in the bottom of Fig. 10), both are achieved by prompting GPT-4 with human correction as necessary. Robust models should be invariant and not flip their predictions for this perturbation, since the meanings of questions keep unchanged. For **data poisoning**, we attack the input data by shuffling video frames, shuffling question words, and removing keywords from the questions (*e.g.*, question words ‘6W1H’², nouns, and verbs). Examples are presented

in the first three cases of Fig. 10. Intuitively, models should suffer significant performance loss with poisoned data. For data shuffling, we repeat the experiment 3 times with different random seeds and find there is negligible variance in performance ($\pm 0.1\%$). Therefore, we report only the median results for brevity. Additionally, for data poisoning, we revisit the issue of “*answering incomplete questions*” explored by (Agrawal et al., 2016), analogous to human behavior of answering by listening to only a part of the question. We realize this by progressively truncating the question, starting from the first word and increasing the omitted portion.

For probing of model robustness in **data diversifying**, the results (both accuracy and keep rate (1 - flip rate)) in Fig. 11a and 11b show that almost all models deteriorate performances, especially in OEQA. Yet, we surprisingly find that GPT-4o’ accuracy gets improved by 3% when adding spoken phrases, we attribute this strength of GPT-4o to its learning from numerous real-life user cases. Additionally, we highlight the weak behavior of the general-purpose Video-LLMs in answering questions with spoken prefixes in OEQA. For example, the accuracy degradation rates and flip dates of Video-LLaVA and LLaMA-VID are both higher than those of non-LLM method VIOLETv2. Finally, comparing the same model (LLaMA-VID) of different LLM sizes (7B and 13B) reveals that larger LLMs improve accuracy but not necessarily invariance to data diversity.

For better interpretation, we visualize some predictions in Fig. 12. The general purpose Video-LLMs (*e.g.*, LLaMA-VID and Video-LLaVA) tend to change their answers with the edited questions even though the questions’ meanings remain the same. Generally, they prefer giving more specific answers, but always result in hallucinations or ignore the actual questions (*e.g.*, refer to examples at the bottom of Fig. 12). A likely reason could be that the models are not instruction-tuned to answer such edited questions. Another cause could be that the modified questions are often longer and appear more complex than the original ones. Consequently, LLMs are induced for more detailed responses point by point, which increases the risk of hallucination. In conclusion, the experiments demonstrate that the models are not sufficiently robust to language diversifying.

For probing of model robustness in **data poisoning**, Fig. 11c shows that after **shuffling the video frames**, all models’ accuracies have little to no change, be it on MCQA or OEQA. Also, the flip rates are small. The exception, however, is GPT-4o, which has a ~ 4 to $5\times$ higher flip rate than other models. This result echos the findings in Sec. 3.4 and 3.5 where GPT-4o conditions better on the video content for question answering. Yet, for all models, the negligible fluctuation of

² Who, What, When, Where, Why, Which, How

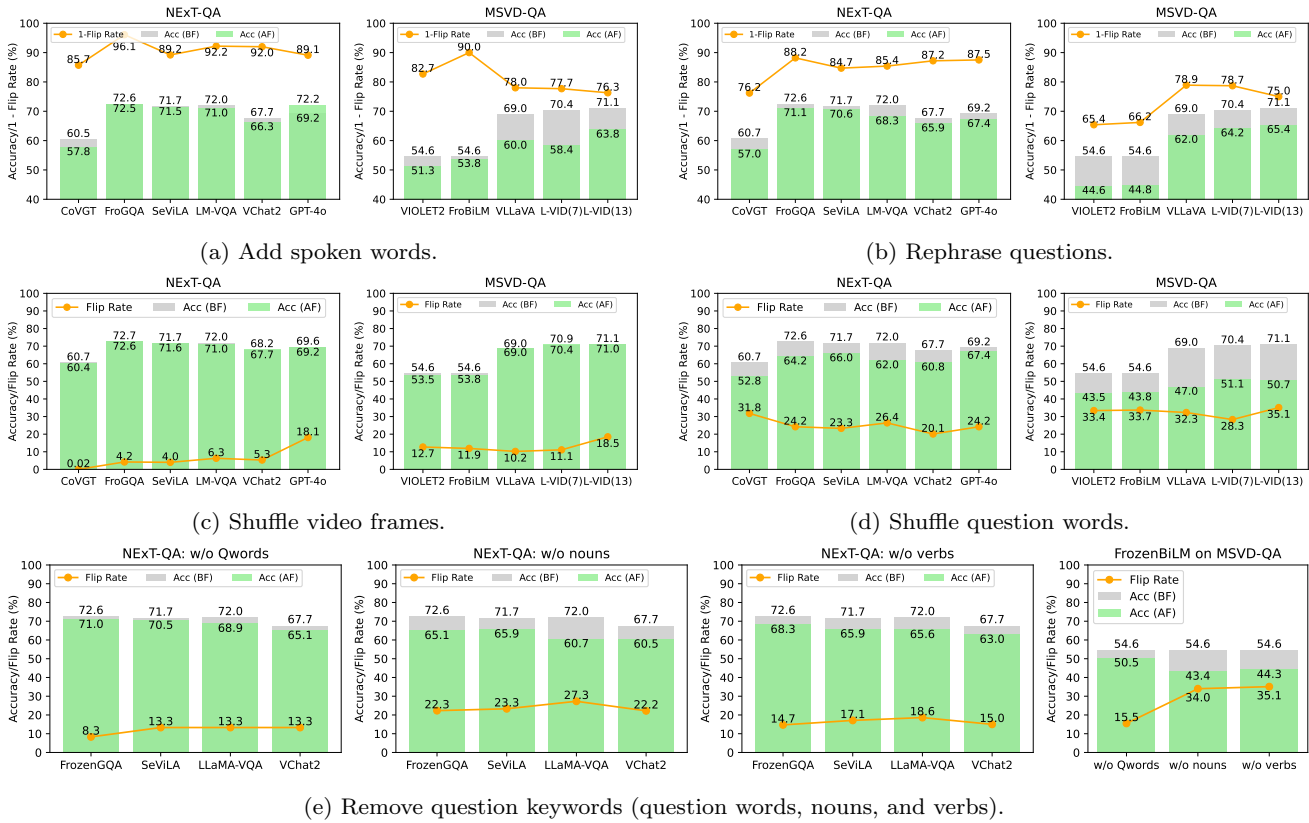


Fig. 11: Results of robustness on both MCQA (NExT-QA) and OEQA (MSVD-QA). The answers of Video-LLaVA (VLLaVA) and LLaMA-VID (L-VID, 7B, and 13B) are judged by GPT-3.5-turbo following the original papers. Also, their flip rates are calculated based on the yes/no responses of GPT. (FroGQA: FrozenGQA. FroBiLM: FrozenBiLM. LM-VQA: LLaMA-VQA.)



accuracy indicates a strong static bias in making predictions. To be more precise, we additionally evaluate the effect of frame shuffling on a subset of temporal questions whose answers are related to content ordering, and intuitively, should be more sensitive to frame shuffling. The results in Fig. 13 show that shuffling frames again affects little the model performances in answering even temporal questions. This reflects that the models are stubborn and are not anchored on content order for answering temporal questions. Combining with our previous observation on BlindQA experiments (see Sec. 3.5 and Fig. 5), we conclude that existing Video-LLMs do not really capture video temporality though they ground on videos for answer predictions.

Compared with shuffling frames, Fig. 11d shows that model performances degenerate more significantly when **shuffling question words**. Yet, they still maintain 86%~97% of their original performances on MCQA, and 70%~80% on OEQA. Comparing among models, Video-LLMs generally show higher accuracy and lower flip rates than non-LLM methods. In particular, the performance of GPT-4o on NExT-QA only decreases marginally by 1.8%. The results indicate Video-

LLMs' superiority in resilience of question poisoning. Nonetheless, this kinds of resilience departs from human intuition in answering questions without syntax.

Additionally, the probes of shuffling frames and questions, combined with the previous temporal probe in Sec. 3.4, suggest that existing models have little to no capability of capturing content position or ordering information in neither language nor video inputs. A major reason could be the weak position embeddings. No matter the entangled absolute position embeddings as in BERT, or the decoupled relative position embeddings in other language models, such embeddings currently do not fully reflect the ordering information and point to a potential direction for further investigation.

For **removing question key words**, Fig. 11e shows that models suffer more performance loss and flip more predictions when removing nouns and verbs compared to removing the question words. This holds true for both MCQA and OEQA. The observation differs from (Agrawal et al., 2016) where question words are more crucial than verbs. However, this is reasonable as we analyze VideoQA (*vs.* image VQA), where the QAs are mostly related to actions.

	[Original]: Who put the noodles into the hot water? -Lady. [Spoken]: I have got a question for you who put the noodles into the hot water? -Lady			[Original]: Who is slicing shrimp with a knife? -Person. [Rephrase]: Who is cutting up the shrimp with a blade? -Person.			
	Model	Original		Spoken	Model	Original	Rephrase
	VIOLETV2	Lady		Lady	VIOLETV2	Person	Woman
	FrozenBiLM	Lady		Lady	FrozenBiLM	Person	Lady
LLaMA-VID	The person in the video put the noodles ...	The person who put the noodles into the is not visible ...	LLaMA-VID	... a person is slicing a person cutting up ...		
	[yes,5]	[no,2]		[yes,5]	[yes,5]		
Video-LLaVA	The person in the video puts the noodles into the hot water.	Yes, the person who put the noodles into the hot water is the person who is cooking noodles.	Video-LLaVA	a person is seen slicing ...	The video does not provide any information about who is cutting ...		
	[yes,5]	[yes,4]		[yes,5]	[no,4]		



	[Original]: What is a man doing? -Cut. [Spoken]: Would it be alright if I ask what is a man doing? -Cut.			[Original]: What are people doing? -Climb. [Rephrase]: What activity are individuals engaged in? -Climb			
	Model	Original		Spoken	Model	Original	Rephrase
	VIOLETV2	Cut		Cut	VIOLETV2	Climb	Education
	FrozenBiLM	Cut		Cut	FrozenBiLM	Climb	Building
LLaMA-VID	The man is cutting up carrots on a cutting board.	Yes, it would be alright.	LLaMA-VID	... People are sitting on the floor.	... engaged in playing with dog, sitting on the ground, and playing with a frisbee.		
	[yes,4]	[no,1]		[no,1]	[no,1]		
Video-LLaVA	A man is seen cutting a piece of meat on a cutting board.	Sure, the man is demonstrating how to properly wrap meat. He starts by wrapping the meat with plastic and then ties it up with a string.	Video-LLaVA	People are playing different games and having fun in the park.	... engaged in playing frisbee, sitting on the ground and standing on a bench.		
	[yes,5]	[no,2]		[no,2]	[no,1]		

Fig. 12: LLaMA-VID and Video-LLaVA predictions after adding spoken phrases and rephrasing questions. The model answers are provided together with the GPT-3.5-turbo evaluation, e.g., [yes, 4] means that GPT-3.5 thinks the prediction matches the ground-truth answer with a score of $4 \in \{1, \dots, 5\}$.

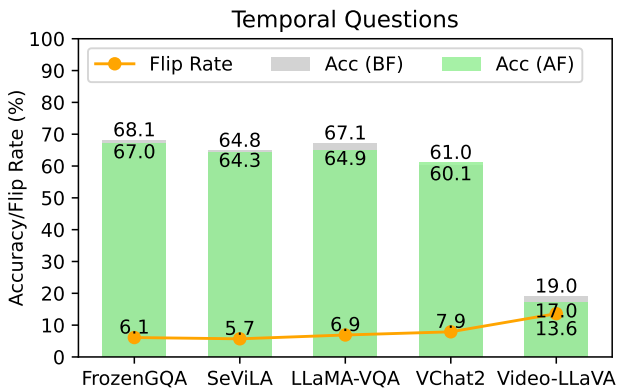


Fig. 13: Results in answering temporal questions after shuffling video frames. The questions are selected from ActivityNet-QA (size of ~ 700) for Video-LLaVA in open-ended QA and NExT-QA (size of $\sim 1K$) for other models in multi-choice QA.

Aside from removing particular words, Fig. 14a revisits the models’ behavior with truncated question inputs as in (Agrawal et al., 2016), but in the context of LLMs. Overall, Video-LLMs show stronger performance in answering incomplete question than non-LLM methods, but the specific behavior slightly varies among MCQA and OEQA. For better analysis and compari-

son, we follow (Agrawal et al., 2016) to highlight the models’ behavior at half (50%) input length.

Concretely, in MCQA, the keep rate (1 - flip rate) at this *half* point indicates that the Video-LLMs predict a fixed answer for approximately 75% (refer to SeViLA on NExT-QA) of the samples by listening to merely half the questions. This fixed answer ratio is higher than that of 60% for non-LLM method (refer to CoVGT on NExT-QA), the corresponding accuracy is also higher of 60% (*vs.* 50%). This suggests that with incomplete question inputs, video-LLMs consistently predict correct answers more so than non-LLM methods. In OEQA, the fixed answer rate of Video-LLM (FrozenBiLM) at the *half* point is about 40%, which is smaller than that of non-LLM method VIOLET2, e.g., 55%. Yet, a joint consideration of the lower accuracy ($\sim 30\%$) suggests that FrozenBiLM converges less to the wrong answers. Together with the observations of (Agrawal et al., 2016) for CNN+RNN and attention models, it seems that models with better accuracy are less likely to predict wrong answers even with incomplete question inputs.

Additionally, Video-LLMs achieve higher MCQA accuracy (e.g., $\sim 60\%$ of SeViLA) even *without* the questions. This result echoes our findings in Sec. 3.6 on video-answer short-cuts for decision making. Regarding OEQA, an interesting observation is that VIOLETv2

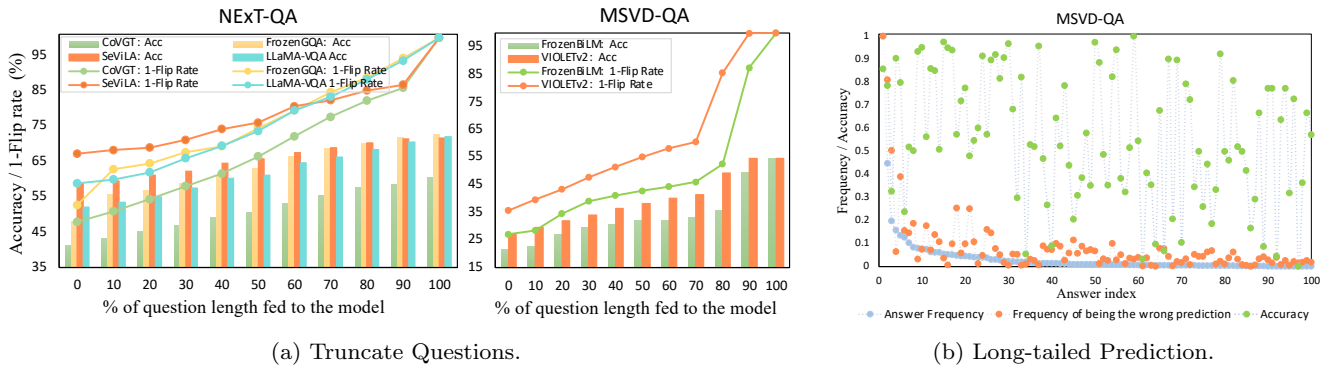


Fig. 14: Model behavior with (a) truncated question inputs and (b) long-tailed answer distribution. Results with zero-length questions in (a) depict the scenario of “*knowing the answer without or ahead of the question*”. The predictions for the answers of top-100 frequency are shown in (b), where the answers are arranged in descending order according to their frequency, *e.g.*, 0 indexes the answer of highest frequency.

outperforms FrozenBiLM when fed with incomplete questions, but such superiority gradually disappears with the increase of question words. We suspect this is because VIOLETv2 finetunes on BERT (*vs.* frozen LLMs) with masked language modelling. The masking mechanism allows cross-modal matching with partial and incomplete sentences, and may conflict with the underlying intent of the probe.

3.8 Generalizability

Video-LLMs, by virtue of using LLMs, are assumed to encode some common sense and open-world knowledge (Kojima et al., 2022; Ko et al., 2023). To that end, their decisions should be less affected by the QA training data and generalize better. Our previous probes implicitly test model generalization to a certain extent by curating new data. This section studies two classic generalization scenarios more explicitly: generalization to **long-tailed** data within dataset and generalization to **out-of-distribution** (OOD) data across datasets. Both long tails and OOD data conflict and do not reflect the training data on which the models are developed. It is worth mentioning that the general-purpose and tool-based Video-LLMs have already shown excellent zero-shot performance in our previous probes. Thus, we focus on analyzing the specialized Video-LLMs that are finetuned on the target datasets in this section.

3.8.1 Generalization to long-tailed data

For this experiment, we investigate the models’ predictions at a per-answer basis. We consider open-ended QA with close-set classification setting where each answer is treated as a class label, *e.g.* MSVD-QA (Xu et al.,

2017). Specifically, we analyze an answer’s frequency and its accuracy, as well as the frequency of it being a false positive prediction. An answer’s accuracy stands for the proportion of correctly answered questions over all questions with that answer as ground-truth answer. We experiment with FrozenBiLM and VIOLETv2 as representatives of Video-LLMs and non-LLMs for close-set classification respectively.

We present the results of FrozenBiLM in Fig. 14b. VIOLETv2 shares almost the same distribution and is omitted from the plot for clarity. The answers’ frequency distribution and accuracy distribution has a correlation coefficient of only $r = 0.2$ for both FrozenBiLM and VIOLETv2. In contrast, the coefficient value between answers’ frequency distribution and the frequency distribution of an answer being a false positive prediction is 0.9 for both methods. The experimental results suggest that there is little to no correlation between an answer’s frequency and its accuracy for both LLM and non-LLM methods. However, there is a strong positive correlation between an answer’s frequency and the frequency of it being a false positive prediction, and this stands true for both LLM- and non-LLM based methods. While we suspect that the LLM in FrozenBiLM may not be large enough ($\sim 1B$), the experiments indeed suggest that finetuned (or specialized) Video-LLMs are similar to non-LLM method in generalizing to long-tailed data distribution.

3.8.2 Generalization to OOD data

The test samples in all previous probes are either derived from the same types of questions or from the same dataset. Here, we focus on generalization across different question types and datasets.

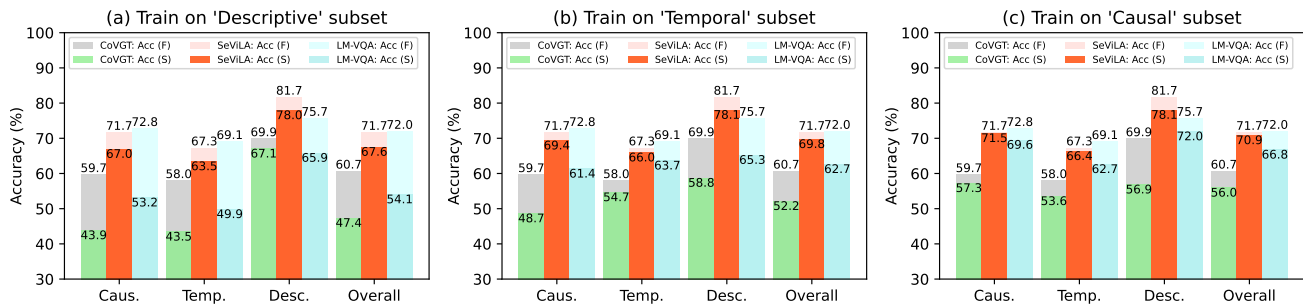


Fig. 15: Generalization across different question types. (F)/(S) denote training on the Full/Subset.

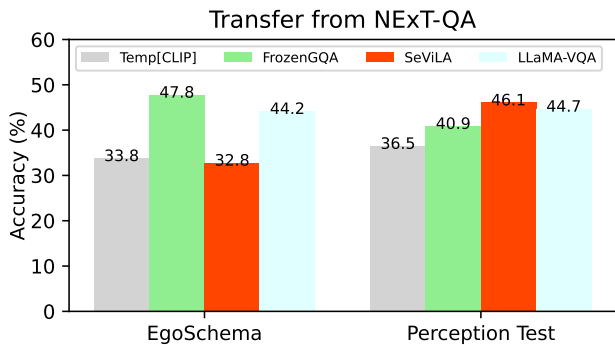


Fig. 16: Generalization across different datasets.

For different question types, we experiment with NExT-QA (Xiao et al., 2021) as it has three distinct question groups: Causal (“why and how”), Temporal (“what ... before/after/when”) and Descriptive (“what/where is”). We investigate models’ behavior when training with data from one of the three groups and testing with samples from the other two. For different datasets, we test the models pretrained on NExT-QA on two recent datasets: EgoSchema (Mangalam et al., 2023) for 1st-person view long video understanding and Perception Test (Pătrăucean et al., 2023) for fine-grained visual perception and reasoning. These datasets are selected as they are considered one of the most prominent benchmarks for understanding 1st-person view visual contents and fine-grained human-object interactions, respectively.

Fig. 15 shows that Video-LLMs generally maintain stronger QA performance when transferring across different question types compared to non-LLM method (e.g., CoVGT). A comparison among figures of (a)/(b)/(c) suggests that training on temporal/causal questions often yields better performance than training on simple descriptive questions. In particular, Video-LLMs (SeViLA and LLaMA-VQA) have marginal or no accuracy declines on descriptive questions when trained with temporal questions as opposed to training on the corresponding descriptive questions; performance even

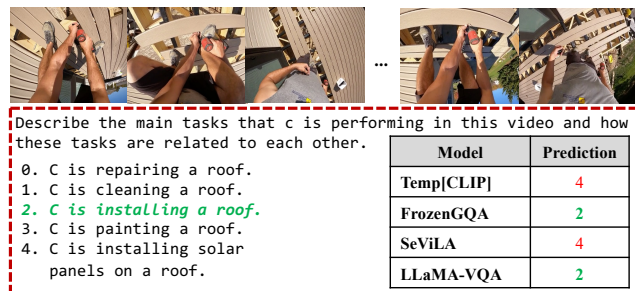


Fig. 17: Transfer the models pretrained on NExT-QA to EgoSchema.

improves when training with causal questions. While a possible reason is that there are more causal and temporal questions than descriptive questions in the training data, we intriguingly find that the non-LLM method contrasts with LLM method and achieves the highest accuracy of 67.1% (vs. 58.8% and 56.9%) on descriptive questions when trained with descriptive questions. Such discrepancy thus reflects Video-LLMs’ superior behavior in generalizing to descriptive questions even if they are not trained to do so. Yet, we note that the best results for all model across different question groups are always obtained by learning on the full training set.

Among the models, SeViLA generalize the best among question types. However, its superiority disappears when generalizing to EgoSchema (Mangalam et al., 2023). For example, its accuracy is 32.8% which is even worse than that of non-LLM method Temp[CLIP], e.g. 33.8% (refer to Fig. 16). A prediction example in Fig. 17 suggests that SeViLA fails to holistically understand the long video content. This is reasonable as SeViLA identifies only a limited number of keyframes (4 out of 32) for QA, which is a departure from EgoSchema which defines temporal certificate to challenges *long-form* video understanding. Nevertheless, all Video-LLMs remain their superior performance over non-LLM method (Temp[CLIP]) in generalizing to Perception Test (Pătrăucean et al., 2023). The observations, together with our experiments on NExT-OD

in Sec. 3.6 and the experiments in (Mangalam et al., 2023), suggest that Video-LLMs, even the specialized or finetuned ones, commonly generalize well to OOD data. Yet this is not guaranteed for each specific model.

4 Discussion

We summarize the major limitations of Video-LLMs and discuss possible directions for improvement.

Robustness and Trustworthiness. All probes showed that the open-sourced Video-LLMs be it general-purpose or fine-tuned, perform well for standard question-answering, but suffer under adversarial language modifications while being unaffected by analogous video modifications. These findings reveal a lack of robustness and interpretability and underscores the need for rationales in Video-LLM developing. Some recent studies in multimodal chain-of-thought (Wei et al., 2022; Zhang et al., 2023e; Fei et al., 2024) and modular multi-agent approaches (Min et al., 2024; Shang et al., 2024) show improved robustness and interpretability. Yet, one needs to mind the inefficiency issues of such techniques. In addition, video multimodal benchmarks are emerging (Li et al., 2024a; Fu et al., 2024; Liu et al., 2024b; Li et al., 2024b), but almost all of them target comprehensive video understanding, with little attention on interpretability. Related benchmarks such as VIP (Himakunthala et al., 2023) and NExT-GQA (Xiao et al., 2024) are thus valuable efforts in developing trustworthy Video-LLM techniques, and deserve more research efforts.

Efficient and Fine-Grained Long-Form Video Understanding. Our observations about GPT-4o’s behavior in VideoQA (refer to Fig. 1 and 5), as well as the rapid evolution of SOTA results on common VideoQA benchmarks (*e.g.*, MSVD-QA) suggests that coarse and holistic understanding of short videos (less than 20s) are solvable by scaling up existing Video-LLMs or operating powerful image MLLMs (like GPT-4o) frame by frame. Fine-Grained Long-Form Video Understanding manifest two major challenges for existing Video-LLMs:

The first is a ‘*needle in the haystack*’ challenge - search in the long video for short moments (or key frames) that carry the correct answer. Existing benchmarks such as NExT-GQA (Xiao et al., 2024) and Ego4D-QA (Datta et al., 2022) embody such challenges, yet effective techniques are lacking. Recent solutions (*e.g.*, MoReVQA (Min et al., 2024), VideoAgent (Wang et al., 2024a; Fan et al., 2024) and TravelER (Shang et al., 2024)) show promise, but they are inefficient, brute-force methods that traverse the whole video frame-by-frame (or segment-by-segment) and perform

LLM inference multiple times. Thus, efficiently understanding long videos is still an open problem.

The second challenge is fine-grained understanding of very long-form videos, with large temporal certificates, as defined in EgoSchema (Mangalam et al., 2023). Our studies in Sec. 3.8.2 show that existing Video-LLMs targeting short clips do not generalize well to such videos. The aforementioned traversal solutions are ineffective as the task requires reasoning over and weaving together multiple frames or segments to achieve holistic understanding. Recent memory- and caption-based solutions (*e.g.*, MoReVQA (Min et al., 2024), LLoVi (Zhang et al., 2023a) and VideoAgent (Fan et al., 2024)) as well as the direct long-frame-encoding solutions (*e.g.*, LongVA (Zhang et al., 2024a)) offer some insights to handle long videos, but understanding the videos in efficient and fine-grained manner remains a key challenge.

Egocentric and Embodied QA. We primarily analyzed VideoQA with datasets featuring third-person view (exo-centric) videos and QAs, be it effective as benchmark evaluation for Video-LLMs. Yet noteworthy an important real-world application for VideoQA is geared towards reliable embodied QA assistance (Grauman et al., 2022; Majumdar et al., 2024). In this regard, first-person view (ego-centric) VideoQA are of greater interest and relevance. Sec. 3.8.2 shows that Video-LLMs pre-trained on third-person view VideoQA datasets can generalize to these application scenarios, but the performance are weak compared with the tool-based Video-LLMs (Zhang et al., 2023a) that directly use ego-centric pretrained visual descriptions (Zhao et al., 2023), as well as the well-prompted general-purpose MLLMs (*e.g.* GPT-4o) (Liu et al., 2024a). Therefore, the efforts of leveraging existing MLLMs for ego-centric VideoQA will be of critical importance to initiate successful embodied assistance applications.

5 Conclusion

This paper has vetted Video-LLMs’ performance in VideoQA by probing their success and failure modes with well-designed adversarial tests. While Video-LLMs generally show better QA accuracy, the decrease rates and flip rates align with or even higher than non-LLM methods when faced with adversarial challenges. Specifically, Video-LLMs show significant limitation in coping with video temporality, of both reasoning the chronological content order and grounding the temporal moments to substantiate the answers. Also, they are unresponsive towards video perturbation while being susceptible to simple language variations of questions and candidate answers. Additionally, Video-LLMs, after finetuned, are not necessarily generalize better. Un-

derstanding these limitations is crucial for developing future Video-LLMs and VideoQA techniques, where we also conclude some promising directions to proceed.

Limitations We note that Video-LLM research is emerging, and there are other powerful models we may have missed testing. We thus release all our test data: <https://github.com/doc-doc/VideoQA-LLMs>.

Acknowledgements We greatly thank OpenAI for offering us with research access API credits for this project.

References

- Agrawal A, Batra D, Parikh D (2016) Analyzing the behavior of visual question answering models. In: Conference on Empirical Methods in Natural Language Processing (EMNLP), pp 1955–1960
- Alayrac JB, Donahue J, Luc P, Miech A, Barr I, Hasson Y, Lenc K, Mensch A, Millican K, Reynolds M, et al. (2022) Flamingo: a visual language model for few-shot learning. *Advances in Neural Information Processing Systems (NeurIPS)* 35:23716–23736
- Antol S, Agrawal A, Lu J, Mitchell M, Batra D, Zitnick CL, Parikh D (2015) Vqa: Visual question answering. In: Proceedings of the IEEE international conference on computer vision (ICCV), pp 2425–2433
- Bagad P, Tapaswi M, Snoek CG (2023) Test of time: Instilling video-language models with a sense of time. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 2503–2516
- Bai Z, Wang P, Xiao T, He T, Han Z, Zhang Z, Shou MZ (2024) Hallucination of multimodal large language models: A survey. arXiv preprint arXiv:240418930
- Buch S, Eyzaguirre C, Gaidon A, Wu J, Fei-Fei L, Niebles JC (2022) Revisiting the "video" in video-language understanding. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition (CVPR), pp 2917–2927
- Chen X, Djolonga J, Padlewski P, Mustafa B, Changpinyo S, Wu J, Ruiz CR, Goodman S, Wang X, Tay Y, et al. (2023) Pali-x: On scaling up a multilingual vision and language model. arXiv preprint arXiv:230518565
- Chiang WL, Li Z, Lin Z, Sheng Y, Wu Z, Zhang H, Zheng L, Zhuang S, Zhuang Y, Gonzalez JE, Stolica I, Xing EP (2023) Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality. URL <https://lmsys.org/blog/2023-03-30-vicuna/>
- Chung HW, Hou L, Longpre S, Zoph B, Tay Y, Fedus W, Li Y, Wang X, Dehghani M, Brahma S, et al. (2022) Scaling instruction-finetuned language models. arXiv preprint arXiv:221011416
- Dai W, Li J, Li D, Tiong AMH, Zhao J, Wang W, Li B, Fung P, Hoi S (2023) Instructblip: towards general-purpose vision-language models with instruction tuning. In: Proceedings of the 37th International Conference on Neural Information Processing Systems (NeurIPS), pp 49250–49267
- Datta S, Dharur S, Cartillier V, Desai R, Khanna M, Batra D, Parikh D (2022) Episodic memory question answering. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 19119–19128
- Devlin J, Chang MW, Lee K, Toutanova K (2018) Bert: Pre-training of deep bidirectional transformers for language understanding. arXiv preprint arXiv:181004805
- Dosovitskiy A, Beyer L, Kolesnikov A, Weissenborn D, Zhai X, Unterthiner T, Dehghani M, Minderer M, Heigold G, Gelly S, et al. (2021) An image is worth 16x16 words: Transformers for image recognition at scale. In: International Conference on Learning Representations (ICLR)
- Dubey A, Jauhri A, Pandey A, Kadian A, Al-Dahle A, Letman A, Mathur A, Schelten A, Yang A, Fan A, et al. (2024) The llama 3 herd of models. arXiv preprint arXiv:240721783
- Fan Y, Ma X, Wu R, Du Y, Li J, Gao Z, Li Q (2024) Videoagent: A memory-augmented multimodal agent for video understanding. arXiv preprint arXiv:240311481
- Fei H, Wu S, Ji W, Zhang H, Zhang M, Lee ML, Hsu W (2024) Video-of-thought: Step-by-step video reasoning from perception to cognition. In: Forty-first International Conference on Machine Learning (ICML)
- Fu C, Dai Y, Luo Y, Li L, Ren S, Zhang R, Wang Z, Zhou C, Shen Y, Zhang M, et al. (2024) Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. arXiv preprint arXiv:240521075
- Fu TJ, Li L, Gan Z, Lin K, Wang WY, Wang L, Liu Z (2021) Violet: End-to-end video-language transformers with masked visual-token modeling. arXiv preprint arXiv:211112681
- Fu TJ, Li L, Gan Z, Lin K, Wang WY, Wang L, Liu Z (2023) An empirical study of end-to-end video-language transformers with masked visual modeling. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 22898–22909
- Goyal Y, Khot T, Summers-Stay D, Batra D, Parikh D (2017) Making the v in vqa matter: Elevating the role of image understanding in visual question an-

- swering. In: IEEE Conference on Computer Vision and Pattern Recognition (CVPR), pp 6904–6913
- Grauman K, Westbury A, Byrne E, Chavis Z, Furnari A, Girdhar R, Hamburger J, Jiang H, Liu M, Liu X, et al. (2022) Ego4d: Around the world in 3,000 hours of egocentric video. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp 18995–19012
- He K, Zhang X, Ren S, Sun J (2016) Deep residual learning for image recognition. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), pp 770–778
- He P, Liu X, Gao J, Chen W (2020) DeBERTa: Decoding-enhanced bert with disentangled attention. arXiv preprint arXiv:200603654
- Himakunthala V, Ouyang A, Rose D, He R, Mei A, Lu Y, Sonar C, Saxon M, Wang W (2023) Let’s think frame by frame with vip: A video infilling and prediction dataset for evaluating video chain-of-thought. In: Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP), pp 204–219
- Hochreiter S, Schmidhuber J (1997) Long short-term memory. *Neural computation* 9(8):1735–1780
- Hu EJ, Shen Y, Wallis P, Allen-Zhu Z, Li Y, Wang S, Wang L, Chen W (2021) Lora: Low-rank adaptation of large language models. arXiv preprint arXiv:210609685
- Jang Y, Song Y, Yu Y, Kim Y, Kim G (2017) Tgifqa: Toward spatio-temporal reasoning in visual question answering. In: Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR), pp 2758–2766
- Jang Y, Song Y, Kim CD, Yu Y, Kim Y, Kim G (2019) Video question answering with spatio-temporal reasoning. *International Journal of Computer Vision (IJCV)* 127:1385–1412
- Kervadec C, Antipov G, Baccouche M, Wolf C (2021) Roses are red, violets are blue... but should vqa expect them to? In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 2776–2785
- Kim W, Choi C, Lee W, Rhee W (2024) An image grid can be worth a video: Zero-shot video question answering using a vlm. arXiv preprint arXiv:240318406
- Ko D, Lee J, Kang WY, Roh B, Kim H (2023) Large language models are temporal and causal reasoners for video question answering. In: Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP), pp 4300–4316
- Kojima T, Gu SS, Reid M, Matsuo Y, Iwasawa Y (2022) Large language models are zero-shot reasoners. *Advances in neural information processing systems (NeurIPS)* 35:22199–22213
- Le TM, Le V, Venkatesh S, Tran T (2020) Hierarchical conditional relation networks for video question answering. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 9972–9981
- Lei J, Li L, Zhou L, Gan Z, Berg TL, Bansal M, Liu J (2021) Less is more: Clipbert for video-and-language learning via sparse sampling. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 7331–7341
- Lei J, Berg T, Bansal M (2023) Revealing single frame bias for video-and-language learning. In: Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pp 487–507
- Li J, Li D, Savarese S, Hoi S (2023a) Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In: International conference on machine learning (ICML), PMLR, pp 19730–19742
- Li K, He Y, Wang Y, Li Y, Wang W, Luo P, Wang Y, Wang L, Qiao Y (2023b) Videochat: Chat-centric video understanding. arXiv preprint arXiv:230506355
- Li K, Wang Y, Li Y, Wang Y, He Y, Wang L, Qiao Y (2023c) Unmasked teacher: Towards training-efficient video foundation models. In: Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)
- Li K, Wang Y, He Y, Li Y, Wang Y, Liu Y, Wang Z, Xu J, Chen G, Luo P, et al. (2024a) Mvbench: A comprehensive multi-modal video understanding benchmark. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 22195–22206
- Li L, Chen YC, Cheng Y, Gan Z, Yu L, Liu J (2020) Hero: Hierarchical encoder for video+ language omni-representation pre-training. In: Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), pp 2046–2065
- Li S, Li L, Ren S, Liu Y, Liu Y, Gao R, Sun X, Hou L (2023d) Vitatecs: A diagnostic dataset for temporal concept understanding of video-language models. arXiv preprint arXiv:231117404
- Li Y, Wang X, Xiao J, Ji W, Chua TS (2022) Invariant grounding for video question answering. In: IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 2928–2937
- Li Y, Wang C, Jia J (2023e) Llama-vid: An image is worth 2 tokens in large language models. arXiv preprint arXiv:231117043

- Li Y, Wang X, Xiao J, Ji W, Chua TS (2023f) Transformer-empowered invariant grounding for video question answering. *IEEE Transactions on Pattern Analysis and Machine Intelligence*
- Li Y, Xiao J, Feng C, Wang X, Chua TS (2023g) Discovering spatio-temporal rationales for video question answering. In: *IEEE/CVF International Conference on Computer Vision (ICCV)*, pp 13869–13878
- Li Y, Chen X, Hu B, Wang L, Shi H, Zhang M (2024b) Videovista: A versatile benchmark for video understanding and reasoning. *arXiv preprint arXiv:240611303*
- Lin B, Zhu B, Ye Y, Ning M, Jin P, Yuan L (2023) Video-llava: Learning united visual representation by alignment before projection. *arXiv preprint arXiv:231110122*
- Liu B, Dong Y, Wang Y, Rao Y, Tang Y, Ma WC, Krishna R (2024a) Coarse correspondence elicit 3d spacetime understanding in multimodal language model. *arXiv preprint arXiv:240800754*
- Liu H, Li C, Wu Q, Lee YJ (2023) Visual instruction tuning. *Advances in neural information processing systems (NeurIPS)* 36
- Liu Y, Ott M, Goyal N, Du J, Joshi M, Chen D, Levy O, Lewis M, Zettlemoyer L, Stoyanov V (2019) Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:190711692*
- Liu Y, Li S, Liu Y, Wang Y, Ren S, Li L, Chen S, Sun X, Hou L (2024b) Tempcompass: Do video llms really understand videos? *arXiv preprint arXiv:240300476*
- Liu Z, Ning J, Cao Y, Wei Y, Zhang Z, Lin S, Hu H (2022) Video swin transformer. In: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition (CVPR)*, pp 3202–3211
- Maaz M, Rasheed H, Khan S, Khan FS (2023) Videochatgpt: Towards detailed video understanding via large vision and language models. *arXiv preprint arXiv:230605424*
- Majumdar A, Ajay A, Zhang X, Putta P, Yenamandra S, Henaff M, Silwal S, Mcvay P, Maksymets O, Arnaud S, et al. (2024) Openeqa: Embodied question answering in the era of foundation models. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 16488–16498
- Mangalam K, Akshulakov R, Malik J (2023) Egoschema: A diagnostic benchmark for very long-form video language understanding. In: *The 37th Conference on Neural Information Processing Systems (NeurIPS) Track on Datasets and Benchmarks*.
- Min J, Buch S, Nagrani A, Cho M, Schmid C (2024) Morevqa: Exploring modular reasoning models for video question answering. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 13235–13245
- Niu Y, Tang K, Zhang H, Lu Z, Hua XS, Wen JR (2021) Counterfactual vqa: A cause-effect look at language bias. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 12700–12710
- OpenAI (2023) Gpt-4 technical report. [2303.08774](https://arxiv.org/abs/2303.08774)
- Pătrăucean V, Smaira L, Gupta A, Contente AR, Markeeva L, Banarse D, Koppula S, Heyward J, Malinowski M, Yang Y, et al. (2023) Perception test: A diagnostic benchmark for multimodal video models. In: *The 37th Conference on Neural Information Processing Systems (NeurIPS) Track on Datasets and Benchmarks*.
- Radford A, Kim JW, Hallacy C, Ramesh A, Goh G, Agarwal S, Sastry G, Askell A, Mishkin P, Clark J, et al. (2021) Learning transferable visual models from natural language supervision. In: *International Conference on Machine Learning (ICML)*, PMLR, pp 8748–8763
- Seo PH, Nagrani A, Schmid C (2021) Look before you speak: Visually contextualized utterances. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 16877–16887
- Shah M, Chen X, Rohrbach M, Parikh D (2019) Cycle-consistency for robust visual question answering. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 6649–6658
- Shang C, You A, Subramanian S, Darrell T, Herzig R (2024) Traveler: A multi-lmm agent framework for video question-answering. *arXiv preprint arXiv:240401476*
- Sun C, Myers A, Vondrick C, Murphy K, Schmid C (2019) Videobert: A joint model for video and language representation learning. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pp 7464–7473
- Sun Q, Fang Y, Wu L, Wang X, Cao Y (2023) Eva-clip: Improved training techniques for clip at scale. *arXiv preprint arXiv:230315389*
- Surís D, Menon S, Vondrick C (2023) Vipergpt: Visual inference via python execution for reasoning. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp 11888–11898
- Tang Y, Bi J, Xu S, Song L, Liang S, Wang T, Zhang D, An J, Lin J, Zhu R, et al. (2023) Video understanding with large language models: A survey. *arXiv preprint arXiv:231217432*

- Team G, Anil R, Borgeaud S, Wu Y, Alayrac JB, Yu J, Soricut R, Schalkwyk J, Dai AM, Hauth A, et al. (2023) Gemini: a family of highly capable multimodal models. arXiv preprint arXiv:231211805
- Touvron H, Lavril T, Izacard G, Martinet X, Lachaux MA, Lacroix T, Rozière B, Goyal N, Hambro E, Azhar F, et al. (2023) Llama: Open and efficient foundation language models. arXiv preprint arXiv:230213971
- Wang X, Zhang Y, Zohar O, Yeung-Levy S (2024a) Videoagent: Long-form video understanding with large language model as agent. arXiv preprint arXiv:240310517
- Wang Z, Yu S, Stengel-Eskin E, Yoon J, Cheng F, Bertasius G, Bansal M (2024b) Videotree: Adaptive tree-based video representation for llm reasoning on long videos. arXiv preprint arXiv:240519209
- Wei J, Wang X, Schuurmans D, Bosma M, Xia F, Chi E, Le QV, Zhou D, et al. (2022) Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems (NeurIPS)* 35:24824–24837
- Xiao J, Shang X, Yao A, Chua TS (2021) Next-qa: Next phase of question-answering to explaining temporal actions. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 9777–9786
- Xiao J, Yao A, Liu Z, Li Y, Ji W, Chua TS (2022a) Video as conditional graph hierarchy for multi-granular question answering. In: *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, vol 36, pp 2804–2812
- Xiao J, Zhou P, Chua TS, Yan S (2022b) Video graph transformer for video question answering. In: *European Conference on Computer Vision (ECCV)*, Springer, pp 39–58
- Xiao J, Zhou P, Yao A, Li Y, Hong R, Yan S, Chua TS (2023) Contrastive video question answering via video graph transformer. *IEEE Transactions on Pattern Analysis and Machine Intelligence (TPAMI)* 45(11):13265–13280, DOI 10.1109/TPAMI.2023.3292266
- Xiao J, Yao A, Li Y, Chua TS (2024) Can i trust your answer? visually grounded video question answering. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 13204–13214
- Xu D, Zhao Z, Xiao J, Wu F, Zhang H, He X, Zhuang Y (2017) Video question answering via gradually refined attention over appearance and motion. In: *Proceedings of the 25th ACM international conference on Multimedia*, pp 1645–1653
- Yang A, Miech A, Sivic J, Laptev I, Schmid C (2021) Just ask: Learning to answer questions from millions of narrated videos. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pp 1686–1697
- Yang A, Miech A, Sivic J, Laptev I, Schmid C (2022) Zero-shot video question answering via frozen bidirectional language models. *Advances in Neural Information Processing Systems (NeurIPS)* 35:124–141
- Yu S, Cho J, Yadav P, Bansal M (2023) Self-chained image-language model for video localization and question answering. In: *The 37th Conference on Neural Information Processing Systems (NeurIPS)*
- Yu Z, Xu D, Yu J, Yu T, Zhao Z, Zhuang Y, Tao D (2019) Activitynet-qa: A dataset for understanding complex web videos via question answering. In: *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, vol 33, pp 9127–9134
- Zhang C, Lu T, Islam MM, Wang Z, Yu S, Bansal M, Bertasius G (2023a) A simple llm framework for long-range video question-answering. arXiv preprint arXiv:231217235
- Zhang H, Li X, Bing L (2023b) Video-llama: An instruction-tuned audio-visual language model for video understanding. arXiv preprint arXiv:230602858 URL <https://arxiv.org/abs/2306.02858>
- Zhang P, Zhang K, Li B, Zeng G, Yang J, Zhang Y, Wang Z, Tan H, Li C, Liu Z (2024a) Long context transfer from language to vision. arXiv preprint arXiv:240616852
- Zhang R, Han J, Liu C, Gao P, Zhou A, Hu X, Yan S, Lu P, Li H, Qiao Y (2023c) Llama-adapter: Efficient fine-tuning of language models with zero-init attention. arXiv preprint arXiv:230316199
- Zhang R, Han J, Zhou A, Hu X, Yan S, Lu P, Li H, Gao P, Qiao Y (2024b) Llama-adapter: Efficient fine-tuning of language models with zero-init attention. *ICLR*
- Zhang X, Zhang F, Xu C (2023d) Reducing vision-answer biases for multiple-choice vqa. *IEEE Transactions on Image Processing (TIP)* pp 4621–4634
- Zhang X, Zhang F, Xu C (2024c) Next-ood: Overcoming dual multiple-choice vqa biases. *IEEE Transactions on Pattern Analysis and Machine Intelligence (TPAMI)* 46(4):1913–1931, DOI 10.1109/TPAMI.2023.3269429
- Zhang Y, Huang X, Ma J, Li Z, Luo Z, Xie Y, Qin Y, Luo T, Li Y, Liu S, et al. (2024d) Recognize anything: A strong image tagging model. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp 1724–1732

- Zhang Y, Li B, Liu h, Lee Yj, Gui L, Fu D, Feng J, Liu Z, Li C (2024e) Llava-next: A strong zero-shot video understanding model. URL <https://llava-vl.github.io/blog/2024-04-30-llava-next-video/>
- Zhang Z, Zhang A, Li M, Zhao H, Karypis G, Smola A (2023e) Multimodal chain-of-thought reasoning in language models. arXiv preprint arXiv:230200923
- Zhao Y, Misra I, Krähenbühl P, Girdhar R (2023) Learning video representations from large language models. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp 6586–6597
- Zhong Y, Xiao J, Ji W, Li Y, Deng W, Chua TS (2022) Video question answering: Datasets, algorithms and challenges. In: Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing (EMNLP), pp 6439–6455
- Zhu B, Lin B, Ning M, Yan Y, Cui J, Wang H, Pang Y, Jiang W, Zhang J, Li Z, et al. (2023) Languagebind: Extending video-language pretraining to n-modality by language-based semantic alignment. arXiv preprint arXiv:231001852

In this appendix, we first introduce our data curation strategy in Sec. .1, .2 and .3. Then, we detail our approach of adopting GPT-4o for VideoQA in Sec. .4.

.1 Temporal Probes

We adopt different methods to generate the **Temporal Exchange** and **Temporal Description** data described in Sec. 3.4. Yet, both are followed with human (the first 4 authors) checking and correction to ensure the quality. The details are as follows:

To get the data of **Temporal Exchange**, we prompt GPT-4 by giving the original question and correct answer pairs. In our implementation, we find it is better to use different prompts to handle questions about “before/after” and questions about “when/while”. Specific prompts are presented in Tab. 5. We find the generated QAs are quite good and only do small effort in correction.

To get the data of **Temporal Description**, we directly parse the syntactic structure of the questions according to the time signal words “before/after/when/while”. Specifically, we keep the question part ahead of the time words. For instance, we derive the new question “what did the person do?” from the original question “what did the person do after she took the black item away?”. To curate the options, we use different time words to combine the two terms “she took the black item away” and “pat animal”, and ensure only one combination is correct regarding the content order of the video. Also, we keep the position of the correct answer unchanged. Additionally, we find there are temporal location descriptions for some questions, such as “... in the middle of the video”. To handle this, we trim off such description and append it behind the new question. Note that the grammatical issues such as “before pat animal” *vs.* “before patting animal” are ignored, since they do not affect the overall meanings of the questions and answers.

.2 Multi-Choice Short-Cuts

To test the short-cuts in candidate answers, we obtain the edited Question-Answer (QA) and Video-Answer (VA) data by prompting GPT-4, again followed by human checking and correction. Our specific prompts are listed in Tab. 6. For human checking, we specifically check the edited negative options to ensure that they are actual wrong answers with regard to the question and video contents.

.3 Robustness

To obtain questions with **spoken** prefixes, we first prompt GPT-4 to generate a set of spoken phrases that humans typically use before asking questions as shown in Tab. 4. Then, we randomly select from these spoken phrases and prepend them to the questions. To obtain the **rephrased** questions, we simply prompt GPT-4 using the instructions specified at the bottom of Tab. 6. We find the generated questions are quite good and only do small correction.

Table 4: Examples of spoken prefixes.

Can I ask you a quick question
 Would you mind if I asked
 Could I pick your brain for a second?
 I hope you don't mind me asking, but
 I've been meaning to ask you
 Do you have a moment to answer a question?
 Can I get your answer on
 Would you be able to answer
 I need your answer on
 I'm trying to find out
 May I ask for your answer on
 Could you help me understand
 Is it okay if I ask
 I'm curious about
 Would it be alright if I ask
 I've got a question for you.
 Could you clarify something for me?
 Do you know
 I want to know
 Can you tell me
 Would you happen to know
 May I know
 Could you please let me know
 Could you please tell me
 ...

.4 GPT-4o for VideoQA

Following popular methods, we first decode each video at 3 frames per second (fps) and then uniformly sample 32 video frames. We then feed all of the sampled 32 frames together with the question and answer into GPT-4o and prompt it to answer the question based on the sequence of image contents. Specific prompts are shown in Tab. 7. Particularly, for the PosVQA experiment described in Sec. 3.5, we sample all frames (after decoding at 3 fps) from the positive temporal moments and uniformly sample 32 frames if the total frames of a segment is large than 32. This is because we find that, for a non-trivial number of samples, only a single frame is positive if we uniformly sample 32 frames from the whole video. Finally, in all experiments, we only experiment with 40% of the original data considering the time and API expenses. Also, we choose not to perform GPT-4o on open-ended QA for answer evaluation issues.

Table 5: The list of instructions for prompting GPT-4 to produce the temporal probing data. Note that the QA examples in the prompts may vary a little bit to cope with all samples.

1. **Temporal Exchange (before/after):** “ You are an excellent video question generator. Please help to change the before (after) questions into after (before) ones.
Examples:
Input: "what did the lady do before wiping the baby’s mouth? Take napkin."
Output: "what did the lady do after taking the napkin? Wipe the baby’s mouth."
Input: "What did the man in grey do before the plane took off? Hold the plan."
Output: "What happened to the plane after the man holds the plane? Plane take off."
Input: "what was the boy in yellow doing before the boy in blue turned his head behind at the middle? Pick up something from ground."
Output: "What was the boy in blue doing after the boy in yellow picks something up from the ground at the middle? Turn his head behind."
Input: "what did the lady in blue do when she reached the stairs? Sit on stairs."
Output: "What did the lady in blue do before she sits on stairs? Reach the stairs."
I will give you the original question-answer pairs, please only return the generated QA pair. The answer should start after the '?' . ”
2. **Temporal Exchange (when/while):** “ You are an excellent video question generator. Please help to change the temporal question-answer pairs into different ones. For example, "what does A do when/while B ... ” should be changed to "what does (happened to) B do when/while A ...". Make sure the generated question-answer pair share the same video content with the input question-answer pair. The generated questions should be natural and meaningful.
Examples:
Input: "what did the girl do when the lady was patting the dog at the start? Walk across."
Output: "what did the lady do when the girl walked across at the start? Pat the dog."
Input: "What does the man in blue do when the car titles at a sharp angle near the end? stand up."
Output: "what happened to the car when the man in blue stand up near the end? Car titles at a sharp angle."
Input: "what happened to the man in grey when the man in blue socks jump onto the man in grey? carry him."
Output: "What did the man in blue do before the man in grey carry him? Jump onto the man in grey."
Input: "what happened to the man in grey when the man in blue socks jump onto the man in grey? carry him."
Output: "What did the man in blue do before the man in grey carry him? Jump onto the man in grey."
I will give you the original question-answer pairs, please generate and only return the QA pair. The answer should start after the '?' ”

Table 6: The list of instructions for prompting GPT-4 to finding and mitigating QA and VA short-cuts, as well as for rephrasing questions.

1. **QA short-cuts:** “You are an excellent video question generator. I need you help to amend the multiple-choice answers for the question. All candidate answers should contain the key words from the question. The edited answers should be succinct as the original ones, with each adhering to 2 to 6 words. For example: the original question is ‘What did the person do after the animal started sniffing the black item on the bed?’ and the options are ‘[jump on it, changing diaper, remove black item, play with toy, moves away]’. The refined options should be: [jump on bed, changing diaper for animal, remove black item, play with black toy, moves away from bed]. I will give you original questions and corresponding options. please return the refined options only. If most of the original options contain the key words from the question, then please return an empty list ‘[]’.”
2. **VA short-cuts:** “You are an excellent video question generator. I need your help to amend the multiple-choice answers for the question. Do small edit to ensure each answer in the options correlates to the video labels but differ from each other. The edited answers should be succinct as the original ones, with each adhering to 1 to 6 words and keep the same order. For example, the video labels are: [gift, doorway, doll, girl, boy, video game, stool, grandmother, treat, couch, floor, picture frame, tree, christmas, pink, christmas tree, woman, toy, chair, walk, mother]. The original question is: ‘why did the boy pick up one present from the group of them and move to the sofa’, and the options are: [share with girl, approach lady sitting there, unwrap it, playing with toy train, gesture something]. Example of well-refined options is: [share with girl, approach lady sitting on sofa, unwrap gift, playing with toy train, gesture towards woman]. If the answer already relates to the video labels, keep it unchanged. I will give you the original questions, corresponding answer options and video labels. Please only return the amended options without other context”
3. **Question Rephrase:** “You are an excellent video question generator. I need your assistance to rephrase the given question to another one with the same meaning but with different language format. For instance, if the original question is ‘why did the baby cry?’, well-generated questions could be ‘what caused the infant to weep?’ or ‘Why is the kid crying’. Please return 1 best rephrased question for each question I give to you.”

Table 7: Prompts for GPT-4o to perform VideoQA. For different experiments, we will replace the example inputs and outputs with the respective QAs in that experiments. In particular, for visual grounding experiment, we find that the highlighted sentence is very important to achieve better QA performance, regardless of whether performing grounding.

“You are excellent at answering video questions. Task:
 For an input question and 5 optional answers, you need to output the key (chosen from 0 to 4) of the correct answer based on the sequence of image contents. **You also need to output an index interval between 0 to 31 (or the total number of images) , which indicates the images you based on to get the correct answer.** The image sequence are sampled video frames and are sorted in time order.
 Examples:
 Input: why does the lady wipe the baby’s mouth? "0": "baby spits out milk.", "1": "chocolate stains.", "2": "strawberry stains.", "3": "there was paint on his face.", "4": "there was water spills."
 Output: "answer": 0, "images": [14,15]
 Input: how did the baby move up the stairs near the end of the video? "0": "lady carried her.", "1": "walk up.", "2": "ran up.", "3": "man hold her up.", "4": "crawl up."
 Output: "answer": 4, "images": [15,31]
 Input: What did the lady do after wiping the baby’s mouth? "0": "Touch the baby again.", "1": "Turn away.", "2": "Adjust the baby in grey.", "3": "Smile.", "4": "Take napkin."
 Output: "answer": 4, "images": [15,15]
 - I will give you question and options. ****Only output the correct answer key and index interval.****
 Input: ”