

# Enhanced Semantic Graph Based Approach With Sentiment Analysis For User Interest Retrieval From Social Sites

USAMA AHMED JAMAL<sup>1,2</sup>

<sup>1</sup>Glamourexdesigns Westheimer Rd, ste M Houston Texas 77082 United States (usama@glamourexdrapes.com)

<sup>2</sup>Department of Computer Science and Engineering, HITEC University, Taxila 47080 Pakistan

Corresponding author: Usama Ahmed Jamal (e-mail: samusamaa@gmail.com)

This research was conducted as part of Master Thesis in Computer Science by the first author at HITEC University Taxila.

arXiv:2408.04395v1 [cs.SE] 8 Aug 2024

## ABSTRACT

Blogs and social networking sites serve as a platform to the users for expressing their interests, ideas and thoughts. Targeted marketing uses the recommendation systems for suggesting their services and products to the users or clients. So the method used by target marketing is extraction of keywords and main topics from the user generated texts. Most of conventional methods involve identifying the personal interests just on the basis of surveys and rating systems. But the proposed research differs in manner that it aim at using the user generated text as a source medium for identifying and analyzing the personal interest as a knowledge base area of users. Semantic graph based approach is proposed research work that identifies the references of clients and users by analyzing their own texts such as tweets. The keywords need to be extracted from the text generated by the user on the social networking sites. This can be made possible by using several algorithms that extracts the keywords automatically from the available content provided by the user. Based on frequency and degree it ranks the extracted keywords. Furthermore, semantic graph based model assists in providing useful suggestions just by extracting the interests of users by analyzing their contents from social media. In this approach graph comprises of nodes and edges where nodes represents the keywords extracted by the algorithm and edges shows the semantic connection between the nodes. The method does not require internet related user activities like surveys or ratings to gather user interest related information.

**INDEX TERMS** Semantic Graph, Social Media, Semantic Analysis, Web Mining

## I. INTRODUCTION

In the current era, the use of internet is increasing more rapidly as the amount and complexity of information and web documents processed on internet are growing day by day. So, it becomes difficult for user to extract the useful information from huge source of web content. Filtering is required for efficient information retrieval. For searching the documents from web search engines or extracting any useful information from documents, or social sites keywords are preferred as they assist in summarizing the concept of document. But in the current era, the semantics technology is considered to be the advanced version that gives relevant results according to the queries and preferences of the users. The intention of the semantic based search is to prioritize the search results based on the semantics of the query and the content. They retrieve efficient results and save the user time and improve the efficiency of system. The use of social networking sites

is rapidly increasing and the customers and companies can used it as a platform for interaction. Users may share their common interests using social sites. The significant results according to the preferences of users from social platforms can be achieved and gathered by analyzing the content of ideas expressed by the user on their social sites.

The problem area is that the system must provide the information regarding the personal interest of users. Currently, researchers are concentrating much more on the recommending and rating systems as well as on personal service systems. There are wide ranges of mini-blogs, shopping, music, movies, and news related sites that recommend their products and updates to the users. For business purposes the use of social networking sites are tremendously evolving. All of the restaurants, hotels gain the popularity through recommendation and personalized systems. Most of the systems recommend their products or services based on their previous

search history and purchased items history. But the problem or question arise is that either the system is providing the knowledge related to the users interest or according to their own considerations.

Most of the existing recommending systems suggest useless services to the users just because of their poor knowledge area. Self-interest of end-user is essential requirement for any good recommending system and for that purpose the knowledge about users interests is required. Traditional systems emphasize on gathering the information by surveys, ratings, and tracking users behavior and they are not concerned with the text or content the user shares or updates on their social sites or blogs. The proposed research is concerned with identifying the areas that are of users interest. For extracting the topic related to users interest multi-purpose automatic topic indexing algorithm is suitable. A social connection serves as a key concept that assists in extracting user interest from social networks. Graphs are used in which users are shown with nodes and edges represent the connection between the users. But considering the semantic similarity of edges is mandatory and useful concept for semantic based search. To generate user interest graph the proposed technique here is semantic graph based approach. The main contributions are as follow:

- 1) To extract the user interest from the content or social sites according to their preferences, user interest models are generated. This assists in improving the accuracy in a manner that user will acquire the accurate search results, products or services.
- 2) For keyword extraction using Multi-purpose automatic topic indexing (Muai) algorithm would be beneficial in a manner that it provides the features of increase phrase length, node degree, and semantic relatedness as compared to RAKE algorithm used in baseline approach which has certain limitations of accuracy.
- 3) Zemanta used serve as web service that also links to DBpedia. It provides more accuracy and used for data (extracted keyword tweets) analysis purpose and serves as text analysis tool too. This would be helpful in extracting the information related to users interest. Sentiment analysis introduce in proposed research depicts the feature in which opinion score used will determine the positive score or negative score of the product according to the users interest.

## II. LITERATURE REVIEW

L.M. Jose et al. [1] proposed a technique based on semantic graph generation on the basis of users interest. By analyzing the content of users tweet the preferences are gathered. Product based graph is also generated and by matching the user interests graph and product graph the outcomes are predicted according to the users preferences. The algorithm used for keyword extraction in this approach is RAKE and the DBpedia is used for Wikipedia links. W. Yuezhong, et al. [2] presented the technique for obtaining high quality data according to users preferences from huge source of information. In this approach user interest model is combined with ontology semantic tree and vector space model. For updating the users interest forgetting function is used. The architecture of user interest model based on VSM and ontology comprises

of three layers: input layer, processing layer and output layer. The input layer is primarily concerned with data acquisition; processing layer is concerned with preprocessing and data processing mechanisms whereas the output layer represents the user interest model. A. Akay et al. [3] presented weighted network model and applied the technique on health social network site.

In order to describe the users interaction and extract the knowledge content from posts the approach is used and comprises of use activity, network clustering and module analysis. R.Nithish et al. [4] proposed an approach for mining the opinions or reviews given by the users about the products feature. For rating the features of product sentiment analysis is performed and the domain ontology is used to accumulate the opinions embedded with product feature description. Basically the model has three main phases. In first step domain ontology is created and then the relevant reviews are extracted from twitter. Finally sentiment analysis needs to be performed. The technique for extracting the keywords by using the graph based model comprised of nodes and edges was also studied. Nodes contain the documents and edges represent the relationship that exists between the words of documents. S. Adalbjornsson et al. [5] presented extension of Gaussian emission probabilistic latent semantic analysis model which shows improved accuracy than the prior latent semantic model by providing the recommendations according to the preferences of users.

Furthermore, two types of recommendation systems are discussed content based and collaborative filtering. In content based the preferences of users analyzed from the meta-data of items on the basis of items or products they had purchased or liked in the past. Collaborative filtering predicts the services based on analyzing the users interaction with the product items by observing the consumption behavior of users as well as on neighbors opinion. V. Jawa et al. [6] presented a model in which sentiment analysis are conjugated with interest graphs that assists the users in suggesting their preferences ranging from to whom they may follow on social networking site to the decisions taking regarding what products to be buy online.

K. Selami et al. [7] presented technique for semantic social recommendation system. In this approach social aspects and semantic aspects are merged by using the social network analysis measures and the semantic similarity measures. E. Aumayr et al. [8] investigated and analyzed the correlation among the topic and user behaviors. The latent topic encompasses sociability, accessibility, controversy and is performed on several online communities. M. Saraswat et al. [9] uses Explicit Semantic Analysis (ESA), Pointwise Mutual Information (PMI) and Explicit Semantic Analysis (ESA) as approaches for topic matching matrix to figure out semantic relatedness for cross domain recommendations. Based on the reviews and comments of users recommendations and decisions are suggested. The proposed approach shows better precision for cross domain recommendation as it involves semantic relatedness then the cosine similarity

measure which only incorporate topic matching. C.H. Tsai et al. [10] proposed architecture comprised of three modules for effective social personal preference information analysis.

Personal Preference Recommendation Interface module collects preference data, Data Processing Platform Module performs data collection and Preference Analysis Arithmetic Module analyzes preferences of data. The approach carries out the recommendations on the basis of analyzing the users behavior and preferences on social sites. M.A. Zingla et al. [11] presented approaches for tweet contextualization. The contextualization is concerned with extracting contents from tweets. Authors used both the statistical and semantic approaches. Statistical approach uses association mining rules whereas semantics approach uses knowledge source Wikipedia to enhance quality of context by obtaining relevant context. M. S. Bhuvan et al. [12] presented a semantic sentiment analysis model which is scalable and flexible.

Many of the Natural Language Processing (NLP) techniques and machine learning techniques are used for extracting statistical and linguistic patterns from texts. These technologies have found their way into medical and health sciences as it is being used for detecting types of depression based on data from social site Twitter [13]. At this stage such models serve as preliminary diagnosis and should be verified by an domain expert. Machine Learning applications ranges from homogeneous pattern delineation in atmospheric data [14] to segmentation and regression of remote sensing data [15]. Therefore, on the other hand social media provides a vast domain to be explored though it requires further efficiency for approaches being used because of large amount of data.

The model depends more on grammar is the limitation of that approach and can be improved by improving the quality of grammars. Just by defining the semantics related to any specific domain the model is said to be flexible. Sentiment polarity and sentiment score for each review are defined by semantic patterns and thus the model supports the scalability feature. F. Zarrinkalam et al. [16] research work is concerned with extracting active topics from the users tweet within certain time period and then rate of users inclination towards the topic are determined.

Identifying the topics based on their semantics from the tweet and hence determining the user interests is the problem areas resolved in the approach [17]. Mangal et al. [18] proposed an approach that exploits the combination of sentiment analysis and classification of tweets. The approach assists in extracting the interest related topic areas of the user. Tweets are collected and sentiment analysis is performed on the tweets to identify the preferences of user. Then the classification of tweets under certain labels is performed. Finally the interest of user is attained according to the users preferences. Sarivastava et al. [19] presented Two Parse algorithm named Weighted k-Nearest Neighbor Classifier used as product review analysis system. The system predicts the reviews of the product in effective manner that either product is good or bad. In addition, it also satisfies the customer

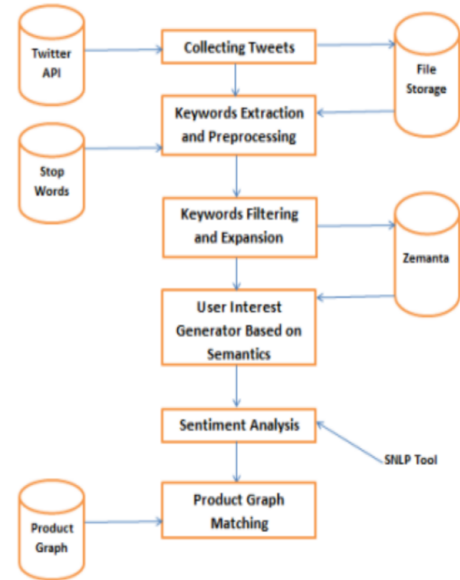


FIGURE 1: Block Diagram of Methodology

by providing the percentage of positivity that the product provides to the customer. The system saves the customers time because in this manner there is no need to read each of the review manually.

### III. METHODOLOGY

Multi-purpose automatic topic indexing algorithm used for extracting keywords and ranking them based on their frequency and degree. Further the core phase is user interest graph generator based on semantics and is comprised of nodes and edges where nodes represents the extracted keywords and edges shows the semantic connection between the nodes.

#### A. OVERVIEW OF THE DOMAIN

Semantic search and technologies is an advanced version of existing search mechanism that is primarily concerned with providing well structured and efficient search results to users according to their preferences. Web data mining is actually the domain area of semantic search for extracting the knowledge of user interest from social media or any other web document. The data mining concepts are considered for information extraction and retrieval techniques. The proposed research work aims at using novel semantic graph based approach. For extracting the interests of users from social sites Multi-purpose automatic topic indexing (Maui) algorithm is considered. Figure 1 shows a block diagram for the adopted methodology.

#### B. EXPLANATION

In the first phase data collection task is performed in which Twitter API is used that is concerned with collecting the tweets of users which they have updated on their accounts.

The tweets in the form of text are stored in files. The stored tweets act as an input for the next phase. The second phase is keyword extractions module and is an essential task because keywords expresses the main topics of the text. During that phase list of all the keywords are extracted from the users tweets. These keywords are identified for using in upcoming phases. The tweets stored in files and the stop words acts as an input modules for this phase. The stop words include all the insignificant words that must be filtered out from the text because they provide lot of unnecessary information.

Keyword extraction involves candidate selection in which identifying the words or phrases that can be considered as keywords is the initial activity. Then properties of that keyword need to be calculated in terms of figuring out the frequency that how many times the selected candidate keyword occur, its position in the text and the phrase length. The keywords are then scored across the tweet. Multipurpose automatic topic indexing (Maui) algorithm is used for keyword extraction as it provides the features of increase phrase length, node degree, and semantic relatedness.

Maui serves as pre-processing phase for extraction of keywords from the texts such as tweets. Pre-processing involves replacing the name of users with real names according to the screen name as in this way certain ids are allotted to the user. Zemanta API is used and it includes the links to DBpedia and provides more accuracy so used in the proposed approach. Zemanta is concerned with identifying entity from the users tweet. Inside it is DBpedia that extracts the wikipedia information. The next phase is keywords filtration, all of the extracted keywords are checked in Zemanta API and DBpedia that if there exists certain entry related to that keyword or not. If not then the keywords are removed because they will not be useful for semantic graph generation. Certain short descriptions related to list of keywords are added by checking their corresponding entry in DBpedia inside Zemanta API. The next phase is user interest graph generator based on the semantics. The extracted keywords are used as nodes of graph and the connection between nodes is represented as edges. The edge is drawn between semantically similar nodes.

The sentiment analysis of the generated users interest is then performed by using the SNLP tool. In this phase opinion score is determined based on three measures positive, negative and objective. Positive score shows the positive behavior of word, negative score shows the negative and objective depicts less subjective behavior of word. Product graphs are generated from the category of available products and then product graph matching is performed with the user interest graph based on their semantics and finally the outcome shows that the product graphs that relate more to the users interest are more strongly semantically connected to the users graph. Connection strength is determined by the weights that the node possesses. The weights are assigned to each of the node according to the number of connections it has with the adjacent node.

## REFERENCES

- [1] L. M. Jose and R. K, "A semantic graph based approach on interest extraction from user generated texts in social media," in 2016 International Conference on Data Mining and Advanced Computing (SAPIENCE), 2016, pp. 101–104.
- [2] W. Yuezhong and L. He, "A system constructing user interest model based on vsm and ontology," in 2016 International Conference on Robots & Intelligent System (ICRIS), 2016, pp. 71–76.
- [3] A. Akay, A. Dragomir, and B. E. Erlandsson, "Assessing antidepressants using intelligent data monitoring and mining of online fora," IEEE Journal of Biomedical and Health Informatics, vol. 20, no. 4, pp. 977–986, 2016.
- [4] R. Nithish, S. Sabarish, M. Kishen, A. Abirami, and A. Askaranisa, "An ontology based sentiment analysis for mobile products using tweets," in 2013 Fifth International Conference on Advanced Computing (ICoAC), 2013, pp. 342–347.
- [5] S. Adalbjornsson, J. Sward, M. O. Berg, S. Vang Andersen, and A. Jakobs-son, "Conjugate priors for gaussian emission pls recommender systems," in 2016 24th European Signal Processing Conference (EUSIPCO), 2016, pp. 2096–2100.
- [6] V. Jawa and V. Hasija, "A sentiment and interest based approach for product recommendation," in 2015 17th UKSim-AMSS International Conference on Modelling and Simulation (UKSim), 2015, pp. 75–80.
- [7] K. Sellami, M. Ahmed-Nacer, and P. Tiako, "From social network to semantic social network in recommender system," 2015. [Online]. Available: <https://arxiv.org/abs/1407.3392>
- [8] E. Aumayr and C. Hayes, "On the correlation between topic and user behaviour in online communities," Proceedings of the International AAAI Conference on Web and Social Media, vol. 10, no. 1, pp. 531–534, Aug. 2021. [Online]. Available: <https://ojs.aaai.org/index.php/ICWSM/article/view/14818>
- [9] M. Saraswat, S. Chakraverty, N. Mahajan, and N. Tokas, "On using reviews and comments for cross domain recommendations and decision making," in 2016 3rd International Conference on Computing for Sustainable Global Development (INDIACom), 2016, pp. 3656–3659.
- [10] C.-H. Tsai, H.-W. Liu, T. Ku, and W.-F. Chien, "Personal recommendation engine of user behavior pattern and analysis on social networks," in 2015 International Conference on Computational Science and Computational Intelligence (CSCI), 2015, pp. 404–409.
- [11] M. A. Zingla, L. Chiraz, Y. Slimani, and C. Berrut, "Statistical and semantic approaches for tweet contextualization," Procedia Computer Science, vol. 60, pp. 498–507, 2015, knowledge-Based and Intelligent Information & Engineering Systems 19th Annual Conference, KES-2015, Singapore, September 2015 Proceedings. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S187705091502298X>
- [12] M. S. Bhuvan, V. D. Rao, S. Jain, T. S. Ashwin, and R. M. R. Guddeti, "Semantic sentiment analysis using context specific grammar," in International Conference on Computing, Communication & Automation, 2015, pp. 28–35.
- [13] M. O. Nusrat, W. Shahzad, and S. A. Jamal, "Multi class depression detection through tweets using artificial intelligence," 2024. [Online]. Available: <https://arxiv.org/abs/2404.13104>
- [14] A. Nusrat, H. F. Gabriel, S. Haider, S. Ahmad, M. Shahid, and S. Ahmed Jamal, "Application of machine learning techniques to delineate homogeneous climate zones in river basins of pakistan for hydro-climatic change impact studies," Applied Sciences, vol. 10, no. 19, 2020. [Online]. Available: <https://www.mdpi.com/2076-3417/10/19/6878>
- [15] S. A. Jamal and A. Aribisala, "Data fusion for multi-task learning of building extraction and height estimation," 2023. [Online]. Available: <https://doi.org/10.48550/arXiv.2308.02960>
- [16] F. Zarrinkalam, H. Fani, E. Bagheri, M. Kahani, and W. Du, "Semantics-enabled user interest detection from twitter," in 2015 IEEE/WIC/ACM International Conference on Web Intelligence and Intelligent Agent Technology (WI-IAT), vol. 1, 2015, pp. 469–476.
- [17] M. O. Nusrat, Z. Habib, M. Alam, and S. A. Jamal, "Emoji prediction in tweets using bert," 2023. [Online]. Available: <https://arxiv.org/abs/2307.02054>
- [18] N. Mangal, R. Niyogi, and A. Milani, "Analysis of users' interest based on tweets," in Computational Science and Its Applications – ICCSA 2016. Cham: Springer International Publishing, 2016, pp. 12–23.
- [19] A. Srivastava, M. Singh, and P. Kumar, "Supervised semantic analysis of product reviews using weighted k-nn classifier," in 2014 11th International Conference on Information Technology: New Generations, 2014, pp. 502–507.

...