# Automation Configuration in Smart Home Systems: Challenges and Opportunities

Sheik Murad Hassan Anik, Xinghua Gao, Hao Zhong, Xiaoyin Wang, Na Meng

*Abstract*—As the innovation of smart devices and internet-ofthings (IoT), smart homes have become prevalent. People tend to transform residences into smart homes by customizing offthe-shelf smart home platforms, instead of creating IoT systems from scratch. Among the alternatives, Home Assistant (HA) is one of the most popular platforms. It allows end-users (i.e., home residents) to smartify homes by (S1) integrating selected devices into the system, and (S2) creating YAML files to control those devices. Unfortunately, due to the diversity of devices and complexity of automatic configurations, many users have difficulty correctly creating YAML files. Consequently, their smart homes may not work as expected, causing frustration and concern in users.

This paper presents a novel study on issues of YAML-based automation configuration in smart homes (issues related to S2). We mined the online forum Home Assistant Community for discussion threads related to automation configuration. By manually inspecting 190 threads, we revealed 3 categories of concerns: implementation, optimization, and debugging. Under each category, we classified discussions based on the issue locations and technical concepts involved. Among debugging discussions, we further classified discussions based on users resolution strategies; we also applied existing analysis tools to buggy YAML files, to assess the tool effectiveness. Our study reveals the common challenges faced by users and frequently applied resolution strategies. There are 129 (68%) examined issues concerning debugging, but existing tools can detect at most 14 of the issues and fix none. It implies that existing tools provide limited assistance in automation configuration. Our research sheds light on future directions in smart home development.

Index Terms—Empirical, smart home, automation, end-user programming

#### I. INTRODUCTION

A smart home is a residence that uses internet-connected devices to remotely monitor and manage appliances/systems. According to Fortune Business Insights, the global Smart Home Market size is projected to reach USD 338.28 billion by 2030, at a Compound Annual Growth Rate (CAGR) of 20.1% during the forecast period 2023–2030 [1]. As explained by researchers, the increasing number of internet users, surging disposable income of consumers within emerging economies,

S. Anik and N. Meng are with the Department of Computer Science, Virginia Tech, Blacksburg, VA 24060.

E-mail: {murad, nm8247}@vt.edu

X. Gao is with the Myers-Lawson School of Construction, Virginia Tech, Blacksburg, VA 24060.

Email: xinghua@vt.edu

H. Zhong is with the Department of Computer Science and Engineering, Shanghai Jiao Tong University, Shanghai, China.

Email: zhonghao@sjtu.edu.cn

X. Wang is with the Department of Computer Science, University of Texas at San Antonio, San Antonio, TX 78249. Email: xiaoyin.wang@utsa.edu




Fig. 1: An exemplar YAML file for home automation [10]

the growing significance of home monitoring in remote areas, and the increasing demand for low-carbon emission and energy-saving-oriented solutions are anticipated to drive the market competencies [2].

A smart home platform is a software framework that controls and manages multiple devices from multiple manufacturers, usually through a smartphone or tablet app. Various smart home platforms are available: some are commercial systems and close-source (e.g., Samsung SmartThings [3]); some are free and open-source (e.g., openHAB [4]). Among the alternatives, Home Assistant (HA) has become one of the most widely used platforms [5], [6], [7] mainly because it is free, open-source, and designed specially for local control as well as privacy.

Up till March 2024, HA has got over 332 thousand active installations; HA developers estimated the actual number of HA users (e.g., residents of HA-based smart homes) to be 3 times of this number (i.e., about 1 million) [8]. The widespread usage of HA motivated us to do research on HA-based smart homes, because (1) the data from these systems can represent many smart homes, and (2) our research findings will help shape the future of smart homes.

To create a smart home with HA, users need to (1) integrate components (e.g., devices) into the system and (2) create YAML files to automatically control those components. YAML [9] is a human-friendly data serialization language for all programming languages. With YAML, HA users can define an automation rule by specifying a **trigger**, an **action**, and (optionally) a **condition**; such a rule expresses that HA performs an action when a trigger event occurs and optionally the specified condition is met. For instance, the rule in Fig. 1 means to turn on office lights, when someone moves (i.e., the sensor detects motion) and the outside is dark (i.e., the solar elevation angle is less than four degrees).

With some initial inspection of the online forum Home Assistant Community [11], we found lots of questions concerning automation configuration. On the forum, over 10,000 questions were tagged with "automation" and over 1,000 questions were tagged with "configuration" [12]. This may be because many HA users have no programming background and automatic control is challenging. As a result, misconfigured smart homes may misbehave [13], waste energy [14], frustrate users [15], or jeopardize home safety.

Inspired by our initial observations, we conducted a novel empirical study on automation configuration issues in HAbased smart homes, to understand the technical challenges and identify research opportunities. Specifically, we crawled the discussion threads of "Configuration" during 03/2022–08/2022 using tag "automation", and retrieved 438 potentially relevant threads. Then we manually analyzed all threads to identify the root cause and resolution strategy of each issue under discussion, and filtered out 248 threads because they lack necessary information. We explored the following research questions (RQs) and observed interesting phenomena:

- **RQ1:** What challenges do users face when configuring automation? Among the 190 threads, 129, 52, and 9 discussions separately focus on debugging, implementation, and optimization. It means that users get stuck with debugging more often than other issues. We also observed significant concept commonality/similarity among threads (e.g., data specification for matching), which implies users' strong need for help or tool support in implementing, debugging, or optimizing some features.
- **RQ2:** *How do users address challenges in automation configuration?* Users frequently applied eight strategies to address common challenges. Two of the strategies correct formats (i.e., quotes and indentation); two conditionally call various services; one replaces the trigger type; one correctly accesses or calculates data; one correctly specifies data for matching; one handles a group/list of same-typed entities. All strategies imply desired tool support.
- **RQ3:** *How effectively do existing tools detect or fix buggy YAML files?* We searched online for all existing tools that can validate YAML files. By applying the 6 publicly available tools to 190 buggy files, we observed all tools to report only 16–20 files/snippets as invalid ones, and 1– 5 of these reports are false positives. All tools achieved high precision, very low recall, and very low F score when detecting bugs; their error-reporting mechanism is poor. No tool fixes bugs.

In this paper, we made the following research contributions:

- We conducted a novel and comprehensive empirical study to characterize real-world issues of automation configuration in HA-based smart homes. No prior work did that.
- We revealed the common root causes and recurring resolution strategies for HA-related automation issues; many of our findings are revealed for the first time.
- We novelly applied 6 publicly available tools to 129 buggy YAML files/snippets, and surprisingly found all tools ineffective in detecting or fixing bugs.
- We open-sourced our dataset and tool-application results, to facilitate future research in related areas.

HA is one of the most widely used smart home platforms, and commonly shares the automation configuration mechanism (if-this-then-that rules) with many other platforms (e.g.,




Fig. 2: The consumer pattern in Home Assistant

IFTTT [16] and Samsung SmartThings [3]). Thus, our study will shed light on future research in smart homes, help with end-user IoT programming, and enlighten potential ways of improving smart-home quality. Our dataset is available at https://figshare.com/s/7aa8ea9f4af98c371114

# II. BACKGROUND

This section introduces terms relevant to Home Assistant. HA can be installed on various devices, from full Linux systems to some network-attached storage (NAS) environment or even a Raspberry Pi. As shown in Fig. 2, users can access HA through a dashboard or web-based user interface by using companion apps for smart phones, or by using web browsers for tablets and PCs. Once the HA software is installed, it acts as a hub-a central control system for home automation. Without any mandatory dependence on vendor-specific cloud services, devices, or mobile apps, the HA hub can have local control of the IoT devices, software, applications, and services that are supported by modular integration components. Home Assistant Community (HAC) [11] is an online forum dedicated for HA developers/users to discuss and resolve issues in smart home systems. HAC contains discussion threads. Each thread has one question post, and zero or more answer posts;

**Integrations** are pieces of software that allow HA to connect to other software and platforms. For example, a product by Philips called Hue smart light (see Fig. 2) can be included into a smart home via the Philips Hue integration, which integration allows HA to talk to the hardware controller Hue Bridge, so that any HA-compatible physical devices connected to Hue Bridge appear in HA as logical devices (i.e, virtual objects) and can be controlled by the hub.

at most one answer in each thread is the accepted answer.

**Entities** are the basic building blocks to hold data in HA. An entity represents a sensor, actor, or function in HA, which can monitor physical properties or control other entities. Each entity has a **state** to hold information of interest (e.g., whether a light is on or off); an entity's state only holds one value at a time. Entities can store **attributes** related to its state, such as the brightness of a turned-on light. **Sensors** return information about an object, such as the level of water in a tank. **Devices** are logical groups for entities. A device may represent a physical device with one or more sensors; the sensors are entities associated with the device.

Automation is a set of repeatable actions that can be run automatically. Automation Configuration is about defining YAML files to specify automations, after HA is installed and all components are integrated. In a YAML file, an automation rule has three key segments: (i) **Trigger** describes what starts an automation [17]. An automation can be triggered by an event (i.e., signal emitted when something happens), certain entity state (e.g., when a light is on), or a given time. Multiple triggers can be specified simultaneously for one automation. When any of the automation's triggers becomes true (i.e, trigger fires), HA will validate the conditions if any, and call the action. For the example in Fig. 1, the trigger is an event: when the state of a motion sensor is changed to "on".

(ii) Condition is optional; it describes the **predicates** (i.e., tests) that must be met before actions get run [10]. After a trigger occurs, all conditions are checked. If any of them returns false, the action is not run. The condition in Fig. 1 tests whether the solar elevation angle is less than four degrees.

(iii) Action describes what is executed when a rule fires [18]. It can interact with anything via services or events. Service carries out a task, such as turning on the light in the living room. A service can have a target and data. For instance, entity scene.office\_lights in Fig. 1 is a scene that prescribes a series of actions, with each action setting an entity's state. The defined action interacts with this scene by calling service scene.turn\_on, to turn on lights and set their states as prescribed by the scene.

**Scripts** are also repeatable actions, similar to automations. The difference is that scripts do not have triggers: scripts cannot automatically run unless they are used in an automation.

**Templates** are used for formatting outgoing messages to present to users or processing incoming data from entities. They are expressed with Jinja2 [19]—a general-purpose templating language. For instance, "{{state\_attr('sun.sun', 'elevation') < 4}}" in Fig. 1 is a template, which gets the solar elevation degree from entity sun.sun and compares that value with 4 to define a predicate for condition checking. Templates enable smart homes to flexibly respond to varying entity states. To define templates, people must surround singleline templates with double quotes (") or single quotes ('). When defining multi-line templates, people must use {% %} to enclose the program structures (e.g., loop) in templates.

#### III. METHODOLOGY

To understand the challenges and opportunities in home automation, we explored the following three research questions:

- **RQ1:** What challenges do users face when configuring automations? What kind of automation-related questions do users ask? Are there questions frequently asked? What are the root causes of the frequently asked questions?
- **RQ2:** *How do experts/users address challenges related to automation configuration?* Namely, when people ask similar or identical questions, is there any answer repetitively suggested? Do answers present resolution strategies?
- **RQ3:** *How effectively do existing tools detect or fix buggy YAML files?* When users have difficulty debugging erroneous YAML files, can existing tools reveal or fix those errors?

This section first introduces our procedure of data collection, and then explains our method of exploring RQs.

# A. Data Collection

The program data related to HA-based smart home systems can be majorly found on two websites: GitHub [20] and HAC [11]. We decided to crawl HAC for two reasons. First, HAC organizes discussion threads based on categories and tags. Such an organization enables us to quickly locate automation configuration-related program data. Second, many questions on HAC are resolved, with some resolutions well explained and finally accepted by askers. Such a high availability of technical solutions and rationale explanation enables us to characterize questions and answers with high rigor.

Specifically, we manually went through the discussion threads under category "Configuration" of HAC, to locate candidates tagged with "automation" during 03/01/2022 -08/31/2022. That six-month period was chosen because we collected data in September 2022. As HAC ranked threads based on timestamps of the latest activity on each thread (e.g., question posting or answer updating), we successfully retrieved a dataset of 438 candidate discussion threads purely based on the HAC ranking and timestamp range. Next, we manually inspected each thread to record (1) ID of the question post, (2) the URL, (3) the original YAML file provided by the asker, and (4) the suggested YAML file mentioned, referred to, or implied by the accepted answer. In this process, we filtered out a thread if

- (i) the question asker does not present a YAML file,
- (ii) no answer was explicitly marked as accepted by the asker,
- (iii) the accepted answer does not suggest or lead to any concrete version of YAML file, or
- (iv) the discussion is too confusing for us to understand.

We defined the four filters mentioned above, to ensure the high quality of our data analysis results. With more details, based on our experience so far, when people asked questions at HAC, they sometimes failed to provide YAML files to clearly show the programming context or automation scenarios. Consequently, analyzing such questions can be very challenging and time-consuming, as it is hard to tell what is the major issue and what types of resolutions askers inquiry for. To avoid such confusion, we introduced filter (i) to guarantee that each covered question post provides sufficient details on the programming context, including but not limited to askers' automation needs, the attempts they made, the technical issues they face, and their specific requests for help. When processing each thread, we manually inspected all posts involved in the discussion. As long as the asker provided their YAML files in any of the posts, we kept those threads.

Filter (ii) ensures that there is a correct answer for us to refer to, when characterizing people's concern and resolution for each covered thread. Filter (iii) makes sure that the suggested resolution is clear and concrete. Namely, we do not have to speculate on the correct version of YAML files, and thus will not commit mistakes in speculation. In reality, however, an asker might accept an answer that provides no concrete YAML files, while the concrete version was mentioned in a different post of the same thread. To tolerate such inaccuracy in askers' labeling of accepted answers, we read all posts in each thread. As long as a concrete YAML file is suggested by an accepted answer or any answer related to that one, we counted in the thread. In this way, we made our dataset as representative as possible. Filter (iv) ensures that we have high confidence in our interpretation of threads. After applying all filters mentioned above, we kept 190 threads for further analysis.

# B. Data Analysis

For RQ1, we took an open-coding approach to classify threads, because we had no prior knowledge of people's concerns on automation configuration. Specifically, two authors manually inspected all threads to identify keywords/phrases, which characterize each thread in terms of the (1) issue type, (2) automation component under discussion, and (3) involved technical concepts. Then they separately defined an initial taxonomy and categories by clustering recurring or similar keywords/phrases. Next, they held a meeting to compare and discuss their initial results to refine the taxonomy and improve thread classification. Using the classification labels they agreed upon, author A rechecked all threads to label categories and to reveal overlooked or wrong categories. Afterwards, author B examined A's labels for all threads; whenever he disagreed upon any labels, he had discussions with author A until reaching a consensus. This procedure sometimes involved multiple iterations of thread labeling, and lasted until both authors agreed upon all labels.

For RQ2, we also took an open-coding approach to identify frequently adopted resolution strategies. With more details, inside each category, author A summarized the resolution suggestion for each issue-under-discussion, and then clustered issues if their resolutions are identical or similar in certain aspect. In this procedure, A also defined resolution strategies based on the common summaries. Next, author B manually inspected all strategies as well as related threads, and initiated discussion with A for any disagreement. The discussion lasted until all disagreements were addressed.

For RQ3, we first defined a ground-truth dataset of buggy YAML files/snippets, according to the classification results in RQ1. In this dataset, we also included the fixes suggested by accepted answers. Next, we applied all state-of-the-art YAML validation tools to the dataset, to study how effectively existing tools detect and fix bugs.

## **IV. EXPERIMENT RESULTS**

This section presents and explains our results for RQ1-RQ3.

### A. RQ1: Challenges in Handling Automation Configuration

Fig. 3 shows our thread classification based on issue types, issue locations, and involved technical concepts.

1) Classification Based on Issue Types: We observed three types of technical issues: (1) implementation, (2) debugging, and (3) optimization. **Implementation** means that people described their program context and automation requirements; they asked for implementation to fit the context and satisfy those requirements. **Debugging** means that users provide erroneous automations, requesting to diagnose the root cause and fix bugs. Compared with implementation, debugging questions often include askers' unsuccessful trials (i.e., buggy YAML files) to implement certain requirements. **Optimization** means that people present the correct YAML files satisfying certain requirements, express their optimization goals, and ask for refined YAML files.

Our dataset includes 129 debugging issues, 52 implementation issues, and 9 optimization issues. It means that most askers had difficulty debugging YAML files, while fewer askers were bothered by implementation and optimization issues. This may be because automation configurations have relatively simple control logic. It is not quite difficult for people to get started and have initial implementation done. However, it is harder for people to successfully debug initial implementation, in order to deliver high-quality automation configurations. Consequently, even fewer people bother to optimize correct configurations for refinement.

**Finding 1:** 68% (129/190) of the examined issues are about debugging, implying the significant challenge of addressing buggy YAML files.

2) Classification Based on Segments Involved: Under each issue category, we classified threads based on where issues occurred. Namely, if an issue resided in purely the trigger, condition, or action segment of an automation rule, we labeled it accordingly. Otherwise, if an issue resided in multiple segments or we could not clearly tell which specific segment an issue was about, then we labeled the issue with "Automation".

As shown in Fig. 3, for both debugging and implementation issues, "Action" is the largest among four categories. This implies that actions are harder to develop than triggers and conditions. One reason is that HA defines the script syntax [21], which allows people to define complex control structures (e.g., if-then and loop), or special behaviors in actions (e.g., wait\_for\_trigger to wait for a trigger before calling a service). The syntax poses challenges for people to understand and properly use all syntactic components. Additionally, there are more threads on triggers than conditions. It implies that triggers are harder to develop, probably because there are more alternative ways of defining triggers, and more delicate constraints on trigger definition. Finally, automation issues widely exist in all three categories. It means that users have difficulty in developing multiple segments for consistency, or in creating code that can exist in any of the segments.

**Finding 2:** There are 73, 50, 43, and 24 issues separately about action, automation, trigger, and condition, implying that automation and action segments are more challenging to create or improve.

3) Classification Based on Technical Concepts: We further classified issues based on the technical concepts involved. In this procedure, whenever we observed similar issues in different segments (i.e., trigger, condition, or action), we used the same terms to capture the similarity, and to identify segment-specific concepts as well as segment-agnostic ones. In Fig. 3, the 129 debugging issues cover 19 unique concepts; 8 concepts are shared among segments (D1–D8).

D1. Wrong data specification for matching means that data (e.g., state or attribute) was wrongly provided for predicate-value matching in trigger, condition, action, or the whole au-


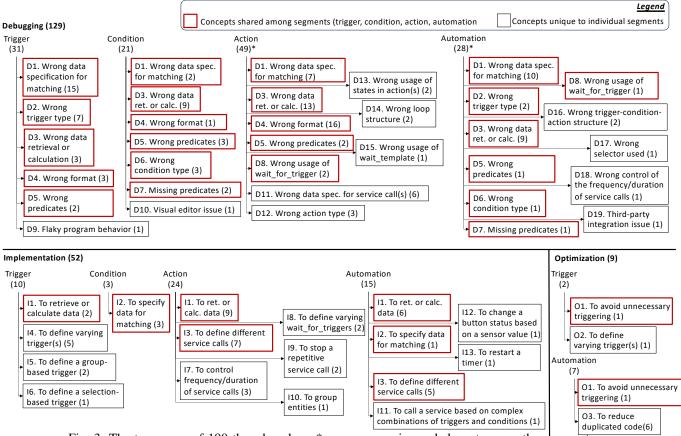


Fig. 3: The taxonomy of 190 threads, where \* means some issues belong to more than one category

tomation, making the automation run abnormally. For instance, lines 2–6 in Listing 1 show a buggy snippet from a debugging thread [22]. This snippet defines a state trigger, to start an automation when an entity input\_boolean.ecobee\_fan\_on\_off changes from the 'off' state to 'on'. However, as both states are misspelled, HA is case-sensitive and does not recognize those states. Consequently, the automation is never started because the prescribed state transition never happens.



Listing 1: Two YAML snippets to show the common challenge of "data specification for matching" [22], [23]

D2. Wrong trigger type: There are multiple types of triggers (e.g., state trigger and device trigger) usable to specify the triggering logic of an automation. However, when users wrongly choose a trigger type, the specified logic does not work because the chosen type does not support that logic.



Listing 2: A bug and fix related to D2 [24]

For instance, the buggy version in Listing 2 defines a device trigger, to fire when sensor binary\_sensor.v4b01\_motion detects no motion for the number of minutes users specified via input\_number.timeout\_offices, a numeric input box in GUI. However, device triggers do not support templating (see line 11), so the buggy version fails.

D3. Wrong data retrieval or calculation means that some data used in an automation is wrongly accessed or calculated, causing automation fail to run normally. For in-

```
# Bug: Wrong way of retrieving the sensor state value
2
  action:
   - service: notify.mobile_app_huawei_p20
3
4
    data:
      title: Temperature Warning
      message: 'Temperature is: {{
       ↔ sensor.temperatur gefrierschrank }}'
   # Fix: sensor.temperatur_gefrierschrank =>
      states("sensor.temperatur gefrierschrank")
   # Implementation: To include sensor value into the
   → notification
  action:
     - device id: c593fadfd2c2d134bc507567b588b2ae
10
11
      domain: mobile_app
12
       type: notify
       message: Energy production ended. Energy produced
13
           today:
       \hookrightarrow
           {{states('sensor.solaredge current power')}}
       \hookrightarrow
```

Listing 3: Two YAML snippets to show the common challenge of "data retrieval or calculation" [25], [26]

```
# Bug: Wrong combination of predicates
condition:
    - condition: sun
before: sunrise
after: sunset
```

Listing 4: A buggy snippet of "wrong predicates" (D5) [27]

stance, lines 2-6 in Listing 3 show a buggy snippet from a debugging thread [26], which defines an action to send a notification message via mobile phone. This action calls the service notify.mobile\_app\_huawei\_p20, with a dynamically generated message to incorporate the reading of a temperature sensor sensor.temperatur\_gefrierschrank. However, as users wrongly accessed the sensor value via sensor.temperatur\_gefrierschrank, the automation does not run and an error message is produced: "Error rendering data template: UndefinedError: 'sensor ist undefined".

*D4. Wrong format* means that a YAML file is malformed, by violating the formatting rules defined by either YAML or HA. Typical violations include wrong line indentation and wrong quote usage.

D5. Wrong predicates means automation fails because the predicates used in automation have flaws: the defined predicates or predicate combinations do not enable action execution as expected. For instance, Listing 4 shows a buggy condition that combines two predicates before:sunrise and after:sunset. The former predicate corresponds to the time period between midnight and sunrise, while the latter corresponds to the period between sunset and midnight. These two predicates should never get used together to define a period "after the sunset of Day N and before the sunrise of Day (N+1)", because the two predicates are always interpreted as two separate periods: "after the sunset of Day N and before the sunrise of Day N"; no time point satisfies both predicates at the same time.

*D6. Wrong condition type* is similar to D2. There are multiple types of conditions. However, using some condition type (e.g., device condition) can limit automation expressiveness (e.g., no template allowed), making some logic infeasible.

*D7. Missing predicates* means one or more predicates are not checked before an automation executes certain action.

D8. Wrong usage of wait\_for\_trigger: Action

```
# Bug: A service call with wrongly provided data
action:
    - service: tts.google_say
    data:
    entity_id: media_player.living_room_speaker
    message: Dryer has started
    cache: true
    cache_dir: /tmp/tts
```

2

3

4

5

6

7

Listing 5: A buggy snippet of D11 [28]

wait\_for\_trigger allows automation to wait for a trigger being fired before doing anything. Some users messed it up with (1) another specialized action wait\_template, which waits for a template to evaluate to true before running automation, or (2) the trigger segment.

D9. Flaky program behavior means two semantically equivalent implementations of the same logic have divergent outcomes: one automation succeeds and the other fails.

*D10. Visual editor issue* means a problematic YAML file is generated due to the usage of a visual editor in HA IDE.

D11. Wrong data specification for service calls means an action calls service(s) using wrong data, making the entire automation fail. Namely, if we treat service calls as analogous to method calls in Java programming, then wrongly specified service data is analogous to wrongly provided parameter values. For instance, Listing 5 shows a service call, which intends to make the Google speaker announce an audio message "Dryer has started". However, lines 7–8 are not needed by the service call. When both key-value pairs are provided, the automation fails and an error message is generated: *extra keys not allowed @data['cache\_dir']*.

D12. Wrong action type is similar to D2 and D6. It happens when users wrongly select a type to implement some unsupported logic.

D13. Wrong usage of states in action(s) means users try to define an action by specifying entity states. However, action can be only defined via interactions with services or events (e.g., service calls).

*D14. Wrong loop structure* means users wrongly use the loop construct to define a malformed automation.

D15. Wrong usage of wait\_template means users have difficulty correctly using this action.

*D16.* Wrong trigger-condition-action structure means users wrongly define the trigger-condition-action structure to implement an automation, like defining an action without trigger.

D17. Wrong selector used: Selectors are used to specify what values are acceptable by automation, or define how the input is shown in GUI. D19 is similar to D2, D6, and D12. Basically, when multiple alternative selectors are available, users have difficulty choosing the right one to specify the intended logic.

D18. Wrong control of the frequency/duration of service calls is similar to D2, D6, D12, and D17. There are multiple means to control the frequency or duration of service calls, and these means differ in expressiveness. If users choose a wrong mean, then they are unable to express the intended logic.

D19. Third-party integration issue means when an automation depends on a third-party software for device control, users may have difficulty fixing issues due to that software usage.

# The 52 implementation issues cover 13 distinct concepts. Three concepts are shared among segments (I1–I3).

11. To retrieve or calculate data is similar to D3, because it also reflects users' concerns on appropriate data access or calculation. For instance, lines 8–12 in Listing 3 show a correct snippet from an implementation thread [25], which defines an action to send a notification message via mobile phone. The message is formulated based on the value of a sensor that tracks energy production sensor.solaredge\_current\_power. This snippet was recommended because some users could not retrieve the sensor value. Note that I1 is different from D3, as I1 covers implementation questions while D3 is about debugging questions.

12. To specify data for matching is similar to D1, as it also reflects users' concerns on data specification for predicate-value matching. For instance, lines 8–15 in Listing 1 show a snippet from an implementation thread [23]. The snippet defines a state trigger, which monitors four sensors (sensor.pcX\_printjob), and starts automation when any sensor (1) changes its state and (2) the to-state is not 'unknown'. This snippet was suggested because some users could not specify an unwanted state for the trigger.

13. To define different service calls concerns about the correct way of calling distinct services based on the fired triggers, satisfied conditions, or collected data.

*14. To define varying trigger(s)* means to define one or more changeable triggers (i.e., triggers with variables or templates), whose firing rules vary with the surrounding environment, time, or inputs.

*15. To define a group-based trigger(s)* means to define triggers based on the values of a group of sensors.

16. To define a selection-based trigger means to define a trigger, which fires based on which GUI button users click.

*17. To control frequency/duration of service calls* is similar to D18, because it also concerns the correct way of controlling the frequency or duration of service calls.

18. To define varying wait\_for\_trigger(s) is similar to D8, as it also focuses on the correct usage of wait\_for\_trigger.

*19. To stop a repetitive service call* means when users call a service in a loop structure, they need help in defining the loop so that the service is called repetitively, and the loop condition is properly evaluated before automation terminates.

110. To group entities means to group a set of entities (e.g., speakers) so that they work unanimously just like one entity.

111. To call a service based on complex combinations of triggers and conditions means users have complex predicates/tests to meet, before a service is called. Thus, they specify their automation needs and all predicates, asking for a well-structured automation that properly puts predicates in triggers and conditions.

Both *112* and *113* are self-explanatory, so we skip the explanation for succinctness.

The nine optimization issues cover three unique concepts: to avoid unnecessary trigger firings, to efficiently define changeable triggers, and to reduce duplicated code in automation. One of the concepts is shared among segments (O1).

We use **segment-agnostic concepts** to refer to the concepts shared among distinct segments, and use **segment-specific**  **concepts** to refer to the remaining. Fig. 3 shows one, three, and eight segment-agnostic concepts separately found in optimization, implementation, and debugging issues. They imply that users ask similar or related questions even though they work on distinct segments. Additionally, across all categories, issues related to trigger cover in total five segment-specific concepts (i.e., D9, I4–I6, O2). Meanwhile, issues related to condition, action, and automation separately cover one, nine, and eight segment-specific concepts. These observations imply that the issues related to trigger and condition are less diverse than those related to action and automation; action and automation are harder to develop and maintain.

**Finding 3:** One, three, and eight segment-agnostic concepts are separately identified in optimization, implementation, and debugging issues. This implies the wide existence of common challenges.

Between the two categories—debugging and implementation, we observed similarity among identified concepts: (i) D1 vs. I2, (ii) D3 vs. I1, (iii) D8 vs. I8, (iv) D18 vs. I7, (v) D11 vs. I3. For instance, both D1 and I2 focus on "data specification for matching"; however, the former describes a root cause of recurring bugs and the latter describes a frequent implementation request. Between implementation and optimization, we also observed a commonality: to define varying triggers (I4 vs. O2). All such similarity or commonality implies that some concepts are challenging and popular; they confuse people no matter whether people implement, debug, or optimize automations.

To facilitate understanding, we use representative examples to show two common challenges. Listing 1 has a buggy snippet from a debugging thread of D1, and a correct snippet from an implementation thread of I2. In the first snippet, users committed mistakes by misspelling states (e.g., 'on' instead of 'on'), and the automation never started. The second snippet was suggested because some users could not specify an unwanted state. Both snippets evidence that users have difficulty in specifying data for matching. Listing 3 shows another buggy snippet and another correct snippet. In the former one, users made mistakes when accessing a sensor value; the latter one was recommended because some users asked for help in getting a sensor value. Both snippets imply that users have difficulty in retrieving or calculating data.

**Finding 4:** Five concepts commonly exist in implementing, debugging, and optimization issues; these concepts are challenging no matter whether users implement, debug, or optimize automations.

# B. RQ2: Frequent Resolution Strategies

We realized that the 190 examined issues were resolved in diverse ways; no dominant strategy was applied to resolve the majority. However, we managed to identify some strategies repetitively applied to resolve multiple issues ( $\geq 4$ ). Table I lists each strategy in terms of its focus, the relevant technical concept(s), the number of issues it addressed, and the strategy content. We ranked the eight strategies in ascending order of the number of relevant concepts. This section explains all strategies in detail.

Idx	Focus	The Relevant Technical Concept(s)	# of Issues Resolved	ues Strategy Content	
R1	Quote usage	Wrong format	10	Add or remove quotes to properly use String literals, variables, and templates	
R2	Indentation usage	Wrong format	6	Add or remove white spaces to properly align statements	
R3	Picking a trigger type	Wrong trigger type	4	Replace the device trigger with a (numeric) state trigger	
R4	Reading an entity's state	Wrong data retrieval or calculation, to retrieve or calculate data	9	Use template {{states('ENTITY')}} to read the state of ENTITY	
R5	Specifying states for matching	Wrong data specification for matching, to specify data for matching	8	Look up all possible states of the entity in Developer Tools -> States, and use one of the states with case sensitivity.	
R6	Different service calls based on fired triggers	To reduce duplicated code, to avoid unnecessary triggering, wrong data specification for matching	5	Define multiple triggers, specify a unique ID for each trigger, and call services differently based on the fired trigger.	
R7	Different service calls based on entity values	To reduce duplicated code, to define different service calls, wrong data specification for matching, wrong loop structure	7	Define a dictionary to map entity values to distinct service calls or service data, and call services based on the retrieved entity values.	
R8	Handling a group or list of same-typed entities	To reduce duplicated code, to define different service calls, to define varying trigger(s), wrong data retrieval or calcula- tion, wrong algorithm design	5	Use expand() to enumerate a group or list of entities, and define filters to pick elements that satisfy certain requirements.	

TABLE I: The representative resolution strategies (i.e., each strategy occurs at least four times in our dataset)

**R1** corrects quote usage. It was frequently applied when askers posted YAML files with wrong formats. For instance, Listing 6 shows a representative bug and fix. The buggy snippet tries to set a counter counter.configure using the value of another counter.aux\_ac\_pieza, but the quote usage violates a domain-specific constraint in HA: when there are quotes inside and outside a template, differentiate the outer and inner ones by using different quote types. The buggy code nests single quotes. Thus, the fix is to replace the inner pair of single quotes with double quotes.

R2 corrects indentation. As with R1, this was also adopted to fix wrong formats. The basics of YAML syntax are block collections and mappings containing key-value pairs. Indentation is important for specifying relations among collections, mappings, and their items. For instance, the buggy version in Listing 7 tries to repetitively (1) check whether the door is open at night (between 23:30pm and 5am next day), and (2) send a notification if so. Such a logic can be realized with a while-loop, which encloses two blocks—a while block and a sequence block-with keyword repeat. However, as the buggy version did not indent the sequence block properly (see lines 10–11), the automation fails.

R3 replaces device triggers with triggers of numeric\_state or state, because device triggers are too limited to express triggering events. For instance, the buggy version in Listing 2 defines a device trigger, to fire when sensor binary\_sensor.v4b01\_motion detects no motion for the number of minutes users specified via input\_number.timeout\_offices, a numeric input box in GUI. However, device triggers do not support templating (see line 11), so the buggy version fails. The fix is to replace that trigger with a state trigger (lines 14-20).

**R4** is about state access. To correctly read the state of an entity (see Listing 3), people are suggested to call function states(...) with that entity's ID, such as

```
service: counter.configure
data_template:
  value: '{{states('counter.aux_ac_pieza')}}'
# Bug: A pair of single quotes enclose another pair of
   single quotes
# Fix: Replace the inner guotes with double guotes, as
   below
  value: '{{states(''counter.aux_ac_pieza'')}}'
```

Listing 6: A bug and fix related to the quote usage (R1) [29]

states('sensor.solaredge\_current\_power').

**R5** fixes misspelled states, by suggesting users to look up valid states of a given entity in Developers Tools of HA IDE and properly specify states. For example, input\_boolean.ecobee\_fan\_on\_off in Listing 1 is a boolean variable representing an input box in GUI, whose state value is 'on' or 'off'. Users must specify states accordingly.

R6 defines alternative triggers in one automation rule, and calls services differently depending on the fired trigger. It establishes correspondence between triggers and service calls by (1) assigning distinct IDs to triggers, and (2) referring to those IDs in service calls. For instance, suppose that an HA user wants to turn on a wifi bulb at 3pm and off at 5pm every day; the bulb should be also turned on whenever it gets online during 3pm-5pm after being offline, because the bulb sometimes goes offline at 2:59pm due to connectivity issues. To define both turning-on and turning-off behaviors of the bulb in the same automation rule, lines 2–12 in Listing 8 define three alternative triggers, and assign two IDs to those triggers separately: 'on' and 'off'; line 15 calls the corresponding service (i.e., light.turn\_on or light.turn\_off) by composing a service name using the trigger.id value.

**R7** reads values of multiple entities (e.g., sensors), and calls services differently depending on those values. It typically defines a dictionary to map entity values with service calls or data. Given an entity value, it looks up the dictionary to take an action. For instance, Listing 9 uses three self-defined sensors to pull bin collection dates (rubbish, recycling, garden) from a website, and sends notification messages the night before

1	action:
2	- repeat:
3	while:
4	- condition: state
5	entity_id:
	→ binary_sensor.group_door_sensor_at_night
6	<pre>state: 'on'</pre>
7	- condition: time
8	<b>before:</b> '05:00:00'
9	after: '23:30:00'
10	sequence:
11	<ul> <li>service: notify.mobile_app_iphone</li> </ul>
12	# Bug: The while-loop does not have "sequence" aligned
	↔ with "while"
13	<pre># Fix: To indent the "sequence" block</pre>
14	sequence:
15	- <b>service:</b> notify.mobile app iphone

Listing 7: A bug and fix about indentation (R2) [30]

```
alias: TurnOnOffBulb
2
     trigger:
        - id: 'on'
3
          platform: time
4
          at: '15:00:00'
5
         id: 'off
6
          platform: time
7
8
          at: '17:00:00'
         id: 'on'
9
          platform: state
10
11
          entity_id: light.mybulb
     from: 'unavailable'
condition: "{{ today_at('15:00:00') <= now() <</pre>
12
13
         today_at('17:00:02') }}"
      \rightarrow 
14
     action:
15
         service: 'light.turn_{{ trigger.id }}'
16
          target:
            entity_id: light.mybulb
17
```

Listing 8: Different service calls based on fired triggers (R6) [31]

a collection is due. In the automation, the Jinja variable x is defined as a dictionary (line 7), to map pulled dates of bin collection to bin types. The Jinja variable t holds the date of next day (line 6). Variable waste is initialized as 'nothing' if the next day's date t does not match any bin collection date, or as a bin type if t finds a match (line 9). Finally, the service is called with the value set to waste (line 17).

**R8** defines pipelines to uniformly handle a group or list of same-typed entities. Each pipeline typically starts with the Jinja function call expand() to enumerate all elements in a group/list, and then invokes Jinja built-in filters (e.g., map()) to refine or process elements. For instance, suppose that an HA user wants to set all Google speakers at home to the same volume, by referring to the most recent volume setting among all speakers. Listing 10 satisfies the automation need through three steps. First, to identify all turned-on speakers, it enumerates speakers (lines 4-7), rejects turned-off entities (line 7), gathers values of attribute 'entity\_id' (line 8), and lists those values. Second, to acquire the most recent volume setting, it enumerates all volume sensors (lines 10-13), sorts them in descending order of their latest change timestamps (line 14), gathers values of attribute 'state' (i.e., timestamps), gets the first one in that list (i.e., the mosts recent one),

```
id: '1631649587197'
     alias: Alert - Bin collection tomorrow
     description: ''
     variables:
       waste: >
         {% set t = (now() + timedelta(davs=1)).date() %}
         {% set x =
    { strptime(states('sensor.rubbish_bin_collection'),'%a %d
        %b %Y').date(): 'Rubbish',
        strptime(states('sensor.recycling_bin_collection'),'%a
    \hookrightarrow
        %d %b %Y').date(): 'Recycling',
    \hookrightarrow
        strptime(states('sensor.garden_bin_collection'),'%a
    \rightarrow
        %d %b %Y').date(): 'Garden' } %}
         {{ x[t] if t in x.keys() else 'nothing' }}
    trigger:
10
       platform: time
11
       at: '20:00:00'
12
    condition: "{{ waste != 'nothing' }}"
13
14
     action:
       service: notify.admin devices
15
16
       data:
17
         message: "{{ waste }} bin collection tomorrow!"
    mode: single
```

Listing 9: Different service calls based on entity values (R7) [32]

and converts the value to a floating-point number. Third, the automation sets all turned-on speakers to the same volume.

Notice that R1–R3 address debugging issues; R4–R5 resolve debugging and implementation issues; R6 fixes optimization and debugging issues; R7–R8 handle issues of all three categories. These strategies provide two insights for future tool support of smart home development. First, users repetitively commit certain mistakes, and such mistakes present clear bug patterns; it is promising to create new tools to detect and fix repetitive bugs. Second, some users cannot (1) define diverse actions depending on the fired triggers or entity values, or (2) define uniform processing for elements in a group/list, although such automation needs are not uncommon. Therefore, it will be helpful to create tools, which generate automation implementations to at least partially satisfy those needs.

**Finding 5:** The eight resolution strategies imply that domain experts addressed recurring issues by following certain principles; it is promising to automate such principles.

## C. RQ3: Current Debugging Tool Support

To study the existing tools for debugging YAML files or YAML-based automation configuration, we searched online with keywords "YAML validator" and found five publicly available tools: YAML Validator by Code Beautify [34], YAML Lint [35], YAML Checker [36], YAML Validator by JSON formatter [37], and ONLINEYAMLTOOLS [38]. Additionally, as HA provides an IDE to help automation development, we also included its checker into the tool list for evaluation. As shown in Table II, for simplicity, we assigned a unique ID to each tool, and will consistently use T1–T6 to refer to these tools. In our experiments, **because we found no tool to suggest any bug fix, this section focuses on our results about tools' capabilities of bug detection.** 

1) Metrics for Automatic Bug Detection: We defined three metrics to evaluate the bug detection capabilities of tools:

**Recall** (**R**) measures among all known bugs, how many of them are reported by a tool:

2

3

4

6

9

10

11

12

13

14

15

16

17

18

19

$$R = \frac{\text{\# of known bugs reported}}{\text{Total \# of known bugs}}$$
(1)

1	action:		
2	- variables:		
3	<pre>speakers_on: &gt;</pre>		
1	{{ expand("media_player.google_home_bedroom",		
5	"media_player.google_nestmini_office",		
5	"media_player.google_nesthub_living_room",		
7	"media_player.google_nestmini_kitchen")		
	→ rejectattr('state', 'eq', 'off')		
8	<pre>  map(attribute='entity_id')   list }}</pre>		
9	<pre>recent_volume: &gt;</pre>		
D	{{ expand("sensor.volume_google_speaker_bedroom",		
1	"sensor.volume_google_speaker_office",		
2	"sensor.volume_google_speaker_living_room",		
3	"sensor.volume_google_speaker_kitchen" )		
1	<pre>sort(attribute='last_changed', reverse=true)</pre>		
5	map(attribute='state')   first   float(0) }}		
5	<ul> <li>service: media_player.volume_set</li> </ul>		
7	data:		
3	<pre>volume_level: "{{ recent_volume }}"</pre>		
9	target:		
)	<pre>entity_id: "{{ speakers_on }}"</pre>		

Listing 10: Handling a group or list of same-typed entities (R8) [33]

TABLE II: The bug detection capabilities of current tools

ID	Tool Name	# of Bugs Correct	Reported Incorrect	Р	R	F
T1	YAML Validator by	15	3	83%	9%	15%
	Code Beautify [34]					
T2	YAML Lint [35]	14	3	82%	7%	13%
T3	YAML Checker	15	5	75%	8%	14%
	[36]					
T4	YAML Validator	15	4	79%	8%	14%
	by JSON					
	formatter [37]					
T5	ONLINEYAML	15	4	79%	8%	14%
	TOOLS [38]					
T6	HA IDE Checker	15	1	94%	8%	14%
	[39]					

To compute the recall of a tool, we first intersected the toolreported bugs with known 129 bugs. Then we computed the count ratio between this intersection and the known bug set.

**Precision** (**P**) measures among all bugs reported by a tool, how many of them are real bugs:

$$P = \frac{\text{\# of true bugs reported}}{\text{Total \# of bugs reported}}$$
(2)

The 129-bug set does not include all bugs existent in given YAML files/snippets, as developers sometimes omitted discussion on trivial bugs. To compute a tool's precision, we manually inspected all bug reports. If a report  $B_r$  clearly describes a known bug, we consider  $B_r$  a true positive. Otherwise, if  $B_r$  is confusing, we applied the tool which originally output  $B_r$  also to the developer-fixed version. If (1) that tool reported nothing for the fixed version or (2) our domain knowledge confirms the bug reported by  $B_r$ , we consider  $B_r$  a true positive; otherwise,  $B_r$  is a false positive.

*F-score* (F) combines P with R, to measure the overall accuracy of bug detection as below:

$$F = \frac{2 \times P \times R}{P + R} \tag{3}$$

F is the harmonic mean of P and R. All three metrics have their values vary within [0, 1]. The higher, the better.

2) Tool Effectiveness: As shown in Table II, the tools behaved similarly to each other. All tools achieved high precision (75%-94%), low recall (7%-9%), and low F scores (13%-15%). They reported bugs in 14 common YAML files/snippets, and detected no bug in 106 common files/snippets. High precision means that the six tools report bugs with low false positives. Namely, if a tool reports a bug for a given YAML file/snippet, the file or snippet is very likely to be buggy. Meanwhile, low recall means that these tools poorly reveal known bugs. Among the 129 bugs we distilled from HA discussion, only 9–11 bugs were covered by the reports generated by each tool; the combination of all tools' outputs only revealed 14 known bugs. Due to such low recall rates, the measured F values are also low.

Among the tools, T6 got the highest precision; T1 got the highest recall and F-score; T4 and T5 acquired identical values for all metrics. Between T4 and T5, we found a significant overlap in tool-generated bug reports; both tools described all errors in almost identical ways. This interesting observation implies that T4 and T5 may share the same core implementation. Additionally, we once hypothesized T6 to outperform other tools in all metrics, because T6 was specially

 TABLE III: The confusing tool-generated reports for Listing 6

 ID
 Error Message

ID ID	Error Message
T1	Error: Unexpected characters near "counter.aux_ac_pieza')}}'".
	Line : 3 value: '{{states('counter.aux_ac_pieza')}}'
T2	Unexpected scalar at node end at line 3, column 21
T3	bad indentation of a mapping entry (3:21)
T4	Error: can not read an implicit mapping pair; a colon is missed
	at line 3, column 46
T5	YAMLException: can not read an implicit mapping pair; a colon
	is missed at line 3, column 46
T6	bad indentation of a mapping entry (3:21)

designed to reveal HA-related issues while all other tools are general YAML file checkers. Surprisingly, we found T6 to work similarly with other tools, and only outperformed the other tools in precision.

**Finding 6:** For bug detection, existing tools achieved high precision, low recall, and low F scores.

3) Characterization of Tool-Generated Bug Reports: Among the bug reports output by different tools, we observed two phenomena. First, the bug reports are purely about wrong formats. These issues may involve wrong quote usage, bad indentation, and wrong tag (i.e., token) usage. However, as mentioned in Section IV-A, the 129 known bugs cover 19 distinct concepts; "wrong format" is just one of them, and its bugs seem easier to detect because formatting rarely requires for advanced program analysis. Unfortunately, existing tools cannot detect other types of bugs. Even within the 20 known bugs of "Wrong format", we still observed 11 cases missed by all tools. For three cases, T3–T5 failed to interpret the legal notation "!" and incorrectly reported it as wrong tag usage.

**Finding 7:** Existing tools only revealed a relatively simple type of bugs—wrong format; even for the detection of such bugs, current tools suffer from significant false positive and false negative issues.

Second, *the error messages in many bug reports are very confusing*. They may incorrectly pinpoint the bug location, wrongly describe an error, or provide meaningless hints that mislead users. For instance, Listing 6 shows a buggy snippet to misuse quotes at line 3. Essentially, single quotes should not be nested. However, T1 and T2 output confusing messages to complain about unexpected characters/scalar at line 3 (see Table III), without clarifying which character/scalar is unexpected. T3 and T6 reported bad indentation, but no indentation issue exists at all. T4 and T5 mentioned a missing colon, which does not reflect the wrongly used quotes, either. Among the 109 bug reports we examined in total, 45 reports contain confusing error messages. T1 produced the biggest number of confusing reports—12, while T3–T6 output the fewest—6.

**Finding 8:** In our experiment, 41% (45/109) of the examined bug reports are confusing, which evidences the need of improving the error-reporting mechanism.

#### V. THREATS TO VALIDITY

Threats to External Validity. All our observations are based on the experimental dataset. Although the study analyzes 190 threads in depth, the sample size, while substantial, may not fully represent the diverse range of experiences and challenges encountered by all users. In the future, we will add more data to our dataset, and conduct further research as well as analysis to draw more generalized conclusions about automation configuration issues in smart homes.

Threats to Internal Validity. Our manual analysis for the collected data and tool outputs is subject to human bias, and is limited to our domain knowledge. To mitigate the problem, we had two authors independently examine the data in multiple iterations. When they disagreed upon certain data labels or classification criteria, they had discussion until coming to an agreement and enforced the same labeling/classification mechanism in the next iteration.

## VI. LESSONS LEARNED

Below are actionable items we learned from this study.

*For Tool Developers and SE Researchers:* Our study shows that HA users do not have sufficient domain knowledge or good tool support for automation development. Tool developers and SE researchers can build tools to (1) better detect or fix bugs in user-defined automations or (2) generate automation implementation from scratch. In particular, we suggest three future directions.

First, syntax checkers and fixers. Users often use quotes and indentation in wrong ways (Sections IV-A and IV-B), and the current tool support is poor (Section IV-C). HA defines a set of grammar rules on top of the basic YAML rules (e.g, whileloop). To enforce these domain-specific rules, future work can create parsers to analyze YAML files, locate HA-specific keywords as well as structures, comprehend automation rules based on the extracted information, and create syntax trees. In the tree-creation procedure, parsers can detect malformed content by reporting any violation of grammar rules; they can further automate or suggest fixes by observing grammar rules and program context.

Second, semantic checkers and fixers. As described by Section IV-B, HA defines semantic rules on segment-specific concepts (e.g., device triggers do not support templating), and segment-agnostic ones (e.g., sensor states should be accessed via the function  $state(\ldots)$ ). To enforce these rules, future work can create analyzers to traverse the parsing trees mentioned above, gather semantic information like the definition or usage of variables/templates/entities, compare the gathered information with predefined bug patterns, and report a bug for each found pattern-match. The analyzers can also automate or suggest fixes based on predefined bug-fixing patterns, or data analysis of correct automations.

Third, generators of automation configurations. As mentioned in Section IV-B, some users have similar automation needs (e.g., to call distinct services based on the fired triggers), and the code to satisfy those needs share commonality (e.g., defining and using trigger IDs). Future work can use datadriven approaches like machine learning and large language models (LLMs) to (1) infer the correspondence between automation needs and YAML code, and (2) generate YAML code given automation specification. Such tools can be used in combination with the bug detectors and fixers mentioned above, to iteratively refine or optimize automations.

For HA Developers: Users are often confused about the correct usage of some program constructs, built-in functions,

or templates (Section IV-A). The error messages generated by existing HA checker seem not quite helpful (Section IV-C). To help users better adopt HA and further broaden the platform's impact, HA developers may need to improve documentation, and to combine existing concrete YAML examples with a more systematic and comprehensive concept explanation. They may also need to enhance the error-reporting mechanism, to clarify the root causes or even fixes of reported bugs.

*For HA Users:* Carefully read the available HA documentation to follow best practices and avoid the well-known pitfalls. When asking questions on HA, provide all relevant information (e.g., automation specification, unsuccessful trials, error messages, and help request) to benefit most from the community wisdom.

## VII. RELATED WORK

The related work includes empirical studies on Internet-of-Thing (IoT) systems, and bug detection in those systems.

# A. Empirical Studies on IoT Systems

Studies were recently performed to characterize issues or problems in IoT systems [40], [41], [42], [43], [44], [45], [46]. For instance, Fernandes et al. [40], Alrawi et al. [42], and Zhou et al. [44] analyzed the security properties of IoT platforms and systems. In contrast, our research focuses on coding issues in IoT automation configuration, covering three categories: (1) implementing new features, (2) debugging, and (3) optimization. He et al. [41] did an online survey with 72 users of smart home systems, to learn their negative user experiences. The participants reported fears of breaking the system by writing code, and struggles of diagnosing or recovering from system failures. Similarly, Makhshari and Mesbah [45] did interviews and surveys with IoT developers; they also found testing and debugging as the major challenges. However, neither study examines any widely used smart home platform to characterize the bug patterns or fixing strategies, let alone to provide concrete actionable advices to tool builders. Our study is motivated by and complement both studies.

Brackenbury et al. [43] focused on the trigger-action programming (TAP) model. They systematized the temporal paradigms through which TAP systems could express rules, and classified TAP programming bugs into three categories: control logic, timing, and inaccurate user expectation. As with Brackenbury et al., we also identified bugs related to these three general categories (e.g., wrong loop structure and wrong data specification for matching). However, our taxonomy is finer-grained and more comprehensive, as we derived bug patterns from real-world bugs instead of speculation on the TAP model. Our observations reflect the real-world bug distribution among patterns; we also characterized (1) bugs violating syntactic rules (e.g., wrong formats) and more diverse semantic rules (e.g., data access), (2) developers' bug fixes, (3) recurring implementation requests, and (4) frequent optimization needs.

Wang et al. [46] inspected 330 device integration bugs mined from HAC to characterize any root cause, fix, trigger condition, and impact of those bugs. Our study is closely related to the work by Wang et al., as we also examined data mined from HAC. However, our study is irrelevant to device integration; instead, it focuses on the coding issues in automation configuration.

#### B. Automatic Bug Detection in IoT Systems

Tools were created to automatically detect bugs in IoT systems [47], [48], [49], [50], [51], [52], [53]. Specifically, VulHunter [51] detects new vulnerabilities by analyzing the known vulnerability patch packs in Industry IoT. SOTE-RIA [48] verifies whether IoT apps adhere to the identified safety, security, and functional properties via model checking. Liang et al. [47] and Fu et al. [52] separately created tools to reveal bugs in IoT operating systems (OSes).

Some tools [49], [50], [53] detect conflicting interactions between smart home IoT applications, because these conflicts can result in undesired actions like locking a door during a fire. For instance, Trimananda et al. [49] studied 198 official and 69 third-party apps on Samsung SmartThings, and found 3 major categories of app conflicts. Based on their observations, the researchers created a conflict detector that uses model checking to detect up to 96% of the conflicts. Li et al. [50] categorized conflicts in a totally different way. They also invented a graph structure named *IA graph* to represent the controls in each IoT app and event schedules. With that representation, they created an efficient algorithm to leverage first-order logic and SMT solvers to detect conflicts.

Our study complements all tools mentioned above; it focuses on a different type of IoT bugs—bugs in automation configuration or implementation. Such implementation bugs are less relevant to security, IoT kernels, or inter-app conflicts. However, they are still important as these bugs can prevent end-users from realizing the desired automation rules or achieving high-quality automations.

### VIII. CONCLUSION

As the growing prevalence of smart homes, we believe that they will become crucial to lower utility costs, improve people's life, and protect people's properties. Wrongly configured home automations can waste utilities, jeopardize people's life, and compromise home safety/security. Our study characterizes the challenges and opportunities in HA-based smart homes, enlightening future research to improve end-user programming and smart-home quality.

#### REFERENCES

- "The global smart home market size was valued at \$80.21 billion in 2022 & is projected to grow from \$93.98 billion in 2023 to \$338.28 billion by 2030." https://www.fortunebusinessinsights.com/ industry-reports/smart-home-market-101900, 2024.
- [2] "With 21.1% CAGR, Smart Home Worth Market 2028," USD 380.52 Billion https://www. in globenewswire.com/en/news-release/2022/06/28/2470249/0/en/ With-21-1-CAGR-Smart-Home-Market-Worth-USD-380-52-Billion-in-2028. html, 2022. [3]
- [3] SmartThings, SmartThings, 2024. [Online]. Available: https://www. smartthings.com/
- [4] P. Lounge, OpenHAB Vs Home Assistant: Detailed Comparison By An Expert in 2022, Retrieved September 12, 2022. [Online]. Available: https://purdylounge.com/openhab-vs-home-assistant/

- [5] "If starting again what smart home platform would people go with ?" https://www.reddit.com/r/smarthome/comments/16sk3qg/if\_starting\_ again\_what\_smart\_home\_platform\_would/, 2023.
- [6] "The best home automation systems: Compare SmartThings, Apple HomeKit, Amazon Alexa, and more," https://www.zdnet.com/ home-and-office/smart-home/best-home-automation-system/, 2023.
- [7] "How Popular Is Home Assistant Compared To The Competition?" https://whatsmarthome.com/how-popular-is-home-assistant/, 2023.
- [8] "Home Assistant Analytics," https://analytics.home-assistant.io, 2024.
- [9] "YAML," https://yaml.org, 2024.
- [10] "Automation Conditions Home Assistant," https://www. home-assistant.io/docs/automation/condition/, 2024.
- [11] "Home Assistant Community," https://community.home-assistant.io, 2024.
- [12] "Tags Home Assistant Community," https://community.home-assistant. io/tags, 2024.
- "Strategies for dealing with restarts in automations," https://community. home-assistant.io/t/strategies-for-dealing-with-restarts-in-automations/ 400922, 2022.
- [14] "Automation house thermostat based on phone location - not working," https://community.home-assistant.io/t/ automation-house-thermostat-based-on-phone-location-not-working/ 401942, 2022.
- [15] "Time Before and After condition, I'm going crazy," https://community. home-assistant.io/t/time-before-and-after-condition-i-m-going-crazy/ 416170, 2022.
- [16] "IFTTT Automation for business and home," https://ifttt.com, 2024.
- [17] "Automation Trigger Home Assistant," https://www.home-assistant.io/ docs/automation/trigger/, 2024.
- [18] "Automation actions Home Assistant," https://www.home-assistant.io/ docs/automation/action/, 2024.
- [19] "Jinja," https://palletsprojects.com/p/jinja/, 2022.
- [20] "GitHub," https://github.com, 2024.
- [21] "Script Syntax Home Assistant," https://www.home-assistant.io/docs/ scripts/, 2022.
- [22] "Boolean triggering script," https://community.home-assistant.io/t/ boolean-triggering-script/404465, 2022.
- [23] "Condition on trigger.entity\_id," https://community.home-assistant.io/t/ condition-on-trigger-entity-id/442838, 2022.
- [24] "Cant use template in for field of trigger automation," https://community.home-assistant.io/t/ cant-use-template-in-for-field-of-trigger-automation/400475, 2022.
- [25] "Putting information from sensor into mobile notification," https://community.home-assistant.io/t/ putting-information-from-sensor-into-mobile-notification/264000, 2022.
- [26] "Notify How to display sensor value in message," https://community. home-assistant.io/t/notify-how-to-display-sensor-value-in-message/ 376646, 2022.
- [27] "Lights on only after sunset and before sunrise," urlhttps://community.home-assistant.io/t/lights-on-only-after-sunsetand-before-sunrise/307761, 2022.
- [28] "My automation generates an error message," https://community. home-assistant.io/t/my-automation-generates-an-error-message/434970, 2022.
- [29] "Set counter value equals to other counter in automation," https://community.home-assistant.io/t/ set-counter-value-equals-to-other-counter-in-automation/442485, 2022.
- [30] "Automation door alarm use template," https://community. home-assistant.io/t/automation-door-alarm-use-template/439744, 2022.
- [31] "Exceptions on automation," https://community.home-assistant.io/t/ exceptions-on-automation/409661, 2022.
- [32] "Automation reference condition template variable in action notification," https://community.home-assistant.io/t/ automation-reference-condition-template-variable-in-action-notification/ 339858, 2021.
- [33] "Automation Action Templating," https://community.home-assistant.io/
- 128. t/automation-action-templating/409680, 2022.
  [34] C. 2023, *CodeBeautify YAML Validator*, Accessed October 11, 2023. [Online]. Available: https://codebeautify.org/yaml-validator
- [35] Y. Lint, YAML Lint, Accessed October 11, 2023. [Online]. Available: https://www.yamllint.com/
- [36] Y. Checker, YAML Checker, Accessed October 11, 2023. [Online]. Available: https://yamlchecker.com/

- [37] J. Formatter, JSON Formatter YAML Validator, Accessed October 11, 2023. [Online]. Available: https://jsonformatter.org/yaml-validator
- [38] O. Y. Tools, Online YAML Tools, Accessed October 11, 2023. [Online]. Available: https://onlineyamltools.com/validate-yaml
- [39] "Home Assistant," https://www.home-assistant.io, 2022
- [40] E. Fernandes, J. Jung, and A. Prakash, "Security analysis of emerging smart home applications," in 2016 IEEE symposium on security and privacy (SP). IEEE, 2016, pp. 636–654.
- [41] W. He, J. Martinez, R. Padhi, L. Zhang, and B. Ur, "When smart devices are stupid: Negative experiences using home smart devices," in 2019 IEEE Security and Privacy Workshops (SPW), 2019, pp. 150–155.
- [42] O. Alrawi, C. Lever, M. Antonakakis, and F. Monrose, "Sok: Security evaluation of home-based iot deployments," in 2019 IEEE symposium on security and privacy (sp). IEEE, 2019, pp. 1362–1380.
- [43] W. Brackenbury, A. Deora, J. Ritchey, J. Vallee, W. He, G. Wang, M. L. Littman, and B. Ur, "How users interpret bugs in trigger-action programming," in *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*, ser. CHI '19. New York, NY, USA: Association for Computing Machinery, 2019, pp. 1–12. [Online]. Available: https://doi.org/10.1145/3290605.3300782
- [44] W. Zhou, C. Cao, D. Huo, K. Cheng, L. Zhang, L. Guan, T. Liu, Y. Jia, Y. Zheng, Y. Zhang, L. Sun, Y. Wang, and P. Liu, "Reviewing iot security via logic bugs in iot platforms and systems," *IEEE Internet of Things Journal*, vol. 8, no. 14, pp. 11621–11639, 2021.
- [45] A. Makhshari and A. Mesbah, "Iot bugs and development challenges," in 2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE). IEEE, 2021, pp. 460–472.
- [46] T. Wang, K. Zhang, W. Chen, W. Dou, J. Zhu, J. Wei, and T. Huang, "Understanding device integration bugs in smart home system," in *Proceedings of the 31st ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2022, pp. 429–441.
- [47] H. Liang, Q. Zhao, Y. Wang, and H. Liu, "Understanding and detecting performance and security bugs in iot oses," in 2016 17th IEEE/ACIS International Conference on Software Engineering, Artificial Intelligence, Networking and Parallel/Distributed Computing (SNPD). IEEE, 2016, pp. 413–418.
- [48] Z. B. Celik, P. McDaniel, and G. Tan, "Soteria: Automated {IoT} safety and security analysis," in 2018 USENIX Annual Technical Conference (USENIX ATC 18), 2018, pp. 147–158.
- [49] R. Trimananda, S. A. H. Aqajari, J. Chuang, B. Demsky, G. H. Xu, and S. Lu, "Understanding and automatically detecting conflicting interactions between smart home iot applications," in *Proceedings of the 28th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, 2020, pp. 1215–1227.
- [50] X. Li, L. Zhang, and X. Shen, "Diac: An inter-app conflicts detector for open iot systems," ACM Trans. Embed. Comput. Syst., vol. 19, no. 6, oct 2020. [Online]. Available: https://doi.org/10.1145/3391895
- [51] F. Xiao, L.-T. Sha, Z.-P. Yuan, and R.-C. Wang, "Vulhunter: A discovery for unknown bugs based on analysis for known patches in industry internet of things," *IEEE Transactions on Emerging Topics in Computing*, vol. 8, no. 2, pp. 267–279, 2020.
- [52] L. Fu, S. Ji, K. Lu, P. Liu, X. Zhang, Y. Duan, Z. Zhang, W. Chen, and Y. Wu, "Cpscan: Detecting bugs caused by code pruning in iot kernels," ser. CCS '21. New York, NY, USA: Association for Computing Machinery, 2021, pp. 794–810. [Online]. Available: https://doi.org/10.1145/3460120.3484738
- [53] B. Huang, D. Chaki, A. Bouguettaya, and K.-Y. Lam, "A survey on conflict detection in iot-based smart homes," *ACM Comput. Surv.*, vol. 56, no. 5, nov 2023. [Online]. Available: https: //doi.org/10.1145/3629517