

IntOPE: Off-Policy Evaluation in the Presence of Interference

Yuqi Bai¹, Ziyu Zhao², Minqin Zhu², Kun Kuang²

¹University of Waterloo

²Zhejiang University

y78bai@uwaterloo.ca, benzhaostyx@gmail.com, minqinzhu@zju.edu.cn, kunkuang@zju.edu.cn

Abstract

Off-Policy Evaluation (OPE) is employed to assess the potential impact of a hypothetical policy using logged contextual bandit feedback, which is crucial in areas such as personalized medicine and recommender systems, where online interactions are associated with significant risks and costs. Traditionally, OPE methods rely on the Stable Unit Treatment Value Assumption (SUTVA), which assumes that the reward for any given individual is unaffected by the actions of others. However, this assumption often fails in real-world scenarios due to the presence of interference, where an individual’s reward is affected not just by their own actions but also by the actions of their peers. This realization reveals significant limitations of existing OPE methods in real-world applications. To address this limitation, we propose IntIPW, an IPW-style estimator that extends the Inverse Probability Weighting (IPW) framework by integrating marginalized importance weights to account for both individual actions and the influence of adjacent entities. Extensive experiments are conducted on both synthetic and real-world data to demonstrate the effectiveness of the proposed IntIPW method.

1 Introduction

The context bandit process is important across a range of real-world applications, including precision medicine (Ameko et al. 2020), recommender systems (Li et al. 2011), and advertising (Li et al. 2011). In these interactive systems, a logging policy observes user contexts, executes actions (treatments), and collects rewards (outcomes), thereby generating a substantial volume of logs. These logs, resulting from online interactions, provide critical data for off-policy evaluation (OPE). OPE is designed to assess the performance of new policies without resorting to A/B testing (Lewis and Reiley 2008), thereby reducing high costs and potential ethical concerns.

As interest in the OPE problem grows, numerous estimators have been developed to use offline log data for assessing new policies. Direct Method (DM) (Beygelzimer and Langford 2016) learns a predictive reward function from the log data. Inverse Probability Weighting (IPW) (Horvitz and Thompson 1952; Strehl, Langford, and Kakade 2010) assigns sample weights based on the propensities of the behavior and evaluation policies. Doubly Robust (DR) (Dudik,

Copyright © 2025, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.

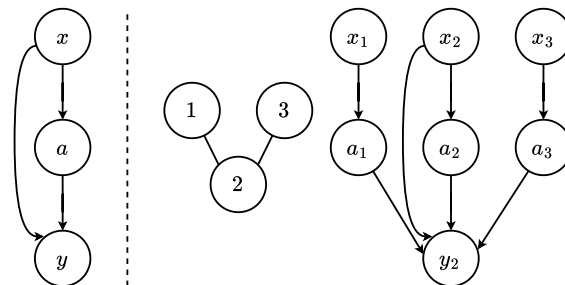


Figure 1: Example of a small social network. x , a and y are contexts, actions, and rewards respectively. Left: causal graph of common SUTVA setting. Right: the network connection topology and causal graph of our setting. For simplicity, y_1 and y_3 are not shown.

Langford, and Li 2011) combines DM and IPW. These estimators have demonstrated effectiveness across various domains (Saito and Joachims 2022; Peng et al. 2023; Kallus and Zhou 2018). The effectiveness of these methods relies on the Stable Unit Treatment Value Assumption (SUTVA), which assumes that the reward for any given unit is influenced solely by its context and the action it takes. However, the SUTVA is often violated in many real-world scenarios involving a social network since peers are not independent (Ma and Tresp 2021).

In a social network, interference occurs when a unit’s reward is influenced not only by its own action but also by the actions of its social contacts, a phenomenon also known as peer effects (Ogburn et al. 2022). For instance, in epidemiology, deciding whether to vaccinate a person against an infectious disease can affect the health status of those around them (Fine, Eames, and Heymann 2011); in recommender systems, recommending a product to a person can also indirectly influence the purchasing intentions of others within their social circle (Qian et al. 2014) through opinion propagation; in advertising, an ad’s exposure may directly affect a user’s purchase behavior and indirectly affect others in the social network through the acquisition behavior of others (Parshakov, Naidenova, and Barajas 2020). However, current studies on OPE neglect the peer effects which may cause these estimators to fail completely. Therefore, how to

evaluate a new policy from logging data in the presence of interference remains an open problem.

In this paper, we study the problem of off-policy evaluation in social networks in the presence of interference. As shown in the left half of Fig.1, prior studies on OPE mainly adhered to the SUTVA. However, in real-world scenarios, as shown on the right side of Fig.1, there often exists a social network in which people with social relationships influence each other, thus violating the SUTVA. Specifically, for each individual, the reward is influenced not only by the action they take but also by the actions of other individuals in their social relationships.

To bridge this gap, in this paper, we propose an IPW-style estimator termed IntIPW, which uses marginalized importance weights to account for both individual actions and the effects of adjacent entities. Specifically, IntIPW simplifies the process of weight estimation into a binary classification task. This is achieved by first assigning unique labels to context-action pairs from the logging policy and the evaluation policy. Following this, a classifier that employs a Graph Convolutional Network (GCN) (Guo, Li, and Liu 2020; Chu, Rathbun, and Li 2021; Kipf and Welling 2017) is trained to differentiate the sample distributions from different policies. Ultimately, the logged samples are assigned weights based on the classifier’s predictions, thereby presenting a new approach within the IPW framework to effectively bridge the existing gap. Empirical studies conducted on two synthetic datasets and two real-world datasets demonstrate the effectiveness of the proposed method in the presence of interference.

The main contributions of this paper are as follows:

- We investigate a new problem of off-policy evaluation in social networks in the presence of interference.
- We propose IntIPW estimator, which uses marginalized importance weights to account for both individual actions and adjacent entities’ effects.
- Empirical results on both synthetic and real-world datasets show that our estimator outperforms other baselines in OPE in the presence of interference.

2 Related Works

2.1 Off-Policy Evaluation

Common OPE estimators mainly include the Direct Method (DM) (Beygelzimer and Langford 2016; Strehl, Langford, and Kakade 2010) that directly learns the reward function, the Inverse Probability Weighting (IPW) (Horvitz and Thompson 1952) method which weights samples based on the inverse of the propensity score, and the Doubly Robust (DR) (Dudik, Langford, and Li 2011) method which combines both. Among these, the IPW method is the most common.

In practical scenarios, when the behavior and evaluation policies are very dissimilar, the estimates from IPW tend to be poor. To mitigate this issue, Metelli, Russo, and Restelli (2021) introduce Sub-Gaussian IPW (SGIPW), which modifies the vanilla weights by applying power mean. This method provides robustness against outliers and extreme values in data distributions.

When the number of actions is large, IPW-based estimators can suffer from significant bias and variance because “full support”, a key theoretical requirement of IPW, is violated. This happens when the probability of some actions is zero in some contexts (Sachdeva, Su, and Joachims 2020). To solve this problem, Sachdeva, Su, and Joachims (2020) identify three approaches: restricting the action space, reward extrapolation, and restricting the policy space. Alternatively, Saito and Joachims (2022) propose Marginalized IPW method, which utilizes action embeddings. In addition, Peng et al. (2023) propose GroupIPW estimator, whose main idea is action grouping.

Another issue that needs to be addressed is that the vanilla IPW estimator is not applicable when the action space is continuous. To resolve this problem, Kallus and Zhou (2018) introduce a new IPW estimator that generalizes IPW and DR to continuous action spaces by using a kernel function.

2.2 Interference

In recent years, there has been a considerable amount of literature studying network interference from various perspectives. A large portion of such work has focused on studying average treatment effects in observational data of homogeneous networks, where the influence of each unit on every neighbor is assumed to be uniform (Liu, Hudgens, and Becker-Dreps 2016; Ogburn et al. 2022; Sofrygin and van der Laan 2016; Eric J. Tchetgen Tchetgen and Shpitser 2021). In terms of individual treatment effects, Ma and Tresp (2021) research causal effect estimation under general network interference using Graph Neural Networks. Ma et al. (2022) investigate high-order interference modeling and proposed a new causality learning framework powered by hypergraph neural networks.

In the real world, interference is often heterogeneous, meaning that the influence of a node on different neighbors varies (Qu et al. 2022). In this context, Song et al. (2019) propose a recommender system for online communities based on a dynamic-graph-attention neural network. Similarly, aiming at providing a general method for improving recommender systems by including social network information, Ma et al. (2011) propose a matrix factorization framework with social regularization.

3 PRELIMINARIES

In this section, we begin by outlining a formal definition of the contextual bandit framework when interference is present. Subsequently, we enumerate several traditional methods for off-policy evaluation and explore their constraints where interference occurs.

3.1 Problem Setup

In this paper, we explore a scenario that extends beyond the conventional contextual bandit framework by including the influence of social networks on off-policy evaluation. The dataset includes four key components: $\mathbf{x} \in \mathcal{X} \subseteq \mathbb{R}^p$ are p -dimensional vectors that represent the contexts of units; $\mathbf{a} \in \mathcal{A}$ are the actions taken by units, where $\mathcal{A} = \{1, 2, \dots, D\}$ is a discrete and finite action space of size D ; $\mathbf{r} \in (-\infty, \infty)$

is the rewards obtained by units; A is the adjacency matrix representing the link information of the social network, where $A[i, j] = A[j, i] = 1$ if units i and j are neighbors, and $A[i, j] = A[j, i] = 0$ otherwise.

The process of dataset collection is:

- The context of each unit x_i is sampled from the population distribution $x_i \sim p(x)$.
- The action taken by each unit a_i is drawn by the behavior policy π_0 , which is stochastic, conditional on the context of the unit. That is, $a_i \sim \pi_0(a|x_i)$.
- The reward received by each unit r_i depends on its context, action, and actions of its neighbors. That is, $r_i \sim p(r|x_i, a_i, a_{i\mathcal{N}})$, where $a_{i\mathcal{N}}$ is the aggregation of neighbors' actions.

To summarize, the dataset follows such a distribution:

$$\mathcal{D} := A, \{(x_i, a_i, r_i)\}_{i=1}^n \sim p(x)\pi_0(a|x)p(r|x, a, a_{i\mathcal{N}}). \quad (1)$$

To ensure that the historical dataset can be utilized for an unbiased estimation of the effectiveness of the evaluation policy, traditional estimators usually require the SUTVA. However, the SUTVA does not hold in our setting because the reward of a unit is influenced by the actions of 1-hop neighbors. Instead, following Jiang and Sun (2022); Zhao et al. (2024), we assume that the interference has the Markov property:

Assumption 1. (Markov) *The potential reward for any unit is influenced by its own context, its action, and the action of its neighbors only:*

$$r_i \perp\!\!\!\perp a_{i-\mathcal{N}} \mid x_i, a_i, a_{i\mathcal{N}}, \quad (2)$$

where $a_{i-\mathcal{N}}$ is the actions of the non-neighbor units of unit i .

In addition, adequate overlap in the action distributions of the evaluation policy and the behavior policy is required (Sachdeva, Su, and Joachims 2020). Formally, networked common support is defined as:

Assumption 2. (Networked Common Support) *The behavior policy π_0 is said to have common support for the evaluation policy π if*

$$p(a_i, a_{i\mathcal{N}}|x_i, A, \pi) > 0 \rightarrow p(a_i, a_{i\mathcal{N}}|x_i, A, \pi_0) > 0 \quad (3)$$

for all $a \in \mathcal{A}$, $x \in \mathcal{X}$, and unit i .

Our objective is to estimate the effectiveness of the evaluation policy π with only \mathcal{D} given:

$$V(\pi) := \mathbb{E}_{p(x)\pi(a|x)p(a_{i\mathcal{N}}|A, x, \pi)p(r|x, a, a_{i\mathcal{N}})}[r]. \quad (4)$$

To achieve this, we need to develop an estimator \hat{V} . The accuracy of \hat{V} can be measured by the MSE (Saito and Joachims 2022):

$$\begin{aligned} \text{MSE}(\hat{V}(\pi)) &:= \mathbb{E}_{\mathcal{D}} \left[\left(V(\pi) - \hat{V}(\pi; \mathcal{D}) \right)^2 \right] \\ &= \text{Bias}^2 \left(\hat{V}(\pi) \right) + \text{Var}_{\mathcal{D}} \left(\hat{V}(\pi; \mathcal{D}) \right). \end{aligned} \quad (5)$$

3.2 Existing Estimators

Next, we introduce some traditional OPE estimators and analyze their limitations in social networks with interference.

Direct Method (DM). DM estimator involves learning a reward function $\hat{r}(x, a)$ from historical data. It then uses this reward function to directly estimate the reward of the evaluation policy.

$$\hat{V}_{DM} = \frac{1}{n} \sum_{i=1}^n \sum_{a \in \mathcal{A}} \pi(a|x_i) \hat{r}(x_i, a). \quad (6)$$

Inverse Probability Weighting (IPW). This method is also known as Inverse Propensity Score or Importance Sampling. In IPW estimator, the inverse of the probabilities of selecting an action is used as a weight to reweight the rewards of samples in the dataset.

$$\hat{V}_{IPW} = \frac{1}{n} \sum_{i=1}^n \frac{\pi(a_i|x_i)}{\pi_0(a_i|x_i)} r_i. \quad (7)$$

$w(x_i, a_i) := \frac{\pi(a_i|x_i)}{\pi_0(a_i|x_i)}$ is called the (vanilla) importance weight (Saito and Joachims 2022).

Self-Normalized Inverse Probability Weighting (SNIPW). Based on the vanilla IPW, this method self-normalizes the weights. By doing so, the problem that IPW suffers from propensity overfitting when the mean of weights deviates from its expected value of 1 is improved (Swaminathan and Joachims 2015). This adjustment also reduces the variance.

$$\hat{V}_{SNIPW} = \frac{\sum_{i=1}^n \frac{\pi(a_i|x_i)}{\pi_0(a_i|x_i)} r_i}{\sum_{i=1}^n \frac{\pi(a_i|x_i)}{\pi_0(a_i|x_i)}}. \quad (8)$$

Doubly Robust (DR). Doubly robust estimator is a combination of the DM estimator and the IPW estimator. The term "doubly robust" refers to the estimator's key feature that it is unbiased when either the propensity scores or estimated rewards are correct.

$$\begin{aligned} \hat{V}_{DR} &= \frac{1}{n} \sum_{i=1}^n \left[\sum_{a \in \mathcal{A}} \pi(a|x_i) \hat{f}(x_i, a) \right. \\ &\quad \left. + \frac{\pi(a_i|x_i)}{\pi_0(a_i|x_i)} \left(r_i - \hat{f}(x_i, a_i) \right) \right]. \end{aligned} \quad (9)$$

These estimators are not suitable for social networks where interference exists, because they all require the SUTVA, which assumes the potential reward for any unit is not influenced by the action assignment of other units, to ensure performance.

For DM, it may exhibit significant bias when the discrepancy in the distribution of actions between the behavior policy and the evaluation policy is large (Dudik, Langford, and Li 2011). Moreover, in the presence of interference, DM becomes even more biased because instead of learning a reward function $\hat{r}(x, a)$, it should learn $\hat{r}(x, a, a_{i\mathcal{N}})$.

Moreover, the vanilla IPW is also biased in the presence of interference because the vanilla importance weights do not take into account the effect of neighbors' actions. Ideally,

the weights should consider both the units’ own actions and the aggregation of neighbors’ actions:

$$w(a_i, a_{i\mathcal{N}}, x_i) = \frac{p(a_i, a_{i\mathcal{N}}|x_i, A, \pi)}{p(a_i, a_{i\mathcal{N}}|x_i, A, \pi_0)}. \quad (10)$$

Correspondingly, an ideal unbiased IPW estimator would be:

$$\hat{V}_{\text{ideal-IPW}} = \frac{1}{n} \sum_{i=1}^n \frac{p(a_i, a_{i\mathcal{N}}|x_i, A, \pi)}{p(a_i, a_{i\mathcal{N}}|x_i, A, \pi_0)} r_i. \quad (11)$$

4 Algorithm

In this section, we provide a detailed description of our IntIPW algorithm that aims to solve the OPE problem in social networks in the presence of interference. Our method uses marginalized importance weights to account for both individual actions and adjacent entities’ effects.

In the presence of interference, not only the vanilla IPW but also all estimators that fail to account for the influence of neighbors’ actions are biased. Therefore, we need to propose a new estimator to address the OPE problem in the presence of interference. The ideal IPW estimator Eq.11 is quite intuitive, but without additional assumptions (Li and Wager 2022), it is difficult to determine how much a unit is affected by the actions of its neighbors. Alternatively, inspired by Kipf and Welling (2017), we conceived the idea of representing the adjacency information with a graph, and then using a GCN to aggregate units’ own actions with the actions of neighbors. Subsequently, we convert the problem of assigning weights into a binary classification problem (Sondhi, Arbour, and Dimmery 2020). Building on this foundation, we propose a supervised learning approach to address the challenge of OPE in the presence of interference.

First, we assign a label $L = 0$ to the historical samples (generated by the behavior policy) $\{\mathbf{x}, \mathbf{a}_0, A\}$ and a label $L = 1$ to the samples generated by the evaluation policy $\{\mathbf{x}, \mathbf{a}, A\}$. These two datasets have the same state distribution $\mathbf{x} \sim p(x)$ and size. The only difference is their action distributions $\mathbf{a}_0 \sim \pi_0(a|x)$ and $\mathbf{a} \sim \pi(a|x)$.

With the labeled datasets, we want to learn joint representations for each sample. To do so, we use an embedding function e to map actions into the semantic space, and concatenate the contexts and the action embeddings for the labeled datasets as \mathbf{h}_0 and \mathbf{h}_1 :

$$\mathbf{h}_0 = [\mathbf{x}, e_\phi(\mathbf{a}_0)] \quad (12)$$

$$\mathbf{h}_1 = [\mathbf{x}, e_\phi(\mathbf{a})], \quad (13)$$

where ϕ is a learnable parameter of the embedding function e_ϕ .

Next, through a GCN, we learn a binary classifier to distinguish between the two datasets. Specifically, for each sample from \mathbf{h}_0 and \mathbf{h}_1 , the classifier uses a GCN to aggregate the adjacency information of the neighbors and outputs $f \in [0, 1]$, representing the probability that the sample comes from the behavior policy. The probability that the sample comes from the evaluation policy is then $1 - f$. Let vector \mathbf{f}_0 denote the outputs of samples in the historical dataset and let vector \mathbf{f}_1 denote the outputs of samples in the

dataset where actions are generated by the evaluation policy:

$$\mathbf{f}_0 = g_\theta(\tilde{A}, \mathbf{h}_0) \quad (14)$$

$$\mathbf{f}_1 = g_\theta(\tilde{A}, \mathbf{h}_1), \quad (15)$$

where θ is a learnable parameter of GCN g_θ and $\tilde{A} = A + I_n$, since we want the GCN to focus on both the actions of the neighbors and units’ own action. To refine the model, we optimize g_θ and e_ϕ by minimizing the Binary Cross-Entropy (BCE) loss between \mathbf{f} and the true label L of the samples:

$$\mathcal{L} = -\frac{1}{n} \sum_{i=1}^n \log(f_{0i}) + \log(1 - f_{1i}), \quad (16)$$

where f_{0i} and f_{1i} are the i th values in \mathbf{f}_0 and \mathbf{f}_1 , respectively.

We replace the vanilla importance weights with new weights based on the probabilities given by the classifier:

$$w_i = \frac{f_{0i}}{1 - f_{0i}}. \quad (17)$$

Since the weights are assigned to the rewards from the historical dataset, \mathbf{f}_1 does not appear in Eq.17. It is used for training only.

These weights are equivalent to the weights of the ideal IPW style estimator mentioned above. The proof is as follows:

$$\begin{aligned} & w(a_i, a_{i\mathcal{N}}, x_i) \\ &= \frac{p(a_i, a_{i\mathcal{N}}|x_i, A, \pi)}{p(a_i, a_{i\mathcal{N}}|x_i, A, \pi_0)} = \frac{p(a_i, a_{i\mathcal{N}}|x_i, A, L = 1)}{p(a_i, a_{i\mathcal{N}}|x_i, A, L = 0)} \\ &= \frac{p(a_i, a_{i\mathcal{N}}|x_i, A, L = 1)p(x_i, A, L = 1)/p(a_i, a_{i\mathcal{N}}, x_i, A)}{p(a_i, a_{i\mathcal{N}}|x_i, A, L = 0)p(x_i, A, L = 0)/p(a_i, a_{i\mathcal{N}}, x_i, A)} \\ &= \frac{p(L = 1|a_i, a_{i\mathcal{N}}, x_i, A)}{p(L = 0|a_i, a_{i\mathcal{N}}, x_i, A)} = \frac{f_{0i}}{1 - f_{0i}}. \end{aligned} \quad (18)$$

While maintaining consistency, we reduce the variance by self-normalizing the weights (Swaminathan and Joachims 2015). Finally, we can evaluate a policy in the presence of interference:

$$\hat{V}_{\text{IntIPW}} = \frac{\sum_{i=1}^n w_i r_i}{\sum_{i=1}^n w_i}. \quad (19)$$

5 Experiments

We conducted extensive experiments on both synthetic and real-world datasets to validate the effectiveness of our method IntIPW.

5.1 Baseline Estimators

Our baseline estimators are **Direct Method (DM)** (Beygelzimer and Langford 2016) as described in Eq.6, which learns a predictive reward function from the log data and then uses it to estimate the evaluation policy; **Inverse Probability Weighting (IPW)** (Horvitz and Thompson 1952; Strehl, Langford, and Kakade 2010), as described in Eq.7 which reweights the rewards based on the propensities of the behavior and evaluation policies; **Self Normalized Inverse Probability Weighting (SNIPW)** (Swaminathan and Joachims

Table 1: The experimental results on the synthetic datasets. The smaller metric means better performance, and the best performance of MSE is marked bold.

Erdős-Rényi graph															
Methods	$\beta = -1$			$\beta = -0.75$			$\beta = -0.5$			$\beta = -0.25$			$\beta = 0$		
	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD
DM	1.425	1.130	0.386	1.410	1.122	0.390	1.353	1.100	0.377	1.180	1.023	0.365	0.194	0.420	0.133
IPW	1.429	1.131	0.386	1.413	1.123	0.389	1.356	1.102	0.376	1.184	1.026	0.364	0.193	0.419	0.133
SNIPW	1.429	1.131	0.386	1.414	1.123	0.389	1.356	1.102	0.377	1.184	1.025	0.365	0.193	0.419	0.133
BIPW	1.532	1.187	0.352	1.516	1.179	0.355	1.457	1.157	0.344	1.273	1.074	0.344	0.229	0.455	0.148
SGIPW	1.835	1.302	0.375	1.811	1.290	0.383	1.730	1.262	0.373	1.486	1.162	0.368	0.233	0.462	0.140
DR	1.425	1.130	0.386	1.410	1.122	0.390	1.352	1.100	0.377	1.181	1.023	0.365	0.193	0.419	0.133
IntIPW	1.266	1.033	0.446	1.287	1.049	0.431	1.152	0.985	0.427	1.111	0.936	0.485	0.163	0.383	0.128
Watts-Strogatz graph															
Methods	$\beta = -1$			$\beta = -0.75$			$\beta = -0.5$			$\beta = -0.25$			$\beta = 0$		
	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD
DM	1.450	1.140	0.389	1.423	1.129	0.384	1.360	1.103	0.378	1.164	1.017	0.361	0.204	0.432	0.132
IPW	1.452	1.141	0.388	1.425	1.130	0.384	1.363	1.105	0.378	1.167	1.018	0.361	0.204	0.432	0.132
SNIPW	1.452	1.140	0.389	1.425	1.130	0.384	1.363	1.105	0.379	1.168	1.018	0.362	0.204	0.431	0.132
BIPW	1.548	1.192	0.358	1.522	1.181	0.350	1.463	1.157	0.354	1.273	1.073	0.347	0.240	0.466	0.153
SGIPW	1.874	1.312	0.393	1.836	1.298	0.391	1.757	1.267	0.388	1.488	1.160	0.376	0.249	0.476	0.148
DR	1.450	1.140	0.389	1.423	1.129	0.385	1.360	1.103	0.378	1.165	1.017	0.361	0.204	0.432	0.132
IntIPW	1.396	1.107	0.414	1.359	1.098	0.392	1.330	1.089	0.378	1.103	0.984	0.366	0.168	0.395	0.109

2015; Kallus and Uehara 2019) as described in Eq.8, which normalizes the observed rewards by the self-normalized importance weight. **Balanced Inverse Probability Weighting (BIPW)** (Sondhi, Arbour, and Dimmery 2020), which re-weights the rewards by the importance weights estimated via a supervised classification procedure; **Sub Gaussian Inverse Probability Weighting (SGIPW)** (Metelli, Russo, and Restelli 2021), which modifies the vanilla weights by applying power mean; **Doubly Robust (DR)** (Dudik, Langford, and Li 2011) as described in Eq.9, which combines DM and IPW;

We invoked these baseline estimators from the Open Bandit Pipeline (Saito et al. 2020).

5.2 Experiment Settings

Units' contexts. Each unit's context is represented by a 10-dimensional vector. In synthetic experiments, the context vectors are independently Gaussian distributed: $x_i \stackrel{iid}{\sim} \mathcal{N}(0, 1), 1 \leq i \leq 10$. In real-world datasets, the dimensions of the contexts are very large, so we use Principal Component Analysis (PCA) from scikit-learn (Pedregosa et al. 2011) to reduce the contexts to 10 dimensions for consistency.

Reward function. We drew inspiration from (Peng et al. 2023) to set the reward function as:

$$r(x_i, a_i, a_{i\mathcal{N}}) = (\beta_1^\top x_i \cdot 1.5^{\beta_2^\top x_i} + b |\beta_3^\top x_i + e(a_i)^\top x_i|^2 + c |\beta_4^\top x_i + e(a_{i\mathcal{N}})^\top x_i|^2 \cdot \sqrt{|N(i)|})^{\frac{1}{3}} + \varepsilon_i, \quad (20)$$

where $\beta_1, \beta_2, \beta_3, \beta_4$ are 10-dimensional vectors independently generated from Gaussian distribution: $\beta_i \stackrel{iid}{\sim} \mathcal{N}(0, 1), 1 \leq i \leq 4$; $e(a)$ is an embedding function that maps actions into the semantic space; $|N(i)|$ is the number of neighbors of unit i ; $\varepsilon_i \stackrel{iid}{\sim} \mathcal{N}(0, 1)$ is the error term of unit

i ; b and c , both with default values of 1, are coefficients that control the impact of one's own action and the impact of the neighbors' actions, respectively. $a_{i\mathcal{N}}$ is set to be the linear aggregation of the neighbors' actions. For instance, when the action is binary, $a_{i\mathcal{N}}$ can be interpreted as a value in $[0, 1]$, representing the proportion of unit i 's neighbors having action = 1. Correspondingly, $e(a_{i\mathcal{N}})$ denotes the influence of the linear aggregation of neighbors' actions $a_{i\mathcal{N}}$ on unit i :

$$e(a_{i\mathcal{N}}) = \frac{\sum_{j \in N(i)} e(a_j)}{|N(i)|}. \quad (21)$$

Behavior policy. Following Saito and Joachims (2022), our behavior is a function similar to the softmax function:

$$\pi_0(a_i | x_i) = \frac{\exp(r_{\text{direct}}(x_i, a_i)\beta)}{\sum_{a_j \in A} \exp(r_{\text{direct}}(x_i, a_j)\beta)}, \quad (22)$$

where r_{direct} is a function similar to Eq.20 but does not take into account the influence of the neighbors' actions:

$$r_{\text{direct}}(x_i, a) = \beta_1^\top x_i \cdot 1.5^{\beta_2^\top x_i} + |\beta_3^\top x_i + e(a_{i\mathcal{N}})^\top x_i|^2, \quad (23)$$

and β acts as an exploration-exploitation controller. A larger β implies that the action with the greatest r_{direct} is more likely to be selected. It is worth noting that when β equals zero, π_0 is a purely random strategy, with each action having an equal probability of being selected.

Evaluation policy. The evaluation policy is similar to that in (Peng et al. 2023):

$$\pi(a_i | x_i) = \begin{cases} \gamma & \text{if } a_i = \arg \max_{a' \in A}, [r_{\text{direct}}(x_i, a')], \\ \frac{1-\gamma}{D-1} & \text{otherwise,} \end{cases} \quad (24)$$

where D is the number of actions and $\gamma \in [0, 1]$ is the probability that the action with the greatest r_{direct} is selected. Other actions are selected with an equal probability of $\frac{1-\gamma}{D-1}$. We set

γ to 0.8.

Validation metrics. In off-policy evaluation, bias measures how well an estimator handles shifts in distributions. However, due to the impracticality of frequently sampling actions from the behavior policy for multiple off-policy evaluations, the MSE is a more crucial and representative metric (Peng et al. 2023). We have also argued previously in Eq.5 that MSE can be considered a combination of the capability to handle distribution shifts (bias) and stability (standard deviation).

5.3 Synthetic Experiments

Synthetic Datasets. We choose two random graphs, generated using the Python package `NetworkX` (Hagberg, Schult, and Swart 2008), to serve as the adjacency matrices.

Erdős-Rényi (ER) graph (Erdős and Rényi 1959; Gilbert 1959). In this model, a graph is constructed by connecting nodes completely at random. Each pair of units has a fixed probability p of becoming neighbors.

Watts-Strogatz graph (Watts and Strogatz 1998). The construction of a Watts-Strogatz graph starts with a regular ring lattice, where each node is connected to its k neighbors. In our experiment, we arranged the units according to the results of reducing the contexts to one dimension using PCA. Then, each edge is randomly rewired, allowing for long-range connections.

Although these two random graphs not necessarily reflect real-world situations, their advantage is that we can freely change the sample size and the number of neighbors to study their impact on the results.

Results. The default settings for the experiment are as follows: sample size $n = 10,000$; each unit has 10 neighbors on average, that is, $p = \frac{10}{n}$ for Erdős-Rényi graph and $k = 10$ for Watts-Strogatz graph; actions are binary; β in the behavior policy Eq.22 is set to 0, meaning the behavior policy is purely random; γ in the evaluation policy Eq.4 is set to 0.8, indicating that the evaluation policy has an 0.8 probability of choosing the optimal action for the unit itself; b and c in the reward function Eq.20 are both set to 1, signifying that the weights of the impact of one’s own action and the neighbors’ actions are the same. We modify these default settings to compare the performance of our IntIPW estimator with baseline estimators. For each setting, we conduct experiments with 20 different seeds.

How does IntIPW perform under different selection bias strength β of the behavior policy? We set β in $[-1, -0.75, -0.5, -0.25, 0]$. A higher β value means that each unit in the behavior policy has a higher probability of choosing the optimal action for itself (the action with the greatest value of r_{direct}), which also implies less discrepancy between the behavior and evaluation policies. As demonstrated in Tab.1, the results of the two graphs are very close. When the discrepancy between the behavior and evaluation policies decreases, all estimators show improved performance, with reductions across all three metrics. For both graphs, our method not only has the smallest MSE but also the least bias across all experiments.

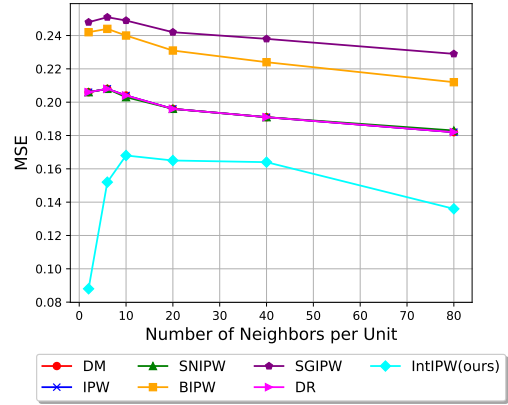


Figure 2: Performance of estimators with varying average numbers of neighbors

How does IntIPW perform with different number of neighbors? We keep the sample size $n = 10,000$ unchanged and make each unit have $[2, 6, 10, 20, 40, 80]$ neighbors. We conduct the experiment with the Watts-Strogatz graph. As results demonstrated in Fig.2, IntIPW performs very well when the number of neighbors is either very large or very small. The MSE of IntIPW is at its worst when each unit has 10 neighbors (which is the default setting for other experiments), yet even in this scenario, it still outperforms baseline estimators.

5.4 Real-World Experiments

Real-World Datasets. We use the following two real-world datasets for our experiments.

BlogCatalog (Leskovec and Sosič 2016). BlogCatalog is a social blog directory that has been used as a dataset for network analysis and social media research. It includes data about bloggers and their connections, organized in a way that represents the social network among them. The dataset we used contains 5,196 units and 171,743 edges. Each unit’s context is a 2,246-dimensional vector.

Flickr (Leskovec and Sosič 2016). Flickr is a web-based platform for storing, organizing, and sharing digital photographs. This network dataset is a collection of data extracted from the Flickr social network, primarily focusing on the connections and interactions among Flickr users. The dataset consists of units representing individual users and edges indicating the follower networks between them. It contains 7,575 units and 239,738 edges. Each unit’s context is a 1,205-dimensional vector.

These two datasets contain the context and adjacency information for each unit, but do not include actions and rewards. Like the synthetic experiments, we use the behavior policy Eq.22, evaluation policy Eq.4, and reward function Eq.20 specified in the experiment settings.

Results. Similar to the synthetic experiments, the default settings for the experiment are as follows: actions are binary; β in the behavior policy Eq.22 is set to 0; γ in the evaluation policy Eq.4 is set to 0.8; b and c in the reward function Eq.20 are both set to 1. We modify these default settings to com-

Table 2: The experimental results on the real-world datasets. The smaller metric means better performance, and the best performance of MSE is marked bold.

<i>BlogCatalog</i>															
Methods	$\beta = -1$			$\beta = -0.75$			$\beta = -0.5$			$\beta = -0.25$			$\beta = 0$		
	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD
DM	10.729	2.860	1.596	9.764	2.731	1.518	9.101	2.704	1.338	7.286	2.417	1.201	4.561	1.888	0.998
IPW	12.815	2.052	2.933	11.488	2.630	2.138	9.353	2.423	1.866	6.778	2.276	1.263	4.205	1.778	1.022
SNIPW	11.659	2.166	2.640	10.829	2.580	2.043	8.894	2.387	1.788	6.629	2.247	1.258	4.203	1.778	1.021
BIPW	14.621	2.811	2.592	13.287	2.677	2.474	11.929	2.705	2.148	9.988	2.547	3.872	6.316	2.152	1.299
SGIPW	29.856	4.917	2.383	26.301	4.606	2.254	22.703	4.326	1.997	16.542	3.703	1.682	8.479	2.635	1.239
DR	15.806	3.227	2.322	10.946	2.831	1.712	8.799	2.586	1.453	6.698	2.262	1.258	4.275	1.780	1.053
IntIPW	9.595	2.555	1.751	7.438	2.298	1.469	5.575	2.091	1.097	4.299	1.776	1.070	2.317	1.192	0.947

<i>Flickr</i>															
Methods	$\beta = -1$			$\beta = -0.75$			$\beta = -0.5$			$\beta = -0.25$			$\beta = 0$		
	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD	MSE	Bias	SD
DM	3.237	0.906	1.554	2.896	0.871	1.462	2.139	0.562	1.350	1.827	0.509	1.25	1.370	0.395	1.102
IPW	4.115	0.623	1.931	3.215	0.790	1.610	2.907	0.378	1.663	2.060	0.498	1.346	1.599	0.402	1.199
SNIPW	4.021	0.673	1.889	3.226	0.793	1.612	2.875	0.387	1.651	2.049	0.492	1.344	1.596	0.401	1.198
BIPW	2.915	0.691	1.561	2.551	0.677	1.447	1.457	0.424	1.130	1.337	0.461	1.061	1.171	0.500	0.960
SGIPW	5.777	1.727	1.671	5.227	1.645	1.588	3.530	1.268	1.386	3.049	1.149	1.315	2.275	0.912	1.202
DR	3.865	0.695	1.839	5.729	0.306	2.374	1.568	0.300	1.216	1.452	0.365	1.148	1.489	0.370	1.163
IntIPW	1.790	0.996	0.893	1.318	0.862	0.758	1.099	0.748	0.734	1.154	0.857	0.648	0.851	0.691	0.611

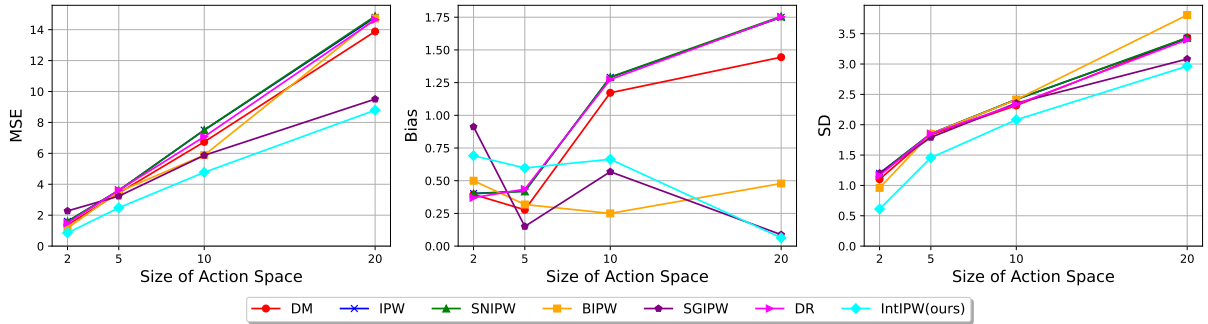


Figure 3: Performance of estimators in different action spaces

pare the performance of our IntIPW estimator with baseline estimators. For each setting, we conduct experiments with 20 different seeds.

How does IntIPW perform under different selection bias strength β of the behavior policy? Identical to the synthetic experiment, we set β in $[-1, -0.75, -0.5, -0.25, 0]$. As can be seen from Tab.2, as the discrepancy between the behavior and evaluation policies decreases, all estimators perform better, with IntIPW consistently being the best among them. In BlogCatalog, the bias and SD of IntIPW are almost always the lowest as well (the only exception is when $\beta = -1$). In Flickr, compared with the baseline estimators, IntIPW balances a slight additional bias with a significant reduction in SD, thereby consistently achieving better MSE performance.

When the action space is large, does IntIPW estimator still perform well? We vary the number of actions D in $[2, 5, 10, 20]$ on Flickr. As results demonstrated in Fig.3, as the action space gets augmented, the performance of all estimators worsens, but IntIPW consistently has the smallest MSE and SD. When $D = 20$, our method also has the smallest bias. This indicates that our method is robust across

different action spaces.

6 Conclusion and Future Work

In this paper, our goal is to address the problem of OPE in the presence of interference. We point out that existing estimators are biased in this setting because they do not consider interference. To address this issue, we propose a new estimator, IntIPW. It trains a classifier through a GCN to give the probabilities of a unit coming from the behavior and evaluation policies, and then assigns weights to the samples in the historical dataset based on the ratio of these probabilities. Extensive results on both synthetic and real-world datasets prove the effectiveness and robustness of IntIPW.

Our work raises several questions for further research. First, our current method is only applicable to discrete action spaces, so how to generalize our method to continuous action spaces is a direction worth exploring. In addition, in our experiment setting, the influence of actions of neighbors is homogeneous, which is often not true in real life (Qu et al. 2022; Song et al. 2019; Ma et al. 2011). Whether our method remains effective in real-world scenarios with heterogeneous interference is a matter worthy of investigation.

References

- Ameko, M. K.; Beltzer, M. L.; Cai, L.; Boukhechba, M.; Teachman, B. A.; and Barnes, L. E. 2020. Offline Contextual Multi-armed Bandits for Mobile Health Interventions: A Case Study on Emotion Regulation. In *Proceedings of the 14th ACM Conference on Recommender Systems, RecSys '20*, 249–258. New York, NY, USA: Association for Computing Machinery. ISBN 9781450375832.
- Beygelzimer, A.; and Langford, J. 2016. The Offset Tree for Learning with Partial Labels. arXiv:0812.4044.
- Chu, Z.; Rathbun, S. L.; and Li, S. 2021. Graph Infomax Adversarial Learning for Treatment Effect Estimation with Networked Observational Data. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining, KDD '21*. ACM.
- Dudik, M.; Langford, J.; and Li, L. 2011. Doubly Robust Policy Evaluation and Learning. arXiv:1103.4601.
- Erdős, P.; and Rényi, A. 1959. On Random Graphs. *Publicationes Mathematicae (Debrecen)*, 6: 290–297.
- Eric J. Tchetgen Tchetgen, I. R. F.; and Shpitser, I. 2021. Auto-G-Computation of Causal Effects on a Network. *Journal of the American Statistical Association*, 116(534): 833–844. PMID: 34366505.
- Fine, P.; Eames, K.; and Heymann, D. 2011. "Herd immunity": a rough guide. *Clinical Infectious Diseases*, 52(7): 911–916.
- Gilbert, N. 1959. Random Graphs. *Annals of Mathematical Statistics*, 30: 1141.
- Guo, R.; Li, J.; and Liu, H. 2020. Learning Individual Causal Effects from Networked Observational Data. In *Proceedings of the 13th International Conference on Web Search and Data Mining, WSDM '20*, 232–240. New York, NY, USA: Association for Computing Machinery. ISBN 9781450368223.
- Hagberg, A. A.; Schult, D. A.; and Swart, P. J. 2008. Exploring network structure, dynamics, and function using NetworkX. In Varoquaux, G.; Vaught, T.; and Millman, J., eds., *Proceedings of the 7th Python in Science Conference (SciPy2008)*, 11–15. Pasadena, CA USA.
- Horvitz, D. G.; and Thompson, D. J. 1952. A Generalization of Sampling Without Replacement from a Finite Universe. *Journal of the American Statistical Association*, 47: 663–685.
- Jiang, S.; and Sun, Y. 2022. Estimating Causal Effects on Networked Observational Data via Representation Learning. In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management, CIKM '22*, 852–861. New York, NY, USA: Association for Computing Machinery. ISBN 9781450392365.
- Kallus, N.; and Uehara, M. 2019. Intrinsically Efficient, Stable, and Bounded Off-Policy Evaluation for Reinforcement Learning. arXiv:1906.03735.
- Kallus, N.; and Zhou, A. 2018. Policy Evaluation and Optimization with Continuous Treatments. arXiv:1802.06037.
- Kipf, T. N.; and Welling, M. 2017. Semi-Supervised Classification with Graph Convolutional Networks. arXiv:1609.02907.
- Leskovec, J.; and Sosič, R. 2016. SNAP: A General-Purpose Network Analysis and Graph-Mining Library. *ACM Trans. Intell. Syst. Technol.*, 8(1).
- Lewis, R. A.; and Reiley, D. H. 2008. Does Retail Advertising Work? Measuring the Effects of Advertising on Sales Via a Controlled Experiment on Yahoo! *SSRN Electronic Journal*.
- Li, L.; Chu, W.; Langford, J.; and Wang, X. 2011. Unbiased offline evaluation of contextual-bandit-based news article recommendation algorithms. In *Proceedings of the fourth ACM international conference on Web search and data mining, WSDM'11*. ACM.
- Li, S.; and Wager, S. 2022. Random Graph Asymptotics for Treatment Effect Estimation under Network Interference. arXiv:2007.13302.
- Liu, L.; Hudgens, M. G.; and Becker-Dreps, S. 2016. On inverse probability-weighted estimators in the presence of interference. *Biometrika*, 103(4): 829–842.
- Ma, H.; Zhou, D.; Liu, C.; Lyu, M. R.; and King, I. 2011. Recommender systems with social regularization. In *Proceedings of the fourth ACM international conference on Web search and data mining*, 287–296.
- Ma, J.; Wan, M.; Yang, L.; Li, J.; Hecht, B.; and Teevan, J. 2022. Learning Causal Effects on Hypergraphs. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*, 1202–1212.
- Ma, Y.; and Tresp, V. 2021. Causal inference under networked interference and intervention policy enhancement. In *International Conference on Artificial Intelligence and Statistics*, 3700–3708. PMLR.
- Metelli, A. M.; Russo, A.; and Restelli, M. 2021. Subgaussian and Differentiable Importance Sampling for Off-Policy Evaluation and Learning. In Ranzato, M.; Beygelzimer, A.; Dauphin, Y.; Liang, P.; and Vaughan, J. W., eds., *Advances in Neural Information Processing Systems*, volume 34, 8119–8132. Curran Associates, Inc.
- Ogburn, E. L.; Sofrygin, O.; Diaz, I.; and van der Laan, M. J. 2022. Causal inference for social network data. arXiv:1705.08527.
- Parshakov, P.; Naidenova, I.; and Barajas, A. 2020. Spillover effect in promotion: evidence from video game publishers and eSports tournaments. *Journal of Business Research*, 118: 262–270.
- Pedregosa, F.; Varoquaux, G.; Gramfort, A.; Michel, V.; Thirion, B.; Grisel, O.; Blondel, M.; Prettenhofer, P.; Weiss, R.; Dubourg, V.; Vanderplas, J.; Passos, A.; Cournapeau, D.; Brucher, M.; Perrot, M.; and Duchesnay, E. 2011. Scikit-learn: Machine Learning in Python. *Journal of Machine Learning Research*, 12: 2825–2830.
- Peng, J.; Zou, H.; Liu, J.; Li, S.; Jiang, Y.; Pei, J.; and Cui, P. 2023. Offline Policy Evaluation in Large Action Spaces via Outcome-Oriented Action Grouping. In *Proceedings of the ACM Web Conference 2023, WWW '23*, 1220–1230.

New York, NY, USA: Association for Computing Machinery. ISBN 9781450394161.

Qian, X.; Feng, h.; Zhao, G.; and Mei, T. 2014. Personalized Recommendation Combining User Interest and Social Circle. *Knowledge and Data Engineering, IEEE Transactions on*, 26: 1763–1777.

Qu, Z.; Xiong, R.; Liu, J.; and Imbens, G. 2022. Efficient Treatment Effect Estimation in Observational Studies under Heterogeneous Partial Interference. arXiv:2107.12420.

Sachdeva, N.; Su, Y.; and Joachims, T. 2020. Off-policy Bandits with Deficient Support. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, KDD '20. ACM.

Saito, Y.; and Joachims, T. 2022. Off-Policy Evaluation for Large Action Spaces via Embeddings. arXiv:2202.06317.

Saito, Y.; Shunsuke, A.; Megumi, M.; and Yusuke, N. 2020. Open Bandit Dataset and Pipeline: Towards Realistic and Reproducible Off-Policy Evaluation. *arXiv preprint arXiv:2008.07146*.

Sofrygin, O.; and van der Laan, M. J. 2016. Semi-Parametric Estimation and Inference for the Mean Outcome of the Single Time-Point Intervention in a Causally Connected Population. *Journal of Causal Inference*, 5.

Sondhi, A.; Arbour, D.; and Dimmery, D. 2020. Balanced off-policy evaluation in general action spaces. arXiv:1906.03694.

Song, W.; Xiao, Z.; Wang, Y.; Charlin, L.; Zhang, M.; and Tang, J. 2019. Session-based social recommendation via dynamic graph attention networks. In *Proceedings of the Twelfth ACM international conference on web search and data mining*, 555–563.

Strehl, A. L.; Langford, J.; and Kakade, S. M. 2010. Learning from Logged Implicit Exploration Data. *CoRR*, abs/1003.0120.

Swaminathan, A.; and Joachims, T. 2015. The Self-Normalized Estimator for Counterfactual Learning. In Cortes, C.; Lawrence, N.; Lee, D.; Sugiyama, M.; and Garnett, R., eds., *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc.

Watts, D. J.; and Strogatz, S. H. 1998. Collective dynamics of ‘small-world’ networks. *Nature*, 393: 440–442.

Zhao, Z.; Bai, Y.; Kuang, K.; Xiong, R.; and Wu, F. 2024. Learning Individual Treatment Effects under Heterogeneous Interference in Networks. arXiv:2210.14080.

A Pseudocode of IntIPW

Alg.1 is the pseudocode of our algorithm IntIPW.

Algorithm 1: IntIPW

Input: Historical dataset $\mathcal{D} = \{(x_i, a_i, r_i)\}_{i=1}^n$ generated by the behavior policy π_0 , new actions \mathbf{a} generated by the evaluation policy π , adjacency matrix A , learning rate α

Output: Average estimated reward for all units under new actions

- 1: $\tilde{A} = A + I_n$
 - 2: **for** epoch in max epochs **do**
 - 3: $\mathbf{h}_0 \leftarrow [\mathbf{x}, e_\phi(\mathbf{a}_0)]$
 - 4: $\mathbf{h}_1 \leftarrow [\mathbf{x}, e_\phi(\mathbf{a})]$
 - 5: $\mathbf{f}_0 \leftarrow g_\theta(\tilde{A}, \mathbf{h}_0)$
 - 6: $\mathbf{f}_1 \leftarrow g_\theta(\tilde{A}, \mathbf{h}_1)$
 - 7: $\mathcal{L} = -\frac{1}{n} \sum_{i=1}^n (\log(f_{0i}) + \log(1 - f_{1i}))$
 - 8: Update $\theta \leftarrow \theta - \alpha \frac{\partial \mathcal{L}}{\partial \theta}$
 - 9: Update $\phi \leftarrow \phi - \alpha \frac{\partial \mathcal{L}}{\partial \phi}$
 - 10: **end for**
 - 11: **return** $\frac{\sum_{i=1}^n \frac{f_{0i} - r_i}{1 - f_{0i}}}{\sum_{i=1}^n \frac{f_{0i}}{1 - f_{0i}}}$
-

B Additional Experiment Results

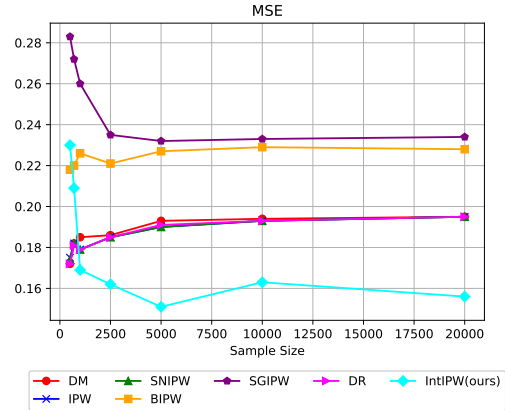


Figure 4: Performance of estimators in different sample sizes

Synthetic Experiment. How does IntIPW perform in different sample sizes? We keep the setting that each unit has 10 neighbors unchanged and set the sample size n in [500, 700, 1,000, 2,500, 5,000, 10,000, 20,000]. We conduct the experiment with the Erdős-Rényi graph. As results shown in Fig.4, when the sample size is too small (e.g., $n = 500$), the performance of IntIPW is not satisfactory. This is likely because, compared to other estimators, IntIPW employs a GCN to aggregate the influence of neighbors, which introduces complexity into the model. Consequently, a larger sample size is required for effective training of this model. As the sample size increases, the MSE of all estimators tends to stabilize, and our method becomes the

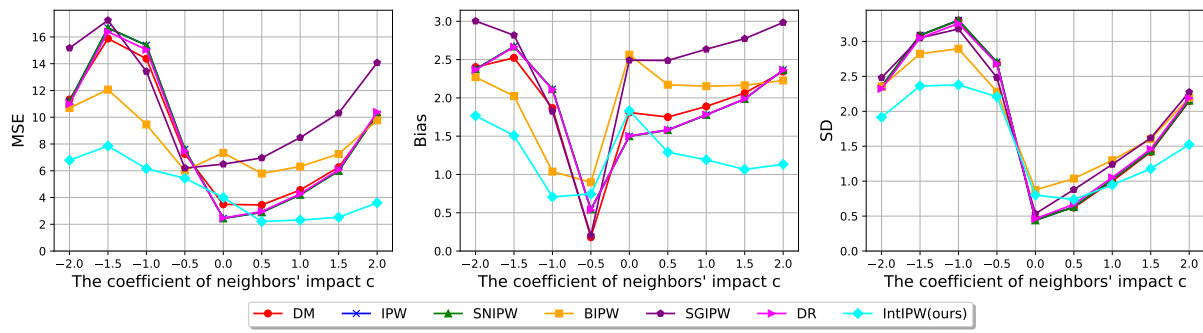


Figure 5: Performance of estimators under different intensities of impact of neighbors' actions

optimal one.

Real-World Experiment. When the weight of the impact of one's own action and the impact of the neighbors' actions change, how effective is IntIPW estimator? We conducted experiments on BlogCatalog by changing the values of b and c in the reward function Eq.20. We selected 9 (b, c) value pairs: $(0, -2)$, $(0.5, -1.5)$, $(1, -1)$, $(1.5, -0.5)$, $(2, 0)$, $(1.5, 0.5)$, $(1, 1)$, $(0.5, 1.5)$, and $(0, 2)$. The results are shown in Fig.5. From the MSE graph, we can see that when the neighbors have no influence (i.e., $c = 0$), our method is slightly inferior to the baseline estimators. This is expected, as baseline estimators only consider the impact of one's own action, making them well-suited for this setting. As the absolute value of c increases, the MSE of baseline estimators rapidly increases, making our method the best. This is because they only focus on the impact of actions taken by the unit itself, completely ignoring the influence of neighbors.