

---

# Seeing Through the Mask: Rethinking Adversarial Examples for CAPTCHAs

---

**Yahya Jabary**  
TU Wien  
jabaryyahya@gmail.com

**Andreas Plesner\***  
ETH Zurich  
aplesner@ethz.ch

**Turlan Kuzhagaliyev**  
ETH Zurich  
kturlan@student.ethz.ch

**Roger Wattenhofer**  
ETH Zurich  
wattenhofer@ethz.ch

## Abstract

Modern CAPTCHAs rely heavily on vision tasks that are supposedly hard for computers but easy for humans. However, advances in image recognition models pose a significant threat to such CAPTCHAs. These models can easily be fooled by generating some well-hidden "random" noise and adding it to the image, or hiding objects in the image. However, these methods are model-specific and thus can not aid CAPTCHAs in fooling all models. We show in this work that by allowing for more significant changes to the images while preserving the semantic information and keeping it solvable by humans, we can fool many state-of-the-art models. Specifically, we demonstrate that by adding masks of various intensities the Accuracy @ 1 (Acc@1) drops by more than 50%-points for all models, and supposedly robust models such as vision transformers see an Acc@1 drop of 80%-points. These masks can therefore effectively fool modern image classifiers, thus showing that machines have not caught up with humans – yet.

## 1 Introduction

Not surprisingly, CAPTCHAs are currently threatened by advanced image recognition models. Plesner et al. [2024] has recently shown that the most popular CAPTCHA environment (reCAPTCHA by Google [6sense, 2023]) can be solved equally well by machines and humans. If CAPTCHAs are to have a future, a new approach is needed. Adversarial machine learning is closely related to CAPTCHAs, as researchers try to build samples where the machine fails to recognize the image while the human does not register any manipulation happening. On the one hand, these imperceptible manipulations are more ambitious than CAPTCHAs since even the earliest CAPTCHAs did not bother to hide the manipulation of the input. On the other hand, adversarial image generation is not robust enough for automatic bot detection, as it often tailors the attack to a specific model. We want images that can effectively fool any machine learning model, but we do not mind having a visible manipulation. However, the manipulation should be easy for humans to filter out. In other words, we do not mind if many pixels are changed a lot, as long as the image is still easily recognizable to humans. This is easily achieved if the image manipulation is somehow predictable, for instance by overlaying the original with a periodic signal like a grid. A promising new form of CAPTCHAs, known as hCaptcha, is doing exactly that, and in this work, we want to get a clearer understanding of what this approach can and cannot do.

---

\*Corresponding author

The signals, or masks, inspired by hCaptcha can be surprisingly simple yet very powerful. In addition, to fully assess their capabilities and potential impact on vision models, we have established the following key motivations for this study.

1. **Exploration of aggressive adversarial perturbations:** In contrast to traditional adversarial attacks that aim for imperceptibility, our study focuses on the domain of CAPTCHAs where visible perturbations are acceptable. In this context, we can be more aggressive with the perturbations, as the limit is not imperceptibility but rather semantic preservation for humans.
2. **Exploiting the human-machine vision gap:** Our research aims to highlight and leverage the difference in human and machine perception.
3. **Accessibility of attacks:** The simplicity and ease of execution of the proposed attacks make them readily available to large-scale CAPTCHA systems.
4. **Evaluating robustified models:** We aim to benchmark models that have been specifically fine-tuned for robustness in our use case. This evaluation will provide valuable insights into the effectiveness of current robustification techniques against our proposed class of adversarial examples.

Thus, our work examines adversarial examples through the lens of CAPTCHA services. We challenge the constraints of imperceptibility in adversarial attacks, proposing that any semantics-preserving distortion that effectively differentiates human users from automated solvers is acceptable within this domain. This approach allows for large perturbations, shifting our focus to metrics that quantify semantic change rather than visual imperceptibility.

Although reCAPTCHA has been broken, hCaptcha remains undefeated in the ongoing attack-defense arms race and has recently added multiple new challenges and layers of security measures [QIN2DIM, 2022, allerlegro, 2022].

**Approach** To investigate these issues, we focus on evaluating the performance of state-of-the-art vision models against a range of image filters inspired by hCaptcha techniques. Our study aims to:

1. Quantify the drop in Acc@1 and Acc@5 accuracy when various filters are applied to input images.
2. Compare the resilience of different model architectures to these adversarial examples.
3. Assess whether models specifically designed for robustness offer significant advantages in this context.

Our preliminary findings underscore the effectiveness of masks in challenging even the most advanced vision models, motivating our deeper investigation of these adversarial techniques.

Through this research, we hope to contribute to the ongoing discussion on AI safety and reliability, emphasizing the need for vision models that can maintain high performance in the face of real-world image manipulations. Our findings have implications not only for the development of more robust models but also for the broader challenge of creating computer vision systems that can match human-level adaptability in visual perception tasks.

## 2 Related Work

Deep learning models have achieved unprecedented performance in computer vision tasks, frequently exceeding human-level accuracy on image classification benchmarks [He et al., 2015, Russakovsky et al., 2015]. State-of-the-art architectures such as Vision Transformers (ViT) [Dosovitskiy et al., 2021], ConvNeXt [Liu et al., 2022], and EVA-02 [Fang et al., 2024] now form the foundation of numerous critical applications, ranging from autonomous vehicles [Yurtsever et al., 2020] to medical imaging [Chen et al., 2022, Shamshad et al., 2023]. However, the robustness of these models against adversarial attacks remains a pressing concern for their deployment in real-world scenarios, which could compromise their reliability and security [Serban et al., 2020].

The field of adversarial examples in machine learning has seen significant advances in recent years [Hendrycks et al., 2021]. Our work on geometric masks for CAPTCHAs builds on the

foundational concept of robust and non-robust features in machine learning models, as proposed by [Ilyas et al., 2019]. This perspective suggests that adversarial examples exploit non-robust features susceptible to imperceptible perturbations while preserving robust features crucial for human interpretation.

Expanding on this framework, recent studies have demonstrated the potential of geometric metrics to detect adversarial samples. Venkatesh and Steinbach [2022] showed promising results using density and coverage metrics to identify adversarial examples in datasets such as MNIST and biomedical imagery. This approach aligns with our focus on geometric perturbations that disrupt machine learning models’ reliance on non-robust features while maintaining image semantic integrity for human solvers.

In the specific context of CAPTCHAs, researchers have explored various innovative approaches to enhance security against automated solvers. Sheikh and Banday [2022] proposed a novel animated CAPTCHA technique based on the persistence of vision, which displays text characters in multiple layers within an animated image. This word-level adversarial attack demonstrates ongoing efforts to develop more robust CAPTCHA systems that can effectively distinguish between human and machine solvers. Similarly, Hajjdiab [2017] introduced a random CAPTCHA system to match images that eliminates the need for an image database while maintaining ease of use. Their approach generates random images and asks users to match feature points between two images, leveraging concepts from computer vision research.

By synthesizing these diverse research directions, our work aims to contribute to the ongoing efforts to enhance the robustness of machine learning models against adversarial attacks, particularly in the context of CAPTCHA systems. We seek to leverage insights from geometric perturbations, adversarial training, and innovative CAPTCHA designs to develop more effective and secure visual challenges that maintain a clear distinction between human and machine solvers.

### 3 Methodology

In this section, we will go over the data that we used for the analysis along with the model choices. We have selected multiple models, which we will evaluate on the datasets to demonstrate the effectiveness of the masks we have constructed.

**Models** We selected several models to evaluate the performance of, namely: “ConvNeXt\_XXLarge” [Liu et al., 2022], Open CLIP’s “EVA01-g-14-plus” [Fang et al., 2023b] and “EVA02-L-14” [Fang et al., 2024], “DFN5B-CLIP-ViT-H” by Apple [Fang et al., 2023a], the original “ViT-L-14-378” and “ViT-H-14-378-quickgelu” [Dosovitskiy et al., 2021], “ResNet50x64” [He et al., 2015], and RoBERTa-B and RoBERTa-L [Conneau et al., 2020]; the RoBERTa models are selected as they are supposed to be robust against adversarial attacks.<sup>2</sup> Due to time constraints, we were not able to test the method presented recently by Fort and Lakshminarayanan [2024]; we leave this for future work. The models were selected to represent landmark architectures in both convolutional and transformer-based approaches. This selection allows us to evaluate the effectiveness of our masks across different model paradigms.

**Data** We conducted our experiments using both the enriched ImageNet dataset with 1,000 entries provided by “visual-layer” on HuggingFace and the reduced ImageNette dataset [Howard, 2019]. The ImageNette dataset, consisting of approximately 10,000 images evenly distributed across 10 categories, was chosen to make the computations more feasible. To accommodate the need for multiple iterations on each image, we created three smaller datasets: SubSet200, SubSet500, and ResizedA11. SubSet200 and SubSet500 contain 2,000 and 5,000 images, respectively, maintaining the full resolution of ImageNette. ResizedA11 includes all ImageNette images scaled down to 128x128 pixels, a standard size for CAPTCHAs, to speed up image processing. Note that this resizing may result in a slight performance drop compared to full-resolution images. The models generally achieve Acc@1 accuracy in the high 80% to low 90% range, with Acc@5 accuracy in the high 90% range; see Appendix A.1 for details.

---

<sup>2</sup>We highlight results for a subset of these, namely ConvNeXt, EVA02, ViT-H-14, ResNet50, and RoBERTa-L, and leave the rest for the appendix.

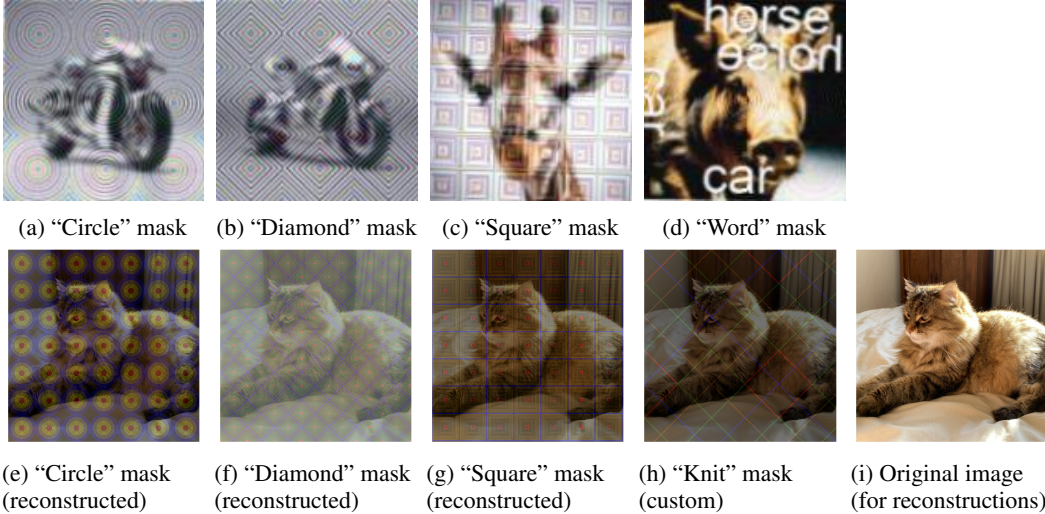


Figure 1: Selected examples by hCaptcha and their optimized reconstructions. The “Word” overlay was omitted and replaced with a custom “Knit” mask.

We defined four masks – “Circle”, “Diamond”, “Square” and “Knit” – which we apply to the images at various intensities. These masks were selected based on an experiment involving 1,600 web-scraped and hand-labeled images from hCaptcha. The number and intensity of mask elements are determined by the density and opacity values, with the density fixed to a constant value in our subsequent experiments focusing on the effects of varying opacity; for details, see Appendix A.2.

**Perceptual Quality and the Accuracy Metric** Perceptual quality is a crucial aspect of our evaluation, assessing the visual fidelity of adversarial examples. We used a weighted average metric to capture various aspects of image quality. This metric combines cosine similarity (15% weight) [Singhal et al., 2001], Peak Signal-to-Noise Ratio (PSNR, 25% weight) [Faragallah et al., 2021], Structural Similarity Index (SSIM, 35% weight) [Wang et al., 2004], and Learned Perceptual Image Patch Similarity (LPIPS, 25% weight) [Zhang et al., 2018]. The weights were chosen to balance the importance of each component in the overall quality assessment.

Moreover, we evaluate the models based on their accuracy. The models predict a likelihood for each of their pre-trained classes so the classes can be sorted by likelihood in descending order from top to bottom. We focus on the accuracy@ $k$  (with  $k = 1$  and  $k = 5$ ), denoted  $\text{Acc}@k$ , which measures how often the ground truth label is in the top  $k$  classes.

## 4 Results

We perform three experiments, one per dataset, with the range of models mentioned earlier. We only show the key partial results here with full tables in the Appendix.

### 4.1 Experiment 1 – SubSet500

We evaluate how the rank of the correct class changes when applying the masks by measuring the rank (the position after sorting) of the ground-truth class before and after applying a mask to an image. In addition, we measure the perceptual quality of the images. We then look at the mean change in rank across models and images, and report the results for each combination of mask and opacity.

The results of our experiment are visualized in Figure 2 (the specific values can be found in Table 4 in the Appendix). The figure reveals a clear trend in the trade-off between adversarial effectiveness and perceptual quality. The plot shows a clear inverse relationship between these two factors, as indicated by the polynomial regression curve of degree 2. This relationship suggests that as the effectiveness of the adversarial attack increases (lower  $\Delta$  Accuracy Rank), the perceptual quality of adversarial

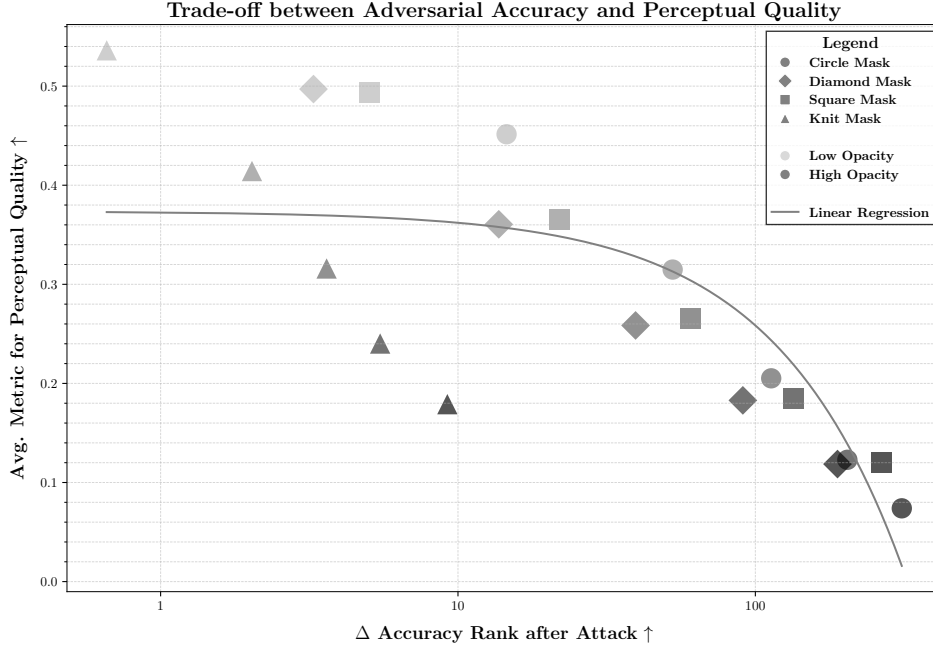


Figure 2: Accuracy vs. Perceptual Quality Trade-off

examples tends to decrease. This could be expected, but we noticeably see instances with significant drops in rank ( $>10$ ) while having a relatively high perceptual quality ( $>0.4$ ).

The different mask types (circle, square, diamond, and knit) and opacity levels demonstrate varying performance across this trade-off spectrum. The scatter plot reveals clusters of points corresponding to different mask types, with some masks consistently outperforming others in terms of balancing attack effectiveness and perceptual quality. Most importantly, it shows that these geometric pattern masks generalize across SOTA models.

Model	Mask	Opacity			
		20%	30%	40%	50%
ConvNeXt	Circle	15.36 (4.40)	28.49 (12.47)	43.73 (24.76)	62.11 (40.72)
	Diamond	3.86 (0.36)	9.22 (2.11)	18.55 (6.20)	34.40 (16.14)
	Square	6.51 (0.90)	18.73 (5.30)	35.54 (15.00)	55.90 (32.53)
EVA02	Circle	10.78 (1.33)	21.63 (5.60)	34.22 (14.58)	43.55 (27.17)
	Diamond	1.87 (0.00)	6.63 (0.30)	15.12 (1.81)	26.33 (5.78)
	Square	6.93 (0.30)	16.02 (2.23)	28.73 (8.43)	41.69 (19.64)
ResNet	Circle	19.70 (5.66)	32.35 (12.35)	45.36 (22.47)	59.94 (33.31)
	Diamond	10.12 (2.23)	25.30 (10.12)	47.83 (24.94)	68.73 (45.72)
	Square	12.65 (3.19)	27.23 (10.96)	47.11 (24.76)	67.65 (41.87)
ViT-H-14	Circle	4.22 (0.78)	11.75 (3.31)	27.59 (12.17)	49.40 (28.25)
	Diamond	0.72 (0.00)	1.39 (0.24)	3.07 (0.42)	7.41 (2.05)
	Square	1.81 (0.06)	3.25 (0.66)	12.59 (3.80)	31.45 (17.17)
RoBERTa-L	Circle	7.29 (1.93)	21.51 (8.31)	42.77 (21.75)	62.89 (39.70)
	Diamond	1.51 (0.06)	4.82 (0.96)	12.41 (3.25)	25.12 (9.82)
	Square	4.76 (0.84)	12.83 (3.07)	28.73 (11.20)	52.83 (30.00)

Table 1: Change of Acc@1 (and Acc@5) for SubSet200 [%].

## 4.2 Experiment 2 – SubSet200

This experiment measures the drop in Acc@1 and Acc@5 for the subset of images in SubSet200 that all models correctly classify. Thus, for the images used in this experiment, Acc@1 (and Acc@5) is 100% before applying the masks. We show in Table 1 the change in accuracy observed in the experiment. The table shows that the circle mask is very effective in confusing models, and even with a relatively low opacity the Acc@1 drops by almost 20%-points for ResNet. We also see that RoBERTa, as a supposedly robust model, is worse than ViT for masks and opacity levels. Based on the results, we see that diamond-shaped masks pose the least threat to the models at any opacity, but the square masks are almost as effective as the circle masks. In an extension of this, we also looked at the confidence scores, the results of which are Appendix A.8.

## 4.3 Experiment 3 – ResizedAll

In this experiment, we used the ResizedAll dataset to measure the drop in Acc@1 and Acc@5 of the models for CAPTCHA-sized images. We see the result of this in Table 2, and an important conclusion regarding the combination of masks and resolution changes is that while the drops in Acc@1 are similar to earlier, the drops in Acc@5 are larger. Compared to the results from the previous experiment, it is evident that in this setting, masks at much lower opacity ratios are more successful in distorting models’ performance. Based on these results, the scaling of images combines very well with masks. In closer analysis, it is also evident that EVA02 is the one that suffers the least from circular masks at opacity values >30% in both datasets, but that it comes at a trade-off of being more sensitive to diamond-shaped masks.

## 5 Conclusion

In this study, we have demonstrated the high effectiveness of geometric masks in fooling state-of-the-art vision models, and the experiments leverage the gaps between human and machine abilities. This suggests potential new directions for developing more robust vision models over the long term while creating secure visual challenges in the short term. We show that there is a clear trade-off in the perceptual quality of images for them to be effective against vision models. However, while the perceptual quality decreases, the accuracy of the models also drops, often with more than 50%-points. This highlights vulnerabilities in advanced vision systems and underscores the continued capability of CAPTCHA-style challenges in differentiating humans from machines.

Although our study focused on specific mask types and datasets, one could easily expand into other masks or determine how effectively models can be fine-tuned on images with masks applied. Furthermore, one could try the methods on the recently published DeepMind model which is supposed to be very robust against adversarial examples [Fort and Lakshminarayanan, 2024]. In addition, a detailed human evaluation of the masks should be performed.

Overall, this study contributes to the ongoing discussion on AI safety and reliability, highlighting the persistent challenge of creating truly robust vision systems that can match human-level adaptability in visual perception tasks.

Model	Mask	Opacity			
		20%	30%	40%	50%
ConvNeXt	Circle	29.19 (22.42)	60.03 (54.46)	77.90 (81.72)	83.17 (92.15)
	Diamond	14.13 (7.85)	27.61 (17.67)	44.90 (34.26)	60.64 (55.38)
	Square	19.20 (9.64)	34.41 (22.54)	56.46 (46.97)	73.45 (73.76)
EVA02	Circle	31.79 (18.02)	49.85 (35.62)	60.88 (51.76)	70.18 (64.66)
	Diamond	18.53 (5.83)	30.72 (12.45)	44.20 (23.03)	55.31 (36.42)
	Square	23.75 (8.20)	39.69 (19.66)	57.61 (40.56)	69.98 (61.78)
ResNet	Circle	63.53 (48.57)	76.44 (69.36)	79.43 (73.21)	80.14 (74.74)
	Diamond	42.94 (23.41)	69.33 (50.58)	82.46 (73.29)	86.93 (87.20)
	Square	36.27 (19.40)	66.85 (51.60)	83.77 (81.84)	88.41 (94.35)
ViT-H-14	Circle	21.15 (8.89)	47.78 (26.80)	71.36 (51.07)	85.55 (71.71)
	Diamond	5.26 (1.25)	10.55 (3.33)	18.80 (8.50)	32.89 (20.92)
	Square	10.78 (4.17)	26.94 (15.49)	55.77 (43.32)	78.86 (71.37)
RoBERTa-L	Circle	37.21 (17.90)	66.50 (47.53)	83.84 (73.32)	91.09 (85.24)
	Diamond	12.64 (3.84)	24.93 (10.62)	43.00 (22.82)	59.68 (40.75)
	Square	19.83 (6.32)	40.93 (20.68)	68.47 (52.44)	86.17 (80.77)

Table 2: Change of Acc@1 (and Acc@5) for resized ImageNet (ResizedA11) [%].

## A Appendix / supplemental material

### A.1 Acc@1 and Acc@5 accuracy of the tested models.

Model	Acc@1 (%)	Acc@5 (%)
ConvNeXt	84.75	95.82
EVA02	92.67	97.97
Apple: ViT-H	93.10	99.29
ResNet	89.54	98.26
ViT-H-14	93.10	99.29
ViT-L-14	91.47	98.77
RoBERTa-B	84.61	97.18
RoBERTa-L	93.61	98.45

Table 3: Acc@1 and Acc@5 (in %) for Different Models on the ResizedAll dataset.

### A.2 Hyperparameter Optimization

In our hyperparameter optimization phase, we focused on classification models because of their interpretability advantages over segmentation models. Our initial dataset comprised 1600 scraped and annotated hCaptcha samples, which we used to benchmark several state-of-the-art closed-vocabulary classification models. The “EVA01-g-14 model”, trained on “LAION-400M”, emerged as the top performer with Acc@1 of 94.39% and Acc@5 of 98.93%. Other models like “ConvNeXt-XXLarge” and “ViT-H-14” also showed strong performance, although none achieved 100% accuracy, a notable departure from the results typically seen with reCAPTCHA v2 [Plesner et al., 2024].

Upon analysis of the misclassified images, we observed a combination of imperceptible perturbations and perceptible geometric masks. We identified four distinct geometric mask types for reconstruction and added a novel “knit” mask, essentially a modified “diamond” mask allowing for overlapping shapes. We intentionally left out word-level adversarial attack masks, as they have been proven to be easy to mitigate [Zhang et al., 2023, Dong et al., 2023, Shayegani et al., 2023]. For each mask, we parameterized three variables: “opacity” (alpha value of the overlay), “density” (shapes per row/column and nesting, ranging from 0-100), and “epsilon” (for white-box FGSM attacks with CLIP-ViT on ImageNet).

We conducted a hyperparameter grid search using the `visual-layer/imagenet-1k-v1-enriched` dataset on HuggingFace, testing 5-20 examples per combination on the validation set. We chose the CLIP ViT model for this phase due to its superior adversarial robustness, as noted by Wang et al. [2024]. Our optimization metric combined the difference in model accuracy pre- and post-mask application with an average of three perceptual quality metrics. To identify optimal parameters, we selected examples with the highest perceptual quality for each level of accuracy difference and performed a linear regression. We then focused on samples above the regression line in multidimensional space. This approach proved to be more tractable than our attempts with multi-objective optimization with multiple variables.

Our findings revealed that FGSM perturbations generally degraded the results when combined with masks. We determined that the optimal density value was consistently 70, while the most effective opacity range was 50-170 (equivalent to 19%-66% alpha). These insights allowed us to isolate the best-performing masks for a comprehensive benchmark against the latest models.

This rigorous optimization process, grounded in semantic computer vision research, enabled us to systematically explore the parameter space and identify the most effective adversarial techniques inspired by hCaptcha challenges. The results, visualized in Figure 1, provide a quantitative basis for comparing the masks.

### A.3 Generalizability of Masks – Table

The table with values plotted in Figure 2 can be found in Table 4.



Opacity	Mask	$\Delta$ Acc Rank	Quality	Score
50	Circle	-14.57	0.45	15.02
	Diamond	-3.27	0.50	3.76
	Knit	-0.66	0.54	1.19
	Square	-5.04	0.49	5.54
80	Circle	-52.72	0.31	53.03
	Diamond	-13.72	0.36	14.08
	Knit	-2.03	0.41	2.44
	Square	-22.01	0.37	22.37
110	Circle	-113.07	0.21	113.27
	Diamond	-39.55	0.26	39.81
	Knit	-3.62	0.32	3.93
	Square	-60.57	0.27	60.84
140	Circle	-203.89	0.12	204.01
	Diamond	-90.79	0.18	90.97
	Knit	-5.47	0.24	5.71
	Square	-134.75	0.18	134.94
170	Circle	-310.80	0.07	310.88
	Diamond	-188.92	0.12	189.04
	Knit	-9.21	0.18	9.39
	Square	-264.90	0.12	265.02

Table 4: Generalizability of Masks

#### A.4 Acc@1 and Acc@5 accuracy for SubSet500.

In Tables 5 and 6 we show the full tables with drops in accuracy for all the tested models. We see that the circle mask is very aggressive against all models.

Model	Mask	Opacity				
		19%	31%	43%	54%	66%
ConvNeXt	Circle	13.0	33.6	51.2	64.6	69.2
	Diamond	4.8	13.6	31.8	49.6	64.6
	Knit	2.2	3.2	8.0	11.4	18.0
	Square	6.8	18.4	36.4	52.0	65.6
EVA01	Circle	7.2	15.4	33.0	49.2	65.0
	Diamond	2.6	8.6	19.6	33.0	54.8
	Knit	1.2	1.2	4.4	6.6	10.6
	Square	4.2	9.0	17.4	31.4	55.8
EVA02	Circle	9.4	19.0	31.4	50.4	63.8
	Diamond	2.4	5.6	10.6	19.0	38.0
	Knit	2.8	4.8	5.2	6.8	8.8
	Square	6.8	12.4	20.8	37.4	61.8
ResNet	Circle	31.0	54.6	60.0	62.4	63.4
	Diamond	13.2	31.6	50.4	59.4	62.2
	Knit	5.0	11.2	14.4	19.4	27.6
	Square	15.2	38.8	56.0	62.2	63.4
ViT-H-14	Circle	5.8	20.6	48.2	70.8	80.2
	Diamond	2.0	5.4	15.2	34.4	61.8
	Knit	1.6	2.4	2.8	6.2	8.0
	Square	3.2	9.6	25.0	54.2	77.2

Model	Mask	Opacity				
		19%	31%	43%	54%	66%
ConvNeXt	Circle	7.60	29.60	54.80	73.40	85.00
	Diamond	2.60	8.80	24.20	51.40	71.60
	Knit	1.80	2.20	4.60	7.80	13.20
	Square	4.80	13.20	28.80	54.80	76.80
EVA01	Circle	4.80	14.00	27.80	50.60	75.40
	Diamond	2.40	6.60	14.80	31.00	57.60
	Knit	1.40	2.80	4.60	6.20	8.00
	Square	3.40	7.00	12.60	28.20	61.00
EVA02	Circle	4.60	12.20	24.40	44.60	65.00
	Diamond	1.40	3.60	6.60	14.80	34.80
	Knit	0.40	0.40	1.80	3.20	4.80
	Square	2.20	6.60	15.00	31.40	63.60
ResNet	Circle	34.20	67.40	80.40	85.40	86.20
	Diamond	12.20	28.80	56.00	75.60	85.00
	Knit	4.40	8.00	10.20	15.00	20.80
	Square	15.20	40.20	66.40	82.20	86.60
ViT-H-14	Circle	2.60	16.20	46.00	77.60	90.80
	Diamond	0.20	2.20	10.60	28.60	61.20
	Knit	-0.60	0.60	1.00	2.00	3.20
	Square	1.40	6.40	18.60	50.20	82.80

Table 5: Change of Acc@1 for SubSet500 [%]. Table 6: Change of Acc@5 for SubSet500 [%].

#### A.5 Acc@1 and Acc@5 accuracy for SubSet200.

In the following we show the full tables with Acc@1 and Acc@5 in Tables 7 and 8 when evaluating on SubSet200 as done in Experiment 2. Noticeably, RoBERTa-B performs much worse than RoBERTa-L as its accuracy drops much more. As mentioned in the main results, we see in general that the models have a harder time dealing with the “circles” mask.

Model	Mask	Opacity				
		10%	20%	30%	40%	50%
ConvNeXt	Circle	4.46	15.36	28.49	43.73	62.11
	Diamond	0.78	3.86	9.22	18.55	34.40
	Square	1.39	6.51	18.73	35.54	55.90
EVA02	Circle	1.27	10.78	21.63	34.22	43.55
	Diamond	0.54	1.87	6.63	15.12	26.33
	Square	1.20	6.93	16.02	28.73	41.69
Apple: ViT-H	Circle	1.02	4.22	11.75	27.59	49.40
	Diamond	0.36	0.72	1.39	3.07	7.41
	Square	0.78	1.81	3.25	12.59	31.45
ResNet	Circle	5.24	19.70	32.35	45.36	59.94
	Diamond	2.05	10.12	25.30	47.83	68.73
	Square	2.89	12.65	27.23	47.11	67.65
ViT-H-14	Circle	1.02	4.22	11.75	27.59	49.40
	Diamond	0.36	0.72	1.39	3.07	7.41
	Square	0.78	1.81	3.25	12.59	31.45
ViT-L-14	Circle	1.93	6.93	13.67	20.42	29.88
	Diamond	0.30	1.33	2.59	5.84	11.69
	Square	1.69	6.08	10.42	16.02	26.57
RoBERTa-B	Circle	10.84	36.81	61.51	78.31	90.12
	Diamond	3.13	10.06	23.67	42.23	61.14
	Square	7.35	22.29	39.40	64.70	83.92
RoBERTa-L	Circle	1.02	7.29	21.51	42.77	62.89
	Diamond	0.42	1.51	4.82	12.41	25.12
	Square	0.78	4.76	12.83	28.73	52.83

Model	Mask	Opacity				
		10%	20%	30%	40%	50%
ConvNeXt	Circle	0.48	4.40	12.47	24.76	40.72
	Diamond	0.00	0.36	2.11	6.20	16.14
	Square	0.06	0.90	5.30	15.00	32.53
EVA02	Circle	0.06	1.33	5.60	14.58	27.17
	Diamond	0.00	0.00	0.30	1.81	5.78
	Square	0.00	0.30	2.23	8.43	19.64
Apple: ViT-H	Circle	0.06	0.78	3.31	12.17	28.25
	Diamond	0.00	0.00	0.24	0.42	2.05
	Square	0.00	0.06	0.66	3.80	17.17
ResNet	Circle	0.84	5.66	12.35	22.47	33.31
	Diamond	0.18	2.23	10.12	24.94	45.72
	Square	0.42	3.19	10.96	24.76	41.87
ViT-H-14	Circle	0.06	0.78	3.31	12.17	28.25
	Diamond	0.00	0.00	0.24	0.42	2.05
	Square	0.00	0.06	0.66	3.80	17.17
ViT-L-14	Circle	0.12	1.45	3.98	7.89	13.43
	Diamond	0.00	0.12	0.42	0.96	2.65
	Square	0.00	0.60	2.47	5.24	10.06
RoBERTa-B	Circle	1.57	13.19	35.72	57.29	74.46
	Diamond	0.00	1.39	5.96	16.45	34.64
	Square	0.36	4.82	13.73	37.11	65.54
RoBERTa-L	Circle	0.06	1.93	8.31	21.75	39.70
	Diamond	0.00	0.06	0.96	3.25	9.82
	Square	0.00	0.84	3.07	11.20	30.00

Table 7: Change of Acc@1 for SubSet200 [%]. Table 8: Change of Acc@5 for SubSet200 [%].

## A.6 Acc@1 and Acc@5 accuracy for ResizedAll.

Table 9 and Table 10 show the full tables with the drops in Acc@1 and Acc@5, respectively when applying the masks to the resized images in ImageNette (ResizedAll).

Model	Mask	Opacity				
		10%	20%	30%	40%	50%
ConvNeXt	Circle	5.59	29.19	60.03	77.90	83.17
	Diamond	2.14	14.13	27.61	44.90	60.64
	Square	5.95	19.20	34.41	56.46	73.45
EVA02	Circle	5.52	31.79	49.85	60.88	70.18
	Diamond	6.32	18.53	30.72	44.20	55.31
	Square	13.79	23.75	39.69	57.61	69.98
Apple: ViT-H	Circle	2.80	21.15	47.78	71.36	85.55
	Diamond	-0.14	5.26	10.55	18.80	32.89
	Square	2.34	10.78	26.94	55.77	78.86
ResNet	Circle	17.02	63.53	76.44	79.43	80.14
	Diamond	10.86	42.94	69.33	82.46	86.93
	Square	10.28	36.27	66.85	83.77	88.41
ViT-H-14	Circle	2.80	21.15	47.78	71.36	85.55
	Diamond	-0.14	5.26	10.55	18.80	32.89
	Square	2.34	10.78	26.94	55.77	78.86
ViT-L-14	Circle	9.17	28.73	44.13	57.61	67.10
	Diamond	3.20	9.58	17.10	28.60	42.83
	Square	6.22	15.86	27.39	43.12	60.12
RoBERTa-B	Circle	12.68	43.45	65.91	80.44	84.31
	Diamond	5.55	22.64	39.30	56.07	70.51
	Square	10.11	29.60	52.57	73.37	82.81
RoBERTa-L	Circle	7.69	37.21	66.50	83.84	91.09
	Diamond	4.30	12.64	24.93	43.00	59.68
	Square	7.03	19.83	40.93	68.47	86.17

Table 9: Drop of Acc@1 for resized ImageNette (ResizedAll) [%].

Model	Mask	Opacity				
		10%	20%	30%	40%	50%
ConvNeXt	Circle	3.91	22.42	54.46	81.72	92.15
	Diamond	1.36	7.85	17.67	34.26	55.38
	Square	2.93	9.64	22.54	46.97	73.76
EVA02	Circle	2.53	18.02	35.62	51.76	64.66
	Diamond	1.85	5.83	12.45	23.03	36.42
	Square	3.46	8.20	19.66	40.56	61.78
Apple: ViT-H	Circle	1.16	8.89	26.80	51.07	71.71
	Diamond	-0.12	1.25	3.33	8.50	20.92
	Square	0.65	4.17	15.49	43.32	71.37
ResNet	Circle	6.64	48.57	69.36	73.21	74.74
	Diamond	3.54	23.41	50.58	73.29	87.20
	Square	3.54	19.40	51.60	81.84	94.35
ViT-H-14	Circle	1.16	8.89	26.80	51.07	71.71
	Diamond	-0.12	1.25	3.33	8.50	20.92
	Square	0.65	4.17	15.49	43.32	71.37
ViT-L-14	Circle	3.37	15.84	27.93	41.92	53.82
	Diamond	0.94	2.96	6.27	12.43	24.19
	Square	2.64	6.73	12.49	24.04	42.20
RoBERTa-B	Circle	5.85	28.52	53.14	76.14	84.35
	Diamond	2.03	10.01	22.89	40.94	62.95
	Square	3.42	15.13	36.91	67.46	87.65
RoBERTa-L	Circle	2.06	17.90	47.53	73.32	85.24
	Diamond	0.75	3.84	10.62	22.82	40.75
	Square	1.29	6.32	20.68	52.44	80.77

Table 10: Drop in Acc@5 for resized ImageNette (ResizedAll) [%].

## A.7 Ground Truth Confidence for SubSet200

In extension to Acc@1 and Acc@5 results, then it is useful to compare the results on the confidence of the ground truth for all the same masks, cf. Table 11, as it provides a better idea of how stable the Acc@5 scores are. Initially, the confidence in ground truth is very high and stands far from the next

prediction for most of the cases shift of up 67% in confidence for an opacity level in the range of 50% is not sufficient to drop the model’s Acc@5 below 50%, as it does for Acc@1 and becomes harder for human perception. A drop of ground truth confidence also agrees with the fact that better resistance against some shapes comes at the cost of being more sensitive to the other ones, as it happens based on examples of EVA02 and ViT-H-14.

### A.8 Ground Truth Confidence for ResizedAll

We see that the confidence of the ground truth drops further for many instances Table 12 which indicates that it can be easier to be combined with an FGSM-like attack and target Acc@5 specifically. The table also demonstrates that ViT-L-14 (not presented in the main sections of the paper) is more resistant to masks of circular shape than ViT-H-14 at opacity levels >40%, but more sensitive to the other shapes in both datasets.

Model	Mask	Opacity				
		10%	20%	30%	40%	50%
ConvNeXt	Circles	5.645	18.905	33.361	49.333	66.130
	Diamond	1.044	4.936	11.614	22.641	38.619
	Square	2.067	9.481	22.784	39.798	59.099
EVA02	Circles	1.589	12.123	24.320	36.740	47.974
	Diamond	-0.169	2.543	8.605	18.073	29.397
	Square	1.688	9.081	19.313	31.203	44.633
Apple: ViT-H	Circles	0.041	3.274	11.708	28.551	50.050
	Diamond	-0.545	-0.587	0.059	2.073	6.705
	Square	-0.496	0.457	2.806	11.959	31.869
ResNet	Circles	8.323	26.143	41.388	56.402	69.312
	Diamond	3.928	15.906	33.133	55.247	72.711
	Square	4.559	17.200	33.441	53.504	71.878
ViT-H-14	Circles	0.041	3.274	11.708	28.551	50.050
	Diamond	-0.545	-0.587	0.059	2.073	6.705
	Square	-0.496	0.457	2.806	11.959	31.869
ViT-L-14	Circles	5.912	14.392	22.576	31.488	42.215
	Diamond	1.229	4.030	7.882	13.611	21.541
	Square	5.112	13.642	21.162	29.442	40.269
RoBERTa-B	Circles	10.594	37.631	60.838	75.623	85.685
	Diamond	2.048	10.495	24.429	43.469	61.539
	Square	6.831	22.112	41.473	63.348	80.237
RoBERTa-L	Circles	1.809	10.122	25.972	47.397	66.992
	Diamond	0.731	2.408	6.760	15.256	29.578
	Square	1.115	6.424	15.523	32.914	56.083

Table 11: Ground truth conf drop for SubSet200 [%].

Model	Mask	Opacity				
		10%	20%	30%	40%	50%
ConvNeXt	Circles	9.617	36.234	68.709	86.811	91.899
	Diamond	6.480	18.077	33.547	53.098	70.053
	Square	10.775	23.225	40.300	64.181	82.371
EVA02	Circles	6.761	33.178	53.924	67.718	78.523
	Diamond	7.933	18.738	31.381	44.827	56.812
	Square	15.902	27.058	42.733	61.524	75.634
Apple: ViT-H	Circles	3.520	21.009	48.194	73.760	88.807
	Diamond	1.688	5.023	9.470	17.993	33.330
	Square	2.825	9.920	26.234	56.025	80.729
ResNet	Circles	24.530	76.365	88.196	89.980	90.633
	Diamond	15.953	52.373	76.141	86.627	90.562
	Square	14.456	44.220	73.281	88.062	91.925
ViT-H-14	Circles	3.435	20.802	48.019	73.709	88.582
	Diamond	1.829	5.373	9.629	17.986	34.228
	Square	4.098	10.902	27.179	56.860	81.146
ViT-L-14	Circles	14.812	36.936	53.223	66.353	75.476
	Diamond	9.480	16.366	24.668	36.806	50.707
	Square	10.737	23.081	35.193	51.176	67.486
RoBERTa-B	Circles	19.521	53.359	75.171	89.228	92.515
	Diamond	10.482	28.408	47.659	66.300	80.111
	Square	16.796	38.781	63.461	82.539	91.357
RoBERTa-L	Circles	11.479	42.415	71.558	89.207	96.184
	Diamond	7.859	15.928	29.738	48.025	65.297
	Square	10.725	23.512	45.274	73.033	91.098

Table 12: Ground truth conf drop for ResizedAll [%].

## References

- 6sense. Google Captcha Market Share. <https://6sense.com/tech/captcha/recaptcha-market-share#:~:text=What%20is%20reCAPTCHA%20market%20share,of%2099.93%25%20in%20captcha%20market,2023>. [Online; accessed 17-July-2024].
- allerallegro. hcaptcha-challenger Github Issue Ticket. <https://github.com/QIN2DIM/hcaptcha-challenger/issues/976>, 2022. [Online; accessed 01-Aug-2024].
- Xuxin Chen, Ximin Wang, Ke Zhang, Kar-Ming Fung, Theresa C Thai, Kathleen Moore, Robert S Mannel, Hong Liu, Bin Zheng, and Yuchen Qiu. Recent advances and clinical applications of deep learning in medical image analysis. *Medical image analysis*, 79:102444, 2022.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. Unsupervised cross-lingual representation learning at scale, 2020. URL <https://arxiv.org/abs/1911.02116>.
- Yinpeng Dong, Huanran Chen, Jiawei Chen, Zhengwei Fang, Xiao Yang, Yichi Zhang, Yu Tian, Hang Su, and Jun Zhu. How robust is google’s bard to adversarial image attacks? *arXiv preprint arXiv:2309.11751*, 2023.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale, 2021. URL <https://arxiv.org/abs/2010.11929>.
- Alex Fang, Albin Madappally Jose, Amit Jain, Ludwig Schmidt, Alexander Toshev, and Vaishaal Shankar. Data filtering networks. *arXiv preprint arXiv:2309.17425*, 2023a.
- Yuxin Fang, Wen Wang, Binhui Xie, Quan Sun, Ledell Wu, Xinggang Wang, Tiejun Huang, Xinlong Wang, and Yue Cao. Eva: Exploring the limits of masked visual representation learning at scale. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 19358–19369, June 2023b.
- Yuxin Fang, Quan Sun, Xinggang Wang, Tiejun Huang, Xinlong Wang, and Yue Cao. Eva-02: A visual representation for neon genesis. *Image and Vision Computing*, 149:105171, 2024.
- Osama S. Faragallah, Heba El-Hoseny, Walid El-Shafai, Wael Abd El-Rahman, Hala S. El-Sayed, El-Sayed M. El-Rabaie, Fathi E. Abd El-Samie, and Gamal G. N. Geweid. A comprehensive survey analysis for present solutions of medical image fusion and future directions. *IEEE Access*, 9:11358–11371, 2021. doi: 10.1109/ACCESS.2020.3048315.
- Stanislav Fort and Balaji Lakshminarayanan. Ensemble everything everywhere: Multi-scale aggregation for adversarial robustness, 2024. URL <https://arxiv.org/abs/2408.05446>.
- Hassan Hajjdiab. Random image matching captcha system. *Electronic Letters on Computer Vision and Image Analysis*, 16:1–13, 2017. URL <https://api.semanticscholar.org/CorpusID:55436383>.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Delving deep into rectifiers: Surpassing human-level performance on imagenet classification. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, December 2015.
- Dan Hendrycks, Kevin Zhao, Steven Basart, Jacob Steinhardt, and Dawn Song. Natural adversarial examples. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 15262–15271, June 2021.
- Jeremy Howard. Imagenette: A smaller subset of 10 easily classified classes from imagenet, March 2019. URL <https://github.com/fastai/imagenette>.
- Andrew Ilyas, Shibani Santurkar, Dimitris Tsipras, Logan Engstrom, Brandon Tran, and Aleksander Madry. Adversarial examples are not bugs, they are features. *Advances in neural information processing systems*, 32, 2019.

- Zhuang Liu, Hanzi Mao, Chao-Yuan Wu, Christoph Feichtenhofer, Trevor Darrell, and Saining Xie. A convnet for the 2020s. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11976–11986, June 2022.
- Andreas Plesner, Tobias Vontobel, and Roger Wattenhofer. Breaking recaptchav2. IEEE, 2024. 48th IEEE International Conference on Computers, Software, and Applications (COMPSAC 2024); Conference Location: Osaka, Japan; Conference Date: July 2-4, 2024.
- QIN2DIM. hcaptcha-challenger. <https://github.com/QIN2DIM/hcaptcha-challenger>, 2022. [Online; accessed 01-Aug-2024].
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115:211–252, 2015.
- Alex Serban, Erik Poll, and Joost Visser. Adversarial examples on object recognition: A comprehensive survey. *ACM Computing Surveys (CSUR)*, 53(3):1–38, 2020.
- Fahad Shamshad, Salman Khan, Syed Waqas Zamir, Muhammad Haris Khan, Munawar Hayat, Fahad Shahbaz Khan, and Huazhu Fu. Transformers in medical imaging: A survey. *Medical Image Analysis*, 88:102802, 2023.
- Erfan Shayegani, Yue Dong, and Nael Abu-Ghazaleh. Plug and pray: Exploiting off-the-shelf components of multi-modal models. *arXiv preprint arXiv:2307.14539*, 2023.
- Shafiq Afzal Sheikh and M Tariq Bandy. A novel animated captcha technique based on persistence of vision. *International Journal of Advanced Computer Science and Applications*, 13(2), 2022.
- Amit Singhal et al. Modern information retrieval: A brief overview. *IEEE Data Eng. Bull.*, 24(4): 35–43, 2001.
- Danush Kumar Venkatesh and Peter Steinbach. Detecting adversarial examples in batches—a geometrical approach. *arXiv preprint arXiv:2206.08738*, 2022.
- Chenguang Wang, Ruoxi Jia, Xin Liu, and Dawn Song. Benchmarking zero-shot robustness of multimodal foundation models: A pilot study. *arXiv preprint*, 2024.
- Zhou Wang, Alan C Bovik, Hamid R Sheikh, and Eero P Simoncelli. Image quality assessment: from error visibility to structural similarity. *IEEE transactions on image processing*, 13(4):600–612, 2004.
- Ekim Yurtsever, Jacob Lambert, Alexander Carballo, and Kazuya Takeda. A survey of autonomous driving: Common practices and emerging technologies. *IEEE Access*, 8:58443–58469, 2020. doi: 10.1109/ACCESS.2020.2983149.
- Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 586–595, 2018.
- Xinyu Zhang, Hanbin Hong, Yuan Hong, Peng Huang, Binghui Wang, Zhongjie Ba, and Kui Ren. Text-crs: A generalized certified robustness framework against textual adversarial attacks. *arXiv preprint arXiv:2307.16630*, 2023.