
Towards Underwater Camouflaged Object Tracking: An Experimental Evaluation of SAM and SAM 2

Chunhui Zhang^{1,2,3}, Li Liu^{2*}, Guanjie Huang², Hao Wen³, Xi Zhou³, Yanfeng Wang^{1,4}

¹ Cooperative Medianet Innovation Center, Shanghai Jiao Tong University, Shanghai 200240, China

² The Hong Kong University of Science and Technology (Guangzhou), Guangzhou 511458, China

³ CloudWalk Technology Co., Ltd, 201203, China

⁴ Shanghai AI Laboratory, Shanghai 200232, China

Abstract

Over the past decade, significant progress has been made in visual object tracking, largely due to the availability of large-scale training datasets. However, existing tracking datasets are primarily focused on open-air scenarios, which greatly limits the development of object tracking in underwater environments. To address this issue, we take a step forward by proposing the first large-scale underwater camouflaged object tracking dataset, namely UW-COT. Based on the proposed dataset, this paper presents an experimental evaluation of several advanced visual object tracking methods and the latest advancements in image and video segmentation. Specifically, we compare the performance of the Segment Anything Model (SAM) and its updated version, SAM 2, in challenging underwater environments. Our findings highlight the improvements in SAM 2 over SAM, demonstrating its enhanced capability to handle the complexities of underwater camouflaged objects. Compared to current advanced visual object tracking methods, the latest video segmentation foundation model SAM 2 also exhibits significant advantages, providing valuable insights into the development of more effective tracking technologies for underwater scenarios. The dataset will be accessible at <https://github.com/983632847/Awesome-Multimodal-Object-Tracking>.

1 Introduction

Visual object tracking (VOT) involves continuously locating a target object within a video sequence and has applications in autonomous vehicles [28, 25, 26], surveillance [35, 5], and robotics [33, 36]. Its significance lies in enabling machines to perceive and interpret dynamic environments, supporting tasks like motion analysis and decision-making [22, 15, 23]. Although significant progress has been made in terrestrial and open-air scenarios [17, 9], tracking in underwater environments remains challenging due to factors like visual camouflage, light scattering, and low contrast, which limit the effectiveness of conventional algorithms [34, 1, 2]. Consequently, there is a pressing need for specialized datasets and methods to tackle the complexities of underwater tracking, especially when objects blend with their surroundings, known as camouflaged objects. *However, despite its importance, underwater camouflaged object tracking remains an unexplored field.*

Current VOT methods can be broadly categorized into several types. Traditional correlation filter-based methods [31, 13, 12, 32] utilize efficient convolution operations to track objects, whereas Siamese-based methods [3, 20, 21] employ dual-stream networks to learn a similarity function between the target object and the search region. Transformer-based methods, such as OTrack [30], SeqTrack [6], and ARTrack [27], leverage the attention mechanism to model complex dependencies

*Corresponding author. E-mail: avrilliu@hkust-gz.edu.cn.

in sequences, resulting in enhanced tracking precision. In recent years, Mamba-based approaches like Mamba-FETrack [16], and MambaVT [19] have emerged, offering robust performance through feature enhancement and advanced attention mechanisms. In addition to these methods, SAM-based models have also gained traction. These models, such as SAM-DA [11], Tracking Anything [29], SAM-Track [8], and the latest SAM 2 [24], focus on the precise segmentation of objects across frames, making them particularly suitable for challenging environments like underwater scenarios where object boundaries are difficult to discern.

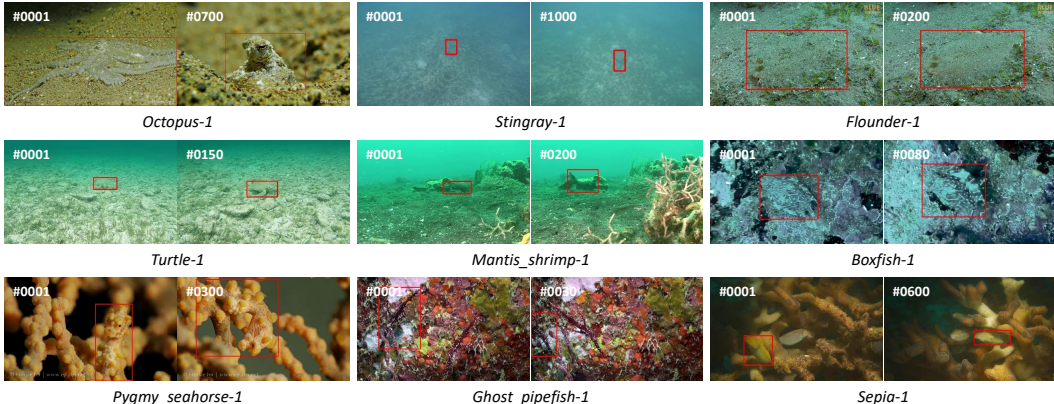


Figure 1: Some examples come from the constructed UW-COT dataset. A camouflaged underwater target object is annotated in each video sequence.

Table 1: Comparison of UW-COT with existing camouflaged object tracking dataset (COTD [14]) and video camouflaged object detection datasets (CAD [4] and MoCA-Mask [7]). UW-COT is currently the largest underwater camouflaged object tracking dataset.

Dataset	Year	Videos	Classes	Min frame	Mean frame	Max frame	Total frames	Labeled frames	Annotation	Link	Underwater
CAD [4]	2016	9	6	30	93	218	836	191	Mask	URL	✗
MoCA-Mask [7]	2022	87	45	23	264	1,296	23 K	23 K	Mask	URL	✗
COTD [14]	2024	200	20	-	400	-	80 K	80 K	BBox	URL	✗
UW-COT (Ours)	2024	220	96	10	722	7,448	159 K	159 K	BBox+Mask	URL	✓

Following the latest large-scale underwater object tracking dataset (*i.e.*, WebUOT-1M [34]), we take a step forward and construct the first underwater camouflaged object tracking dataset, UW-COT (see Fig. 1 and Tab. 1), as a benchmark for evaluating and developing advanced underwater camouflaged object tracking methods. The dataset consists of 220 underwater video sequences, spanning 96 categories, with approximately 159,000 frames. As a single-object visual tracking task, we provide bounding box annotations for the camouflaged underwater objects in each frame. Additionally, using manually annotated bounding boxes as prompts, we generate pseudo mask annotations for the camouflaged underwater objects by leveraging advanced interactive segmentation models (*e.g.*, HQ-SAM [18] and SAM-2 [24]). We conduct pioneering experiments on the constructed dataset to evaluate the performance of state-of-the-art visual object tracking methods and the latest advancements in image and video segmentation. By releasing UW-COT, we aim to inspire interest in exploring various underwater vision tasks and to foster the development of advanced methods for underwater camouflaged object tracking.

2 UW-COT Dataset

Our goal is to construct a large-scale underwater camouflaged object tracking dataset that involves a rich variety of categories and various real underwater scenes for evaluating and developing general underwater camouflaged object tracking methods. To achieve this, we collect underwater videos from video-sharing platforms (*e.g.*, YouTube²) and existing tracking datasets (*e.g.*, WebUOT-1M [34] and

²<https://www.youtube.com/>

VastTrack [23]), and we filter out 220 videos that contain underwater camouflaged objects. Following existing datasets [17, 10, 33, 23, 34], we provide a bounding box annotation for the camouflaged object in each frame, represented as $[x, y, w, h]$, where x and y denote the coordinates of the top-left corner of the object, and w and h indicate the width and height of the object. Furthermore, to enhance the accuracy of object representation, we use segmentation foundation models (*e.g.*, HQ-SAM [18] and SAM-2 [24]) to generate pseudo mask annotations for the camouflaged objects. Some examples and detailed statistics of the UW-COT dataset are provided in Fig. 1 and Tab. 1. To the best of our knowledge, UW-COT is the first large-scale benchmark for underwater camouflaged object tracking, featuring a diverse set of 96 categories and various challenging underwater scenes.

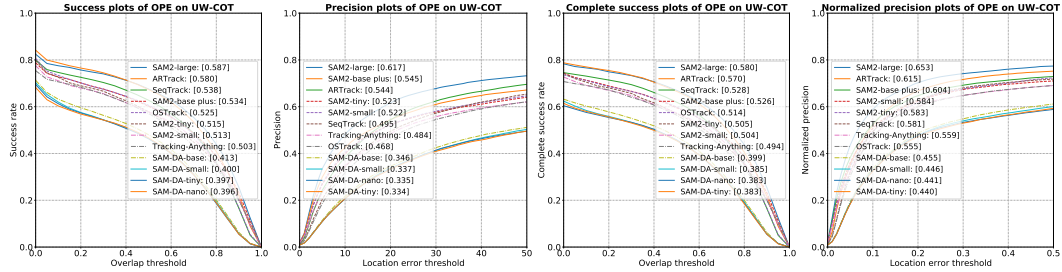


Figure 2: Overall performance on the UW-COT dataset using AUC, Pre, cAUC, and nPre scores.

Table 2: Impact of using different points as the point prompt for SAM 2 [24]. We report AUC, nPre, Pre, cAUC, and mACC scores on the UW-COT dataset.

Method	Point type	AUC (%)	nPre (%)	Pre (%)	cAUC (%)	mACC (%)
SAM 2-tiny	Center point	51.5	58.3	52.3	50.5	51.7
	Random point	36.9	40.7	36.5	35.6	36.5
SAM 2-small	Center point	51.3	58.4	52.2	50.4	51.5
	Random point	35.4	39.9	34.6	34.2	35.0
SAM 2-base plus	Center point	53.4	60.4	54.5	52.6	53.7
	Random point	39.6	44.9	39.6	38.5	39.2
SAM 2-large	Center point	58.7	65.3	61.7	58.0	59.3
	Random point	43.8	48.3	44.8	42.6	43.6

Table 3: Comparison of different models for SAM 2 [24]. We report AUC, nPre, Pre, cAUC, and mACC scores on the UW-COT dataset.

Method	Size (M)	Speed (FPS)	AUC (%)	nPre (%)	Pre (%)	cAUC (%)	mACC (%)
SAM 2-tiny	38.9	47.2	51.5	58.3	52.3	50.5	51.7
SAM 2-small	46	43.3	51.3	58.4	52.2	50.4	51.5
SAM 2-base plus	80.8	34.8	53.4	60.4	54.5	52.6	53.7
SAM 2-large	224.4	24.2	58.7	65.3	61.7	58.0	59.3

3 Experimental Results

Main Results. We evaluate SAM-based tracking methods (*i.e.*, SAM-DA [11], and Tracking Anything [29]), SAM 2, and three current SOTA visual object tracking methods (*i.e.*, OTrack [30], SeqTrack [6], and ARTrack [27]) on the proposed UW-COT dataset. The results are shown in Fig. 2. Our observations are as follows: 1) SAM 2 outperforms SAM-based trackers (SAM-DA and Tracking-Anything) on UW-COT, which can be attributed to a series of improvements SAM 2 introduces over SAM for video and image tasks, such as improving temporal consistency, robustness to occlusions, feature embeddings, computational efficiency, motion estimation accuracy, generalization to new domains, and integration of contextual information. 2) SAM 2 achieves the best performance, surpassing current state-of-the-art VOT methods. As a foundation model for video segmentation, SAM 2’s success reflects a promising effort to address the dynamic challenges present in video data, such as fast motion, deformation, similar distractors, and occlusion, and to provide a more generalized solution for video object tracking and beyond.

Ablation Studies. We take SAM 2 as an example to explore the impact of different ways of point prompts (*i.e.*, center point and random point within the initial target box) and model sizes. From Tab. 2, we find that using the center point as a prompt yields significantly better results than using random points. This suggests that for the interactive segmentation model SAM 2, the quality of the prompt is very important. The results in Tab. 3 demonstrate that larger model sizes generally lead to better performance, but the speed of the model decreases significantly. We also discovered an interesting phenomenon: when the number of model parameters is relatively small, a smaller model (*e.g.*, SAM 2-tiny) can even outperform a larger model (*e.g.*, SAM 2-small). We suspect this may be due to overfitting, or that small models are more sensitive to the quality of the training data.

4 Conclusion

In this paper, we introduce UW-COT, the first large-scale benchmark for underwater camouflaged object tracking, and demonstrate the superior performance of SAM 2 over other tracking methods, showcasing its potential for enhancing underwater tracking technologies. In the future, we plan to expand the scale and modalities of this dataset, as well as explore various underwater vision tasks.

References

- [1] Basit Alawode, Fayaz Ali Dharejo, Mehnaz Ummar, Yuhang Guo, Arif Mahmood, Naoufel Werghi, Fahad Shahbaz Khan, and Sajid Javed. Improving underwater visual tracking with a large scale dataset and image enhancement. *arXiv preprint arXiv:2308.15816*, 2023.
- [2] Basit Alawode, Yuhang Guo, Mehnaz Ummar, Naoufel Werghi, Jorge Dias, Ajmal Mian, and Sajid Javed. Utb180: A high-quality benchmark for underwater tracking. In *Proceedings of the Asian Conference on Computer Vision*, pages 3326–3342, 2022.
- [3] Luca Bertinetto, Jack Valmadre, Joao F Henriques, Andrea Vedaldi, and Philip HS Torr. Fully-convolutional siamese networks for object tracking. In *European Conference on Computer Vision Workshop*, pages 850–865, 2016.
- [4] Pia Bideau and Erik Learned-Miller. It’s moving! a probabilistic model for causal motion segmentation in moving camera videos. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part VIII 14*, pages 433–449. Springer, 2016.
- [5] Wenrui Cai, Qingjie Liu, and Yunhong Wang. Hiptrack: Visual tracking with historical prompts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19258–19267, 2024.
- [6] Xin Chen, Houwen Peng, Dong Wang, Huchuan Lu, and Han Hu. Seqtrack: Sequence to sequence learning for visual object tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14572–14581, 2023.
- [7] Xuelian Cheng, Huan Xiong, Deng-Ping Fan, Yiran Zhong, Mehrtash Harandi, Tom Drummond, and Zongyuan Ge. Implicit motion handling for video camouflaged object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13864–13873, 2022.
- [8] Yangming Cheng, Liulei Li, Yuanyou Xu, Xiaodi Li, Zongxin Yang, Wenguan Wang, and Yi Yang. Segment and track anything. *arXiv preprint arXiv:2305.06558*, 2023.
- [9] Heng Fan, Hexin Bai, Liting Lin, and *et al.*. Lasot: A high-quality large-scale single object tracking benchmark. *International journal of computer vision*, 129(2):439–461, 2021.
- [10] Heng Fan, Liting Lin, Fan Yang, Peng Chu, Ge Deng, Sijia Yu, Hexin Bai, Yong Xu, Chunyuan Liao, and Haibin Ling. Lasot: A high-quality benchmark for large-scale single object tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5374–5383, 2019.
- [11] Changhong Fu, Liangliang Yao, Haobo Zuo, Guangze Zheng, and Jia Pan. Sam-da: Uav tracks anything at night with sam-powered domain adaptation. *arXiv preprint arXiv:2307.01024*, 2023.
- [12] Shiming Ge, Zhao Luo, Chunhui Zhang, Yingying Hua, and Dacheng Tao. Distilling channels for efficient deep tracking. *IEEE Transactions on Image Processing*, 29:2610–2621, 2019.
- [13] Shiming Ge, Chunhui Zhang, Shikun Li, Dan Zeng, and Dacheng Tao. Cascaded correlation refinement for robust deep tracking. *IEEE transactions on neural networks and learning systems*, 32(3):1276–1288, 2020.
- [14] Xiaoyu Guo, Pengzhi Zhong, Hao Zhang, Ling Huang, Defeng Huang, and Shuiwang Li. Camouflaged object tracking: A benchmark. *arXiv preprint arXiv:2408.13877*, 2024.

- [15] Shiyu Hu, Dailing Zhang, Xiaokun Feng, Xuchen Li, Xin Zhao, Kaiqi Huang, et al. A multi-modal global instance tracking benchmark (mgit): Better locating target in complex spatio-temporal and causal relationship. *Advances in Neural Information Processing Systems*, 36, 2024.
- [16] Ju Huang, Shiao Wang, Shuai Wang, Zhe Wu, Xiao Wang, and Bo Jiang. Mamba-fetrack: Frame-event tracking via state space model. *arXiv preprint arXiv:2404.18174*, 2024.
- [17] Lianghua Huang, Xin Zhao, and Kaiqi Huang. Got-10k: A large high-diversity benchmark for generic object tracking in the wild. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 43(5):1562–1577, 2019.
- [18] Lei Ke, Mingqiao Ye, Martin Danelljan, Yu-Wing Tai, Chi-Keung Tang, Fisher Yu, et al. Segment anything in high quality. *Advances in Neural Information Processing Systems*, 36, 2024.
- [19] Simiao Lai, Chang Liu, Jiawen Zhu, Ben Kang, Yang Liu, Dong Wang, and Huchuan Lu. Mambavt: Spatio-temporal contextual modeling for robust rgb-t tracking. *arXiv preprint arXiv:2408.07889*, 2024.
- [20] Bo Li, Wei Wu, Qiang Wang, Fangyi Zhang, Junliang Xing, and Junjie Yan. Siamrpn++: Evolution of siamese visual tracking with very deep networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4282–4291, 2019.
- [21] Bo Li, Junjie Yan, Wei Wu, Zheng Zhu, and Xiaolin Hu. High performance visual tracking with siamese region proposal network. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 8971–8980, 2018.
- [22] Xuchen Li, Shiyu Hu, Xiaokun Feng, Dailing Zhang, Meiqi Wu, Jing Zhang, and Kaiqi Huang. Visual language tracking with multi-modal interaction: A robust benchmark. *arXiv preprint arXiv:2409.08887*, 2024.
- [23] Liang Peng, Junyuan Gao, Xinran Liu, Weihong Li, Shaohua Dong, Zhipeng Zhang, Heng Fan, and Libo Zhang. Vasttrack: Vast category visual object tracking. *arXiv preprint arXiv:2403.03493*, 2024.
- [24] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. Sam 2: Segment anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024.
- [25] Han Wang, Yanjie Wang, Yongjie Ye, Yuxiang Nie, and Can Huang. Elysium: Exploring object-level perception in videos via mllm. *arXiv preprint arXiv:2403.16558*, 2024.
- [26] Xiao Wang, Shiao Wang, Chuanming Tang, Lin Zhu, Bo Jiang, Yonghong Tian, and Jin Tang. Event stream-based visual object tracking: A high-resolution benchmark dataset and a novel baseline. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19248–19257, 2024.
- [27] Xing Wei, Yifan Bai, Yongchao Zheng, Dahu Shi, and Yihong Gong. Autoregressive visual tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9697–9706, 2023.
- [28] Fei Xie, Zhongdao Wang, and Chao Ma. Diffusiontrack: Point set diffusion model for visual object tracking. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19113–19124, 2024.
- [29] Jinyu Yang, Mingqi Gao, Zhe Li, Shang Gao, Fangjing Wang, and Feng Zheng. Track anything: Segment anything meets videos. *arXiv preprint arXiv:2304.11968*, 2023.
- [30] Botao Ye, Hong Chang, Bingpeng Ma, Shiguang Shan, and Xilin Chen. Joint feature learning and relation modeling for tracking: A one-stream framework. In *European Conference on Computer Vision*, pages 341–357, 2022.
- [31] Chunhui Zhang, Shiming Ge, Yingying Hua, and Dan Zeng. Robust deep tracking with two-step augmentation discriminative correlation filters. In *2019 IEEE International Conference on Multimedia and Expo (ICME)*, pages 1774–1779. IEEE, 2019.
- [32] Chunhui Zhang, Shiming Ge, Kangkai Zhang, and Dan Zeng. Accurate uav tracking with distance-injected overlap maximization. In *Proceedings of the 28th ACM International Conference on Multimedia*, pages 565–573, 2020.
- [33] Chunhui Zhang, Guanjie Huang, Li Liu, Shan Huang, Yinan Yang, Xiang Wan, Shiming Ge, and Dacheng Tao. Webuav-3m: A benchmark for unveiling the power of million-scale deep uav tracking. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(7):9186–9205, 2023.
- [34] Chunhui Zhang, Li Liu, Guanjie Huang, Hao Wen, Xi Zhou, and Yanfeng Wang. Webuot-1m: Advancing deep underwater object tracking with a million-scale benchmark. *arXiv preprint arXiv:2405.19818*, 2024.
- [35] Chunhui Zhang, Li Liu, Hao Wen, Xi Zhou, and Yanfeng Wang. Awesome multi-modal object tracking. *arXiv preprint arXiv:2405.14200*, 2024.
- [36] Chunhui Zhang, Xin Sun, Yiqian Yang, Li Liu, Qiong Liu, Xi Zhou, and Yanfeng Wang. All in one: Exploring unified vision-language tracking with multi-modal alignment. In *Proceedings of the 31st ACM International Conference on Multimedia*, pages 5552–5561, 2023.