

A Static Analysis of Popular C Packages in Linux

Jukka Ruohonen
University of Southern Denmark
Email: juk@mmmi.sdu.dk

Mubashrah Saddiq
University of Southern Denmark
Email: msad@mmmi.sdu.dk

Krzysztof Sierszecki
University of Southern Denmark
Email: krzys@mmmi.sdu.dk

Abstract—Static analysis is a classical technique for improving software security and software quality in general. Fairly recently, a new static analyzer was implemented in the GNU Compiler Collection (GCC). The present paper uses the GCC’s analyzer to empirically examine popular Linux packages. The dataset used is based on those packages in the Gentoo Linux distribution that are either written in C or contain C code. In total, 3,538 such packages are covered. According to the results, uninitialized variables and NULL pointer dereference issues are the most common problems according to the analyzer. Classical memory management issues are relatively rare. The warnings also follow a long-tailed probability distribution across the packages; a few packages are highly warning-prone, whereas no warnings are present for as much as 89% of the packages. Furthermore, the warnings do not vary across different application domains. With these results, the paper contributes to the domain of large-scale empirical research on software quality and security. In addition, a discussion is presented about practical implications of the results.

Index Terms—software testing, software security, software verification, software weakness, software vulnerability, security issue, empirical software engineering, Linux, Gentoo, GCC, CWE

I. INTRODUCTION

With Linux serving as the foundation for many critical systems, from servers to embedded devices, ensuring its security and code quality is of high importance. Among the many techniques employed to enhance and improve software robustness, static analysis is a proactive approach for detecting defects, including security vulnerabilities, early on in the software development processes. With this backdrop in mind, the paper presents a large-scale empirical analysis of warnings outputted by the GCC’s relatively new static analyzer for popular open source software packages entirely or partially written in the classical C programming language. The paper is the first to use the GCC’s analyzer for research purposes. In addition, the paper contributes to the domain of large-scale empirical studies on software security and software quality, offering also some ideas on how improvements could be made in practice, including with respect to the static analyzer and the open source software domain in general.

In software testing it is common to make a distinction between dynamic and static analysis. The former includes various techniques to detect problems during run-time of a program; the examples include unit testing, dynamic symbolic execution, performance analysis, and so-called fuzzing, which

has become popular also in the open source context [17], [50]. In contrast, static analysis tests a program without executing it. The history of static analysis traces all the way back to the 1970s during which first static analyzers were implemented based on the 1950s and 1960s ideas about compiler design [58]. Depending on whether source code or binary code is tested, static analyzers range from simple lint-like checkers to more complex solutions based on abstract syntax trees, control flow graphs, model checking, and other techniques. A further taxonomy is between user-oriented and developer-oriented software testing [26]. The present work belongs to the developer-oriented domain; the paper’s topic is about software verification, although the actual verification is still only implicit, drawing on empirical observations.

Static analysis has long been important in software development for improving code quality and software security. The benefits include: swiftness compared to manual code reviews and dynamic analysis, complete and consistent coverage, and ease for non-experts to review code [62], among other things. According to surveys, static analysis is indeed often used in conjunction with code reviews [51]. Against this background, it could be argued that static analysis is particularly relevant for open source software projects [2], given the long-lasting debate over the effectiveness of code reviews in the open source context [44]. Though, it must be stressed that static analysis cannot expel other testing techniques and human expertise. Rather, static analysis complements these and other means to improve software quality.

A static analyzer is presumably easier to implement for strongly typed programming languages than for weakly typed ones. Although C is only partially strongly typed, given a number of implicit conversions between types, pointer arithmetic, and aliasing, static analysis is particularly relevant for C already because of the language’s notoriety in increasing the likelihood of difficult bugs, including various software vulnerabilities, such as buffer and integer overflows. In fact, some open source coding style guidelines and related guides for C recommend turning all compile warnings into errors, such that a program does not successfully compile before a given warning is fixed [42]. Even though such practices may not be enforced in all open source projects [9], [60], the recent integration of static analyzers into continuous integration pipelines of many open source projects has likely eased the enforcement and associated coding practices [63]. Recently,

a lot of effort has also been devoted for improving the static analysis capabilities of C compilers, thus helping developers to avoid common mistakes. This empirical paper relies on these new capabilities for examining problems found through static analysis of popular Linux packages written in C.

Before continuing any further, a remark about terminology is in order: there is no universally accepted term for describing the “problems” found via static analysis. These have been referred to as issues [48], smells [19], or even bugs [6], although both smells and bugs require further deducing. In other words, a given “problem” found through static analysis may not amount to an actual bug or a smell. It may even be that a “problem” is not really a problem; false positives are common. To make things explicit and to avoid further confusion, in what follows, a term “compile-time warning” (CTW) is used. Implicitly, these CTWs are assumed to map to software weaknesses, as described in the Common Weakness Enumeration (CWE) maintained by the MITRE corporation [37]. These weaknesses are about security; a CWE may manifest itself as a concrete software vulnerability, although again further verification is required to make the connection. The paper neither considers such a verification nor deduces about the CTW→CWE mappings in detail. As described in Section II, the mappings are taken for granted based on the static analyzer used. Thus, a grain of salt should be taken about the security-orientedness of the results presented, but still only a grain; by assumption, the analyzer is fairly robust in this regard.

On these notes, the three research questions (RQs) examined can be stated as follows:

- RQ.1: How common are CWE-mapped CTWs in popular Linux packages fully or partially written in the C programming language?
- RQ.2: Which CWEs are particularly common according to the GCC’s compile-time warnings?
- RQ.3: Do the CWE-mapped CTWs vary across typical application domains, such as system libraries, networking tools, or graphical user interfaces?

These three research questions carry novelty. According to a reasonable literature search, the questions have not been previously examined, at least to the large-scale extent presented in the current work. Nor has the GCC’s static analyzer been previously examined or used in academic research. There is also practical relevance. Because the CTWs are related to security—even if only implicitly, and because a large number of packages is examined, an answer to RQ.1 gives a coarse but still useful heuristic for deducing about the potential risks of running a Linux operating system. The answer can be also portrayed through software engineering; a large amount of CWE-mapped CTWs implies that a large amount of work is required to improve the situation. From a perspective of third-party security researchers, on the other hand, CWEs based on static analysis may help at prioritizing packages for actual vulnerability discovery. Then, an answer to RQ.2 sheds light on the typical C programming obstacles faced by Linux developers. If some particularly CWEs are pronounced, it may

be possible to allocate more resources for fixing these issues or improving instructions and documentation about the issues. Finally, a similar rationale applies with respect to RQ.3, which is also generally interesting in that some particular application domains may be particularly prone to security-related CTWs. Again, an answer to the question allows to also hypothesize about potential security risks. For instance: if system libraries are especially prone to CWE-mapped CTWs, the security risks are likely graver than with less important application domains, such as, say, graphical user interface widgets.

The structure of the paper’s reminder is simple. As is common for an empirical paper, materials and methods are first elaborated in Section II. Results are then presented in the subsequent Section III. The final Section IV presents a conclusion, a discussion about limitations, a few further branches of related work, and some ideas about further research possibilities.

II. METHODS AND DATA

In what follows, the methodology is first briefly elaborated. After the elaboration, the construction of the empirical dataset with the methodology is subsequently discussed.

A. Methods

The methodology is based on the static analyzer fairly recently implemented in the GCC for C (but not C++) code. It is based on coverage-guided symbolic execution and thus does not operate entirely at the source code level. In general, coverage-guided symbolic execution, which is used also in some fuzzing implementations [50], systematically examines potential execution paths, assuring that even less frequently executed portions are tested for potential defects.

The static analyzer was initially introduced in the GCC version 10, released in 2020. The rationale behind introducing the static analyzer was based on a well-grounded argument that bugs should be caught early on, and that a static analyzer directly embedded to a compiler fits well into the commonplace edit-compile-debug C development cycle, also reducing the reliance on additional, possibly commercial third-party tools [33]. This rationale seems sound already because existing results indicate that integration of static analyzers into development workflows has sometimes been an obstacle [43]. The integration is useful also for research purposes.

Furthermore, a compiler is a natural place for implementing a static analyzer already because “most compilers run many separate static analyses before and after code is generated” [58]. In line with existing practices, such as those promoted by the Juliet test suite [41], also the CWE mappings were included already in the initial release. These mappings are likely important because existing results also indicate that developers have had difficulties in understanding warnings outputted by static analyzers [8]. A particularly noisy static analyzer with undecipherable warnings may even increase the probability that developers will bypass relevant warnings out of annoyance or ignorance [8], [66]. Thus, understandability and help for diagnosis are important design criteria for static analyzers in general [13], [39]. To this end, the rationale to

include the CWE mappings was that these make “the output more clear, improves precision, and gives you something simple to type into search engines” [33]. In addition to such practical benefits, the explicit CWE mappings are useful for empirical research purposes, as will be demonstrated.

The initial version of the static analyzer in the GCC version 10 contained 15 CTWs. Since then, the amount of warnings has grown steadily; the GCC version 13 used in the present paper already contains 47 compile-time warnings in total [34]. Of these warnings, the paper only considers those explicitly mapped to CWEs. This choice ensures that software security remains firmly on the agenda. Because CWEs are about software security weaknesses and thus often severe, the choice also aligns with previous observations about the use of static analyzers in software development; many developers prioritize warnings that are severe [61]. Although some CWEs are difficult to rigorously define and operationalize in terms of source code [23], the CWEs considered are all about well-known bug types. Therefore, the amount of false positives may also implicitly reduce, given that potentially obscure bugs are likely omitted. Table I enumerates all CWEs considered empirically. For brevity, the listing only includes those CWEs that were detected via the GCC’s CTWs in the popular C packages included in the dataset. The listing is ordered according to the frequencies of the CWEs in the dataset.

TABLE I
CTW-BASED CWEs INCLUDED IN THE DATASET

CWE	Description
CWE-457	Use of uninitialized variable
CWE-476	NULL pointer dereference
CWE-690	Unchecked return value to NULL pointer dereference
CWE-401	Missing release of memory after effective lifetime
CWE-775	Missing release of file descriptor or handle after lifetime
CWE-131	Incorrect calculation of buffer size
CWE-126	Buffer over-read
CWE-122	Heap-based buffer overflow
CWE-127	Buffer under-read
CWE-121	Stack-based buffer overflow
CWE-686	Function call with incorrect argument type
CWE-685	Function call with incorrect number of arguments
CWE-762	Mismatched memory management routines
CWE-415	Double free
CWE-416	Use after free
CWE-1341	Multiple releases of same resource or handle
CWE-479	Signal handler use of a non-reentrant function
CWE-124	Buffer overwrite (“buffer underflow”)
CWE-590	Free of memory not on the heap
CWE-787	Out-of-bounds write
CWE-674	Uncontrolled recursion

Finally, in terms of statistical methods, descriptive statistics are used to answer to the three research questions. In addition, the well-known non-parametric Kruskal–Wallis test [29] is used to examine RQ.3. It tests a null hypothesis that the medians of the package categories are all equal against the alternative that the median of at least one package category is different. Although the test allows non-equal sample sizes of the underlying categories, these were scaled by the number of packages containing C code—a term soon described.

B. Data

The dataset was assembled from all packages that were distributed in the source code based Gentoo Linux distribution during the start of the data collection in 26 July, 2024. Only the Linux kernel was excluded beforehand. This choice justifies the popularity term in the paper’s title; all packages analyzed can be assumed to be widely used and hence popular, well-maintained, and supposedly of relatively high quality.

Together popularity and a programming language are also the most popular choices for sampling packages [59]. Regarding the C language, the choice is well-justified because most of the packages directly distributed in Linux distributions have traditionally been written in the language [11], and this point likely still holds today. Although the language’s flaws are well-understood and a small movement toward alternatives such as Rust is happening, C also still retains its appeal in many domains, such as operating system kernels, low-level system libraries, high-performance computing, and resource-constrained systems. Furthermore, the choice to cover packages in a Linux distribution avoids sampling problems that are typical when operating with more general software hosting services and ecosystems such as GitHub [65]. Obviously, however, not all packages distributed in Gentoo are written in C, and some packages are written in multiple programming languages. A simple criterion was used to determine whether C code was involved in a package: if the GCC was invoked for C code even once, a package was taken to contain C code. To again improve the consistency of the terminology used, a term “packages containing C code” (PCCCs) is used for such packages. Knowledge about PCCCs is important because RQ.3 benefits from scaling.

The underlying Gentoo installation and all packages included in the analysis were kept as vanilla; that is, in particular, so-called USE flags were not used to tune the packages’ features. Because these flags have been a typical reason for Gentoo-specific compilation failures [30], this choice ensures that some packages were not unnecessarily excluded. In the same vein, only “stable” packages were included; that is, masked packages (such as those marked with a tilde) were excluded. Such masked packages refer to those that Gentoo developers consider not yet stable enough or otherwise not ready for production. This choice further reinforces the popularity sampling assumption. Regarding compiling itself: as optimizations may interfere with some of the potential warnings [20], all optimizations were turned off for all packages compiled. In general, optimizations may sometimes eliminate certain execution paths and variables from an analysis, thus potentially also reducing the amount of warnings.

Thus, `-O0 -fanalyzer` were used as the command line options delivered to the compiler. With these compiling options, the dataset was then assembled simply by building all packages through looping the Gentoo’s package manager tree over all package categories except `sys-kernel` and all packages in the categories.¹ Given the large-scale nature of this data

¹ <https://packages.gentoo.org/categories>

collection process, compiling failures and other errors were not examined. Instead, these were bypassed by letting the Gentoo’s package manager to continue to further packages with the `--keep-going` option. That said, only those PCCCs are included in the dataset that were successfully compiled. Then, the actual quantitative dataset was put together by parsing the package manager’s and GCC’s outputs, including the latter’s CTWs in particular. Finally, a brief remark is in order about this time-consuming large-scale data collection process; it took over a month to compile through the Gentoo’s package tree in a virtual machine running on a standard personal computer.

III. RESULTS

The three research questions allow to structure the dissemination of the empirical results. Thus, RQ.1 asked about the prevalence of CWE-mapped CTWs. For the 3,538 successfully compiled PCCCs, a total of 33,817 compile-time warnings were detected. At first glance, therefore, a conclusion might be that more or less security-related CTWs are quite common in popular C packages distributed in Gentoo. However, such a hasty conclusion is unwarranted because the CWEs exhibit an extremely long-tailed distribution across the packages, as can be seen from Fig. 1. In other words, a few packages account for the majority of the CWE-mapped warnings from the GCC’s static analyzer. In fact, the clear majority (89% to be precise) of the successfully compiled PCCCs did not exhibit a single CWE-mapped CTW.

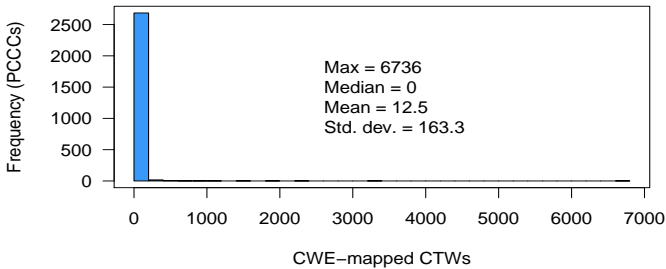


Fig. 1. A Histogram of the CWEs Across PCCCs

Although a long-tailed, power law -like distribution is a classical observation in the software metrics literature [14], the present result does not necessarily align well with previous studies. For instance, a large-scale static analysis of Python packages has found that a little below half of Python packages were prone to warnings from a static analyzer [48]. In contrast, the present result tells about a few particularly warning-prone packages. This result supports the motivation for the three RQs presented in the introduction. While the result does not support a claim that running Linux as such would be risky, it does align with an argument that installing or deploying some particular packages may well increase the security risks. Therefore, also the follow-up motivation is justified; it might be possible to develop CWE-based risk metrics and other heuristics from the GCC’s CTWs. Such metrics and heuristics might also help third-party security researchers. That is to say, the results

further support a claim that there likely are at least some “low-hanging fruits” for vulnerability discovery, even when keeping in mind the real possibility of false positives.

To take a peek about the actual warning-prone packages, Fig. 2 displays the top-15 packages ranked by the CTW-based CWEs. As can be seen, `anope`, a suite for different Internet relay chat (IRC) services, leads the warning scoreboard. In fact, this package alone accounts for as much as 40% of all CWE-mapped compile-time warnings. While the amount is much lower, also `clhep`, a physics library developed by the European Organization for Nuclear Research (CERN), is quite warning-prone according to the GCC’s static analyzer. The third place is taken by `icu`, a library for handling Unicode. Thereafter, the amount of CWEs is much lower, quickly descending toward warning-free packages. What is important to additionally remark is that no essential system libraries, core low-level operating system components, servers, and other generally security-critical software appear in the top-15 CWE-ranking, `openldap` perhaps notwithstanding.

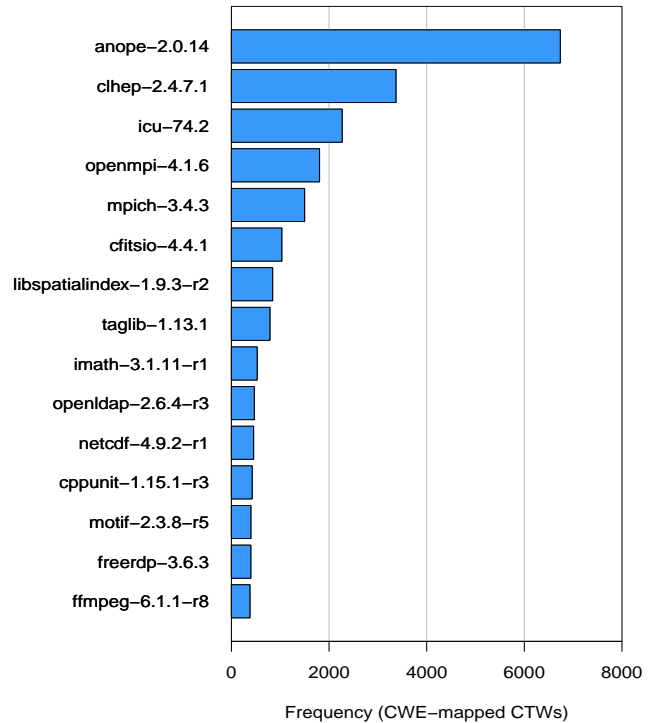


Fig. 2. Top-15 PCCCs According to CWEs

Turning now to RQ.2, which asked about the prevalence of particular CWEs across the popular PCCCs. The results are shown in Fig. 3. When backtracking to Table I, it can be concluded that the use of uninitialized variables is clearly the most frequent CWE-based programming mistake group. A similar result has been obtained also previously [53]. While the security concerns with CWE-457 issues might be often seen as mild, these depend on a context; an uninitialized variable may become a serious issue if the variable is dereferenced later on. In general, the security consequences from unini-

tialized variables may include information disclosure, bypass of security controls, and even control flow hijacking [36]. Then, the second place is taken by potential NULL pointer dereference bugs, as captured by CWE-476 and CWE-690. The third place is occupied by memory and other resource leaks (CWE-401 and CWE-775). Although NULL pointer dereference issues may manifest themselves as exploitable vulnerabilities [15], many of the CWEs in Fig. 3 do not appear or appear only low in top rankings of most dangerous software weaknesses [21]. For instance, classical and serious memory management issues, such as heap and stack overflows (as captured by CWE-126, CWE-122, and CWE-121, among others) are quite rare but still visible as outliers.

These results beg a question: why are warnings about uninitialized variables, NULL pointer dereference issues, and resource leaks so common? While NULL pointer dereference issues can sometimes be difficult to diagnose and debug, uninitialized variables are arguably rather trivial and mechanical to fix. The warnings about resource leaks hint that also memory management remains an issue. Thus, maybe there is something misplaced in existing C programming language guides and coding styles for the language? This point is reinforced by the relatively small amount of security-related memory management warnings, which oftentimes garner lengthy discussions in the guidelines and coding styles for the C programming language. Another potential explanation may originate from the application domains of the warning-prone packages.

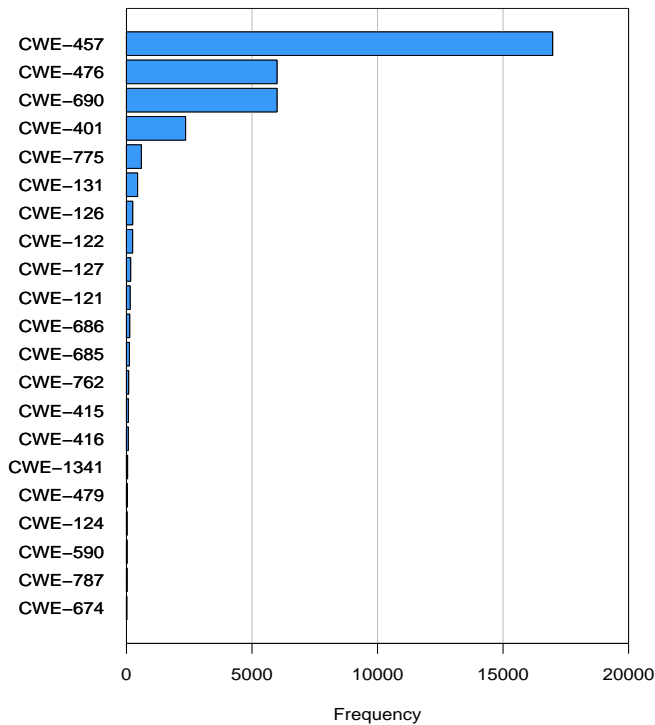


Fig. 3. CTW-based CWEs Detected

The third and final research question asked about potential variance of the compile-time warnings across application do-

main. The Gentoo’s package categories are suitable for this task. Before continuing to formal test results, descriptive statistics are worth looking at beforehand. Thus, Fig. 4 again shows a histogram of the CTW-based CWEs across the Gentoo’s package categories. As can be seen, also this distribution is long-tailed; 50% of the package categories are without any warnings. However, the distribution is not as sharp as the earlier one in Fig. 1, and its tail exhibits also small spikes.

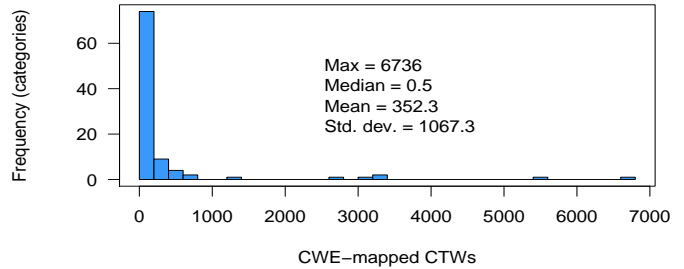


Fig. 4. A Histogram of the CWEs Across Package Categories

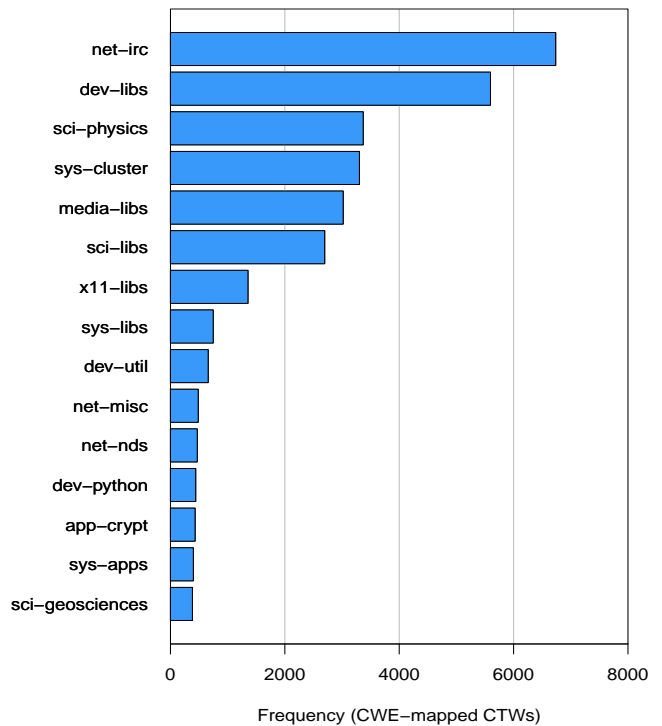


Fig. 5. Top-15 Package Categories According to CWEs

Then, Fig. 5 displays top-15 package categories according to the frequency of CTW-based CWEs. The most frequent category, `net-irc`, is entirely because of the noted `anope` package. The second place is taken by `dev-libs`, a category for different software development libraries. Interestingly, libraries for physics and scientific libraries in general, as categorized into `sci-physics` and `sci-libs`, also exhibit a relatively large amount of CWE-mapped compile-time warnings. This

observation aligns with a recent study according to which many machine learning libraries have been quite prone to vulnerabilities [24]. When compared to the study, however, the CWEs in Fig. 3 show no numerical issues, CWE-131 perhaps excluded. While this misalignment may well be because of the GCC analyzer’s capabilities and limitations, the topic seems interesting enough to possibly examine in further research. Nor do the results in Fig. 5 align well with other large-scale empirical studies. While the Linux kernel was omitted in the present work, existing studies with Debian’s packages indicate that alongside the kernel, web browsers, email clients, and implementations for the Java language lead vulnerability rankings [3]. Existing results have also hinted that graphical user interfaces may receive less development and maintenance effort [12]. Although the `x11-libs` category appears in Fig. 5, none of the application domains except `net-irc` and `dev-libs` pronouncedly stand out in terms of CTWs. On one hand, this misalignment, in turn, likely partially reflects differences between warnings from static analyzers and actual vulnerabilities, including a question about the former’s ability to detect the latter. On the other hand, the question about development and maintenance effort and its relation to software quality remains open for investigations.

The Kruskal-Wallis rank sum test results are shown in Table II. To recall: these test a null hypothesis that the medians are all equal across the Gentoo’s package categories. According to the test results, this null hypothesis remains in force; the medians are equal. Despite the distribution’s long tail in Fig. 4, the tail seems to lack power against the half of the warning-free packages. This results further reinforces the contradiction with the previous studies mentioned. Having said that, the result is important in terms of the earlier speculation about risk factors. While keeping in mind potential false (and true) positives, it seems that users may not particularly need to worry about some particular application domains being particularly risky—at least according to a static analyzer.

Although not part of the research questions, it is finally interesting to take a brief look on whether the distinct CWEs in Fig. 3 also vary across the package categories. To this end, Fig. 6 shows a bipartite graph between the CWEs and the categories; the former are at the bottom and the latter at the top, and the sizes of the vertices are scaled by their degrees. It can be seen that the CWEs with the highest frequencies do not match perfectly well with the most warning-prone package categories, as defined by the number of CWEs in the categories. In fact, many of the warning-prone package categories are also associated with the relatively infrequent CWEs. This observation yields a small caveat to the reasoning about risks,

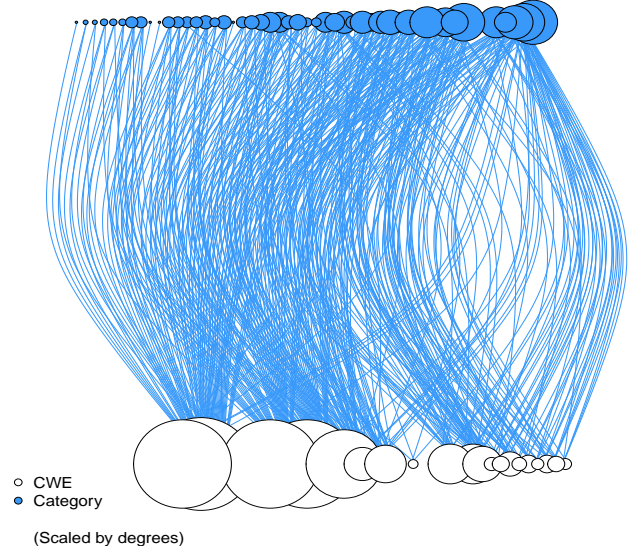


Fig. 6. Package Categories and CWEs

as it might be that for instance memory management issues are particularly prevalent in some application domains. While security risks vary across distinct CWEs, the answer to RQ.3 still holds in terms of the volume of warnings outputted by the GCC’s static analyzer.

IV. DISCUSSION

A. Conclusion

The paper used a static analyzer recently introduced in the GCC to empirically examine popular Linux packages fully or partially written in the C programming language. Three research questions were presented and empirically examined. The answers to these can be briefly summarized as follows:

- The results indicate that static analysis warnings are common and prevalent; over thirty thousand CWE-mapped compile-time warnings were detected for about 3, 5 thousand popular C packages. However, the distribution of these warnings is highly uneven across the packages examined; the overwhelming majority of the packages is entirely without CTWs, while a small minority gathers most of the warnings. In other words, outliers dominate.
- The use of uninitialized variables (CWE-457) is clearly the most typical source behind the GCC’s warnings. NULL pointer dereference issues (CWE-476 and CWE-690) take the second place. Rest of the CWEs detected are much less common. By implication, software quality might be perhaps improved with relatively little amount of effort. It may also be worthwhile to revisit and alter coding guidelines and associated practices for the C language, as has been suggested also previously [28]. Although actual security risks are difficult to evaluate, these might be seen as relatively mild on statistical grounds, the apparent outliers perhaps notwithstanding.

TABLE II
KRUSKAL-WALLIS TESTS (SCALING BY PCCCS)

	χ^2	<i>p</i> -value
All packages	95	0.4807
anope excluded	95	0.4807

- The CWE-mapped compile-time warnings do not statistically vary across different application domains. Although there are outliers and likely detection errors, no particular application domain seems particularly risky for deployments—at least in terms of the static analyzer.

In addition to this concise summary of the paper’s results, some limitations should be acknowledged. After having elaborated these limitations, a more thorough discussion follows about the paper’s relation to existing research and the openings paved for further research.

B. Limitations

Some limitations should be acknowledged. First and foremost, the present work did not consider false positives or other verification of the GCC analyzer’s CTWs. Hence, the security-orientedness of the results presented remains only implicit and statistical. Nor can anything be said about true negatives and true positives, that is, whether a package’s source code is bug-free and secure, or the other way around. To patch the issue, the robustness of the CTW→CWE mappings would first need a closer examination. For instance, a potential lack of robustness may affect the answer to RQ.2 in case the GCC is more capable of analyzing some particular CWEs than others. There is also existing work in this CWE area [22], [23]. From there, actual vulnerabilities might be subsequently evaluated. It should be also noted that the amount of false positives likely varies across different GCC versions; hence, further evaluation work is required also with respect to the compiler’s evolution. This point is also familiar from existing studies [45]. Second, the most important Linux package, the Linux kernel, was omitted from the analysis. Given the sensitivity and low-level nature of kernel code, this package would be particularly relevant in terms of false positives and other potential robustness issues in the GCC’s static analyzer.

Regarding internal validity, third, it may be that some packages force their own compiler flags, bypassing those specified in Gentoo. While this limitation affects all three research questions, the statistical effect of such packages is likely small already due to the large amount of packages covered in the dataset. Fourth, as was noted in Section II-B, default configurations defined by Gentoo developers were used for all packages. While sensible and justifiable due to the large-scale — and slow — data collection process, this choice may cause a bias because existing studies have shown that static analysis warnings vary across different configurations [35]. Fifth, the paper only considered CWE-mapped CTWs, whereas, in reality, also non-mapped warnings may be relevant for software security [13]. While this restriction is justifiable on statistical and security-orientedness grounds, further work is required to examine the other warnings, including their potential security consequences. Sixth, as only successfully compiled PCCCs were considered, a small bias may be present because packages that failed to compile may also be more prone to CWE-mapped compile-time warnings.

Seventh, the paper focused on well-known packages distributed in a well-known Linux distribution. By implication,

it is likely that CTWs are more prevalent in less known and less popular packages. Deploying such packages then likely also increases the security risks. Eighth, only packages in one Linux distribution were examined. This limitation is related to the previous point. For instance, Debian and Ubuntu distribute much more packages than Gentoo [54]. Hence, in purely statistical terms, these distributions also likely carry more CTWs, perhaps being less secure *as a whole*. Together, these two limitations also pinpoint toward a sharper analysis of different deployment scenarios involving mixtures of packages. Here, CWE-mapped CTWs might work together with existing vulnerability counts and other software quality metrics to help those who deploy containers or virtual machines to heuristically deduce about potential security risks in advance. Given the answer to RQ.3, warnings from a static analyzer might balance existing risk metrics, giving a more nuanced picture about software quality. In any case, the topic is generally important because ready-made container images are known to involve various security issues, including unpatched packages that contain verified software vulnerabilities [56], [64]. To this end, security-related CTWs might provide a plausible addition to existing software security and quality metrics.

C. Related and Further Work

It is worthwhile to enumerate a few branches of related work in addition to the points already raised and the works referenced. These also allow to pinpoint further research topics. As was argued in the introduction, the present work has novelty in that a large-scale security-oriented static analysis of popular Linux packages has not been conducted thus far. Though, one option for further work would be to enlarge a sample size even further. As was noted, the limitation to popular packages may cause a bias because less popular packages might be more prone to security-related CTWs. It would be relevant to examine this potential bias because existing results indicate that popular packages actually often have more *reported* bugs and vulnerabilities, supposedly because more developers and users are reporting issues about widely used packages than about less popular or even obscure packages [25], [47]. To this end, it has recently been observed and argued that the conventional wisdom from reliability engineering may not hold well in the open source context; the vulnerability counts may not decrease as popular packages mature [2]. Having said that, Linux as an operating system lacks a universal hosting service or a package ecosystem, and thus ecosystem-wide analysis is generally impossible, unlike with packages specific to programming languages [48]. Sampling packages from GitHub or other hosting platforms would also lead to the well-known issues with popularity metrics [65]. Therefore, a more sharply focused comparative analysis might be an alternative; here, the Berkeley software distributions (BSDs) provide a classical research setup for empirical comparisons [50], [55]. Another plausible option would be a focus on static analyzers rather than packages, operating systems, or ecosystems.

Benchmarking static analyzers is a classical research topic [10], [18], [40], [66]. In particular, a static analyzer’s

ability to detect actual vulnerabilities in C code remains a highly relevant topic, and existing static analyzers are not performing particularly well at this task [4], [16], [22], [23]. These results correlate with those from surveys according to which static analysis is frequently used in (commercial) software development, but its impact upon improving software security is perceived as limited [46]. More generally, a benchmark would be directly relevant also for the developers who maintain and develop the GCC's static analyzer.

Given the rationale for introducing the analyzer, a benchmark might allow to also deduce about the future prospects in the static analyzer landscape, including the viability of commercial tools in the future. In terms of the GCC's direct competitors, further work is also required on the static analysis capabilities of Clang/LLVM. There is also some existing work in this regard [7]. Another promising research path would involve benchmarking of static analyzers against tools for dynamic analysis. For instance: NULL pointer dereference issues perhaps notwithstanding, the potential issues detected by the GCC's static analyzer are quite different from those found via fuzzing [17], [50]. Therefore, a good research question would be how these and other software testing techniques complement each other. It would also be worthwhile to examine whether fixing warnings from a static analyzer reduces issues found via fuzzing later on.

Furthermore, a further classical research topic is the ways open source and other developers use (and possibly misuse) static analyzers [8], [60], [61], [63]. Also this line of research would be relevant for the developers of the GCC's static analyzer. For instance, a good research question would involve examining how easy it is to comprehend and analyze the GCC's CTWs. Analogously, it would be important to know whether the explicit CWE mappings are as useful as presumed. The topic is important because existing results indicate that many automated software testing techniques, including those based on symbolic execution, are oftentimes difficult for developers to apply due to problems in root cause analysis, interpretability, prioritization, cognitive load, and generally the manual effort required [43], [50], [57]. If such problems are present also with the GCC's static analyzer, it might be worthwhile to consider allocating more development resources and time to improve the analyzer's output rather than extending the coverage of different bug types. As has been pointed out recently [13], one potential improvement might be an incorporation of severity information to the warnings. In fact, since concrete, reported, and archived vulnerabilities, as typically identified with Common Vulnerabilities and Exposures (CVEs), are linked to CWEs, it would be possible to use the Common Vulnerability Scoring System (CVSS) information attached to published CVEs as severity scores. While methodological alterations are possible, this is essentially also the way the top CWE rankings are done [21]. If nothing else, such scores might help developers in prioritization of warnings.

On a related note, the CWE framework might also allow to pursue the earlier point about documentation onward. In particular, the framework contains also many so-called views,

which are CWE groupings for different topics and tasks, such as root cause analysis and attack scenarios. There is also an existing view for secure coding with the C language [38]. Thus, it might be interesting to evaluate how well this view or some other view corresponds with the CTW-based CWEs from the GCC's static analyzer. The work could be extended also to CWEs typically found via fuzzing and other software testing techniques. Alternatively: to help developers using static analyzers, it might be reasonable to develop a new view specifically for CWEs typically found via static analysis.

A further worthwhile but perhaps challenging research avenue would open by focusing on the larger Linux ecosystem. The present work concentrated on a so-called downstream distributor, whereas static analysis is presumably more relevant for the actual upstream developers of the packages considered. However, there is a link between the two; bugs are typically triaged between upstream and downstream, although plenty of problems still exist, including with respect to traceability and associated tools [32]. The triaging aspects are important already because patching source code at the distribution-level (instead of the upstream-level) involves well-known security and other risks [1], [32]. In terms of concrete research questions, it would be relevant to know whether the downstream Gentoo developers report CTW-based issues, which may or may not be actual bugs, to upstream developers. As a distribution based on source code, Gentoo developers are in an ideal position for such reporting, although it remains debatable whether such reporting, if not done in conjunction with human evaluation, helps or hampers upstream development efficiency and the quality of software developed.

As an alternative, therefore, the downstream Gentoo developers might consider a continuously updated online dashboard for all CWE-mapped CTWs. It has also been argued and observed that outputs from a static analyzer may predict whether a software component will soon be difficult and costly to maintain [27]. Against this backdrop, a dashboard might also help Gentoo developers to determine whether some particular packages might be deprecated from the distribution due to their real or perceived lack of quality. Although there may be practical challenges to get developers interested in automatically generated CTW reports [52], a dashboard might further help at directing attention and effort to packages that may have problems in maintenance. The warning-prone scientific libraries are a good example in this regard.

Provided that a benchmark would be available for determining the GCC analyzer's ability to detect vulnerabilities, it would be relevant to examine also the triaging of vulnerabilities. Such triaging enlarges the scope, as important vulnerabilities are typically labeled with CVEs. The CVE assignments have also continued to face problems, including time delays due to coordination problems, database quality issues, and other problems [5], [31], [49]. Furthermore, Gentoo, unlike Debian and some other distributions, is not a CVE numbering authority; hence, its developers cannot assign CVEs directly by themselves. This lack of authority implies that the vulnerability triaging is even more convoluted.

REFERENCES

- [1] D. Ahmad. Two Years of Broken Crypto: Debian’s Dress Rehearsal for a Global PKI Compromise. *IEEE Security & Privacy*, 6(5):70–73, 2008.
- [2] N. Alexopoulos, S. M. Habib, S. Schulz, and M. Mühlhäuser. The Tip of the Iceberg: On the Merits of Finding Security Bugs. *ACM Transactions on Privacy and Security*, 24(1):1–33, 2020.
- [3] N. Alexopoulos, S. M. Habib, S. Schulz, and M. Mühlhäuser. M-STAR: A Modular, Evidence-Based Software Trustworthiness Framework. Archived manuscript. Available online in July 2024: <https://arxiv.org/abs/1801.05764>, 2018.
- [4] B. Aloraini and M. Nagappan. Evaluating State-of-the-Art Free and Open Source Static Analysis Tools Against Buffer Errors in Android Apps. In *Proceedings of the IEEE International Conference on Software Maintenance and Evolution (ICSME 2017)*, pages 295–306, Shanghai, 2017. IEEE.
- [5] A. Anwar, A. Abusnaina, S. Chen, F. Li, and D. Mohaisen. Cleaning the NVD: Comprehensive Quality Assessment, Improvements, and Analyses. *IEEE Transactions on Dependable and Secure Computing*, 19(6):4255–4269, 2022.
- [6] N. Ayewah, D. Hovemeyer, J. D. Morgenthaler, J. Penix, and W. Pugh. Using Static Analysis to Find Bugs. *IEEE Software*, 25(5):22–29, 2008.
- [7] B. Babati, G. Horváth, V. Májer, and N. Pataki. Static Analysis Toolset with Clang. In *Proceedings of the 10th International Conference on Applied Informatics*, pages 23–29, Eger, 2017. Available online in July 2024: <https://icai.uni-eszterhazy.hu/icai2017/uploads/papers/2017/final/ICAI.10.2017.23.pdf>.
- [8] D. Baca, B. Carlsson, K. Petersen, and L. Lundberg. Improving Software Security With Static Automated Code Analysis in an Industry Setting. *Software: Practice and Experience*, 43(3), 2013.
- [9] M. Beller, R. Bholanath, S. McIntosh, and A. Zaidman. Analyzing the State of Static Analysis: A Large-Scale Evaluation in Open Source Software. In *Proceedings of the IEEE 23rd International Conference on Software Analysis, Evolution, and Reengineering (SANER 2016)*, pages 470–481, Osaka, 2016. IEEE.
- [10] P. T. Breuer and S. Pickin. One Million (LOC) and Counting: Static Analysis for Errors and Vulnerabilities in the Linux Kernel Source Code. In *Proceedings of the 11th Ada-Europe International Conference on Reliable Software Technologies (Ada-Europe 2006)*, pages 56–70, Porto, 2006. Springer.
- [11] M. Caneill, D. M. Germán, and S. Zacchiroli. The Debsources Dataset: Two Decades of Free and Open Source Software. *Empirical Software Engineering*, 22:1405–1437, 2016.
- [12] K. Champion and B. M. Hill. Underproduction: An Approach for Measuring Risk in Open Source Software. In *Proceedings of the IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER 2021)*, pages 388–399, Honolulu, 2021. IEEE.
- [13] W. Charoenwet, P. Thongtanunam, V. Pham, and C. Treude. An Empirical Study of Static Analysis Tools for Secure Code Review. In *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis (ISSTA 2024)*, pages 691–703, Vienna, 2024. ACM.
- [14] G. Concas, M. Marchesi, S. Pinna, and N. Serra. Power-Laws in a Large Object-Oriented Software System. *IEEE Transactions on Software Engineering*, 33(10):687–708, 2007.
- [15] J. Corbet. Fun With NULL Pointers, Part 1. Linux Weekly News (LWN), available online in September 2024: <https://lwn.net/Articles/342330/>, 2009.
- [16] R. Croft, D. Newlands, Z. Chen, and M. A. Babar. An Empirical Study of Rule-Based and Learning-Based Approaches for Static Application Security Testing. In *Proceedings of the 15th ACM / IEEE International Symposium on Empirical Software Engineering and Measurement (ESEM 2021)*, pages 1–12, Bari, 2021. ACM.
- [17] Z. Y. Ding and C. Le Goues. An Empirical Study of OSS-Fuzz Bugs. In *Proceedings of the IEEE/ACM 18th International Conference on Mining Software Repositories (MSR 2021)*, pages 131–142, Madrid, 2021. IEEE.
- [18] P. Emanuelsson and U. Nilsson. A Comparative Study of Industrial Static Analysis Tools. *Electronic Notes in Theoretical Computer Science*, 217:5–21, 2008.
- [19] A. M. Fard and A. Mesbah. JSNOSE: Detecting JavaScript Code Smells. In *Proceedings of the IEEE 13th International Working Conference on Source Code Analysis and Manipulation (SCAM 2013)*, pages 116–125, Eindhoven, 2013. IEEE.
- [20] FSF. Options That Control Static Analysis. GCC Online Documentation, the Free Software Foundation (FSF), Inc. Available online in July 2024: <https://gcc.gnu.org/onlinedocs/gcc/Static-Analyzer-Options.html>, 2024.
- [21] C. C. Galhardo, P. Mell, I. Bojanova, and A. Gueye. Measurements of the Most Significant Software Security Weaknesses. In *Proceedings of the 36th Annual Computer Security Applications Conference (ACSAC 2020)*, pages 154–164, Austin, 2020. ACM.
- [22] C. Gentsch. Evaluation of Open Source Static Analysis Security Testing (SAST) Tools for C. German Aerospace Center, Technical Report DLR-IB-DW-JE-2020-16. Available online in July 2024: https://elib.dlr.de/133945/1/2020_Gentsch_SAST.pdf, 2020.
- [23] K. Goseva-Popstojanova and A. Perhinschi. On the Capability of Static Code Analysis to Detect Security Vulnerabilities. *Information and Software Technology*, 68:18–33, 2015.
- [24] N. S. Harzevili, J. Shin, J. Wang, S. Wang, and N. Nagappan. Characterizing and Understanding Software Security Vulnerabilities in Machine Learning Libraries. In *Proceedings of the IEEE/ACM 20th International Conference on Mining Software Repositories (MSR 2023)*, pages 27–38, Melbourne, 2023. IEEE.
- [25] I. Herraiz, E. Shihab, T. H. Nguyen, and A. E. Hassan. Impact of Installation Counts on Perceived Quality: A Case Study on Debian. In *Proceedings of the Working Conference on Reverse Engineering (WCRE 2011)*, pages 219–228, Limerick, 2011. IEEE.
- [26] K. Hjerpe, J. Ruohonen, and V. Leppänen. Annotation-Based Static Analysis for Personal Data Protection. In M. Friedewald, M. Önen, E. Lievens, S. Krenn, and S. Fricker, editors, *Privacy and Identity Management. Data for Better Living: AI and Privacy. Proceedings of the 14th IFIP WG 9.2, 9.6/11.7, 11.6/SIG 9.2.2 International Summer School*, pages 343–358, Windisch, 2019. Springer.
- [27] T. Karanikiotis, M. D. Papamichail, and A. L. Symeonidis. Analyzing Static Analysis Metric Trends Towards Early Identification of Non-Maintainable Software Components. *Sustainability*, 13(22):12848, 2021.
- [28] N. Karapetyants1 and D. Efanov. A Practical Approach to Learning Linux Vulnerabilities. *Journal of Computer Virology and Hacking Techniques*, 19:409–418, 2023.
- [29] W. H. Kruskal and W. A. Wallis. Use of Ranks in One-Criterion Variance Analysis. *Journal of the American Statistical Association*, 47(260):583–621, 1952.
- [30] M. Lienhardt, F. Damiani, S. Donetti, and L. Paolini. Multi Software Product Lines in the Wild. In *Proceedings of the 12th International Workshop on Variability Modelling of Software-Intensive Systems (VA-MOS 2018)*, pages 89–96, Madrid, 2018. ACM.
- [31] J. Lin, B. Adams, and A. E. Hassan. On the Coordination of Vulnerability Fixes: An Empirical Study of Practices From 13 CVE Numbering Authorities. *Empirical Software Engineering*, 28:1–34, 2023.
- [32] J. Lin, H. Zhang, B. Adams, and A. E. Hassan. Upstream Bug Management in Linux Distributions: An Empirical Study of Debian and Fedora Practices. *Empirical Software Engineering*, 27:1–41, 2022.
- [33] D. Malcolm. Static Analysis in GCC 10. Red Hat Developer Blog. Available online in July 2024: <https://developers.redhat.com/blog/2020/03/26/static-analysis-in-gcc-10>, 2020.
- [34] D. Malcolm. Improvements to Static Analysis in the GCC 13 Compiler. Red Hat Developer Blog. Available online in July 2024: <https://developers.redhat.com/articles/2023/05/31/improvements-static-analysis-gcc-13-compiler>, 2023.
- [35] F. Medeiros, M. Ribeiro, R. Gheyi, L. Braz, C. Kästner, S. Apel, and K. Santos. An Empirical Study on Configuration-Related Code Weaknesses. In *Proceedings of the XXXIV Brazilian Symposium on Software Engineering (SBES 2020)*, pages 193–202, Natal, 2020. ACM.
- [36] A. Milburn, H. Bos, and C. Giuffrida. Safelnit: Comprehensive and Practical Mitigation of Uninitialized Read Vulnerabilities. In *Proceedings of the Workshop on Network and Distributed System Security (NDSS 2017)*, San Diego, 2017. The Internet Society.
- [37] MITRE et al. Common Weakness Enumeration: A Community-Developed List of SW & HW Weaknesses That Can Become Vulnerabilities. Available online in July: <https://cwe.mitre.org/>, 2024.
- [38] MITRE et al. CWE VIEW: Weaknesses Addressed by the SEI CERT C Coding Standard. Available online in July: <https://cwe.mitre.org/data/definitions/1154.html>, 2024.
- [39] M. Nachtigall, L. N. Q. Do, and E. Bodden. Explaining Static Analysis – A Perspective. In *Proceedings of the 34th IEEE/ACM International Conference on Automated Software Engineering Workshop (ASEW 2019)*, pages 29–32, San Diego, 2019. IEEE.

- [40] A. Nguyen-Duc, M. V. Do, Q. L. Hong, K. N. Khac, and A. N. Quang. On the Adoption of Static Analysis for Software Security Assessment—A Case Study of an Open-Source e-Government Project. *Computers & Security*, 111:102470, 2021.
- [41] NIST. Juliet C/C++ 1.3. National Institute of Standards and Technology (NIST). Available online in July 2024: <https://samate.nist.gov/SARD/test-suites/112>, 2017.
- [42] OpenSSF. Compiler Options Hardening Guide for C and C++. Open Source Security Foundation (OpenSSF). Available online in July: <https://best.openssf.org/Compiler-Hardening-Guides/Compiler-Options-Hardening-Guide-for-C-and-C++.html>, 2024.
- [43] T. D. Oyetoyan, B. Miloshevska, M. Grini, and D. S. Cruzes. Myths and Facts About Static Application Security Testing Tools: An Action Research at Telenor Digital. In *Proceedings of the 19th International Conference on Agile Processes in Software Engineering and Extreme Programming (XP 2018)*, pages 86–103, Porto, 2018. Springer.
- [44] C. Payne. On the Security of Open Source Software. *Information Systems Journal*, 12:61–78, 2002.
- [45] A. M. Reinhold, T. Weber, C. Lemak, D. Reimanis, and C. Izurieta. New Version, New Answer: Investigating Cybersecurity Static-Analysis Tool Findings. In *Proceedings of the IEEE International Conference on Cyber Security and Resilience (CSR 2023)*, pages 28–35, Venice, 2023. IEEE.
- [46] K. Rindell, J. Ruohonen, J. Holvitie, S. Hyrnsalmi, and V. Leppänen. Security in Agile Software Development: A Practitioner Survey. *Information and Software Technology*, 131:106488, 2021.
- [47] J. Ruohonen. A Demand-Side Viewpoint to Software Vulnerabilities in WordPress Plugins. In *Proceedings of the 23rd Conference on the Evaluation and Assessment in Software Engineering (EASE 2019)*, pages 222–228, Copenhagen, 2019. ACM.
- [48] J. Ruohonen, K. Hjerpe, and K. Rindell. A Large-Scale Security-Oriented Static Analysis of Python Packages in PyPI. In *Proceedings of the 18th Annual International Conference on Privacy, Security and Trust (PST 2021)*, pages 1–10, Auckland (online), 2021. IEEE.
- [49] J. Ruohonen, S. Rauti, S. Hyrnsalmi, and V. Leppänen. A Case Study on Software Vulnerability Coordination. *Information and Software Technology*, 103:239–257, 2018.
- [50] J. Ruohonen and K. Rindell. Empirical Notes on the Interaction Between Continuous Kernel Fuzzing and Development. In *Proceedings of the IEEE International Symposium on Software Reliability Engineering Workshops (ISSREW 2019)*, pages 276–281, Berlin, 2019. IEEE.
- [51] I. Ryan, U. Roedig, and K. Stol. Measuring Secure Coding Practice and Culture: A Finger Pointing at the Moon is not the Moon. In *Proceedings of the IEEE/ACM 45th International Conference on Software Engineering (ICSE 2023)*, pages 1622–1634, Melbourne. IEEE.
- [52] I. Ryan, U. Roedig, and K. Stol. Unhelpful Assumptions in Software Security Research. In *Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security (CCS 2023)*, pages 3460–3474, Copenhagen, 2023. ACM.
- [53] M. Selvaraj and G. Uddin. A Large-Scale Study of IoT Security Weaknesses and Vulnerabilities in the Wild. Archived manuscript, available online in September 2024: <https://arxiv.org/abs/2308.13141>, 2023.
- [54] D. Spinellis. Package Management Systems. *IEEE Software*, 29(2):84–86, 2012.
- [55] D. Spinellis, G. Gousios, V. Karakoidas, P. Louridas, P. J. Adams, I. Samoladas, and I. Stamelos. Evaluating the Quality of Open Source Software. *Electronic Notes in Theoretical Computer Science*, 233:5–28, 2009.
- [56] S. Sultan, I. Ahmad, and T. Dimitriou. Container Security: Issues, Challenges, and the Road Ahead. *IEEE Access*, 7:52976–52996, 2019.
- [57] B. Swierzy, F. Boes, T. Pohl, C. Bungartz, and M. Meier. SoK: Automated Software Testing for TLS Libraries. In *Proceedings of the 19th International Conference on Availability, Reliability and Security (ARES 2024)*, pages 1–12, Vienna, 2024. ACM.
- [58] P. Thomson. Static Analysis: An Introduction. *ACM Queue*, 19(4):1–13, 2021.
- [59] A. Tutko, A. Z. Henley, and A. Mockus. How Are Software Repositories Mined? A Systematic Literature Review of Workflows, Methodologies, Reproducibility, and Tools. Archived manuscript. Available online in July 2024: <https://arxiv.org/abs/2204.08108>, 2022.
- [60] C. Vassallo, S. Panichella, F. Palomba, S. Proksch, H. C. Gall, and A. Zaidman. How Developers Engage with Static Analysis Tools in Different Contexts. *Empirical Software Engineering*, 25(2):1419–1457, 2020.
- [61] C. Vassallo, S. Panichella, F. Palomba, S. Proksch, A. Zaidman, and H. Gall. Context Is King: The Developer Perspective on the Usage of Static Analysis Tools. In *Proceedings of the IEEE 25th International Conference on Software Analysis, Evolution and Reengineering (SANER 2018)*, pages 38–49, Campobasso, 2008. IEEE.
- [62] J. West. Secure Programming with Static Analysis. In *OWASP-Day II*, Rome, 2008. The OWASP Foundation. The Open Worldwide Application Security Project (OWASP). Available online in July 2024: <https://wiki.owasp.org/images/a/a9/Owaspday2West.pdf>.
- [63] F. Zampetti, S. Scalabrino, R. Oliveto, G. Canfora, and M. Di Penta. How Open Source Projects Use Static Code Analysis Tools in Continuous Integration Pipelines. In *Proceedings of the IEEE/ACM 14th International Conference on Mining Software Repositories (MSR 2017)*, pages 334–344, Buenos Aires, 2017. IEEE.
- [64] A. Zerouali, T. Mens, G. Robles, and J. Gonzalez-Barahona. On the Relation Between Outdated Docker Containers, Severity Vulnerabilities and Bugs. In *Proceedings of the 26th International Conference on Software Analysis, Evolution and Reengineering (SANER 2019)*, pages 491–501, Hangzhou, 2019. IEEE.
- [65] A. Zerouali, T. Mens, G. Robles, and J. M. Gonzalez-Barahona. On the Diversity of Software Package Popularity Metrics: An Empirical Study of npm. In *Proceedings of the IEEE 26th International Conference on Software Analysis, Evolution and Reengineering (SANER 2019)*, pages 589–593, Hangzhou, 2019. IEEE.
- [66] M. Zitser, R. Lippmann, and T. Leek. Testing Static Analysis Tools Using Exploitable Buffer Overflows from Open Source Code. In *Proceedings of the 12th ACM SIGSOFT Twelfth International Symposium on Foundations of Software Engineering (FSE 2004)*, pages 97–106, Newport Beach, 2004. ACM.