# Sufficient and Necessary Explanations (and What Lies in Between)

Beepul Bharti<sup>1,2</sup> bbharti1@jhu.edu Paul H. Yi <sup>3</sup> paul.yi@stjude.org Jeremias Sulam<sup>1,2,4</sup> jsulam1@jhu.edu

<sup>1</sup>Mathematical Institute for Data Science (MINDS), Johns Hopkins University <sup>2</sup>Department of Biomedical Engineering, Johns Hopkins University <sup>3</sup>St. Jude Children's Research Hospital <sup>4</sup>Department of Computer Science, Johns Hopkins University

October 16, 2024

#### Abstract

As complex machine learning models continue to find applications in high-stakes decision making scenarios, it is crucial that we can explain and understand their predictions. Post-hoc explanation methods provide useful insights by identifying important features in an input x with respect to the model output  $f(\mathbf{x})$ . In this work we formalize and study two precise notions of feature importance for general machine learning models: *sufficiency* and *necessity*. We demonstrate how these two types of explanations, albeit intuitive and simple, can fall short in providing a complete picture of which features a model finds important. To this end, we propose a unified notion of importance that circumvents these limitations by exploring a continuum along a necessity-sufficiency axis. Our unified notion, we show, has strong ties to other popular definitions of feature importance, like those based on conditional independence and game-theoretic quantities like Shapley values. Crucially, we demonstrate how a unified perspective allows us to detect important features that could be missed by either of the previous approaches alone.

# Contents

1	Introduction					
	1.1	Summa	ary of our Contributions	3		
2	Suff	Sufficiency and Necessity				
	2.1	Definit	ions	4		
3	Rela	elated Work 5				
4	Uni	Unifying Sufficiency and Necessity				
	4.1	Solutio	ns to the Unified Problem	7		
5	Two	Two Perspectives of the Unified Approach 7				
	5.1	A Conc	ditional Independence Perspective	7		
	5.2	A Shap	ley Value Perspective	8		
6	Experiments					
	6.1	Tabula	r Data	9		
		6.1.1	Linear Regression	9		
		6.1.2	American Community Survey Income (ACSIncome)	9		
	6.2	Image	Classification	10		
		6.2.1	RSNA CT Hemorrhage	10		
		6.2.2	CelebA-HQ	12		
7	Lim	nitations & Broader Impacts 13				
8	Con	Conclusion 1		14		
A	Арр	endix		18		
	A.1	Proofs		18		
		A.1.1	Proof of Lemma 4.1	18		
		A.1.2	Proof of Lemma 4.2	18		
		A.1.3	Proof of Theorem 4.1	19		
		A.1.4	Proof of Corollary 5.1	20		
		A.1.5	Proof of Theorem 5.1	20		
	A.2	Additic	onal Experimental Details	21		
		A.2.1	RSNA CT Hemorrhage	21		
		A.2.2	CelebA-HQ	22		

# 1 Introduction

Over recent years, modern machine learning (ML) models, mostly deep learning based, have achieved impressive results across several complex domains. We now have models that can solve difficult image classification, inpainting, and segmentation problems, perform accurate text and sentiment analysis, predict the three-dimensional conformation of proteins, and more [LBH15; Wan+23]. Despite their success, the rapid integration of these models into society requires caution due to their complexity and unintelligibility [The23]. Modern ML systems are, by and large black-boxes, consisting of millions of parameters and non-linearities that obscure their prediction-making mechanisms from users, developers, and auditors. This lack of clarity raises concerns about explainability, transparency, and accountability [Zed21; Tom+18]. Thus, understanding how these models work is essential for their safe deployment.

The lack of explainability has spurred research efforts in eXplainable AI (XAI), with a major focus on developing post-hoc methods to explain black-box model predictions, especially at a *local* level. For a model f and input  $\mathbf{x} \in \mathbb{R}^d$ , these methods aim to identify which features in  $\mathbf{x}$  are *important* for the model's prediction,  $f(\mathbf{x})$ . They do so by estimating a notion of importance for each feature (or groups) which allows for a ranking of importance. Popular methods include CAM [Zho+16], LIME [RSG16], gradient-based approaches [Sel+17; SGK17; Jia+21], rate-distortion techniques [Kol+21; Kol+22], Shapley value-based explanations [Che+18a; TLS22; Mos+22], perturbation-based methods [FV17; FPV19; DG17], among others [Che+18b; YJS18; Jet+21; WKB21; RSG18]. However, many of these approaches lack rigor, as the meaning of their computed scores is often ambiguous. For example, it's not always clear what large or negative gradients signify or what high Shapley values reveal about feature importance. To address these concerns, other research has focused on developing explanation methods based on logic-based definitions [Ign+20; DJ22; SCD18], conditional hypothesis testing [Ten+23; Tan+22], among formal notions. While these methods are a step towards rigor, they have drawbacks, including reliance on complex automated reasoners and limited ability to communicate their results in an understandable way for human decision-makers.

In this work, we advance XAI research by formalizing rigorous mathematical definitions and approaches, grounded in the intuitive concepts of *sufficiency* and *necessity*, to explain complex ML models. We begin by illustrating how sufficient and necessary explanations offer valuable, albeit incomplete, insights into feature importance. To address this issue, we propose and study a more general unified framework for explaining models. We offer two novel perspectives on our framework through the lens of conditional independence and Shapley values, and crucially, show how it reveals new insights into feature importance.

# 1.1 Summary of our Contributions

We study two key notions of importance: sufficiency and necessity, both which evaluate the importance of a set of features in  $\mathbf{x}$ , with respect to the prediction  $f(\mathbf{x})$ , of an ML model. A sufficient set of features preserves the model's output, while a necessary set, when removed or perturbed, renders the output uninformative. Although sufficiency and necessity appear complementary, their precise relationship remains unclear. When do sufficient and necessary subsets overlap or differ? When should we prioritize one over the other, or seek features that are both necessary *and* sufficient? To address these questions, we analyze sufficiency and necessity and propose a *unification* of both. Our contributions are summarized as follows:

- 1. We formalize precise mathematical definitions of sufficient and necessary model explanations for arbitrary ML predictors.
- 2. We propose a unified approach that combines sufficiency and necessity, analyzing their relationships and exploring exploring when and how they align or differ. Furthermore, we reveal its strong ties to conditional independence and Shapley values, a game-theoretic measure of feature importance.

3. Through experiments of increasing complexity, illustrate how our unified perspective can reveal new, important, and more complete insights into feature importance.

# 2 Sufficiency and Necessity

**Notation.** We use boldface uppercase letters to denote random vectors (e.g., **X**) and lowercase letters for their values (e.g., **x**). For a subset  $S \subseteq [d] := \{1, \ldots, d\}$ , we denote its cardinality by |S| and its complement  $S_c = [d] \setminus S$ . Subscripts index features; e.g., the vector  $\mathbf{x}_S$  represents the restriction of **x** to the entries indexed by S.

**Setting.** We consider a supervised learning setting with an unknown distribution  $\mathcal{D}$  over  $\mathcal{X} \times \mathcal{Y}$ , where  $\mathcal{X} \subseteq \mathbb{R}^d$  is a *d*-dimensional feature space and  $\mathcal{Y} \subseteq \mathbb{R}$  is the label space. We assume access to a predictor  $f : \mathcal{X} \mapsto \mathcal{Y}$  that was trained on samples from  $\mathcal{D}$ . For an input  $\mathbf{x} = (x_1, \ldots, x_d) \in \mathbb{R}^d$ , our goal is to identify the important features of  $\mathbf{x}$  for the prediction  $f(\mathbf{x})$ . To define feature importance precisely, we use the *average restricted prediction*,

$$f_{S}(\mathbf{x}) = \mathop{\mathbb{E}}_{\mathbf{X}_{\mathcal{S}} \sim \mathcal{V}_{\mathcal{S}}}[f(\mathbf{x}_{S}, \mathbf{X}_{\mathcal{S}})]$$
(1)

where  $\mathbf{x}_S$  is fixed, and  $\mathbf{X}_S$  is a random vector drawn from an arbitrary reference distribution  $\mathcal{V}_S$ . This strategy, popularized in [LL17; Lun+20], allows us to query a predictor f that accepts only d-dimensional inputs and analyze its behavior when specific sets of features in  $\mathbf{x}$  are retained or removed.

## 2.1 Definitions

We introduce two intuitive notions to quantify the importance of a subset S for a prediction  $f(\mathbf{x})$ . For a model f, we begin by evaluating its baseline behavior over an arbitrary reference distribution  $\mathcal{V}$ :  $f_{\emptyset}(\mathbf{x}) = \mathbb{E}[f(\mathbf{X}_{[d]})]$ . Then, for a sample  $\mathbf{x}$  and its prediction  $f(\mathbf{x})$ , we can pose two simple questions:

Which set of features, S, satisfies 
$$f_S(\mathbf{x}) \approx f(\mathbf{x})$$
 or  $f_{S_c}(\mathbf{x}) \approx f_{\emptyset}(\mathbf{x})$ ?

These questions explores the sufficiency and necessity of subset S, which we define formally in the following definitions

**Definition 2.1** (Sufficiency). Let  $\epsilon \ge 0$  and let  $\rho : \mathbb{R} \times \mathbb{R} \mapsto \mathbb{R}$  be a metric on  $\mathbb{R}$ . A subset  $S \subseteq [d]$  is  $\epsilon$ -sufficient with respect to a distribution  $\mathcal{V}$  for f at  $\mathbf{x}$  if

$$\Delta_{\mathcal{V}}^{suf}(S, f, \mathbf{x}) \triangleq \rho(f(\mathbf{x}), f_S(\mathbf{x})) \le \epsilon.$$
<sup>(2)</sup>

Furthermore, S is  $\epsilon$ -super sufficient if all supersets  $\widetilde{S} \supseteq S$  are  $\epsilon$ -sufficient.

This notion of sufficiency is straightforward: a subset S is  $\epsilon$ -sufficient with respect to a reference distribution  $\mathcal{V}$  if, with  $\mathbf{x}_S$  fixed, the average restricted prediction  $f_S(\mathbf{x})$  is within  $\epsilon$  from the original prediction  $f(\mathbf{x})$ . This is further strengthened by super-sufficiency: a subset S is  $\epsilon$ -super sufficient if  $\rho(f(\mathbf{x}), f_S(\mathbf{x})) \leq \epsilon$  and, for any superset  $\widetilde{S}$  of S,  $\rho(f(\mathbf{x}), f_{\widetilde{S}}(\mathbf{x})) \leq \epsilon$ . This simply means including more features in S still keeps  $f_S(\mathbf{x}) \epsilon$  close to  $f(\mathbf{x})$ . To find a small sufficient subset S of small cardinality  $\tau > 0$ , we can solve the following optimization problem:

$$\begin{array}{ll} \arg\min & \Delta_{\mathcal{V}}^{\text{suf}}(S, f, \mathbf{x}) \quad \text{subject to} \quad |S| \leq \tau. \\ S \subseteq [d] \end{array} \tag{Psuf}$$

We will refer to this problem as the *sufficiency problem*, or  $(P_{suf})$ . Using analogous ideas, we also define necessity and formulate an optimization problem to find small necessary subsets.

**Definition 2.2** (Necessity). Let  $\epsilon \ge 0$  and denote  $\rho : \mathbb{R} \times \mathbb{R} \mapsto \mathbb{R}$  to be metric on  $\mathbb{R}$ . A subset  $S \subseteq [d]$  is  $\epsilon$ -necessary with respect to a distribution  $\mathcal{V}$  for f at  $\mathbf{x}$  if

$$\Delta_{\mathcal{V}}^{nec}(S, f, \mathbf{x}) \triangleq \rho(f_{S_c}(\mathbf{x}), f_{\emptyset}(\mathbf{x})) \le \epsilon.$$
(3)

Furthermore, S is  $\epsilon$ -super necessary if all supersets  $\widetilde{S} \supseteq S$  are  $\epsilon$ -necessary.

Here, a subset S is  $\epsilon$ -necessary if marginalizing out the features in S with respect to the distribution  $\mathcal{V}_S$ , results in an average restricted prediction  $f_{S_c}(\mathbf{x})$  that is  $\epsilon$  close to  $f_{\emptyset}(\mathbf{x})$  – the average baseline prediction of f over  $\mathcal{V}_{[d]}$ . Furthermore, S is  $\epsilon$ -super necessary if  $\rho(f_S(\mathbf{x}), f(\mathbf{x})) \leq \epsilon$  and any superset  $\widetilde{S}$  of S is  $\epsilon$ -necessary. To identify a  $\epsilon$ -necessary subset S of small cardinality  $\tau > 0$ , one can solve the following optimization problem, which we refer to as the *necessity* problem or (P<sub>nec</sub>).

$$\begin{array}{ll} \arg\min & \Delta_{\mathcal{V}}^{\mathrm{nec}}(S, f, \mathbf{x}) \quad \text{subject to} \quad |S| \leq \tau. \\ S \subseteq [d] \end{array}$$
 (P<sub>nec</sub>)

# 3 Related Work

Notions of sufficiency, necessity, the duality between the two, and their connections with other feature attribution methods have been studied to varying degrees in XAI research. We comment on the main related works in this section.

**Sufficiency.** The notion of sufficient features has gained significant attention in recent research. Shih, Choi, and Darwiche [SCD18] explore a symbolic approach to explain Bayesian network classifiers and introduce prime implicant explanations, which are minimal subsets S that make features in the complement irrelevant to the prediction  $f(\mathbf{x})$ . For models represented by a finite set of first-order logic (FOL) sentences, Ignatiev et al. [Ign+20] refer to prime implicants as abductive explanations (AXp's). For classifiers defined by propositional formulas and inputs with discrete features, Darwiche and Hirth [DH20] refer to prime implicants as sufficient reasons and define a complete reason to be the disjunction of all sufficient reasons. They present efficient algorithms, leveraging Boolean circuits, to compute sufficient and complete reasons and demonstrate their use in identifying classifier dependence on protected features that should not inform decisions. For more complex models, Ribeiro, Singh, and Guestrin [RSG18] propose high-precision probabilistic explanations called anchors, which represent local, sufficient conditions. For  $\mathbf{x}$  positively classified by f, Wang, Khosravi, and Broeck [WKB21] propose a greedy approach to solve (P<sub>suf</sub>) while the preservation method by Fong and Vedaldi [FV17] relaxes S to  $[0, 1]^d$ .

**Necessity.** There has also been significant focus on identifying necessary features – those that, when altered, lead to a change in the prediction  $f(\mathbf{x})$ . For models expressible by FOL sentences, Ignatiev, Narodytska, and Marques-Silva [INM19] define prime implicates as the minimal subsets that when changed, modify the prediction  $f(\mathbf{x})$  and relate these to adversarial examples. For Boolean models predicting on samples  $\mathbf{x}$  with discrete features, Ignatiev et al. [Ign+20] and [DH20] refer to prime implicates as contrastive explanations (CXp's) and necessary reasons, respectively. Beyond boolean functions, for  $\mathbf{x}$  postively classified by a classifier f, Fong, Patrick, and Vedaldi [FPV19] relax S to  $[0, 1]^d$  and propose the deletion method to approximately solve (P<sub>nec</sub>).

**Duality Between Sufficiency and Necessity.** Dabkowski and Gal [DG17] characterize the preservation and deletion methods as discovering the *smallest sufficient* and *destroying region* (SSR and SDR). They propose combining the two but do not explore how solutions to this approach may differ from individual SSR and SDR solutions. Ignatiev et al. [Ign+20] show that AXp's and CXp's are minimal hitting sets of another by using a hitting set duality result between minimal unsatisfiable and correction subsets. The result enables the identification of AXp's from CXp's and vice versa.

**Sufficiency, Necessity, and General Feature Attribution Methods.** Precise connections between sufficiency, necessity, and other popular feature attribution methods (such as Shapley values [Sha51; Che+18a;

LL17]) remains unclear. To our knowledge, Covert, Lundberg, and Lee [CLL21] provide the only work examining these approaches [FV17; FPV19; DG17] in the context of general removal-based methods, i.e., methods that remove certain input features to evaluate different notions of importance. The work of Watson et al. [Wat+21] is also relevant to our work, as it formalizes a connection between notions of sufficiency and Shapley values. With the specific payoff function <sup>1</sup> defined as  $v(S) = \mathbb{E}[f(\mathbf{x}_S, \mathbf{X}_{S_c})]$ , they show how each summand in the Shapley value measures the sufficiency of feature *i* to a particular subset.

# 4 Unifying Sufficiency and Necessity

Given a model f, sample  $\mathbf{x}$ , and reference distribution  $\mathcal{V}$ , we can identify a small set of important features S by solving either ( $P_{suf}$ ) or ( $P_{nec}$ )<sup>2</sup>. While both methods are popular [Kol+21; Kol+22; FV17; BSL23; YJS18], simply identifying a small sufficient or necessary subset may not provide a complete picture of how f uses  $\mathbf{x}$  to make a prediction. To see why, consider the following scenario: for a fixed  $\tau > 0$ , let  $S^*$  be a  $\epsilon$ -sufficient solution to ( $P_{suf}$ ), so that  $|S^*| \leq \tau$  and

$$\Delta_{\mathcal{V}}^{\text{suf}}(S, f, \mathbf{x}) \le \epsilon. \tag{4}$$

While  $S^*$  is  $\epsilon$ -sufficient, it can also be true that

$$\Delta_{\mathcal{V}}^{\mathrm{nec}}(S, f, \mathbf{x}) > \epsilon \tag{5}$$

indicating  $S^*$  is **not**  $\epsilon$ -necessary: indeed, this can simply happen when its complement,  $S_c^*$ , contains important features. This scenario raises two questions:

- 1. How different are sufficient and necessary features?
- 2. How does varying the levels of sufficiency and necessity affect the optimal set of important features?

In order to provide answers to these questions (and to avoid the scenario above) we propose to search for a small set S that is both sufficient and necessary by combining problems (P<sub>suf</sub>) and (P<sub>nec</sub>). Consider  $\Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha)$ , a convex combination of both  $\Delta_{\mathcal{V}}^{\text{suf}}(S, f, \mathbf{x})$  and  $\Delta_{\mathcal{V}}^{\text{nec}}(S, f, \mathbf{x})$ 

$$\Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha) = \alpha \cdot \Delta_{\mathcal{V}}^{\text{suf}}(S, f, \mathbf{x}) + (1 - \alpha) \cdot \Delta_{\mathcal{V}}^{\text{nec}}(S, f, \mathbf{x})$$
(6)

where  $\alpha \in [0, 1]$  controls the extent to which S is required to be sufficient vs. necessary. Our *unified* problem, (P<sub>uni</sub>), can be expressed as:

$$\begin{array}{ll} \arg\min & \Delta_{\mathcal{V}}^{\mathrm{uni}}(S, f, \mathbf{x}, \alpha) & \text{subject to} & |S| \leq \tau. \\ S \subseteq [d] & \end{array}$$
 (P<sub>uni</sub>)

When  $\alpha$  is 1 or 0,  $\Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha)$  reduces to  $\Delta_{\mathcal{V}}^{\text{suf}}(S, f, \mathbf{x})$  or  $\Delta_{\mathcal{V}}^{\text{nec}}(S, f, \mathbf{x})$ , respectively. In these extreme cases, S is only sufficient or necessary. In the remainder of this work we will theoretically analyze (P<sub>uni</sub>), characterize its solutions, and provide different interpretations of what properties the solutions have through the lens of conditional independence and game theory. In the experimental section, we will show that solutions to (P<sub>uni</sub>) provide insights that neither (P<sub>suf</sub>) nor (P<sub>nec</sub>) offer.

<sup>&</sup>lt;sup>1</sup>Payoff functions are an instrumental tool in game-theoretic approaches. See further Section 5.2 for further details.

<sup>&</sup>lt;sup>2</sup>Solving ( $P_{suf}$ ) or ( $P_{nec}$ ) is NP-hard for general non-convex functions f. We do not concern ourselves with the computational efficiency of these problems as there exist tractable relaxations [Kol+21; Kol+22].

## 4.1 Solutions to the Unified Problem

We begin with a simple lemma that demonstrates why (Puni) enforces both sufficiency and necessity.

**Lemma 4.1.** Let  $\alpha \in (0, 1)$ . For  $\tau > 0$ , denote  $S^*$  to be a solution to  $(P_{uni})$  for which  $\Delta_{\mathcal{V}}^{uni}(S, f, \mathbf{x}, \alpha) = \epsilon$ . Then,  $S^*$  is  $\frac{\epsilon}{\alpha}$ -sufficient and  $\frac{\epsilon}{1-\alpha}$ -necessary. Formally,

$$0 \le \Delta_{\mathcal{V}}^{suf}(S^*, f, \mathbf{x}) \le \frac{\epsilon}{\alpha} \quad and \quad 0 \le \Delta_{\mathcal{V}}^{nec}(S^*, f, \mathbf{x}) \le \frac{\epsilon}{1 - \alpha}.$$
(7)

The proof of this result, and all others, is included Appendix A.1. This result illustrates that solutions to  $(P_{uni})$  satisfy varying definitions of sufficiency and necessity. Furthermore, as  $\alpha$  increases from 0 to 1, the solution shifts from being highly necessary to highly sufficient. In the following results, we will show *when* and *how* solutions to  $(P_{uni})$  are similar (and different) to those of  $(P_{suf})$  and  $(P_{nec})$ . To start, we present the following lemma, which will be useful in subsequent results.

**Lemma 4.2.** For  $0 \le \epsilon < \frac{\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x}))}{2}$ , denote  $S_{suf}^*$  and  $S_{nec}^*$  to be  $\epsilon$ -sufficient and  $\epsilon$ -necessary sets. Then, if  $S_{suf}^*$  is  $\epsilon$ -super sufficient or  $S_{nec}^*$  is  $\epsilon$ -super necessary, we have

$$S_{suf}^* \cap S_{nec}^* \neq \emptyset. \tag{8}$$

This lemma demonstrates that, given  $\epsilon$ -sufficient and necessary sets  $S_{\text{suf}}^*$  and  $S_{\text{nec}}^*$ , if either additionally satisfies the stronger notions of super sufficiency or necessity, they must share some features. This proves useful in characterizing a solution to (P<sub>uni</sub>), which we now do in the following theorem.

**Theorem 4.1.** Let  $\tau_1, \tau_2 > 0$  and  $0 \le \epsilon < \frac{1}{2} \cdot \rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x}))$ . Denote  $S^*_{suf}$  and  $S^*_{nec}$  to be  $\epsilon$ -super sufficient and  $\epsilon$ -super necessary solutions to (P<sub>suf</sub>) and (P<sub>nec</sub>), respectively, such that  $|S^*_{suf}| = \tau_1$  and  $|S^*_{nec}| = \tau_2$ . Then, there exists a set  $S^*$  such that

$$\Delta_{\mathcal{V}}^{uni}(S^*, f, \mathbf{x}, \alpha) \le \epsilon \quad and \quad \max(\tau_1, \tau_2) \le |S^*| < \tau_1 + \tau_2. \tag{9}$$

Furthermore, if  $S_{suf}^* \subseteq S_{nec}^*$  or  $S_{nec}^* \subseteq S_{suf}^*$  then  $S^* = S_{nec}^*$  or  $S^* = S_{suf}^*$  respectively.

This result demonstrates that solutions to  $(P_{uni})$ ,  $(P_{suf})$ , and  $(P_{nec})$  can be closely related. As an example, consider features that are  $\epsilon$ -super sufficient,  $S_{suf}^*$ . If we have domain knowledge that  $S_{suf}^* \subseteq S_{nec}^*$ , and  $S_{nec}^*$  is  $\epsilon$ -super necessary, then  $S_{nec}^*$  is in fact the solution to the  $(P_{uni})$  problem. Conversely, if we know that  $S_{suf}^*$  is  $\epsilon$ -super necessary along with being a subset of  $\epsilon$ -super sufficient set  $S_{suf}^*$ , then  $S_{suf}^*$  will be a solution to the  $(P_{uni})$  problem.

# 5 Two Perspectives of the Unified Approach

In the previous section, we characterized solutions to  $(P_{uni})$  and their connections to those of  $(P_{suf})$  and  $(P_{nec})$ . To better understand sufficiency, necessity, and their unification, we will provide two alternative perspectives of our unified framework through the lens of conditional independence and Shapley values.

## 5.1 A Conditional Independence Perspective

Here we demonstrate how our sufficiency, necessity, and our unified approach, can be understood as measuring conditional independence relations between features  $\mathbf{X}$  and labels Y.

**Corollary 5.1.** Suppose for any  $S \subseteq [d]$ ,  $\mathcal{V}_S = p(\mathbf{X}_S \mid \mathbf{X}_{S_c} = \mathbf{x}_{S_c})$ . Let  $\alpha \in (0, 1)$ ,  $\epsilon \geq 0$ , and denote  $\rho : \mathbb{R} \times \mathbb{R} \mapsto \mathbb{R}$  to be a metric on  $\mathbb{R}$ . Furthermore, for  $f(\mathbf{X}) = \mathbb{E}[Y \mid \mathbf{X}]$  and  $\tau > 0$ , let  $S^*$  be a solution to (P<sub>uni</sub>) such that  $\Delta_{\mathcal{V}}^{uni}(S, f, \mathbf{x}, \alpha) = \epsilon$ . Then,  $S^*$  satisfies the following conditional independence relations,

$$\rho\left(\mathbb{E}[Y \mid \mathbf{x}], \ \mathbb{E}[Y \mid \mathbf{X}_{S^*} = \mathbf{x}_{S^*}]\right) \le \frac{\epsilon}{\alpha} \quad and \quad \rho\left(\mathbb{E}[Y \mid \mathbf{X}_{S^*_c} = \mathbf{x}_{S^*_c}], \ \mathbb{E}[Y]\right) \le \frac{\epsilon}{1-\alpha}. \tag{10}$$

The assumption in this corollary is that,  $\forall S \subseteq [d]$ ,  $f_S(\mathbf{x})$  is evaluated using the conditional distribution  $p(\mathbf{X}_{S_c} \mid \mathbf{X}_S = \mathbf{x}_S)$  as the reference distribution  $\mathcal{V}_S$ . Given the recent advancements in generative models [SE19; HJA20; Son+21], this assumption is (approximately) reasonable in many practical settings, as we will demonstrate in our experiments. With this reference distribution, the results shows that for the model  $f(\mathbf{X}) = \mathbb{E}[Y \mid \mathbf{X}]$  and a sample  $\mathbf{x}$ , the minimizer  $S^*$  of (P<sub>uni</sub>) approximately satisfies two conditional independence properties. First,  $S^*$  is sufficient in that, when the features in  $S^*$  are fixed, the complement,  $S_c^*$ , offers little-to-no additional information about Y. Second,  $S^*$  is necessary because when we marginalize it out and rely only on the features in  $S_c^*$ , the information gained about Y is minimal and similar to  $\mathbb{E}[Y = 1]$ .

## 5.2 A Shapley Value Perspective

In the previous section, we detailed the conditional independence relations one gains from solving ( $P_{uni}$ ). We now present an arguably less intuitive result that shows that solving ( $P_{uni}$ ) is equivalent to maximizing the lower bound of Shapley value. Before presenting our result, we provide a brief background on this game-theoretic quantity.

**Shapley Values.** Shapley values use game theory to measure the importance of players in a game. Let the tuple ([n], v) represent a cooperative game with players  $[n] = \{1, 2, ..., n\}$  and denote a characteristic function  $v(S) : \mathcal{P}([n]) \to \mathbb{R}$ , which maps the power set of [n] to the reals. Then, the Shapley value [Sha51] for player j in the cooperative game ([n], v) is

$$\phi_j^{\text{shap}}([n], v) = \sum_{S \subseteq [n] \setminus \{j\}} w_S \cdot [v(S \cup \{j\}) - v(S)] \tag{11}$$

where  $w_S = \frac{|S|!(n-|S|-1)!}{n!}$ . The Shapley value is the only solution concept that satisfies the desirable axioms of additivity, nullity, symmetry, and linearity [Owe13]. In the context of XAI and feature importance, Shapley values are widely used to measure local feature importance by treating input features as players in a game [CLL20; TLS22; Che+18a; LL17]. Given a sample  $\mathbf{x} \in \mathbb{R}^d$  and a model f, the goal is to evaluate the importance of each feature  $j \in [d]$  for the prediction  $f(\mathbf{x})$ . This is done by defining a cooperative game ([d], v), where v(S) is a characteristic function that quantifies how the features in S contribute to the prediction. Different choices of v(S) can be found in [LL17; SN20; Wat+24]. Although computing  $\phi_j^{\text{shap}}([d], v)$  is computationally intractable, several practical methods for estimation have been developed [Che+23; TLS22; Zha+23; Lun+20]. While Shapley values are popular across various domains [Mon+21; ZDS21; Liu+21], few works, aside from Watson et al. [Wat+21], explore their connections to sufficiency and necessity.

With this background, we now present our result. Recall solving (P<sub>uni</sub>) obtains a small subset S with low  $\Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha)$ . Notice that in (P<sub>uni</sub>) there is a natural *partitioning* of the features into two sets, S and S<sub>c</sub>. In the follow theorem we demonstrate that searching for a small subset S with minimal  $\Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha)$  is equivalent to maximizing a lower bound on the Shapley value in a two player game.

**Theorem 5.1.** Consider an input  $\mathbf{x}$  for which  $f(\mathbf{x}) \neq f_{\emptyset}(\mathbf{x})$ . Denote by  $\Lambda_d = \{S, S_c\}$  the partition of  $[d] = \{1, 2, ..., d\}$ , and define the characteristic function to be  $v(S) = -\rho(f(\mathbf{x}), f_S(\mathbf{x}))$ . Then,

$$\phi_S^{shap}(\Lambda_d, v) \ge \rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \Delta_{\mathcal{V}}^{uni}(S, f, \mathbf{x}, \alpha).$$
(12)

This result has important implications. When the feature space is partitioned into 2 disjoint sets, S and  $S_c$ , where each is a player in a cooperative game, then in searching for an S with small  $\Delta_{uni}(S, \mathcal{V}, \frac{1}{2})$ , as we do in (P<sub>uni</sub>), we are searching for a player, S, with a large lower bound on its Shapley value. Note this connection we show is different from the one presented by [Wat+21]. They show the Shapley value of feature i is a measure of this feature i's sufficiency subsets  $S \subseteq [d]$ . In conclusion, our result provides a new and different and complementary interpretation to the sufficiency, necessity, and our proposed unified method through the lens of game theory.

# 6 Experiments

We demonstrate our theoretical findings in multiple settings of increasingly complexity: two tabular data tasks (on synthetic data and the US adult income dataset [Din+21]) and two high-dimensional image classification tasks using the RSNA 2019 Brain CT Hemorrhage Challenge [Fla+20] and CelebA-HQ datasets [Lee+20].

## 6.1 Tabular Data

In the following examples, we analyze solutions to (P<sub>uni</sub>) for varying levels of sufficiency vs. necessity and multiple size constraints. We learn a predictor f and, for 100 new samples, solve (P<sub>uni</sub>) for  $\tau \in \{3, 6, 9\}$ and  $\alpha \in [0, 1]$ , with  $\rho(a, b) = |a - b|$  and  $\mathcal{V}_S = p(\mathbf{X}_S \mid \mathbf{X}_{S_c} = \mathbf{x}_{S_c})$ . For a fixed  $\tau$  and sample  $\mathbf{x}$ , we denote  $S^*_{\alpha_i}$  to be a solution to (P<sub>uni</sub>) for  $\alpha_i$ . To analyze the stability of  $S^*_{\alpha_i}$  as sufficiency and necessity vary, we report the normalized average Hamming distance [Ham50] between  $S^*_{\alpha_i}$  and  $S^*_0$ , along with 95% confidence intervals, as a function of  $\alpha$ .

#### 6.1.1 Linear Regression

We begin with a regression example. Features **X** are distributed according to  $\mathcal{N}(\boldsymbol{\mu}, \mathbf{AA^T})$  with  $\boldsymbol{\mu} = [2^i]_{i=1}^d$  and  $\mathbf{A}_{i,j} \sim U(0,1)$ . The response is  $Y = \boldsymbol{\beta}^T \mathbf{X} + \boldsymbol{\epsilon}$ , with  $\boldsymbol{\beta} = 32 \cdot [2^{-i}]_{i=1}^d$  and  $\boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_{d \times d})$ . With d = 10 our model is  $f(\mathbf{X}) = \hat{\boldsymbol{\beta}}^T \mathbf{X}$ , where  $\hat{\boldsymbol{\beta}}$  is the least squares solution.

**Stability of Unified Solutions.** Fig. 1a shows that when solutions are constrained to be small ( $\tau = 3$ ), increasing  $\alpha$  to enforce greater sufficiency results in a steady increase in Hamming distance, indicating that the solutions  $S_{\alpha_i}^*$  are consistently changing. When larger solutions are allowed ( $\tau = 6$ ),  $S_{\alpha_i}^*$  rapidly changes with the introduction of sufficiency, as seen by the initial steep rise in Hamming distance. However, as  $\alpha$  continues to increase, this distance grows more gradually. Lastly, when the solution size approaches the dimensionality of the feature space ( $\tau = 9$ ), small to intermediate levels of sufficiency do not significantly alter the solutions. However, requiring high levels of sufficiency ( $\alpha > 0.8$ ) leads to extreme changes in the solutions, as shown by a sharp increase in Hamming distance.

# 6.1.2 American Community Survey Income (ACSIncome)

We use the ACSIncome dataset for California, including 10 demographic and socioeconomic features such as age, education, occupation, and geographic region. We train a Random Forest classifier to predict whether an individual's annual income exceeds \$50K, achieving a test accuracy  $\approx 81\%$ .

**Stability of Unified Solutions.** Fig. 1b shows that when solutions are forced to be small ( $\tau = 3$ ), increasing  $\alpha$  to enforce sufficiency results in a steady increase in Hamming distance, indicating the solutions  $S_{\alpha_i}^*$  are changing. For larger solutions ( $\tau = 6$ ),  $S_{\alpha_i}^*$  changes significantly when low levels sufficiency are

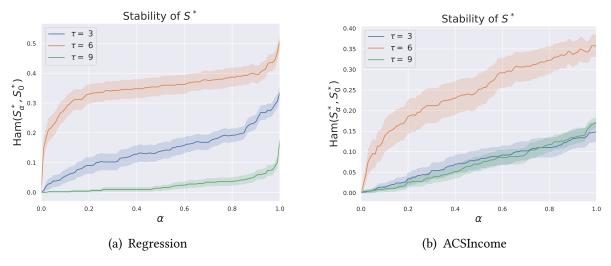


Figure 1: Stability of solutions to (P<sub>uni</sub>) vs.  $\alpha$  for  $\tau \in \{3, 6, 9\}$ 

required, indicated by initial rise in the Hamming distance. As  $\alpha$  continues to increase, the Hamming distance grows more gradually. Interestingly, when the size is close to feature space's dimensionality ( $\tau = 9$ ), the Hamming distance exhibits a behavior similar to that observed for  $\tau = 3$ . In conclusion, both experiments show that the optimal feature set can vary significantly depending on the size allowed and balance between sufficiency and necessity.

## 6.2 Image Classification


The following two experiments explore high dimensional settings in image classification tasks. The features are pixel values and so a subset S corresponds to a binary mask identifying important pixels. Since solving (P<sub>suf</sub>), (P<sub>nec</sub>), or (P<sub>uni</sub>) is NP-hard, we use two methods–one for each setting, described in their respective sections–which solve relaxed problems to identify sufficient and necessary masks S. These experiments serve two purposes. First, they will analyze the extent to which explanations generated by popular methods–including Integrated Gradients [STY17], GradientSHAP [LL17], Guided GradCAM [Sel+17], and h-Shap [TLS22]–identify small sufficient and necessary subsets. To ensure consistent analysis, we normalize all generated attribution scores to the interval [0, 1]. This is done by setting the top 1% of nonzero scores to 1 and dividing the remaining scores by the minimum score from the top 1% of nonzero scores. Then, binary masks are generated by thresholding the normalized scores using  $t \in [0, 1]$ . For a test set of images, we perform this normalization and report the average  $-\log(\Delta^{suf}), -\log(\Delta^{nec})$ , and  $-\log(L^0)$ (across all binary masks) at different threshold values to analyze the sufficiency, necessity and size of the explanations. Finally, the second objective is to understand and visualize the similarities and differences between sufficient and necessary sets.

#### 6.2.1 RSNA CT Hemorrhage

We use the RSNA 2019 Brain CT Hemorrhage Challenge dataset comprised of 752,803 scans. Each scan is annotated by expert neuroradiologists with the presence and type(s) of hemorrhage (i.e., epidural, intraparenchymal, intraventricular, subarachnoid, or subdural). We use a ResNet18 [He+16] classifier that was pretrained on this data [TLS22]. To identify sufficient and necessary sets we solve the relaxed problem,

$$\underset{S \subseteq [0,1]^d}{\operatorname{arg\,min}} \ \Delta_{\mathcal{V}}^{\operatorname{uni}}(S, f, \mathbf{x}, \alpha) + \lambda_1 \cdot ||S||_1 + \lambda_{\operatorname{TV}} \cdot ||S||_{TV}.$$
(13)

Since the dataset consists of highly complex and diverse images, we employ this per-example approach that generates highly specific tailored solutions by solving an optimization problem for each sample following

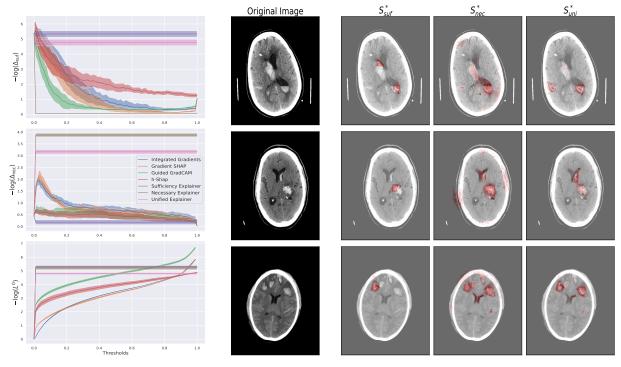

(a) Comparison of different methods.

(b)  $S_{\text{suf}}^*$ ,  $S_{\text{nec}}^*$  and  $S_{\text{uni}}^*$  for various CT scans.

Figure 2: Experimental results on the RSNA dataset.

previous work [FPV19; Kol+21; Kol+22].<sup>3</sup> To learn sufficient and/or necessary masks, we solve Eq. (13) for  $\alpha \in \{0, 0.5, 1\}$ . Details are in Appendix A.2.

**Comparison of Post-hoc Interpretability Methods.** For a set of 20 images positively classified by the ResNet model, we apply multiple post-hoc interpretability methods, as well as computing sufficient and necessary masks by our proposed approach – solving (13). The results in Fig. 2a show that for a threshold of t < 0.1, many methods identify sufficient sets smaller in size than the sufficient and unified explainer, as indicated by their large values of  $-\log(\Delta^{\text{suf}})$  and smaller values of  $-\log(L^0)$ . However, for t > 0.1, only the sufficient and unified explainer identify sufficient sets of a constant small size. Importantly, it is also evident that *no methods, besides our necessity and unified explainers, identify necessary sets.* Furthermore, as expected, the sufficient explainer does not identify necessary sets and vice versa. The unified explainer, as expected, identifies a sufficient and necessary set, albeit at the cost of the set being larger in size. In conclusion, while many methods can identify sufficient, no off-the-shelf method can identify necessary sets for small thresholds. Only when we directly optimize for such properties do we get explanations that are consistently small, sufficient and/or necessary across thresholds.

Sufficiency vs. Necessity. In Fig. 2b we visualize the sufficient and necessary features in various CT scans. The first observation is that sufficient subsets do not provide a complete picture of which features are important. Notice for all the CT scans, a sufficient set,  $S_{suf}^*$  highlights one or two, but never all, brain hemorrhages in the scans. For example, in the last row,  $S_{suf}^*$  only contains the left frontal lobe parenchymal hemorrhages, which happens to be one of the larger hemorrhages present. On the other hand, necessary sets,  $S_{nec}^*$ , contain parts of, sometimes entirely, *all* hemorrhages in the scans. In the last row,  $S_{nec}^*$  contains all multifocal parenchymal hemorrhages in both right and left frontal lobes, because when all these regions are masked, the model yields a prediction  $\approx 0.64$ - the prediction of the model on the mean image. Finally, notice in the 2nd and 3rd columns that  $S_{nec}^*$  and  $S_{uni}^*$  are nearly identical, which precisely demonstrate

 $<sup>^{3}\</sup>lambda_{1}, ||S||_{1}$  and  $\lambda_{\text{TV}}, ||S||_{TV}$  are the  $\ell_{1}$  and Total Variation norms and hyperparamters, promoting sparsity and smoothness.

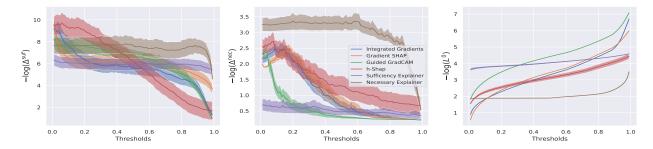


Figure 3: Comparison of different methods on the CelebAHQ dataset.

Lemma 4.1 and Theorem 4.1 in practice. First, since  $S_{suf}^*$  is super sufficient,  $S_{suf}^*$  and  $S_{nec}^*$ , share common features. Second, visually  $S_{suf}^* \subseteq S_{nec}^*$  holds approximately and so  $S_{nec}^* = S_{uni}^*$ . Through this experiment we are able to highlight the differences between sufficient and necessary sets, show how each contain important and complementary information, and demonstrate our theory holding in real world settings.

### 6.2.2 CelebA-HQ

We use a modified version of the CelebA-HQ dataset [Kar17] that contains 30,000 celebrity faces resized to  $256 \times 256$  pixels. We train a ResNet18 to classify whether a celebrity is smiling, achieving a test accuracy  $\approx 94\%$ . To generate sufficient or necessary masks S for samples **x**, we learn models  $g_{\theta} : \mathcal{X} \mapsto \mathcal{X}$ , that (approximately) solve the following optimization problem:

$$\underset{\theta \in \Theta}{\arg\min} \underset{\mathbf{X} \sim \mathcal{D}_{\mathcal{X}}}{\mathbb{E}} \left[ \Delta_{\mathcal{V}}^{\mathrm{uni}}(g_{\theta}(\mathbf{X}), f, \mathbf{X}, \alpha) + \lambda_{1} \cdot ||g_{\theta}(\mathbf{X})||_{1} + \lambda_{\mathrm{TV}} \cdot ||g_{\theta}(\mathbf{X})||_{\mathrm{TV}} \right].$$
(14)

Given the structured nature of the dataset and the similarity of features across images, we use this parametric model approach because it prevents overfitting to spurious signals, an issue that can arise with perexample methods. Additionally, this approach is more efficient, as it still generates tailored per-sample explanations but only requires learning a single model rather than repeatedly solving Eq. (13) [Lin+22; Che+18b; YJS18]. To learn a necessary and sufficient explainer model, we solve Eq. (14) via empirical risk minimization for  $\alpha \in \{0, 1\}$  respectively. Implementation details and hyperparameter settings are included in Appendix A.2.

**Comparison of Post-hoc Interpretability Methods.** For a set of 100 images labeled with a smile and correctly classified by the ResNet model, we apply multiple post-hoc interpretability methods and our sufficient and necessary explainers to identify important features associated with smiling. The results in Fig. 3 illustrate that for a wide range of thresholds  $t \in [0, 1]$ , many methods identify sufficient subsets, as  $-\log(\Delta^{suf})$  for many of them is comparable to that of the sufficient explainer. The necessary explainer, in fact, identifies subsets that are more sufficient than those found by the sufficient explainer. The reason is that the sufficient explainer identifies subsets that are, on average, smaller for all  $t \in [0, 1]$ , while the necessary explainer finds subsets that are constant in size for all  $t \in [0, 1]$  but slightly larger since, to be necessary, they must contain more features that provide additional information about the label. For other methods, as t increases, subset size decreases, and the sufficiency and necessity of the solutions decline. Meanwhile, the necessary explainer naturally identifies necessary subsets, indicated by large  $-\log(\Delta^{nec})$ , whereas other methods fail to do so. In conclusion, many methods can identify sufficient sets, but not necessary ones. Directly optimizing for these criterion leads to identifying small, constant-sized subsets across thresholds.

Sufficiency vs. Necessity. In Fig. 4, we see how sufficient subsets alone may overlook important features, while solutions to  $(P_{uni})$  offer deeper insights. As stated earlier, the sufficient explainer identifies sets that are sufficient but not necessary. On the other hand, the necessary explainer has high  $-\log(\Delta^{suf})$  and  $-\log(\Delta^{nec})$ , indicating that it identifies sufficient *and* necessary set, meaning they also serve as solutions

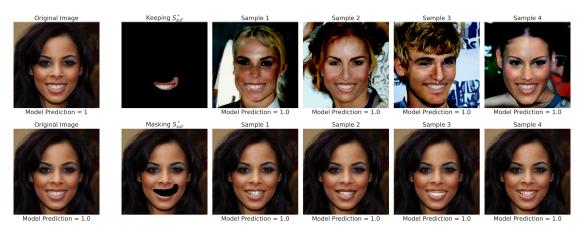


Figure 4: Images and model predictions by fixing and masking the sufficient subset  $S_{suf}^*$ 



Figure 5: Images and model predictions by fixing and masking the necessary subset  $S_{nec}^*$ 

to (P<sub>uni</sub>). In Fig. 4, we visualize the reasons for this phenomena. Notice that  $S_{suf}^*$  precisely highlights (only) the smile. When  $S_{suf}^*$  is fixed, one can generate new images (as done in [Zha+23]) for which the model produces the same predictions as it did for the original image (a smile). On the other hand, we also see why  $S_{suf}^*$  is *not* necessary: we can fix the complement  $(S_{suf}^*)_c$  and, since there are important features in it, a smile is consistently generated, and the model produces the same prediction on these images as it did on the original. Conversely solutions to (P<sub>nec</sub>) (also solutions to (P<sub>uni</sub>) here) generate different explanations that provide a more complete picture of feature importance. Notice that  $S_{nec}^*$  is sufficient because  $S_{suf}^* \subseteq S_{nec}^*$ , with the additional features mainly being the dimples and eyes, which aid in determining the presence of a smile. More importantly, Fig. 5 illustrates why  $S_{nec}^*$  is necessary: when we fix the complement of  $S_{nec}^*$  and generate new samples, half of the faces lack a smile, leading the model f to predict no smile. Details on sample generation are in Appendix A.1.

# 7 Limitations & Broader Impacts

While this work provides a novel theoretical contribution to the XAI community, there are some limitations that require careful discussion. The choice of reference distribution  $V_S$  determines the characteristics of sufficient and necessary explanations. For instance, only with the true conditional data distribution can one obtain the conditional independence results that our theory provides. Naturally, there are computational trade-offs that must be carefully studied; the ability to learn and sample from accurate conditional distributions to generate explanations with clear statistical meaning comes with a computational and statistical cost, particularly in high-dimensional settings. Thus, a key direction for future work is to explore the impact of different reference distributions and provide a principled framework for selecting a  $V_S$  that balances practical utility and computational feasibility.

Another relevant question is how well our proposed notions align with human intuition. While we aim to understand which features are sufficient and necessary *for a given predicted model*, these explanations may not always correspond to how humans perceive importance (since model might use different features to solve a task). This can be an issue in settings where interpretability is essential for trust and accountability, such as in healthcare. On the one hand, our approach can provide useful insights to further evaluate models (e.g. by verifying if the sufficient and necessary features employed by models correlate with the correct ones as informed by human experts). On the other hand, bridging the gap between our mathematical definitions of sufficiency and necessity and other human notions of importance is an area for further investigation. User studies, along with collaboration with domain experts, will be critical in determining how our formal notions of sufficiency and necessity can be adapted or extended to better meet real-world interpretability needs.

Finally, the societal impact of this work warrants discussion. While we offer a rigorous framework to understand model predictions, these are oblivious to notions of demographic bias [HPS16; Fel+15; BYS24]. There is a risk that an "incorrect" choice of generating a sufficient vs. necessary explanation could reinforce biases or obscure the causal reasons behind predictions. Future work will study when and how our framework can be incorporate these biases in the reported important features.

# 8 Conclusion

This work formalizes notions of sufficiency and necessity as tools to evaluate feature importance and explain model predictions. We demonstrate that sufficient and necessary explanations, while insightful, often provide incomplete while complementary answers to model behavior. To address this limitation, we propose a unified approach that offers a new and more nuanced understanding of model behavior. Our unified approach expands the scope of explanations and reveals trade-offs between sufficiency and necessity, giving rise to new interpretations of feature importance. Through our theoretical contributions, we present conditions under which sufficiency and necessity align or diverge, and provide two perspectives of our unified approach through the lens of conditional independence and Shapley values. Our experimental results support our theoretical findings, providing examples of how adjusting sufficiency-necessity trade-off via our unified approach can uncover alternative sets of important features that would be missed by focusing solely on sufficiency or necessity. Furthermore, we evaluate common post-hoc interpretability methods showing that many fail to reliably identify features that are necessary or sufficient. In summary, our work contributes to a more complete understanding of feature importance through sufficiency and necessity. We believe, and hope, our framework holds potential for advancing the rigorous interpretability of ML models.

# References

- [BSL23] Usha Bhalla, Suraj Srinivas, and Himabindu Lakkaraju. "Verifiable Feature Attributions: A Bridge between Post Hoc Explainability and Inherent Interpretability". In: *Advances in neural information processing systems* (2023).
- [BYS24] Beepul Bharti, Paul Yi, and Jeremias Sulam. "Estimating and controlling for equalized odds via sensitive attribute predictors". In: *Advances in neural information processing systems* 36 (2024).

- [Che+18a] Jianbo Chen et al. "L-shapley and c-shapley: Efficient model interpretation for structured data". In: *arXiv preprint arXiv:1808.02610* (2018).
- [Che+18b] Jianbo Chen et al. "Learning to explain: An information-theoretic perspective on model interpretation". In: *International conference on machine learning*. PMLR. 2018, pp. 883–892.
- [Che+23] Hugh Chen et al. "Algorithms to estimate Shapley value feature attributions". In: *Nature Machine Intelligence* (2023), pp. 1–12.
- [CLL20] Ian Covert, Scott M Lundberg, and Su-In Lee. "Understanding global feature contributions with additive importance measures". In: Advances in Neural Information Processing Systems 33 (2020), pp. 17212–17223.
- [CLL21] Ian Covert, Scott Lundberg, and Su-In Lee. "Explaining by removing: A unified framework for model explanation". In: *Journal of Machine Learning Research* 22.209 (2021), pp. 1–90.
- [DG17] Piotr Dabkowski and Yarin Gal. "Real time image saliency for black box classifiers". In: *Advances in neural information processing systems* 30 (2017).
- [DH20] Adnan Darwiche and Auguste Hirth. "On the reasons behind decisions". In: *ECAI 2020*. IOS Press, 2020, pp. 712–720.
- [Din+21] Frances Ding et al. "Retiring adult: New datasets for fair machine learning". In: Advances in neural information processing systems 34 (2021), pp. 6478–6490.

[DJ22] Adnan Darwiche and Chunxi Ji. "On the computation of necessary and sufficient explanations". In: *Proceedings of the AAAI Conference on Artificial Intelligence*. Vol. 36. 2022, pp. 5582– 5591.

- [Fel+15] Michael Feldman et al. "Certifying and removing disparate impact". In: proceedings of the 21th ACM SIGKDD international conference on knowledge discovery and data mining. 2015, pp. 259– 268.
- [Fla+20] Adam E Flanders et al. "Construction of a machine learning dataset through collaboration: the RSNA 2019 brain CT hemorrhage challenge". In: *Radiology: Artificial Intelligence* 2.3 (2020), e190211.
- [FPV19] Ruth Fong, Mandela Patrick, and Andrea Vedaldi. "Understanding deep networks via extremal perturbations and smooth masks". In: Proceedings of the IEEE/CVF international conference on computer vision. 2019, pp. 2950–2958.
- [FV17] Ruth C Fong and Andrea Vedaldi. "Interpretable explanations of black boxes by meaningful perturbation". In: Proceedings of the IEEE international conference on computer vision. 2017, pp. 3429–3437.
- [Ham50] Richard W Hamming. "Error detecting and error correcting codes". In: The Bell system technical journal 29.2 (1950), pp. 147–160.
- [He+16] Kaiming He et al. "Deep residual learning for image recognition". In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2016, pp. 770–778.
- [HJA20] Jonathan Ho, Ajay Jain, and Pieter Abbeel. "Denoising diffusion probabilistic models". In: Advances in neural information processing systems 33 (2020), pp. 6840–6851.
- [HPS16] Moritz Hardt, Eric Price, and Nati Srebro. "Equality of opportunity in supervised learning". In: Advances in neural information processing systems 29 (2016).
- [Ign+20] Alexey Ignatiev et al. "From contrastive to abductive explanations and back again". In: International Conference of the Italian Association for Artificial Intelligence. Springer. 2020, pp. 335– 355.
- [INM19] Alexey Ignatiev, Nina Narodytska, and Joao Marques-Silva. "On relating explanations and adversarial examples". In: *Advances in neural information processing systems* 32 (2019).

[Jet+21]	Neil Jethani et al. "Have We Learned to Explain?: How Interpretability Methods Can Learn to Encode Predictions in their Interpretations." In: <i>International Conference on Artificial Intelligence and Statistics</i> . PMLR. 2021, pp. 1459–1467.
[Jia+21]	Peng-Tao Jiang et al. "Layercam: Exploring hierarchical class activation maps for localization". In: <i>IEEE Transactions on Image Processing</i> 30 (2021), pp. 5875–5888.
[Kar17]	Tero Karras. "Progressive Growing of GANs for Improved Quality, Stability, and Variation". In: <i>arXiv preprint arXiv:1710.10196</i> (2017).
[Kol+21]	Stefan Kolek et al. "Cartoon Explanations of Image Classifiers". In: <i>arXiv preprint arXiv:2110.03485</i> (2021).
[Kol+22]	Stefan Kolek et al. "A Rate-Distortion Framework for Explaining Black-box Model Decisions". In: <i>International Workshop on Extending Explainable AI Beyond Deep Models and Classifiers.</i> Springer. 2022, pp. 91–115.
[LBH15]	Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. "Deep learning". In: <i>nature</i> 521.7553 (2015), pp. 436–444.
[Lee+20]	Cheng-Han Lee et al. "MaskGAN: Towards Diverse and Interactive Facial Image Manipula- tion". In: <i>IEEE Conference on Computer Vision and Pattern Recognition (CVPR)</i> . 2020.
[Lin+22]	Johannes Linder et al. "Interpreting neural networks for biological sequences by learning stochastic masks". In: <i>Nature machine intelligence</i> 4.1 (2022), pp. 41–54.
[Liu+21]	Ruishan Liu et al. "Evaluating eligibility criteria of oncology trials using real-world data and AI". In: <i>Nature</i> 592.7855 (2021), pp. 629–633.
[LL17]	Scott M Lundberg and Su-In Lee. "A unified approach to interpreting model predictions". In: <i>Advances in neural information processing systems</i> 30 (2017).
[Lun+20]	Scott M Lundberg et al. "From local explanations to global understanding with explainable AI for trees". In: <i>Nature machine intelligence</i> 2.1 (2020), pp. 56–67.
[Mon+21]	Arturo Moncada-Torres et al. "Explainable machine learning can outperform Cox regression predictions and provide insights in breast cancer survival". In: <i>Scientific Reports</i> 11.1 (2021), pp. 1–13.
[Mos+22]	Edoardo Mosca et al. "SHAP-Based Explanation Methods: A Review for NLP Interpretability". In: <i>COLING</i> . 2022.
[Owe13]	Guillermo Owen. Game theory. Emerald Group Publishing, 2013.
[RSG16]	Marco Tulio Ribeiro, Sameer Singh, and Carlos Guestrin. ""Why should i trust you?" Explain- ing the predictions of any classifier". In: <i>Proceedings of the 22nd ACM SIGKDD international</i> <i>conference on knowledge discovery and data mining</i> . 2016, pp. 1135–1144.
[RSG18]	Marco Tulio Ribeiro, Sameer Singh, and Carlos Guestrin. "Anchors: High-precision model- agnostic explanations". In: <i>Proceedings of the AAAI conference on artificial intelligence</i> . Vol. 32. 2018.
[SCD18]	Andy Shih, Arthur Choi, and Adnan Darwiche. "A symbolic approach to explaining bayesian network classifiers". In: <i>arXiv preprint arXiv:1805.03364</i> (2018).
[SE19]	Yang Song and Stefano Ermon. "Generative modeling by estimating gradients of the data distribution". In: <i>Advances in neural information processing systems</i> 32 (2019).
[Sel+17]	Ramprasaath R Selvaraju et al. "Grad-cam: Visual explanations from deep networks via gradient- based localization". In: <i>Proceedings of the IEEE international conference on computer vision</i> . 2017, pp. 618–626.

- [SGK17] Avanti Shrikumar, Peyton Greenside, and Anshul Kundaje. "Learning important features through propagating activation differences". In: *International conference on machine learning*. PMLR. 2017, pp. 3145–3153.
- [Sha51] Lloyd S Shapley. Notes on the N-person Game. Rand Corporation, 1951.
- [SN20] Mukund Sundararajan and Amir Najmi. "The many Shapley values for model explanation". In: International conference on machine learning. PMLR. 2020, pp. 9269–9278.
- [Son+21] Yang Song et al. "Score-Based Generative Modeling through Stochastic Differential Equations". In: International Conference on Learning Representations. 2021. URL: https://openreview. net/forum?id=PxTIG12RRHS.
- [STY17] Mukund Sundararajan, Ankur Taly, and Qiqi Yan. "Axiomatic attribution for deep networks". In: International conference on machine learning. PMLR. 2017, pp. 3319–3328.
- [Tan+22] Wesley Tansey et al. "The holdout randomization test for feature selection in black box models". In: *Journal of Computational and Graphical Statistics* 31.1 (2022), pp. 151–162.
- [Ten+23] Jacopo Teneggi et al. "SHAP-XRT: The Shapley Value Meets Conditional Independence Testing". In: *Transactions on Machine Learning Research* (2023).
- [The23] The White House. Executive Order on the Safe, Secure, and Trustworthy Development and Use of Artificial Intelligence. 2023.
- [TLS22] Jacopo Teneggi, Alexandre Luster, and Jeremias Sulam. "Fast hierarchical games for image explanations". In: IEEE Transactions on Pattern Analysis and Machine Intelligence 45.4 (2022), pp. 4494–4503.
- [Tom+18] Richard Tomsett et al. "Interpretable to whom? A role-based model for analyzing interpretable machine learning systems". In: *arXiv preprint arXiv:1806.07552* (2018).
- [Wan+23] Hanchen Wang et al. "Scientific discovery in the age of artificial intelligence". In: *Nature* 620.7972 (2023), pp. 47–60.
- [Wat+21] David S. Watson et al. "Local explanations via necessity and sufficiency: unifying theory and practice". In: Proceedings of the Thirty-Seventh Conference on Uncertainty in Artificial Intelligence. Ed. by Cassio de Campos and Marloes H. Maathuis. Vol. 161. Proceedings of Machine Learning Research. PMLR, 2021, pp. 1382–1392.
- [Wat+24] David Watson et al. "Explaining predictive uncertainty with information theoretic shapley values". In: *Advances in Neural Information Processing Systems* 36 (2024).
- [WKB21] Eric Wang, Pasha Khosravi, and Guy Van den Broeck. "Probabilistic sufficient explanations". In: *arXiv preprint arXiv:2105.10118* (2021).
- [YJS18] Jinsung Yoon, James Jordon, and Mihaela van der Schaar. "INVASE: Instance-wise variable selection using neural networks". In: International Conference on Learning Representations. 2018.
- [ZDS21] Yazeed Zoabi, Shira Deri-Rozov, and Noam Shomron. "Machine learning-based prediction of COVID-19 diagnosis based on symptoms". In: *npj digital medicine* 4.1 (2021), pp. 1–5.
- [Zed21] Carlos Zednik. "Solving the black box problem: a normative framework for explainable artificial intelligence". In: *Philosophy & Technology* 34.2 (2021), pp. 265–288.
- [Zha+23] Guanhua Zhang et al. "Towards coherent image inpainting using denoising diffusion implicit models". In: *International Conference on Machine Learning*. PMLR. 2023, pp. 41164–41193.
- [Zho+16] Bolei Zhou et al. "Learning deep features for discriminative localization". In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. 2016, pp. 2921–2929.

# A Appendix

# A.1 Proofs

# A.1.1 Proof of Lemma 4.1

**Lemma 4.1.** Let  $\alpha \in (0, 1)$ . For  $\tau > 0$ , denote  $S^*$  to be a solution to  $(\mathbf{P}_{uni})$  for which  $\Delta_{\mathcal{V}}^{uni}(S^*, f, \mathbf{x}, \alpha) = \epsilon$ . Then,  $S^*$  is  $\frac{\epsilon}{\alpha}$ -sufficient and  $\frac{\epsilon}{1-\alpha}$ -necessary. Formally,

$$0 \le \Delta_{\mathcal{V}}^{\mathrm{suf}}(S^*, f, \mathbf{x}) \le \frac{\epsilon}{\alpha} \quad \text{and} \quad 0 \le \Delta_{\mathcal{V}}^{\mathrm{nec}}(S^*, f, \mathbf{x}) \le \frac{\epsilon}{1 - \alpha}.$$
 (15)

*Proof.* Let  $\tau > 0$  and  $\alpha \in (0, 1)$  and denote  $S^*$  to be a solution to (P<sub>uni</sub>) such that

$$\Delta_{\mathcal{V}}^{\mathrm{uni}}(S^*, f, \mathbf{x}, \alpha) = \epsilon.$$
(16)

Then, by definition of being a solution to (Puni),

$$|S^*| \le \tau. \tag{17}$$

Furthermore, recall that

$$\Delta_{\mathcal{V}}^{\mathrm{uni}}(S^*, f, \mathbf{x}, \alpha) = \alpha \cdot \Delta_{\mathcal{V}}^{\mathrm{suf}}(S^*, f, \mathbf{x}) + (1 - \alpha) \cdot \Delta_{\mathcal{V}}^{\mathrm{nec}}(S^*, f, \mathbf{x})$$
(18)

which implies

$$\alpha \cdot \Delta_{\mathcal{V}}^{\text{suf}}(S^*, f, \mathbf{x}) = \epsilon - (1 - \alpha) \cdot \Delta_{\mathcal{V}}^{\text{nec}}(S^*, f, \mathbf{x})$$
(19)

$$\leq \epsilon \qquad ((1-\alpha), \ \Delta_{\mathcal{V}}^{\mathrm{nec}}(S^*, f, \mathbf{x}) \geq 0) \qquad (20)$$

$$\implies \Delta_{\mathcal{V}}^{\text{suf}}(S^*, f, \mathbf{x}) \le \frac{\epsilon}{\alpha}.$$
(21)

Similarly,

$$(1 - \alpha) \cdot \Delta_{\mathcal{V}}^{\text{nec}}(S^*, f, \mathbf{x}) = \epsilon - \alpha \cdot \Delta_{\mathcal{V}}^{\text{suf}}(S^*, f, \mathbf{x})$$
(22)

$$\leq \epsilon \qquad (\alpha, \ \Delta_{\mathcal{V}}^{\text{suf}}(S^*, f, \mathbf{x}) \geq 0) \qquad (23)$$
$$\implies \Delta_{\mathcal{V}}^{\text{nec}}(S^*, f, \mathbf{x}) \leq \frac{\epsilon}{-\epsilon}. \qquad (24)$$

$$\implies \Delta_{\mathcal{V}}^{\text{nec}}(S^*, f, \mathbf{x}) \le \frac{\epsilon}{1 - \alpha}.$$
(24)

# A.1.2 Proof of Lemma 4.2

**Lemma 4.2.** For  $0 \le \epsilon < \frac{\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x}))}{2}$ , denote  $S_{\text{suf}}^*$  and  $S_{\text{nec}}^*$  to be  $\epsilon$ -sufficient and  $\epsilon$ -necessary sets. Then, if  $S_{\text{suf}}^*$  is  $\epsilon$ -super sufficient or  $S_{\text{nec}}^*$  is  $\epsilon$ -super necessary,

$$S_{\text{suf}}^* \cap S_{\text{nec}}^* \neq \emptyset.$$
(25)

Proof. We will prove the result via contradiction. First recall that,

$$f_S(\mathbf{x}) = \mathop{\mathbb{E}}_{\mathbf{X}_{S_c} \sim \mathcal{V}_{S_c}} [f(\mathbf{x}_S, \mathbf{X}_{S_c})]$$
(26)

and, for any metric  $\rho : \mathbb{R} \times \mathbb{R} \mapsto \mathbb{R}$ ,

$$\Delta_{\mathcal{V}}^{\text{suf}}(S, f, \mathbf{x}) \triangleq \rho(f(\mathbf{x}), f_S(\mathbf{x})) \tag{27}$$

$$\Delta_{\mathcal{V}}^{\text{nec}}(S, f, \mathbf{x}) \triangleq \rho(f_{S_c}(\mathbf{x}), f_{\emptyset}(\mathbf{x})).$$
(28)

Since  $\rho$  is a metric on  $\mathbb{R}$ , it satisfies the triangle inequality. Thus, for  $a, b, c \in \mathbb{R}$ 

$$\rho(a,c) \le \rho(a,b) + \rho(b,c). \tag{29}$$

Now, let  $S^*_{\rm suf}$  be  $\epsilon\text{-super sufficient and suppose}$ 

$$S_{\text{suf}}^* \cap S_{\text{nec}}^* = \emptyset. \tag{30}$$

This implies

$$S_{\text{suf}}^* \subseteq (S_{\text{nec}}^*)_c. \tag{31}$$

Subsequently, since  $S^*_{\rm suf}$  is  $\epsilon\text{-super sufficient,}$ 

$$\Delta_{\mathcal{V}}^{\text{suf}}((S_{\text{nec}}^*)_c, f, \mathbf{x}) \le \epsilon.$$
(32)

As a result, observe

$$\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) \le \rho(f(\mathbf{x}), f_{(S_{\text{nec}}^*)_c}(\mathbf{x})) + \rho(f_{(S_{\text{nec}}^*)_c}(\mathbf{x}), f_{\emptyset}(\mathbf{x})) \qquad \text{triangle inequality} \tag{33}$$
$$= \Delta_{\mathfrak{V}}^{\mathfrak{suf}}((S_{+\star}^*)_{c_{\star}}, f_{\star}, \mathbf{x}) + \Delta_{\mathfrak{V}}^{\mathfrak{nec}}((S_{+\star}^*)_{c_{\star}}, f_{\star}, \mathbf{x}) \tag{34}$$

$$\leq \epsilon + \Delta_{\mathcal{V}}^{\text{nec}}((S_{\text{nec}}^*)_c, f, \mathbf{x}) \qquad \qquad S_{\text{suf}}^* \text{ is } \epsilon \text{-super sufficient} \qquad (35)$$

$$\leq 2\epsilon$$
  $S_{\rm nec}^*$  is  $\epsilon$ -necessary (36)

$$\implies \epsilon \ge \frac{\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x}))}{2} \tag{37}$$

which is a contradiction because  $0 \le \epsilon < \frac{\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x}))}{2}$ . Thus  $S_{\text{suf}}^* \cap S_{\text{nec}}^* \ne \emptyset$ . The proof of this result assuming  $S_{\text{nec}}^*$  is  $\epsilon$ -super necessary follows the same argument.

## A.1.3 Proof of Theorem 4.1

**Theorem 4.1.** Let  $\tau_1, \tau_2 > 0$  and  $0 \le \epsilon < \frac{1}{2} \cdot \rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x}))$ . Denote  $S_{\text{suf}}^*$  and  $S_{\text{nec}}^*$  to be  $\epsilon$ -super sufficient and  $\epsilon$ -super necessary solutions to (P<sub>suf</sub>) and (P<sub>nec</sub>), respectively, such that  $|S_{\text{suf}}^*| = \tau_1$  and  $|S_{\text{nec}}^*| = \tau_2$ . Then, there exists a set  $S^*$  to (P<sub>uni</sub>) such that

$$\Delta_{\mathcal{V}}^{\text{uni}}(S^*, f, \mathbf{x}, \alpha) \le \epsilon \quad \text{and} \quad \max(\tau_1, \tau_2) \le |S^*| < \tau_1 + \tau_2.$$
(38)

Furthermore, if  $S_{suf}^* \subseteq S_{nec}^*$  or  $S_{nec}^* \subseteq S_{suf}^*$ , then  $S^* = S_{nec}^*$  or  $S^* = S_{suf}^*$ , respectively.

*Proof.* Consider the set  $S^* = S^*_{suf} \cup S^*_{nec}$ . This set has the following properties:

- (P1)  $S^*$  is  $\epsilon$ -sufficient because  $S^*_{suf}$  is  $\epsilon$ -super sufficient
- (P2)  $S^*$  is  $\epsilon\text{-necessary}$  because  $S^*_{\mathrm{suf}}$  is  $\epsilon\text{-super necessary}$

(P3) 
$$|S^*| \ge \max(\tau_1, \tau_2)$$
 with  $|S^*| = \tau_1$  when  $S^*_{\text{nec}} \subset S^*_{\text{suf}}$  and with  $|S^*| = \tau_2$  when  $S^*_{\text{suf}} \subset S^*_{\text{nec}}$ 

(P4) Via Lemma 4.1, we know  $S^*_{\rm suf} \cap S^*_{\rm nec} \neq \emptyset$  thus  $|S^*| < \tau_1 + \tau_2$ 

Then by (P1) and (P2)

$$\Delta_{\mathcal{V}}^{\mathrm{uni}}(S^*, f, \mathbf{x}, \alpha) = \alpha \cdot \Delta_{\mathcal{V}}^{\mathrm{suf}}(S^*, f, \mathbf{x}) + (1 - \alpha) \cdot \Delta_{\mathcal{V}}^{\mathrm{nec}}(S^*, f, \mathbf{x})$$
(39)

$$\leq \alpha \cdot \epsilon + (1 - \alpha) \cdot \epsilon = \epsilon \tag{40}$$

and by (P3) and (P4) we have  $\max(\tau_1, \tau_2) \le |S^*| < \tau_1 + \tau_2$ ,

## A.1.4 Proof of Corollary 5.1

**Corollary 5.1.** Suppose for any  $S \subseteq [d]$ ,  $\mathcal{V}_S = p(\mathbf{X}_S \mid \mathbf{X}_{S_c} = \mathbf{x}_{S_c})$ . Let  $\alpha \in (0, 1)$ ,  $\epsilon \geq 0$ , and denote  $\rho : \mathbb{R} \times \mathbb{R} \mapsto \mathbb{R}$  to be a metric on  $\mathbb{R}$ . Furthermore, for  $f(\mathbf{X}) = \mathbb{E}[Y \mid \mathbf{X}]$  and  $\tau > 0$ , let  $S^*$  be a solution to  $(P_{\text{uni}})$  such that  $\Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha) = \epsilon$ . Then,  $S^*$  satisfies the following conditional independence relations,

$$\rho\left(\mathbb{E}[Y \mid \mathbf{x}], \ \mathbb{E}[Y \mid \mathbf{X}_{S^*} = \mathbf{x}_{S^*}]\right) \le \frac{\epsilon}{\alpha} \quad \text{and} \quad \rho\left(\mathbb{E}[Y \mid \mathbf{X}_{S^*_c} = \mathbf{x}_{S^*_c}], \ \mathbb{E}[Y]\right) \le \frac{\epsilon}{1 - \alpha}. \tag{41}$$

*Proof.* All we need to show is that when  $\mathcal{V}_S = p(\mathbf{X}_S \mid \mathbf{X}_{S_c} = \mathbf{x}_{S_c})$  and  $f(\mathbf{X}) = \mathbb{E}[Y \mid \mathbf{X}]$ , we have

$$f_S(\mathbf{x}) = \mathbb{E}[Y \mid \mathbf{X}_S = \mathbf{x}_S].$$
(42)

Once this is proven, we can simply apply Lemma 4.1.

To this end, we have by assumption that  $f(\mathbf{x}) = \mathbb{E}[Y \mid \mathbf{X} = \mathbf{x}]$  and, for any  $S \subseteq [d]$ ,  $\mathcal{V}_S = p(\mathbf{X}_S \mid \mathbf{X}_{S_c} = \mathbf{x}_{S_c})$ . Then by definition

$$f_{S}(\mathbf{x}) = \mathbb{E}_{\mathcal{V}_{S_{c}}}[f(\mathbf{x}_{S}, \mathbf{X}_{S_{c}})] = \int_{\mathcal{X}} f(\mathbf{x}_{S}, \mathbf{X}_{S_{c}}) \cdot p(\mathbf{X}_{S_{c}} \mid \mathbf{X}_{S} = \mathbf{x}_{S}) \, d\mathbf{X}_{S_{c}}$$
(43)

$$= \int_{\mathcal{X}} \mathbb{E}[Y \mid \mathbf{X}_{S} = \mathbf{x}_{S}, \mathbf{X}_{S_{c}}] \cdot p(\mathbf{X}_{S_{c}} \mid \mathbf{X}_{S} = \mathbf{x}_{S}) d\mathbf{X}_{S_{c}}$$
(44)

$$= \int_{\mathcal{X}} \left( \int_{\mathcal{Y}} y \cdot p(y \mid \mathbf{X}_{S} = \mathbf{x}_{S}, \mathbf{X}_{S_{c}}) \, dy \right) \cdot p(\mathbf{X}_{S_{c}} \mid \mathbf{X}_{S} = \mathbf{x}_{S}) \, d\mathbf{X}_{S_{c}} \quad (45)$$

$$= \int_{\mathcal{Y}} y \left( \int_{\mathcal{X}} p(y, \mathbf{X}_{S_c} \mid \mathbf{X}_S = \mathbf{x}_S) \, d\mathbf{X}_{S_c} \right) \, dy \tag{46}$$

$$= \int_{\mathcal{Y}} y \cdot p(y \mid \mathbf{X}_S = \mathbf{x}_S) \, dy \tag{47}$$

$$=\mathbb{E}[Y \mid \mathbf{X}_S = \mathbf{x}_S]. \tag{48}$$

By applying Lemma 4.1, we have the desired result.

# A.1.5 Proof of Theorem 5.1

**Theorem 5.1.** Consider an input **x** for which  $f(\mathbf{x}) \neq f_{\emptyset}(\mathbf{x})$ . Denote by  $\Lambda_d = \{S, S_c\}$  the partition of  $[d] = \{1, 2, ..., d\}$ , and define the characteristic function to be  $v(S) = -\rho(f(\mathbf{x}), f_S(\mathbf{x}))$ . Then,

$$\phi_{S}^{\text{shap}}(\Lambda_{d}, v) \ge \rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \Delta_{\mathcal{V}}^{\text{uni}}(S, f, \mathbf{x}, \alpha).$$
(49)

*Proof.* Before we prove the result, recall the following properties of a metric  $\rho$  in the reals:

- (P1)  $\forall a, b \in \mathbb{R}, \ \rho(a, b) = 0 \iff a = b$
- (P2) for  $a, b, c \in \mathbb{R}$ ,  $\rho(a, c) \le \rho(a, b) + \rho(b, c)$ .

Now, for the partition  $\Lambda_d = \{S, S_c\}$  of  $[d] = \{1, 2, ..., d\}$  and characteristic function  $v(S) = -\rho(f(\mathbf{x}), f_S(\mathbf{x})), \phi_S^{\text{shap}}(\Lambda_d, v)$  is defined as

$$\phi_S^{\text{shap}}(\Lambda_d, v) = \frac{1}{2} \cdot [v(S \cup S_c) - v(S_c)] + \frac{1}{2} \cdot [v(S) - v(\emptyset)]$$
(50)

$$=\frac{1}{2}\cdot\left[\rho(f(\mathbf{x}), f_{S_c}(\mathbf{x})) - \rho(f(\mathbf{x}), f(\mathbf{x}))\right] + \frac{1}{2}\cdot\left[\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \rho(f(\mathbf{x}), f_S(\mathbf{x}))\right]$$
(51)

$$= \frac{1}{2} \cdot \left[\rho(f(\mathbf{x}), f_{S_c}(\mathbf{x}))\right] + \frac{1}{2} \cdot \left[\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \rho(f(\mathbf{x}), f_S(\mathbf{x}))\right] \qquad \text{by (P1)}$$
(52)

By (P2)

$$\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) \le \rho(f(\mathbf{x}), f_{S_c}(\mathbf{x})) + \rho(f_{S_c}(\mathbf{x}), f_{\emptyset}(\mathbf{x}))$$
(53)

$$\implies \rho(f(\mathbf{x}), f_{S_c}(\mathbf{x})) \ge \rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \rho(f_{S_c}(\mathbf{x}), f_{\emptyset}(\mathbf{x})).$$
(54)

Thus

$$\phi_S^{\text{shap}}(\Lambda_d, v) = \frac{1}{2} \cdot \left[\rho(f(\mathbf{x}), f_{S_c}(\mathbf{x}))\right] + \frac{1}{2} \cdot \left[\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \rho(f(\mathbf{x}), f_S(\mathbf{x}))\right]$$
(55)

$$\geq \frac{1}{2} \cdot \left[\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \rho(f_{S_c}(\mathbf{x}), f_{\emptyset}(\mathbf{x}))\right] + \frac{1}{2} \cdot \left[\rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \rho(f(\mathbf{x}), f_S(\mathbf{x}))\right]$$
(56)

$$= \rho(f(\mathbf{x}), f_{\emptyset}(\mathbf{x})) - \Delta_{\mathcal{V}}^{\mathrm{uni}}(S, f, \mathbf{x}, \alpha).$$
(57)

## A.2 Additional Experimental Details

In this section, we include further experimental details. All experiments were performed on a private cluster with 8 NVIDIA RTX A5000 with 24 GB of memory. All scripts were run on PyTorch 2.0.1, Python 3.11.5, and CUDA 12.2.

## A.2.1 RSNA CT Hemorrhage

**Dataset Details.** The RSNA 2019 Brain CT Hemorrhage Challenge dataset [Fla+20], contains 752803 images labeled by a panel of board-certified radiologists with the types of hemorrhage present (epidural, intraparenchymal, intraventricular, subarachnoid, subdural).

**Implementation.** Recall for this experiment, to identify sufficient and necessary masks S for a sample **x**, we considered the relaxed optimization problem [FPV19; Kol+21; Kol+22]

$$\underset{S \subseteq [0,1]^d}{\arg\min} \ \Delta_{\mathcal{V}}^{\mathrm{uni}}(S, f, \mathbf{x}, \alpha) + \lambda_1 \cdot ||S||_1 + \lambda_{\mathrm{TV}} \cdot ||S||_{TV}.$$
(58)

where  $||S||_1$  and  $||S||_{TV}$  are the  $L^1$  and Total Variation norm of S, which promote sparsity and smoothness respectively and  $\lambda_{Sp}$  and  $\lambda_{Sm}$  are the associated. To solve this problem, a mask  $S \in [0, 1]^{512 \times 512}$  is initialized with entries  $S_i \sim \mathcal{N}(0.5, \frac{1}{36})$ . For 1000 iterations, the mask S is iteratively updated to minimize

$$\alpha \cdot |f(\mathbf{x}) - f_S(\mathbf{x})| + (1 - \alpha) \cdot |f(\mathbf{x}) - f_S(\mathbf{x})| + \lambda_1 \cdot ||S||_1 + \lambda_{\text{TV}} \cdot ||S||_{TV}$$
(59)

where for any S,

$$f_S(\mathbf{x}) = \frac{1}{K} \sum_{i=1}^K f((\tilde{\mathbf{X}}_S)_i) \quad \text{with} \quad (\tilde{\mathbf{X}}_S)_i = \mathbf{x} \circ \tilde{\mathbb{1}}_S + (1 - \tilde{\mathbb{1}}_S) \circ b_i.$$
(60)

Here the entries  $(\tilde{\mathbb{1}}_S)_i \sim \text{Bernoulli}(S_i)$  and  $b_i$  is the *i*th entry of a vector  $\mathbf{b} = (b_1, \dots, b_d) \sim \mathcal{V}$ . In our implementation the reference distribution  $\mathcal{V}$  is the unconditional mean image over the of training images and so  $b_i$  is the simply the average value of the *i*th pixel over the training set. To allow for differentiation during optimization, we generate discrete samples  $\tilde{\mathbb{1}}_S$  using the Gumbel-Softmax distribution. This methodology simply implies the entries  $(\tilde{\mathbf{X}}_S)_i$  is a Bernoulli distribution with outcomes  $\{b_i, x_i\}$ , i.e.  $(\tilde{\mathbf{X}}_S)_i$  is distributed as

$$\Pr[(\mathbf{X}_S)_i = x_i] = S_i \tag{61}$$

$$\Pr[(\mathbf{\tilde{X}}_S)_i = b_i] = 1 - S_i \tag{62}$$

For each  $\alpha \in \{0, 0.5, 1\}$ , during optimization we set K = 10,  $\lambda_1 = 2$  and  $\lambda_{\text{TV}} = 20$  and use the Adam optimizer with default  $\beta$ -parameters of  $\beta_1 = 0.9$ ,  $\beta_2 = 0.99$  and a fixed learning rate of 0.1.

# A.2.2 CelebA-HQ

**Dataset Details.** We use a modified version of the CelebA-HQ dataset [Lee+20; Kar17] which contains 30,000 celebrity faces resized to 256×256 pixels with several landmark locations and binary attributes (e.g., eyeglasses, bangs, smiling).

**Implementation.** Recall for this experiment, to generate sufficient or necessary masks S for samples **x**, we learn a model  $g_{\theta} : \mathcal{X} \mapsto [0, 1]^d$  via solving the following optimization problem:

$$\underset{\theta \in \Theta}{\arg\min} \underset{\mathbf{X} \sim \mathcal{D}_{\mathcal{X}}}{\mathbb{E}} \left[ \Delta_{\mathcal{V}}^{\mathrm{uni}}(g_{\theta}(\mathbf{X}), f, \mathbf{X}, \alpha) + \lambda_{1} \cdot ||g_{\theta}(\mathbf{X})||_{1} + \lambda_{\mathrm{TV}} \cdot ||g_{\theta}(\mathbf{X})||_{\mathrm{TV}} \right]$$
(63)

To learn sufficient and necessary explainer models, we solve Eq. (14) via empirical risk minimization for  $\alpha \in \{0, 1\}$  respectively. Given N samples  $\{\mathbf{X}_i\}_{i=1}^N \stackrel{\text{i.i.d.}}{\sim} \mathcal{D}_X$ , we solve

$$\frac{1}{N}\sum_{i=1}^{N} \left[\Delta_{\mathcal{V}}^{\mathrm{uni}}(g_{\theta}(\mathbf{X}_{i}), f, \mathbf{X}_{i}, \alpha) + \lambda_{1} \cdot ||g_{\theta}(\mathbf{X}_{i})||_{1} + \lambda_{\mathrm{TV}} \cdot ||g_{\theta}(\mathbf{X}_{i})||_{\mathrm{TV}}\right].$$
(64)

Here

$$\Delta_{\mathcal{V}}^{\text{uni}}(g_{\theta}(\mathbf{x}_i), f, \mathbf{x}_i, \alpha) = \alpha \cdot |f(\mathbf{x}_i) - f_S(\mathbf{x}_i)| + (1 - \alpha) \cdot |f(\mathbf{x}_i) - f_S(\mathbf{x}_i)|$$
(65)

where is  $f_S(\mathbf{x}_i)$  is evaluated in the same manner as in the RSNA experiment. For  $\alpha = 0$ ,  $\lambda_1 = 0.1$  and  $\lambda_{\text{TV}} = 100$ . For  $\alpha = 1$ ,  $\lambda_1 = 1$  and  $\lambda_{\text{TV}} = 10$ . For both  $\alpha$ , during optimization we use a batch size of 32, set K = 10 and use the Adam optimizer with default  $\beta$ -parameters of  $\beta_1 = 0.9$ ,  $\beta_2 = 0.99$  and a fixed learning rate of  $1 \times 10^{-4}$ 

**Sampling.** To generate the samples in Figs. 4 and 5, samples we use the CoPaint method [Zha+23]. We utilize their code base and pretrained diffusion models with the exact the same parameters as reported in the paper to perform conditional generation. Everything used is available at https://github.com/UCSB-NLP-Chang/CoPaint.